CQLOE.1_D Flight Crew Paperwork

B747-8F / GENX-2B67P Callsign: GIANT 605 HEAVY RKSI / RJGG

NOTE: ALL DATA IS FOR TRAINING USE ONLY. NOT A VALID RELEASE. PERFORMANCE VALUES ARE DERIVED OR APPROXIMATED.

FOR TRAINING USE ONLY. NOT A VALID RELEASE. PERFORMANCE VALUES ARE DERIVED OR APPROXIMATED.

GTI605/##XXX/RKSI-RJGG/N###GT

OPERATIONAL FLIGHT PLAN -- RELEASE NOT VALID --

GTI605/## **RKSI - RJGG** **## XXX ##** **N###GT**
COST INDEX 040 **Revision: 0**
B747-8F / GENX-2B67P / KG / IFR / **FF +3.5**
PROGS ###### Release Valid Until ####Z ##XXX##

ORIG	RKSI/ICN SEOUL/INCHEON INTL	N37278E126263 ####Z
DEST	RJGG/NGO CHUBU/CENTRAIR INTL	N34515E136483 ####Z
PALT	RJAA/NRT TOKYO/NARITA INTL	N35459E140231 ####Z

RKSI/F310 OSPOT2C OSPOT A582 TGU V549 KPO G585 BULGA A586 AGSUS Y697
LANAT Y51 SAMON Y511 CHESS RJGG

Coldest Fuel Temp: -12/SABAE A/WC: T065 T-DEV: P03
FMC Reserves: 14.4 ADIS: 651

	RKSI-RJGG		
ALT1/2	RJAA/		
	FUEL	TIME	GDIS
TRIP	**016416**	**01.34**	**0712**
CONT	001501	00.09	
ALT1	008180	00.52	0352
FRES	004173	00.30	
ADD.AL	000360	00.02	
PCF	002000	00.11	
MINF	**032630**	**03.20**	....
EXTRA	044795	04.16	
TOF	077425		
TAXI	001575	00.35	
BLOCK	**079000**	**08.11**	
REMF	**061009**	**08.12**	....

	Weight	**Actual**	**Limit**	
DOW	193802			
PYLD	086198			
ZFW	280000	.....	S329761	ZFW INC/1000 X 140 MINF ADJ
RAMP	359000		S449056	
TOGW	357425	.....	L362506	MTOW LTD BY VZFW/CK LIMITS
LDGW	341009		S346090	

WEIGHT LIMIT CODES:
S-STRUCT P-PERF L-MTOW BASED ON LDW+TRIP FUEL I-BY DISPATCHER

FOR TRAINING USE ONLY. NOT A VALID RELEASE. PERFORMANCE VALUES ARE DERIVED OR APPROXIMATED.

Remarks

RAIM VALIDATION PASSED

PCF FOR LOW VIS/CIGS DEST AREA
EXTRA FUEL FOR TANKERING

B747-8F/GENX-2B67/-2B67P. Engine failure takeoff performance
based on 10-minute max takeoff EGT limit. Ref: TA747-25-1

RKSI CAT II/III - RWY 15L/15R/16L/16R/33L/33R/34L/34R
RJGG CAT II - RWY 18/36
RJGG CAT III - RWY 36
RJAA CAT II/III - RWY 16R
RJTT CAT II/III - RWY 34R
RJBB CAT II - RWY 06L/06R/24L/24R

MEL/CDL
No Applicable Items

Flight Release Authorization

I certify that this flight has been dispatched in accordance with applicable FARs. All pages of the Operational Flight Plan are an integral part of the Flight Release. By signing this release, I am affirming my belief that the planned flight can be operated safely.

Signed by PIC .. .. (Circle name below)

Signed by Dispatcher: RELEASE NOT VALID

Fit for Duty Affirmation

By signing below, I affirm that I am fit for duty to operate this flight.

			FIT FOR DUTY/ JS VERIFY	RELIEF PIC START-END(Z)
CA	1	1	.. ..	
			TO/LNDG Expiry: --	
FO	2	2	.. ..	
			TO/LNDG Expiry: --	

TO/LNDG currency questions? contact Duty Pilot

FOR TRAINING USE ONLY. NOT A VALID RELEASE. PERFORMANCE VALUES ARE DERIVED OR APPROXIMATED.

GTI605/##XXX/RKSI-RJGG/N###GT

OPERATIONAL FLIGHT PLAN -- RELEASE NOT VALID --

TIME		FUEL	
OUT:	/	ETA RJGG:	UPLIFT:
OFF:	/	SOB:	PYLD:
ON:	/	RVSM ALTIMETER RECORD	
IN:	/	L: S:	R:

(FPL-GTI605-IS
-B748/H-SDE1E2E3FGHIJ3J7M3P2RWXYZ/LB1D1
-RKSI####
-N0477F310 OSPOT2C OSPOT A582 TGU V549 KPO G585 BULGA A586 AGSUS Y697 LANAT Y51 SAMON Y511 CHESS
-RJGG0134 RJAA
-PBN/A1B1C1D1L1O1S2 NAV/RNVD1E2A1 DAT/CPDLCX SUR/260B RSP180 CANMANDATE DOF/###### REG/N###GT EET/RJJJ0044 SEL/#### CODE/###### OPR/GTI RMK/TCAS II EQUIPPED CARGO EMERG CTC 19147018045)

Overflight/Landing Permits

AWY	WPT	MTK	NM	GS	TAS	LEG-T	ETA	MTRS	ISA	WC	REMF
MORA		TTK	MH	IAS	.M	TOT-T	ATA	FL	TEMP	WIND	AREM
	RKSI 00023 FT							SEOUL/INCHEON INTL			
	N37 27.3										
	E126 27.7										
OSPOT2C	**TOC**										
	N36 53.8	124	087	531	474	00.15			M00	T057	0718
	E127 12.1	115	126	300	806	00.14		F310	-46	277/062	
OSPOT2C	**OSPOT**										
	N36 50.3	124	008	560	477	00.01			P04	T083	0716
	E127 20.9	115	126	300	806	00.15		F310	-42	281/087	
A582	**VASLI**										
	N36 42.9	144	010	546	477	00.01			P04	T069	0714
	E127 30.0	135	150	300	806	00.16		F310	-42	281/087	
A582	**MAKDU**										
	N36 27.2	144	022	546	477	00.02			P04	T068	0710
	E127 49.2	135	150	300	806	00.19		F310	-42	281/087	
A582	**BITUX**										
	N36 16.7	144	015	546	477	00.02			P04	T068	0707
	E128 01.8	135	150	300	806	00.20		F310	-42	281/087	
A582	**TGU**		**DALSEONG**					**112.2**			
	N35 48.6	144	039	535	476	00.04			P03	T058	0700
	E128 35.4	135	150	300	806	00.25		F310	-43	276/080	

FOR TRAINING USE ONLY. NOT A VALID RELEASE. PERFORMANCE VALUES ARE DERIVED OR APPROXIMATED.

GTI605/##XXX/RKSI-RJGG/N###GT

OPERATIONAL FLIGHT PLAN -- RELEASE NOT VALID --

AWY	WPT	MTK	NM	GS	TAS	LEG-T	ETA	MTRS	ISA	WC	REMF
MORA		TTK	MH	IAS	.M	TOT-T	ATA	FL	TEMP	WIND	AREM
V549	LAPAL										
	N35 54.2	085	025	551	476	00.03			P03	T075	0696
	E129 04.9	076	082	300	806	00.27		F310	-43	276/080	
V549	KPO		POHANG					112.5			
	N35 58.6	085	020	554	477	00.02			P04	T077	0693
	E129 28.5	076	082	300	806	00.29		F310	-42	268/078	
G585	BULGA										
	N35 56.1	106	017	554	477	00.02			P04	T077	0690
	E129 49.4	098	108	300	806	00.31		F310	-42	268/078	
A586	DABIK										
	N36 17.7	048	028	526	477	00.03			P04	T048	0684
	E130 11.7	039	041	300	806	00.34		F310	-42	268/078	
A586	AGSUS										
	N36 45.3	048	036	536	478	00.04			P04	T059	0678
	E130 40.7	040	041	300	806	00.39		F310	-42	261/080	
(RJJJ)	AT LANAT					00.43	FUKUOKA FIR				
Y697	LANAT										
	N36 22.4	131	043	534	478	00.05			P04	T057	0670
	E131 25.7	122	137	300	806	00.43		F310	-42	261/080	
Y51	DISSH										
	N36 16.9	100	113	556	477	00.12			P03	T080	0650
	E133 45.7	092	102	300	806	00.56		F310	-43	244/093	
Y51	OVSOS										
	N36 15.9	102	016	556	477	00.02			P03	T080	0647
	E134 05.3	093	107	300	806	00.57		F310	-43	244/093	
Y51	SAMON										
	N36 14.6	102	020	554	476	00.02			P02	T079	0644
	E134 30.2	093	107	300	806	00.59		F310	-44	242/095	
Y511	CHILY										
	N36 12.0	102	035	554	476	00.04			P02	T078	0638
	E135 13.4	093	108	300	806	01.03		F310	-44	242/095	
Y511	SABAE										
	N35 56.7	127	032	519	476	00.04			P02	T044	0633
	E135 48.0	118	136	300	806	01.07		F310	-44	240/097	
Y511	TRUGA										
	N35 45.8	127	023	513	469	00.03			P02	T044	0628
	E136 12.4	118	137	296	796	01.10		F310	-44	240/097	

FOR TRAINING USE ONLY. NOT A VALID RELEASE. PERFORMANCE VALUES ARE DERIVED OR APPROXIMATED.

GTI605/##XXX/RKSI-RJGG/N###GT

OPERATIONAL FLIGHT PLAN -- RELEASE NOT VALID --

AWY / MORA	WPT	MTK / TTK	NM / MH	GS / IAS	TAS / .M	LEG-T / TOT-T	ETA / ATA	MTRS / FL	ISA / TEMP	WC / WIND	REMF / AREM
Y511	**TOD**										
	N35 41.2	161	005	465	478	00.01			P02	H013	0627
	E136 15.3	152	173	302	811	01.10		F310	-44	240/097	
Y511	**MARIA**										
	N35 40.2	161	001	419	433	00.00			P02	H013	0627
	E136 15.9	152	173	273	735	01.10		F307	-43	240/097	
Y511	**SHIZU**										
	N35 32.0	159	009	406	417	00.01			P04	H010	0627
	E136 21.5	151	172	272	697	01.12		F282	-37	241/089	
Y511	**CHESS**										
	N35 20.5	159	013	385	395	00.02			P04	H010	0626
	E136 29.1	151	171	272	652	01.14		F249	-30	241/082	
SOARCV	**RJGG** 00012 FT								CHUBU/CENTRAIR INTL		
	N34 50.6	111	095	201	201	00.20			P04	T000	0610
	E136 48.5	103	114	200	303	01.34		DSC	+20	248/017	

FOR TRAINING USE ONLY. NOT A VALID RELEASE. PERFORMANCE VALUES ARE DERIVED OR APPROXIMATED.

GTI605/##XXX/RKSI-RJGG/N###GT

OPERATIONAL FLIGHT PLAN -- RELEASE NOT VALID --

Destination Primary Alternate Route

RJGG V36 BOGON Y79 GUPER Y81 RUTAS RUTAST RJAA
RJGG/0390
GCD 184 GDIS352 FUEL 8180 TIME 00.52
MORA 3700

TLR

FOR TRAINING USE ONLY. NOT A VALID RELEASE. PERFORMANCE VALUES ARE DERIVED OR APPROXIMATED.

```
TAKEOFF AND LANDING REPORT GTI 605 ICN-NGO ##XXX##
TLR-0 SEQ-93088935 ##XXX## ####Z
A/C N###GT  B747-8F GENX-2B67P KG

ACARS INIT DATE = XX    ACARS TAKEOFF REQUEST = ####Z-####Z
         -- TLR TAKEOFF DATA VALID IF --
OAT RANGE = 21C TO MT      QNH = GREATER OR EQUAL TO 29.77

/// TAKEOFF DATA ///

APT  PRWY        POAT PWIND  PQNH  FLP PTOW MFPTW
ICN  15R         31.0 329M05 29.92 10  3574 4037

RMKS T/O 2 - DERATE 2
     PACKS ON
     NO IMPROVED CLIMB
     FLAPS PLANNED AT 10 ONLY

-------- ---- ---- ---- ----------------- -----  --- --- ---
RWY      MTOW ATM  N1   THR/PACKS CONFIG  FLAPS  V1  VR  V2

-------- -------- ---------------------------
SMRGN    ACCEL    EFP

---------------------------- RUNWAY INFO ----------------------------
RWY          LENGTH EFP     NOTES
15L           12303 DT H154 NOTAMS A0523/26
15R           12303 DT H154 NOTAMS A0523/26
16L           13123 DT H154
16R           12303 DT H154
33L           12303 LT H240 NOTAMS A0523/26
33R           12303 LT H240 NOTAMS A0523/26
34L           12303 LT H240
34R           13123 LT H240

------------- DRY RWY - PTOW - ENG A/I OFF - CALM WIND --------------
RWY          MTOW MT    N1 CONFIG              FL V1 VR V2
15L          3574 44 85.7 D-TO 2 - PACKS ON   10 156 166 174
15R          3574 44 85.7 D-TO 2 - PACKS ON   10 156 166 174
16L          3574 48 84.2 D-TO 2 - PACKS ON   10 157 167 174
16R          3574 44 85.7 D-TO 2 - PACKS ON   10 156 166 174
33L          3574 44 85.7 D-TO 2 - PACKS ON   10 156 166 174
33R          3574 44 85.7 D-TO 2 - PACKS ON   10 156 166 174
34L          3574 44 85.7 D-TO 2 - PACKS ON   10 156 166 174
34R          3574 48 84.2 D-TO 2 - PACKS ON   10 157 167 174

-------- DRY RWY - PTOW PLUS 10000 - ENG A/I OFF - CALM WIND --------
RWY          MTOW MT    N1 CONFIG              FL V1 VR V2
15L          3674 40 87.2 D-TO 2 - PACKS ON   10 157 168 176
15R          3674 40 87.2 D-TO 2 - PACKS ON   10 157 168 176
16L          3674 44 85.7 D-TO 2 - PACKS ON   10 158 169 176
16R          3674 40 87.2 D-TO 2 - PACKS ON   10 157 168 176
33L          3674 40 87.2 D-TO 2 - PACKS ON   10 157 168 176
33R          3674 40 87.2 D-TO 2 - PACKS ON   10 157 168 176
34L          3674 40 87.2 D-TO 2 - PACKS ON   10 157 168 176
34R          3674 44 85.7 D-TO 2 - PACKS ON   10 158 169 176

-------------- DRY RWY - PTOW - ENG A/I OFF - 15KT TW ---------------
RWY          MTOW MT    N1 CONFIG              FL V1 VR V2
15L          3574 41 87.0 D-TO 2 - PACKS ON   20 141 155 162
15R          3574 41 87.0 D-TO 2 - PACKS ON   20 141 155 162
16L          3574 41 87.0 D-TO 2 - PACKS ON   20 146 155 162
16R          3574 41 87.0 D-TO 2 - PACKS ON   20 141 155 162
33L          3574 41 87.0 D-TO 2 - PACKS ON   20 141 155 162
33R          3574 41 87.0 D-TO 2 - PACKS ON   20 141 155 162
34L          3574 41 87.0 D-TO 2 - PACKS ON   20 141 155 162
34R          3574 41 87.0 D-TO 2 - PACKS ON   20 146 155 162

--------- DRY RWY - PTOW PLUS 10000 - ENG A/I OFF - 15KT TW ---------
RWY          MTOW MT    N1 CONFIG              FL V1 VR V2
15L          3674 38 88.2 D-TO 2 - PACKS ON   20 141 156 163
```

```
15R          3674 38 88.2 D-TO 2 - PACKS ON   20 141 156 163
16L          3674 38 88.2 D-TO 2 - PACKS ON   20 146 156 163
16R          3674 38 88.2 D-TO 2 - PACKS ON   20 141 156 163
33L          3674 38 88.2 D-TO 2 - PACKS ON   20 141 156 163
33R          3674 38 88.2 D-TO 2 - PACKS ON   20 141 156 163
34L          3674 38 88.2 D-TO 2 - PACKS ON   20 141 156 163
34R          3674 38 88.2 D-TO 2 - PACKS ON   20 146 156 163

------------- WET RWY - PTOW - ENG A/I OFF - CALM WIND --------------
RWY          MTOW MT    N1 CONFIG              FL V1 VR V2
15L          3574 45 85.5 D-TO 2 - PACKS ON   10 155 166 174
15R          3574 45 85.5 D-TO 2 - PACKS ON   10 155 166 174
16L          3574 48 84.4 D-TO 2 - PACKS ON   10 154 167 174
16R          3574 45 85.5 D-TO 2 - PACKS ON   10 155 166 174
33L          3574 45 85.5 D-TO 2 - PACKS ON   10 155 166 174
33R          3574 45 85.5 D-TO 2 - PACKS ON   10 155 166 174
34L          3574 45 85.5 D-TO 2 - PACKS ON   10 155 166 174
34R          3574 48 84.4 D-TO 2 - PACKS ON   10 154 167 174

-------- WET RWY - PTOW PLUS 10000 - ENG A/I OFF - CALM WIND --------
RWY          MTOW MT    N1 CONFIG              FL V1 VR V2
15L          3674 42 86.6 D-TO 2 - PACKS ON   10 160 168 176
15R          3674 42 86.6 D-TO 2 - PACKS ON   10 160 168 176
16L          3674 45 85.5 D-TO 2 - PACKS ON   10 159 169 176
16R          3674 42 86.6 D-TO 2 - PACKS ON   10 160 168 176
33L          3674 42 86.6 D-TO 2 - PACKS ON   10 160 168 176
33R          3674 42 86.6 D-TO 2 - PACKS ON   10 160 168 176
34L          3674 42 86.6 D-TO 2 - PACKS ON   10 160 168 176
34R          3674 45 85.5 D-TO 2 - PACKS ON   10 159 169 176

-------------- WET RWY - PTOW - ENG A/I OFF - 15KT TW ---------------
RWY          MTOW MT    N1 CONFIG              FL V1 VR V2
15L          3574 40 87.4 D-TO 2 - PACKS ON   20 133 153 161
15R          3574 40 87.4 D-TO 2 - PACKS ON   20 133 153 161
16L          3574 41 87.0 D-TO 2 - PACKS ON   20 137 155 162
16R          3574 40 87.4 D-TO 2 - PACKS ON   20 133 153 161
33L          3574 40 87.4 D-TO 2 - PACKS ON   20 133 153 161
33R          3574 40 87.4 D-TO 2 - PACKS ON   20 133 153 161
34L          3574 40 87.4 D-TO 2 - PACKS ON   20 133 153 161
34R          3574 41 87.0 D-TO 2 - PACKS ON   20 137 155 162

--------- WET RWY - PTOW PLUS 10000 - ENG A/I OFF - 15KT TW ---------
RWY          MTOW MT    N1 CONFIG              FL V1 VR V2
15L          3674 37 88.6 D-TO 2 - PACKS ON   20 134 155 163
15R          3674 37 88.6 D-TO 2 - PACKS ON   20 134 155 163
16L          3674 38 88.2 D-TO 2 - PACKS ON   20 138 157 164
16R          3674 37 88.6 D-TO 2 - PACKS ON   20 134 155 163
33L          3674 37 88.6 D-TO 2 - PACKS ON   20 134 155 163
33R          3674 37 88.6 D-TO 2 - PACKS ON   20 134 155 163
34L          3674 37 88.6 D-TO 2 - PACKS ON   20 134 155 163
34R          3674 38 88.2 D-TO 2 - PACKS ON   20 138 157 164


/// LANDING DATA ///

APT  PRWY        POAT PWIND  PQNH  FLP PLDW PMRLW
NGO  18          15.0 000M00 29.92 30  3410 4490

RMKS DRY RUNWAY
TAKEOFF AND LANDING REPORT GTI 605 ICN-NGO ##XXX##            PAGE 2
TLR-0 SEQ-93088935 ##XXX## ####Z




---------------------------- RUNWAY INFO -----------------------------
RWY          LENGTH SLOPE NOTES
18            11483  0.00
36            11483  0.00

- AUTOBRK 2 - 15PCT LDG FACTOR - NO THR REV - MAN LAND - CALM WIND --
        FLAPS 25
  LDW   DRY      WET
  3600  11140    11150
  3500  10880    10890
```

```
/ 3410  10646    10656
  3300  10360    10370
  3200  10100    10110
HW/KT     -49      -49
TW/KT    +164     +165
UP/1PCT  -120     -130
DN/1PCT   +50      +90

- AUTOBRK 3 - 15PCT LDG FACTOR - NO THR REV - MAN LAND - CALM WIND --
        FLAPS 25
  LDW   DRY      WET
  3600   9770    10040
  3500   9550     9820
/ 3410   9352     9622
  3300   9110     9380
  3200   8890     9160
HW/KT     -43      -44
TW/KT    +142     +145
UP/1PCT   -30      -30
DN/1PCT    +0      +30

- AUTOBRK 4 - 15PCT LDG FACTOR - NO THR REV - MAN LAND - CALM WIND --
        FLAPS 25
  LDW   DRY      WET
  3600   8550     9520
  3500   8370     9320
/ 3410   8208     9140
  3300   8010     8920
  3200   7830     8720
HW/KT     -37      -38
TW/KT    +122     +126
UP/1PCT     0      -20
DN/1PCT    +0      +50

 AUTOBRK MAX - 15PCT LDG FACTOR - NO THR REV - MAN LAND - CALM WIND -
        FLAPS 25
  LDW   DRY      WET
  3600   6830     9240
  3500   6690     9020
/ 3410   6564     8822
  3300   6410     8580
  3200   6270     8360
HW/KT     -28      -36
TW/KT     +91     +133
UP/1PCT     0     -120
DN/1PCT    +0     +160

- MAX MANUAL - 15PCT LDG FACTOR - NO THR REV - MAN LAND - CALM WIND -
        FLAPS 25
  LDW   DRY      WET
  3600   6470     9250
  3500   6290     9030
/ 3410   6128     8832
  3300   5930     8590
  3200   5750     8370
HW/KT     -24      -37
TW/KT     +78     +133
UP/1PCT   -60     -140
DN/1PCT    +0     +160

  357425/357425/341009/1575/16416/32630/79000
END TAKEOFF AND LANDING REPORT GTI 605 ICN-NGO ##XXX##
```

Sable Loadsheet

FOR TRAINING USE ONLY. NOT A VALID RELEASE. PERFORMANCE VALUES ARE DERIVED OR APPROXIMATED.

```
ATLAS AIR              B747-8F           LOADSHEET       (Rel. 5.2.11-11010)  Loadsheet Printout NR: 1
                       STANDARD          PROD. TIME: ##:##                     Loadplan Printout NR: 1
FROM/TO        FLIGHT                    A/C REG         ACM     DATE           TIME
ICN/NGO        GTI605                    N###GT           0      ##-XXX-####    ##:##
                            Data Rev. Date: ##-XXX-####
ALL WEIGHTS IN KG

 ---------------- MAIN DECK -------------------------------
     A1   A2   B1   C    D    E    F    G    H    J    K    L    M    P    R    S    T    U    X
R              2900 2900 2900 2900 2900 2900 2900 2900 2900 2900 2900 2900 2900 2900 2900
C    0    0                                                                                    0
L                   2900 2900 2900 2900 2900 2900 2900 2900 2900 2900 2900 2900 2900 2900 2098

 ---------------- LOWER DECK ------------------------------
     11P  12P  21P  22P  23P  24P  25P  31P  32P  33P  41P  42P  52   53   54
     0    0    0    0    0    0    0    0    0    0    0    0    0    0    0
IDX  0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00

 ** LOWER FWD/AFT DECKS CHECKED - DDG 26-16-01-02A CHANNEL A **
 ** FWD LL A (STA 468-880) AND AFT LL A (STA 1720-2160) EMPTY **

                                       WGT KG     CAPTAIN:
BASIC OPERATING WGT                    193802
BALLAST                                     0
ACM                 (00)                    0
SWA                                         0
TOTAL TRAFFIC LOAD                      86198
ZERO FUEL WEIGHT    (Max: 329761)      280000
TAXI FUEL                                1575
TAKE OFF FUEL                           77425
TAKE OFF WEIGHT     (Op. Max: 362506)  357425
TRIP FUEL                               16416
LANDING WEIGHT      (Max: 346090)      341009
ALLOWED PAYLOAD                         91279
                                       FUEL TANK STATUS: ALL FUEL TANKS OK
CAPTAINS INFO BEFORE LMC

IMBALANCE            0.8 %
NOTOC DG             NO                LOADING CERTIFICATE-I CERTIFY THAT THE LOADING OF THIS
NOTOC SC             NO                A/C IS IN ACCORDANCE WITH CURRENT LOADING INSTRUCTIONS
                                       AND LOADPLAN. FERRY FLIGHTS-THE BULK AND LOWER
ACTUAL WEIGHT USED FOR CARGO           COMPARTMENTS HAVE BEEN CHECKED AND ALL BAGGAGE/CARGO
                                       REMOVED.
BALANCE CONDITIONS
                FWD            AFT    LOAD SUPERVISOR: ____________________ (PRINT NAME)
ZFW MAC   20.2 %   14           33
TOW MAC   21.0 %   12           33                      ____________________ (SIGNATURE)
LDG MAC   20.6 %   13           33
STABTRIM                               CPT ACCEPTANCE : ____________________ (SIGNATURE)

UNDERLOAD BEFORE LMC:      5081 KG     LAST MINUTE CHANGES


LOADSHEET CHECKED AND APPROVED BY:     RELEASE NOT VALID(MIA)


--------------------      --------------------      --------------------      --------------------
LWR/FWD DECK CHECKED      LWR/AFT DECK CHECKED      PRINT NAME                SIGNATURE
```

FDP

FOR TRAINING USE ONLY. NOT A VALID RELEASE. PERFORMANCE VALUES ARE DERIVED OR APPROXIMATED.

RKSI 15R Flaps 10

```
QU HDQIT5Y
.PERFF5Y ######
M31
AN N###GT/FI 5Y605
- 280.0

RKSI          GENX-2B67P
FLT NO    RLS NO    TIME
605          0     ####Z
WIND KTS  OAT C      QNH
320/05     +31     29.92
------------------------
GRWT 359.0    VREF30 164
FUEL  79.0
ZFW  280.0

REMARKS
NONE

RKSI  15R          12303
TOGW  357.4   SMRGN ----
FLAPS 10        PACKS ON
ATM   44C         V1 156
THR   D-TO 2      VR 166
N1    85.7        V2 174
CG    21.0     TRIM  7.6

DT H154      ACCEL  1000
```

RKSI 33L Flaps 10

```
RKSI          GENX-2B67P
FLT NO    RLS NO    TIME
605          0     ####Z
WIND KTS  OAT C      QNH
320/05     +31     29.92
------------------------
GRWT 359.0    VREF30 164
FUEL  79.0
ZFW  280.0

REMARKS
NONE

RKSI  33L          12303
TOGW  357.4   SMRGN ----
FLAPS 10        PACKS ON
ATM   44C         V1 156
THR   D-TO 2      VR 166
N1    85.7        V2 174
CG    21.0     TRIM  7.6

LT H240      ACCEL  1000
```

RJAA 16R Flaps 25

```
RJAA          GENX-2B67P
FLT NO     LDW      TIME
605       345.7    ####Z
WIND KTS  OAT C      QNH
090/17     +31     29.92
------------------------

REMARKS
NONE

16R               13123
LDW 345.7   MRLW 346.1/A
FLAPS 25    VREF +05
AUTOBRK 2    11285   5.9
AUTOBRK 3     9855   6.2
AUTOBRK 4     8645   6.5
MAX AUTO      6885   6.8
MAX MAN       6435   7.0
```

RJAA 16R Flaps 30

```
RJAA          GENX-2B67P
FLT NO     LDW      TIME
605       345.7    ####Z
WIND KTS  OAT C      QNH
090/17     +31     29.92
------------------------

REMARKS
NONE

16R               13123
LDW 345.7   MRLW 346.1/A
FLAPS 30    VREF +05
AUTOBRK 2    10833   5.7
AUTOBRK 3     9483   5.9
AUTOBRK 4     8323   6.1
MAX AUTO      6644   6.5
MAX MAN       6223   6.8
```

RJGG 18 Flaps 30

```
RJGG          GENX-2B67P
FLT NO     LDW      TIME
605       341.0    ####Z
WIND KTS  OAT C      QNH
000/00     +15     29.92
-----------------------
REMARKS
NONE

18                11483
LDW 341.0   MRLW 346.1/A
FLAPS 30    VREF +05
AUTOBRK 2    10233   5.4
AUTOBRK 3     8992   5.6
AUTOBRK 4     7900   5.8
MAX AUTO      6329   6.1
MAX MAN       5920   6.4
```

COMPANY NOTAMS

GENERAL

RKSI **A####/##** ####-XXX-## ##:## - UFN
CREATED:####-XXX-## ##:## **FL:** SFC - UNL

SUBJECT: RKSI-FREQ

RKSI IN-RANGE CALL FREQ

ATLAS AIR OPS (B777, B747, B767) USE - 131.000

RJAA **A####/##** ####-XXX-## ##:## - UFN
CREATED:####-XXX-## ##:## **FL:** SFC - UNL

SUBJECT: RJAA-CURFEW

****
NRT CURFEW:
B747-400/F CURFEW = ####-####Z DAILY
N###MC, N###MC, N###SG, N###SG, N###BA CURFEW = ####-####Z DAILY
B767, B777, B748 CURFEW = ####-####Z DAILY
****

RJAA **A####/##** ####-XXX-## ##:## - UFN
CREATED:####-XXX-## ##:## **FL:** SFC - UNL

SUBJECT: RJAA-FLTOPS

NRT RUNWAY USE

DUE TO SLOT RESTRICTIONS IN NRT, POLAR ARRIVALS BETWEEN ####Z
####Z MAY BE ASSIGNED RWY 34R/16L. YOU MAY REQUEST RWY 34L/16R
IF NECESSARY.

FOR DEPARTURES, UTILIZE THE DEPARTURE RUNWAY THAT IS ASSIGNED BY
ATC IN THE CLEARANCE. IF 34R/16L IS ASSIGNED IN THE CLEARANCE,
REQUEST 34L/16R IF REQUIRED FOR OPERATIONAL NECESSITY. MUST BE
WHEELS UP BY ####Z DUE TO CURFEW.

IF AN EXCEPTION TO THIS REQUIREMENT OCCURS, FILE AN FCR.

A####/## ####-XXX-## ##:## - UFN
CREATED:####-XXX-## ##:## **FL:** SFC - UNL

SUBJECT: ADMIN-AERODATA

AERODATA PERFORMANCE
IF 1/8 INCH OR LESS OF WATER, FROST, DRY SNOW OR WET SNOW
- USE WET RUNWAY FOR TAKEOFF PERFORMANCE.
- USE RCC/BRAKING ACTION, IF PROVIDED, FOR LANDING PERFORMANCE.
  OTHERWISE, USE LANDING SURFACE CONDITION.
THIS IS IN ACCORDANCE WITH FOM 8.1 RCAM MATRIX.

A####/## ####-XXX-## ##:## - UFN
CREATED:####-XXX-## ##:## **FL:** SFC - UNL

SUBJECT: ADMIN-DEICE

DEICING / ANTI-ICING INFORMATION FORM
---
* 1. TYPE OF PROCEDURE (DEICE OR DEICE/ANTI-ICE) (CIRCLE ONE) *
*   *
* 2. FLUID TYPE (TYPE I, II, III, OR IV)   (CIRCLE ONE)
*   BRAND:.....
*   *
* 3. FLUID MIXTURE RATIO -   /   *
*   (FOR TYPE II, III, OR IV FLUID ONLY)   *
*   *
* 4. TIME (UTC) OF THE START OF THE FINAL APPLICATION -   Z *
*   *
*   - - RETAIN THIS FORM WITH THE TRIP ENVELOPE - -   *
*   **FOR LCF AIRCRAFT ONLY - DEICE REQUIRES LOGBOOK ENTRY**   *

A####/## ####-XXX-## ##:## - UFN
CREATED:####-XXX-## ##:## **FL:** SFC - UNL

SUBJECT: ADMIN-PUBS747A

CURRENT AIRCRAFT LIBRARY REVISIONS

CURRENT   / CURRENT EFF ON RECEIPT
747-8F
- QRH.............. REV 17   DD-MMM-YY / NA
- FCOM VOL 1....... REV 18   DD-MMM-YY / NA
- FCOM VOL 2....... REV 20   DD-MMM-YY / NA
- DDG.............. VER 20   DD-MMM-YY / NA
- NORMAL CHECKLIST.......... DD-MMM-YY / NA
- ECL .... BFT2B-4000-01G9 / BFT29-4000-01L0
ALL 747
- SUPERNUM/JS BRIEFING CARD...DD-MMM-YY / NA
FOR ALL DDG TRS - REFER TO EFB COMPLY365

A####/## ####-XXX-## ##:## - UFN
CREATED:####-XXX-## ##:## **FL:** SFC - UNL

SUBJECT: ADMIN-WB INDEX

INDEX INFO REMOVED FROM W&B CO NOTAM. FOM 14.1.1 BEING REVISED.

A####/## ####-XXX-## ##:## - UFN
CREATED:####-XXX-## ##:## **FL:** SFC - UNL

SUBJECT: ###-WB

N###GT WEIGHT AND BALANCE ADVISORY

BASIC CREW 193,802
+1 - 193,921 / +2 - 194,040 / +3 - 194,159
+4 - 194,278 / +5 - 194,397 / +6 - 194,516

A####/## ####-XXX-## ##:## - UFN
CREATED:####-XXX-## ##:## **FL:** SFC - UNL

SUBJECT: B747-MAINDECK

****
FALSE MAIN DECK WARNINGS

THERE HAVE BEEN MULTIPLE FALSE MAIN DECK CARGO FIRE WARNING

MESSAGES CAUSED BY CONDENSATION OF MOISTURE AND FOG WHILE
CARRYING HIGH DENSITY FLOWERS AND LIVE ANIMALS SUCH AS PIGS
*MOST FALSE CARGO FIRE WARNING MESSAGES HAVE OCCURRED SEVERAL HRS
INTO THE FLIGHT AND MAIN DECK TEMP BELOW 8 DEGREES
*ANYTIME PERISHABLES OR LIVE ANIMALS ARE ON BOARD
THE USE OF FCOM SP PROCEDURES FOR CARRIAGE
OF ANIMALS AND PERISHABLES (FREIGHTER) MUST BE FOLLOWED
*IAW WITH FOM GUIDANCE, FLIGHT CREWS SHOULD DETERMINE THE
BEST COURSE OF ACTION BEFORE ENTERING CLASS E CARGO
COMPARTMENTS (MAIN DECK) TO VERIFY THE PRESENCE OF A FIRE

****

APT RKSI

ICN - SEOUL/INCHEON INTL DEPARTURE ## ##:## - ## ##:##
RWYS: 15L/33R 15R/33L 16L/34R 16R/34L

RUNWAY

RKSI ICN A0524/26 ####-XXX-## ##:## - ####-XXX-## ##:##
CREATED:####-XXX-## ##:## **FL:** SFC - UNL

RWY 16L/34R CLSD DUE TO WIP

TAXIWAY

RKSI ICN A0489/26 ####-XXX-## ##:## - ####-XXX-## ##:##
CREATED:####-XXX-## ##:## **FL:** SFC - UNL

TXL R10 BEHIND ACFT STAND NR 307 CLSD DUE TO WIP

RAMP

RKSI ICN A0490/26 ####-XXX-## ##:## - ####-XXX-## ##:##
CREATED:####-XXX-## ##:## **FL:** SFC - UNL

ACFT STAND NR 307 CLSD DUE TO WIP

APPROACH AND LANDING

RKSI ICN A0478/26 ####-XXX-## ##:## - ####-XXX-## ##:##
CREATED:####-XXX-## ##:## **FL:** SFC - UNL

THE TRIAL OPS FOR SIMULTANEOUS INDEPENDENT PARALLEL APCH IN FORCE
BTN RWY 33R AND 34L, BTN RWY 15L AND 16R

NAVIGATION

RKSI ICN G1302/26 ####-XXX-## ##:## - ####-XXX-## ##:##
CREATED:####-XXX-## ##:## **FL:** SFC - UNL

27 ####-#### ####-#### ####-####, 28 ####-#### ####-####
####-####, 29 ####-#### ####-####
GPS RAIM OUTAGES PREDICTED FOR NPA

RKSI ICN A0522/26 ####-XXX-## ##:## - ####-XXX-## ##:##
CREATED:####-XXX-## ##:## **FL:** SFC - UNL

####-####
ILS RWY 15R/33L U/S DUE TO WIP

OBSTACLE

RKSI ICN A0523/26 ####-XXX-## ##:## - ####-XXX-## ##:##
CREATED:####-XXX-## ##:## **FL:** SFC - UNL

####-####
TEMPO OBST(EXCAVATOR) ERECTED BTN RWY 15R/33L AND TWY C AS FLW
1. PSN: 372726.7N1262737.1E
   RADIUS: 10M
   HGT: 4.0M(13.12FT) AMSL
2. PSN: 372849.2N1262623.7E
   RADIUS: 10M
   HGT: 4.0M(13.12FT) AMSL
- RMK: NOT PENETRATING OLS

APT RJGG

NGO - CHUBU/CENTRAIR IN DESTINATION ## ##:## - ## ##:##
RWYS: 18/36

GENERAL

NIL

APT RJAA

NRT - TOKYO/NARITA INTL ALTN 1 ## ##:## - ## ##:##
RWYS: 16L/34R 16R/34L

TAXIWAY

RJAA NRT A0490/26 ####-XXX-## ##:## - ####-XXX-## ##:##
CREATED:####-XXX-## ##:## **FL:** SFC - UNL

####-####
TWY K(BTN E1 AND K1-HOLD),E1,C(BTN E1 AND P1) CLSD DUE TO MAINT

NAVIGATION

RJAA NRT A0495/26 ####-XXX-## ##:## - ####-XXX-## ##:##
CREATED:####-XXX-## ##:## **FL:** SFC - UNL

ILS Y RWY 16R GP U/S
LOC RWY 16R AVBL

FIR RKRR

INCHEON FIR

GENERAL

NIL

FIR RJJJ

FUKUOKA FIR

NAVIGATION

RJJJ Q0827/26 ####-XXX-## ##:## - PERM
CREATED:####-XXX-## ##:## **FL:** SFC - UNL

REF AIP PAGE ENR 4.1-13 (CHANGE TO READ)
MATSUMOTO VOR/DME/MBE REMARKS
CHANGE TO READ
VOR UNUSABLE:
040DEG-050DEG BEYOND 35NM BLW 11000FT.
050DEG-060DEG BEYOND 30NM BLW 11000FT.

AIRSPACE

RJJJ Q0682/26 ####-XXX-## ##:## - ####-XXX-## ##:##
CREATED:####-XXX-## ##:## **FL:** SFC - UNL

TRIGGER NOTAM-AIRAC AIP SUP 052/26
WEF ## XXX #### TIL ## XXX ####
ESTABLISHMENT OF TEMPO TRAINING AREAS (EAST OF TOHOKU)

RJJJ Q0681/26 ####-XXX-## ##:## - ####-XXX-## ##:##
CREATED:####-XXX-## ##:## **FL:** SFC - UNL

TRIGGER NOTAM-AIRAC AIP SUP 051/26
WEF ## XXX #### TIL ## XXX ####
ESTABLISHMENT OF TEMPO TRAINING AREAS(SOUTHEAST OF TOHOKU)

RJJJ Z0293/26 ####-XXX-## ##:## - ####-XXX-## ##:##
CREATED:####-XXX-## ##:## **FL:** SFC - UNL

####-####
FLOW CTL AT FIR BDRY AS FLWS,
RTE: B576/Y741/Y743
ACFT : NB ENTERING INCHEON FIR
PROC : FL390 NOT AVBL AT SALMI AND LIPLO
RMK/REF AIP ENR1.9-1

OBSTACLE

RJJJ V0749/26 ####-XXX-## ##:## - ####-XXX-## ##:##
CREATED:####-XXX-## ##:## **FL:** SFC - UNL

OBST LGT ON PWR LINE TOWER-U/S
PSN : 323121.21N1302730.64E (KAMIAMAKUSA-SHI IN KUMAMOTO)
RMK/OBST LGT IN PLACE OF OBST DAY MARKING FOR PWR LINE TOWER
FM SFC TO 469FT AMSL

WARNING

RJJJ Q0428/26 ####-XXX-## ##:## - ####-XXX-## ##:##(EST)
CREATED:####-XXX-## ##:## **FL:** SFC - UNL

OPERATORS OF ACFT REGISTERED IN JAPAN ARE ADVISED NOT TO ENTER
MINSK(UMMV) FIR DUE TO SERIOUS SAFETY AND SECURITY CONCERNS TO
COMMERCIAL AVIATION.

RJJJ P0805/26 ####-XXX-## ##:## - ####-XXX-## ##:##(EST)
CREATED:####-XXX-## ##:## **FL:** SFC - UNL

ALL VFR ACFT ARE REQUESTED TO AVOID FLYING IN FLWG AIRSPACE
DUE TO THE ANTIBALLISTIC MISSILES MAY BE LAUNCHED
FOR THE DESTRUCTION OF AN OBJECT PROPELLED BY ROCKET
LAUNCHED FM NORTH KOREA
AIRSPACE:
(1)264419N1275729E 255619N1275729E
255619N1272129E 264419N1272129E(NAHA-SHI)
(2)251802N1253730E 243002N1253730E
243002N1250130E 251802N1250130E(MIYAKOJIMA)
(3)245604N1242912E 240804N1242912E
240804N1235321E 245604N1235321E(ISHIGAKIJIMA)
(4)245838N1231516E 241038N1231516E
241038N1223916E 245838N1223916E(YONAGUNIJIMA)
RMK/
1)EXC ACFT OF GOVERNMENT AGENCIES,DOCTOR HEL AND
ACFT WITH PRIOR COORDINATION WITH JAPAN SELF DEFENSE FORCE.
MINISTRY OF DEFENSE JOINT STAFF OFFICE
TEL:03-####-####(EXT 30929)
2)ALL VFR ACFT FLYING WI AIRSPACE(EXC EACH CTR AND INFO ZONE) ARE
REQUESTED TO CONTACT FLW FREQ
CALL SIGN : RODE RICK
FREQ : 123.1MHZ,138.05MHZ

RJJJ P0806/26 ####-XXX-## ##:## - ####-XXX-## ##:##(EST)
CREATED:####-XXX-## ##:## **FL:** SFC - UNL

ALL ACFT INTENDING TO FLY WI FUKUOKA FIR ARE ADVISED TO PAY
SPECIAL ATTENTION TO THE FLWG INFORMATION.
IN ACCORDANCE WITH ARTICLE 82-3 OF JAPAN SELF DEFENSE FORCE LAW,
ANTIBALLISTIC MISSILES MAY BE LAUNCHED FOR THE DESTRUCTION OF THE
ROCKET EXP TO BE LAUNCHED FM NORTH KOREA.
THE ANTIBALLISTIC MISSILES ARE DEPLOYED AT POSITIONS BLW,
(1)NAHA-SHI : 261219N1273929E
(2)MIYAKOJIMA : 244602N1251930E
(3)ISHIGAKIJIMA : 242404N1241121E
(4)YONAGUNIJIMA : 242638N1225716E

GENERAL

RJJJ Q0680/26 ####-XXX-## ##:## - ####-XXX-## ##:##
CREATED:####-XXX-## ##:## **FL:** SFC - UNL

TRIGGER NOTAM-PERM AIRAC AIP AMDT NR3/2026
WEF ## XXX ####
REVISION OF AWY
REVISION OF RNAV ROUTES
REVISION OF DCT ROUTES
ESTABLISHMENT OF REPORTING POINT,ETC.

APT RKSI

ICN - SEOUL/INCHEON INTL DEPARTURE ## ##:## - ## ##:##
RWYS: 15L/33R 15R/33L 16L/34R 16R/34L

TAF

```
TAF RKSI ######Z ####/#### 32005KT 9999 SCT050 TX31/####Z TN25/####Z
```

METAR

```
METAR RKSI ######Z 32005KT 9999 SCT050 31/25 Q1013 NOSIG
```

APT RJGG

NGO - CHUBU/CENTRAIR IN DESTINATION ## ##:## - ## ##:##
RWYS: 18/36

TAF

```
TAF RJGG ######Z ####/#### 30003KT 0150 -RA FG OVC001
```

METAR

```
METAR RJGG ######Z 30003KT 0150 -RA FG OVC001 31/31 Q1003 RMK A2962
```

APT RJAA

NRT - TOKYO/NARITA INTL ALTN 1 ## ##:## - ## ##:##
RWYS: 16L/34R 16R/34L

TAF

```
TAF RJAA ######Z ####/#### 09017KT 8000 OVC008
```

METAR

```
METAR RJAA ######Z 09017KT 8000 OVC008 31/25 Q1013 RMK A2992
```

FIR RKRR

INCHEON FIR

SIGMET

```
NIL
```

FIR RJJJ

FUKUOKA FIR


SIGMET

```
NIL
```

Maps and Company Docs

FOR TRAINING USE ONLY. NOT A VALID RELEASE. PERFORMANCE VALUES ARE DERIVED OR APPROXIMATED.

Note - this is a placeholder or a representative company OFP Weather map and may not reflect the actual enroute weather conditions

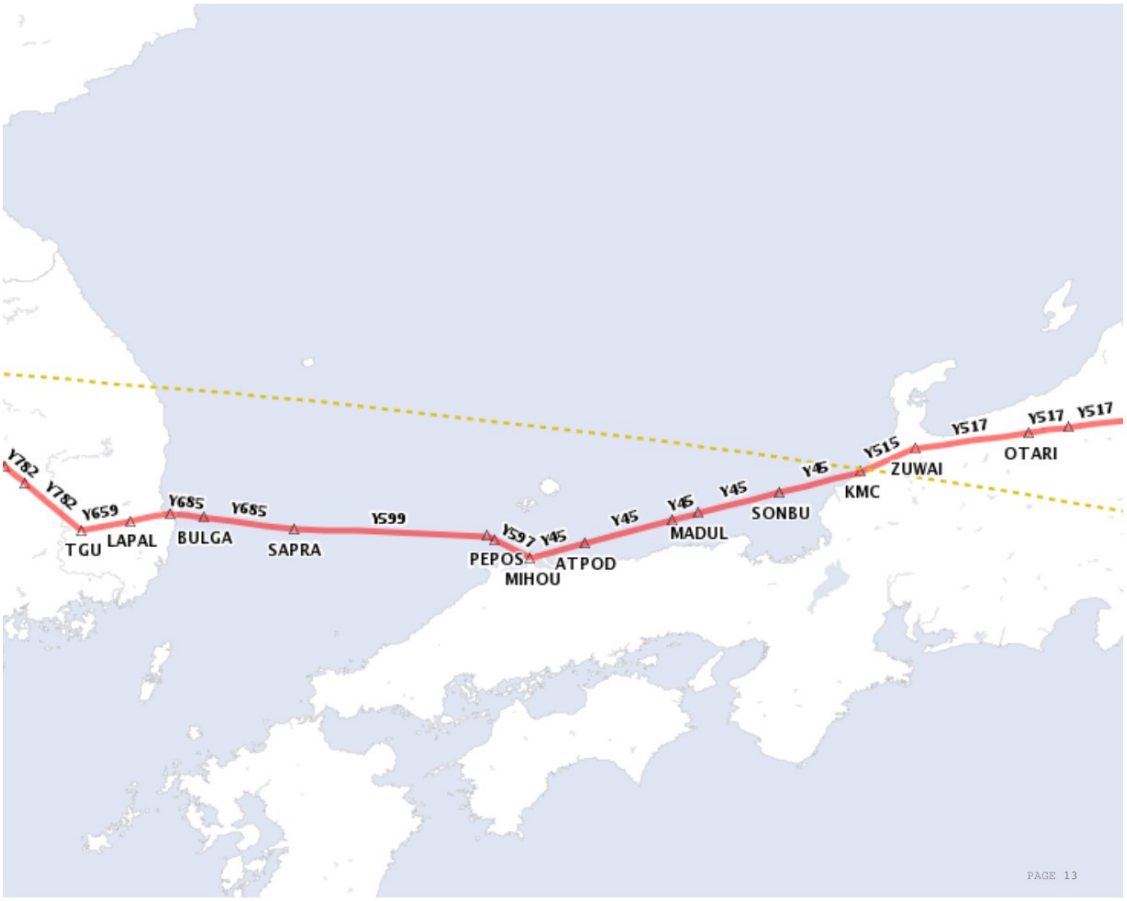

CLEARANCE and ATIS

FOR TRAINING USE ONLY. NOT A VALID RELEASE. PERFORMANCE VALUES ARE DERIVED OR APPROXIMATED.

RKSI DEP ATIS ALPHA ####Z

```
EXP RWY 15R
WIND 320/05KT  VIS 10 SM
SCT050
T 31  DP 25  QNH 1013
RWY 16L UNUSABLE DUE TO
WORK IN PROGRESS.
CAUTION BIRD ACTIVITY.
ADVISE ON INITIAL CONTACT YOU
HAVE INFORMATION ALPHA.
```

CLEARANCE - DCL RKSI GTI 605

```
CLD ####Z ###### RKSI PDC ###
GTI605 CLRD RJGG OFF 15R VIA
OSPOT2C CLIMB VIA SID FL210
SQUAWK 3462
NEXT FREQ 121.8  ATIS A
```

RKSI DEP ATIS BRAVO ####Z (RWY CHANGE)

```
EXP RWY 33L
WIND 320/05KT  VIS 10 SM
SCT050
T 31  DP 25  QNH 1013
RUNWAY CHANGE TO 33L IN EFFECT.
RWY 16L UNUSABLE DUE TO
WORK IN PROGRESS.
CAUTION BIRD ACTIVITY.
ADVISE ON INITIAL CONTACT YOU
HAVE INFORMATION BRAVO.
```

AMENDED CLEARANCE - DCL RKSI GTI 605

```
CLD ####Z ###### RKSI PDC ###
GTI605 CLRD RJGG OFF 33L VIA
OSPOT2E CLIMB VIA SID FL210
SQUAWK 3462
NEXT FREQ 121.8  ATIS B
```

RJGG ARR ATIS CHARLIE ####Z (ENROUTE)

```
WIND 300/03KT  VIS 150 METERS
CEILING 120 FT OVC  -RA FG
T 31  DP 31  QNH 2962
APPROACH IN USE ILS RWY 36
(CAT III OPS IN PROGRESS)
EXPECT LANDING RWY 36
ADVISE ON INITIAL CONTACT YOU
HAVE INFORMATION CHARLIE.
```

RJAA ARR ATIS DELTA ####Z (DIVERSION)

```
WIND 090/17KT  VIS 5 MILES
CEILING 800 FT OVC
T 31  DP 25  QNH 2992
APPROACH IN USE LOC RWY 16R
(ILS Y 16R U/S)
LANDING RWY 16R  DEP RWY 16L
ADVISE ON INITIAL CONTACT YOU
HAVE INFORMATION DELTA.
```