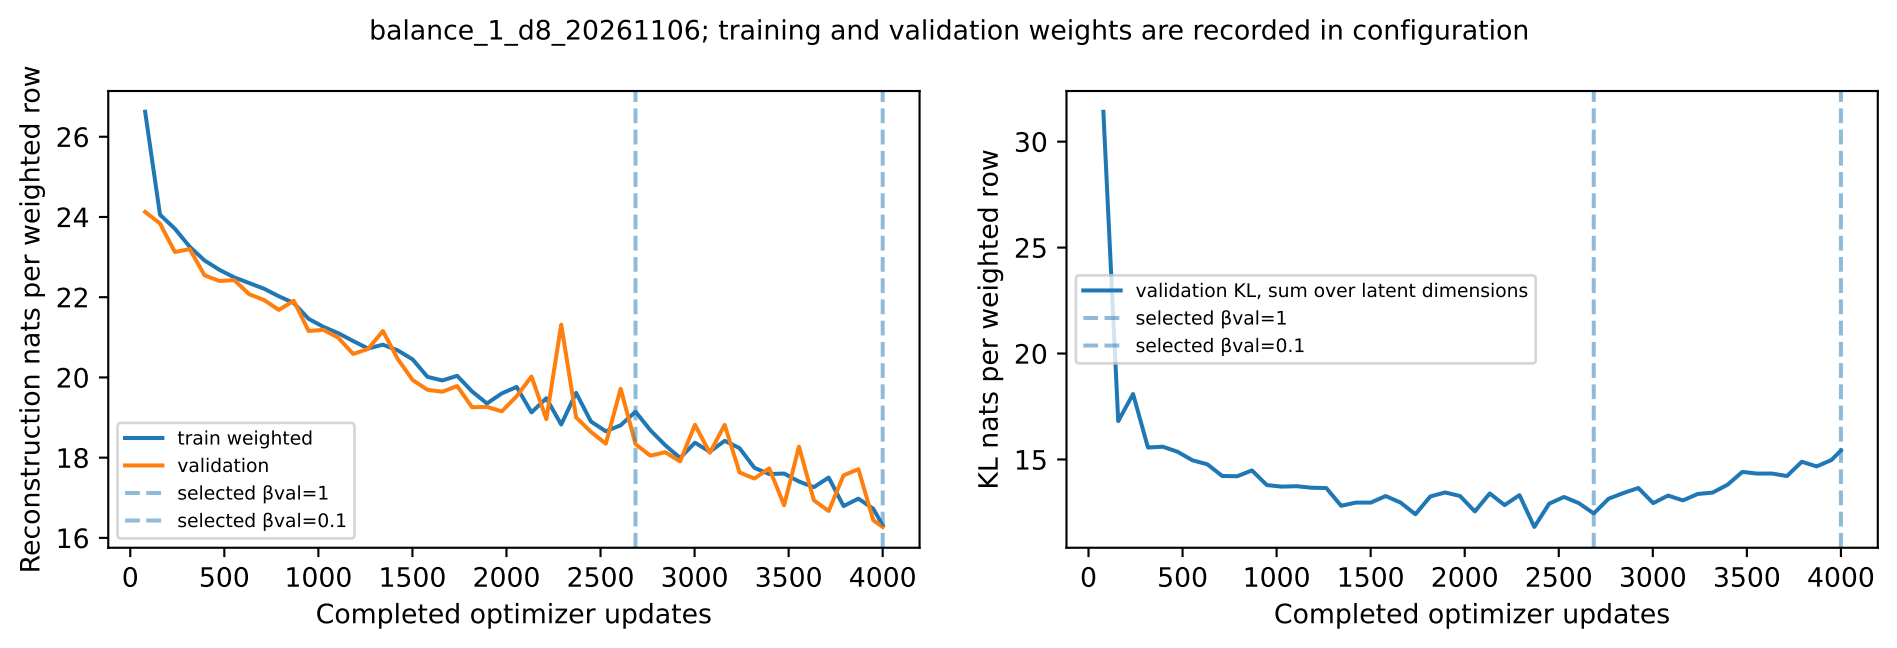
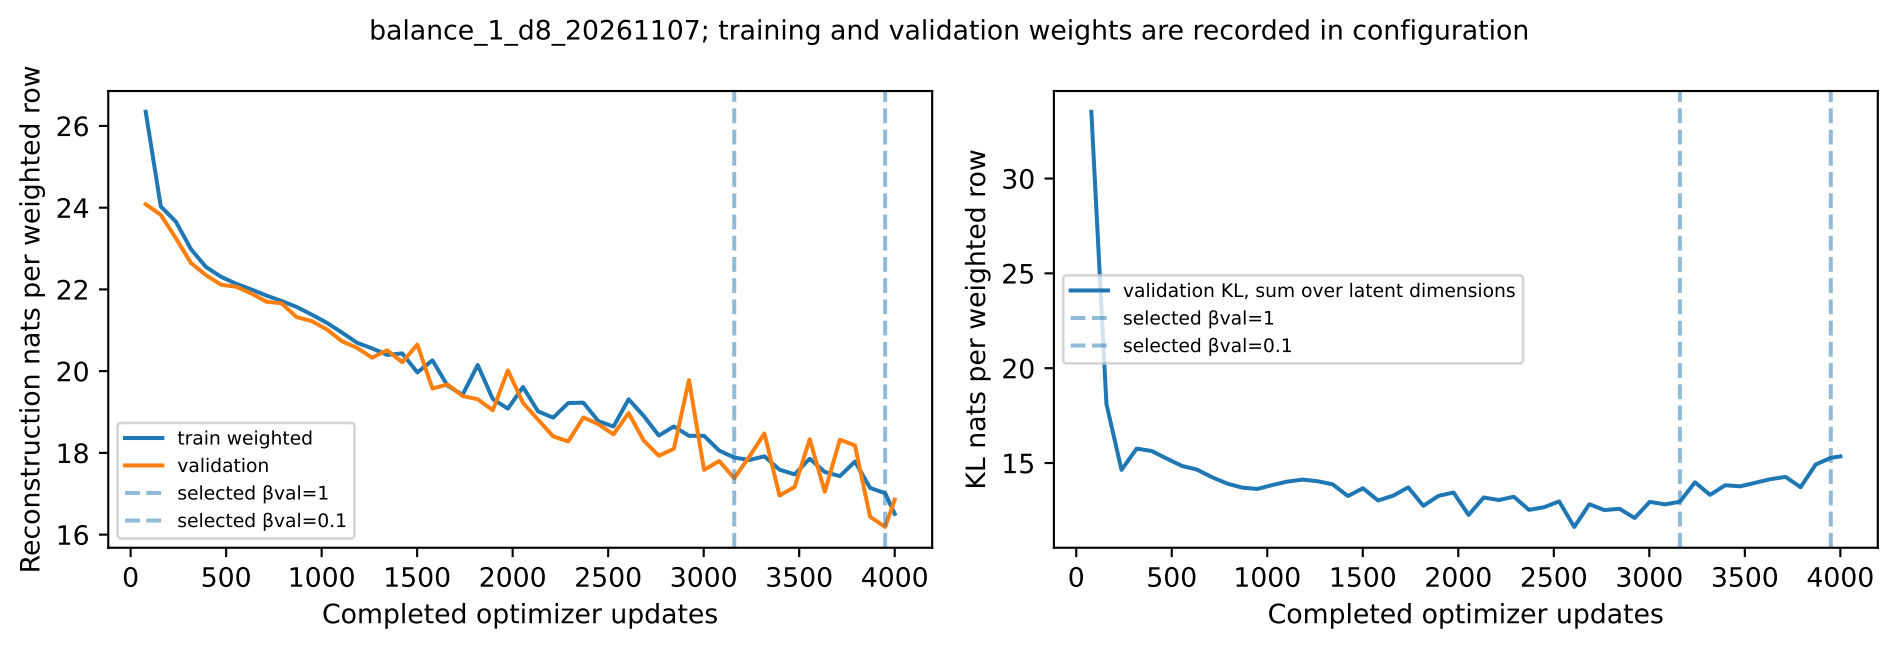
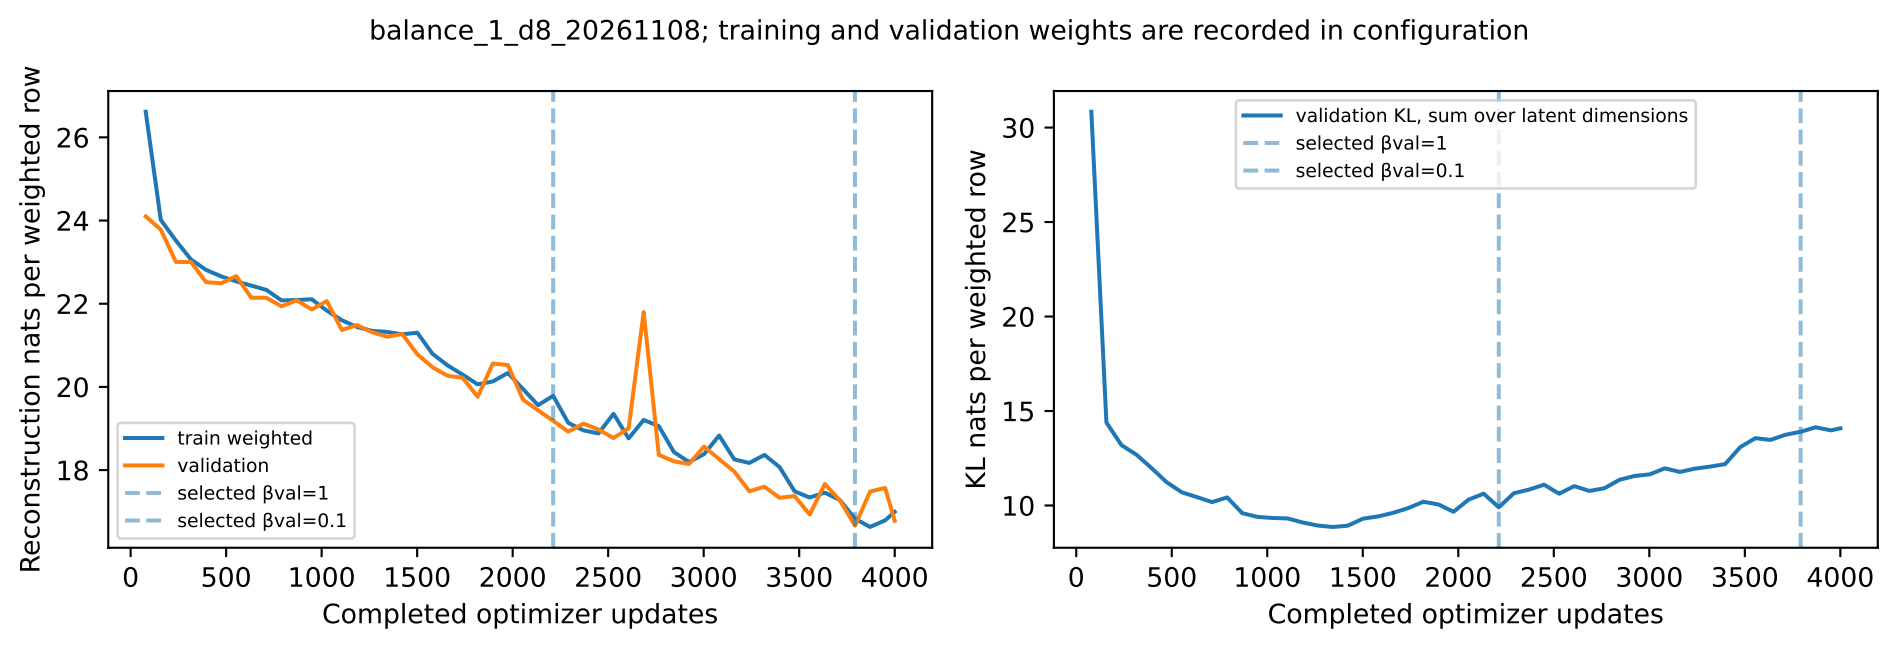
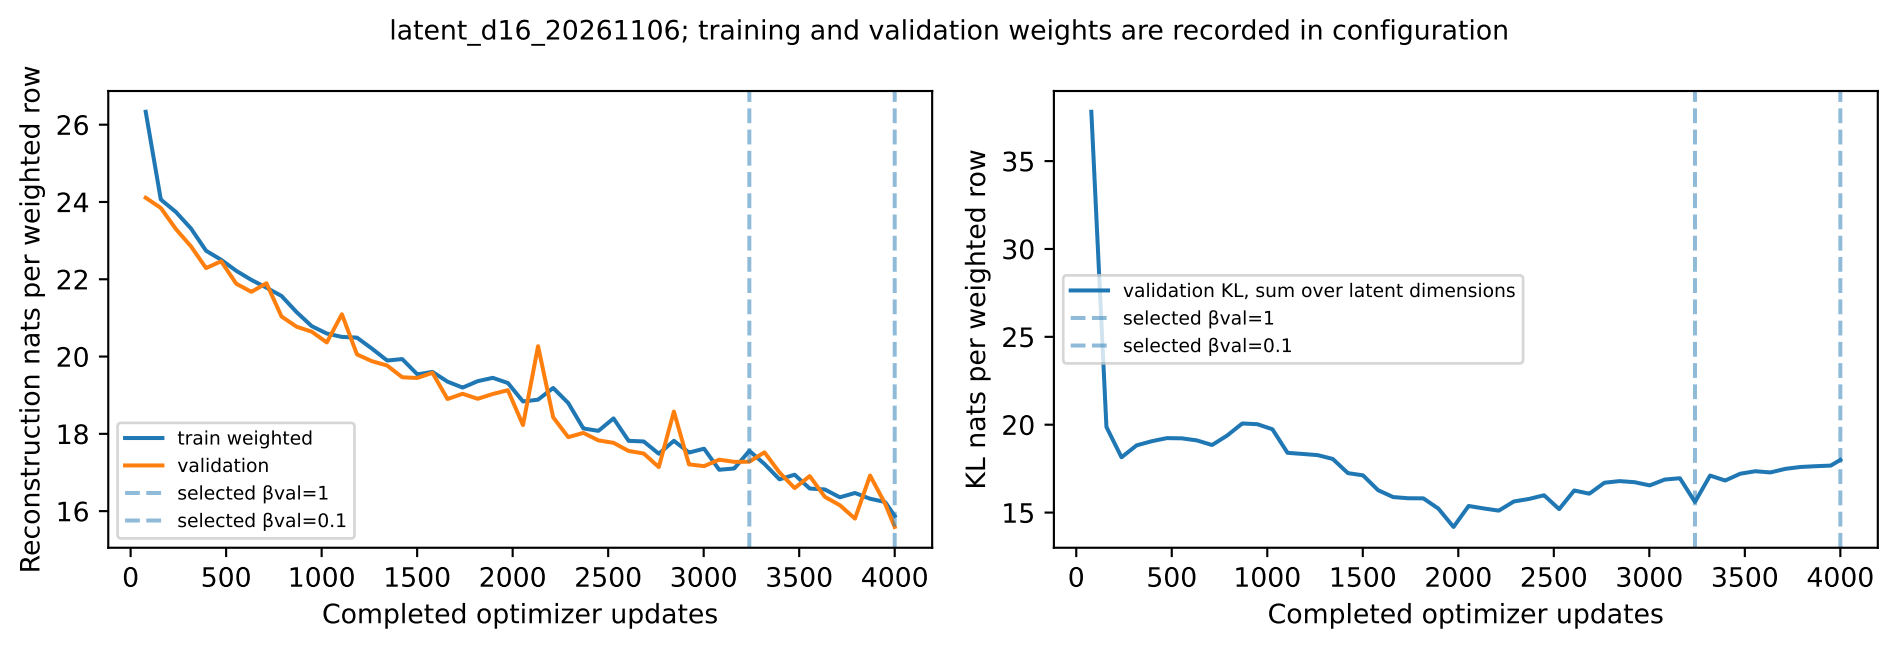
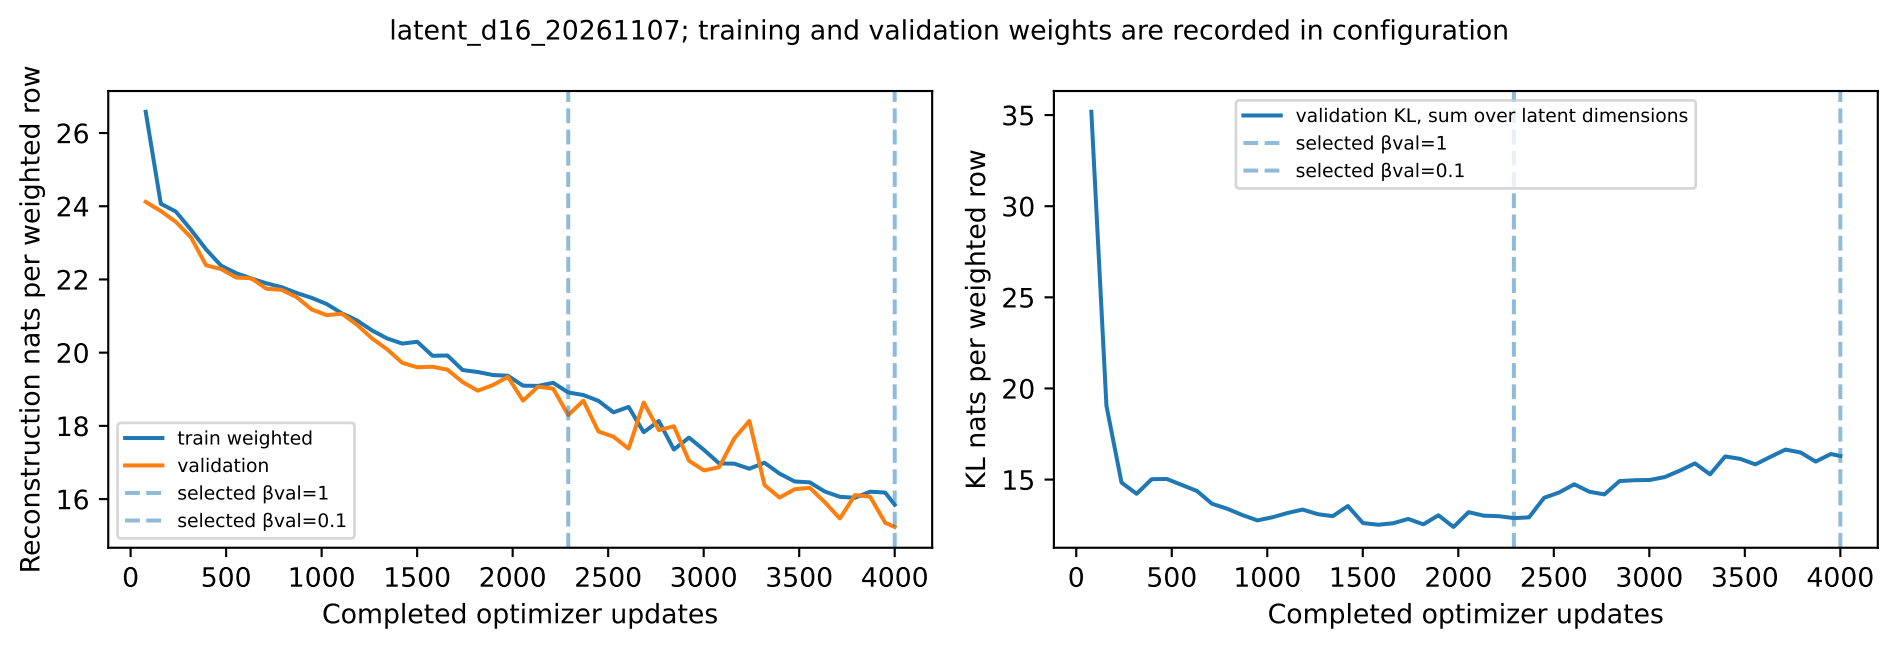
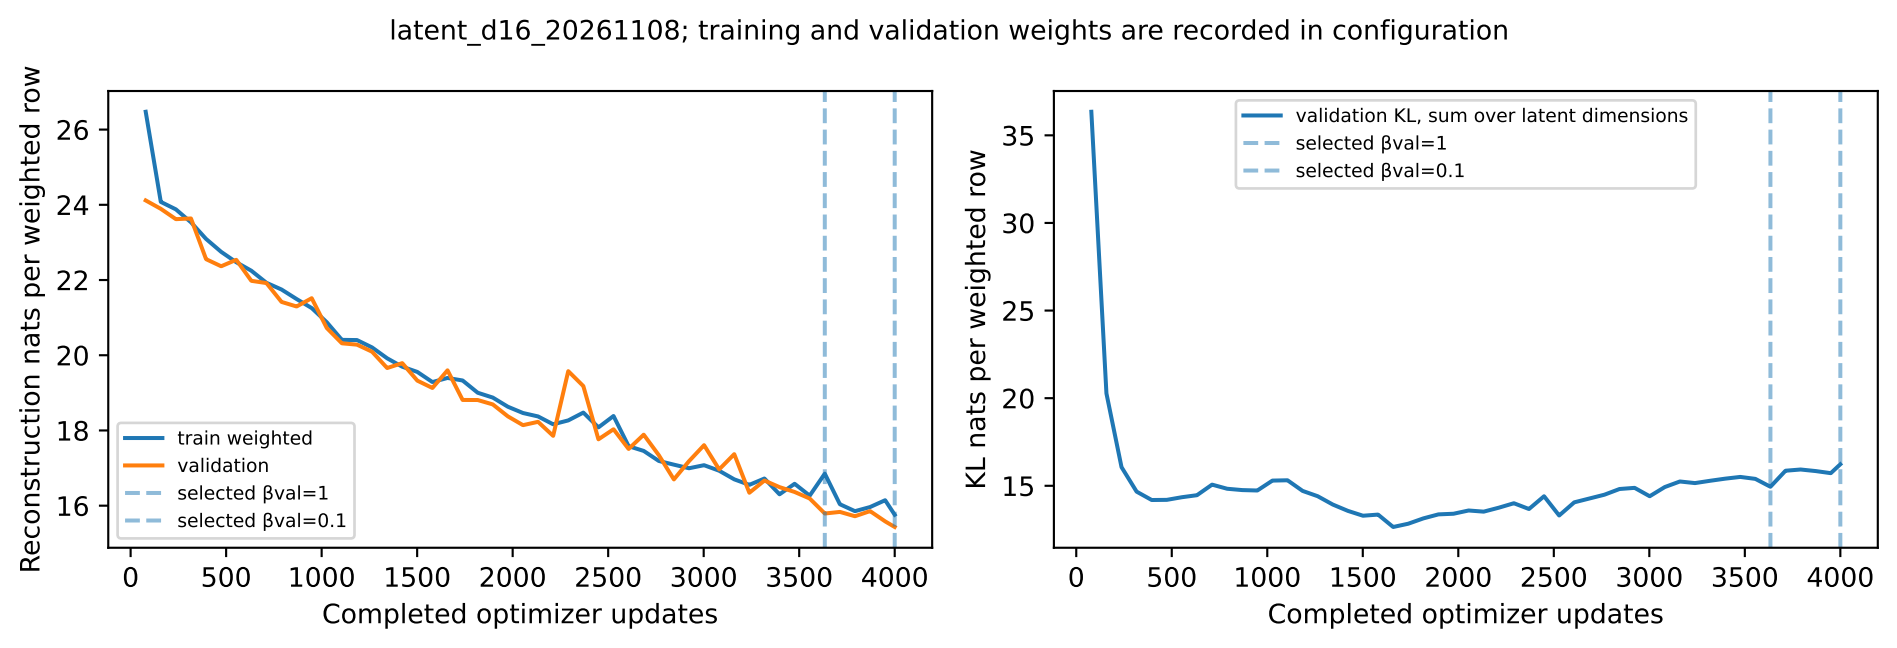

balance_1_d8_20261106; training and validation weights are recorded in configuration
Reconstruction nats per weighted row
Completed optimizer updates
train weighted
validation
selected βval=1
selected βval=0.1
KL nats per weighted row
Completed optimizer updates
validation KL, sum over latent dimensions
selected βval=1
selected βval=0.1

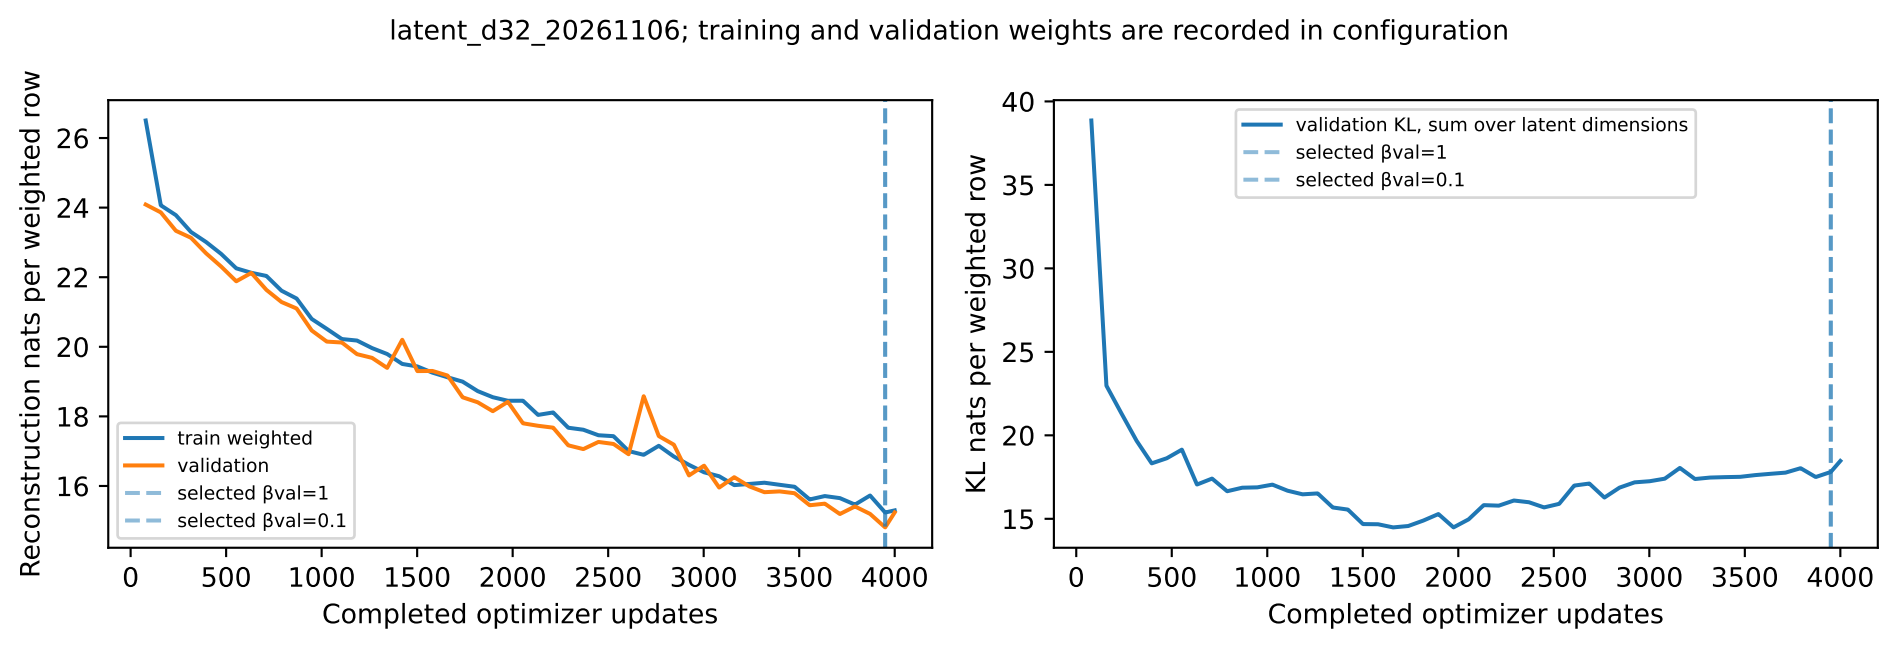

balance_1_d8_20261107; training and validation weights are recorded in configuration
Reconstruction nats per weighted row
Completed optimizer updates
train weighted
validation
selected βval=1
selected βval=0.1
KL nats per weighted row
Completed optimizer updates
validation KL, sum over latent dimensions
selected βval=1
selected βval=0.1

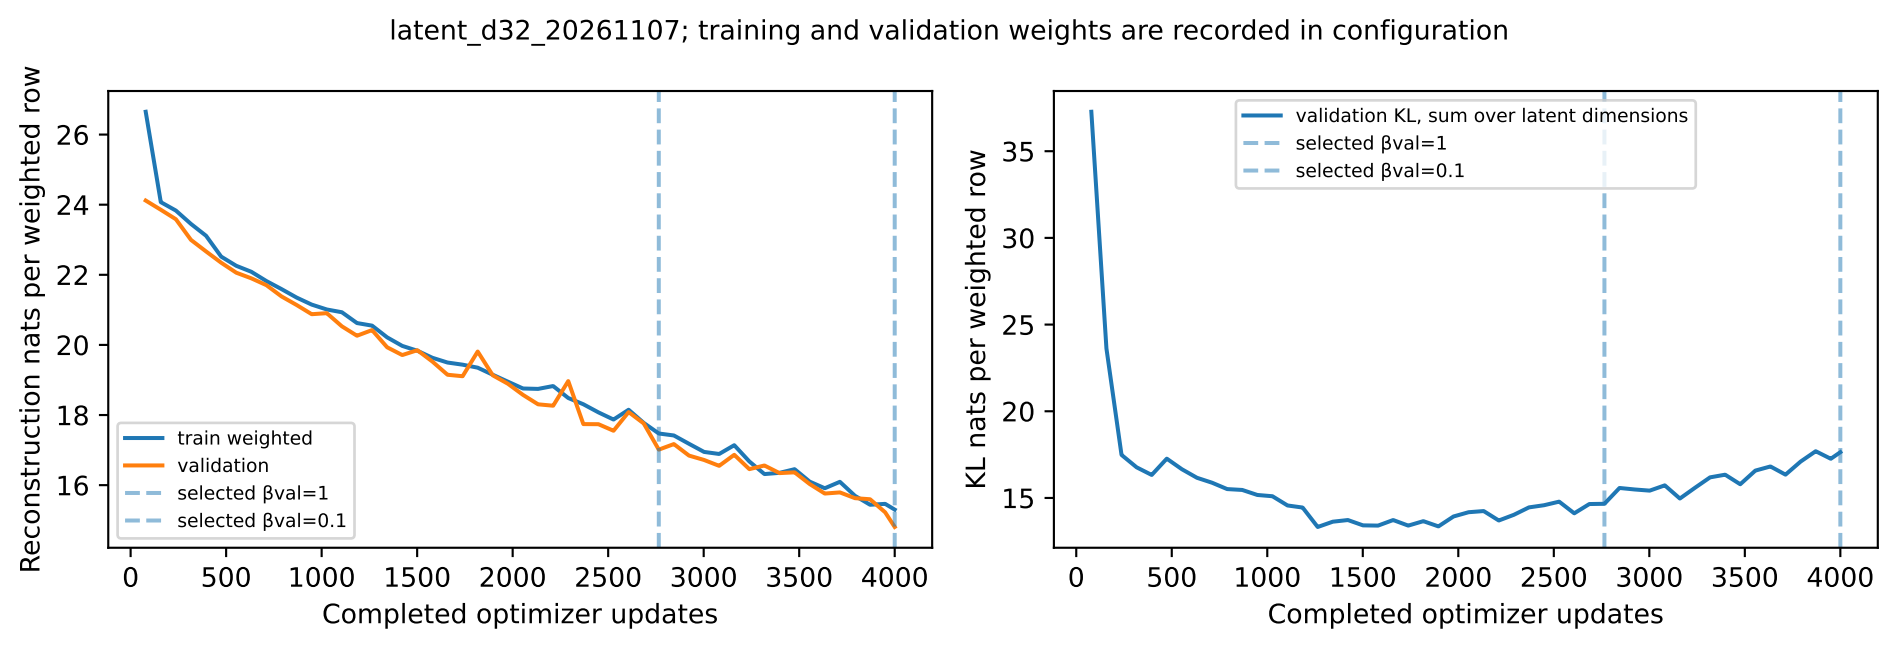

balance_1_d8_20261108; training and validation weights are recorded in configuration
Reconstruction nats per weighted row
Completed optimizer updates
train weighted
validation
selected βval=1
selected βval=0.1
KL nats per weighted row
validation KL, sum over latent dimensions
selected βval=1
selected βval=0.1
Completed optimizer updates

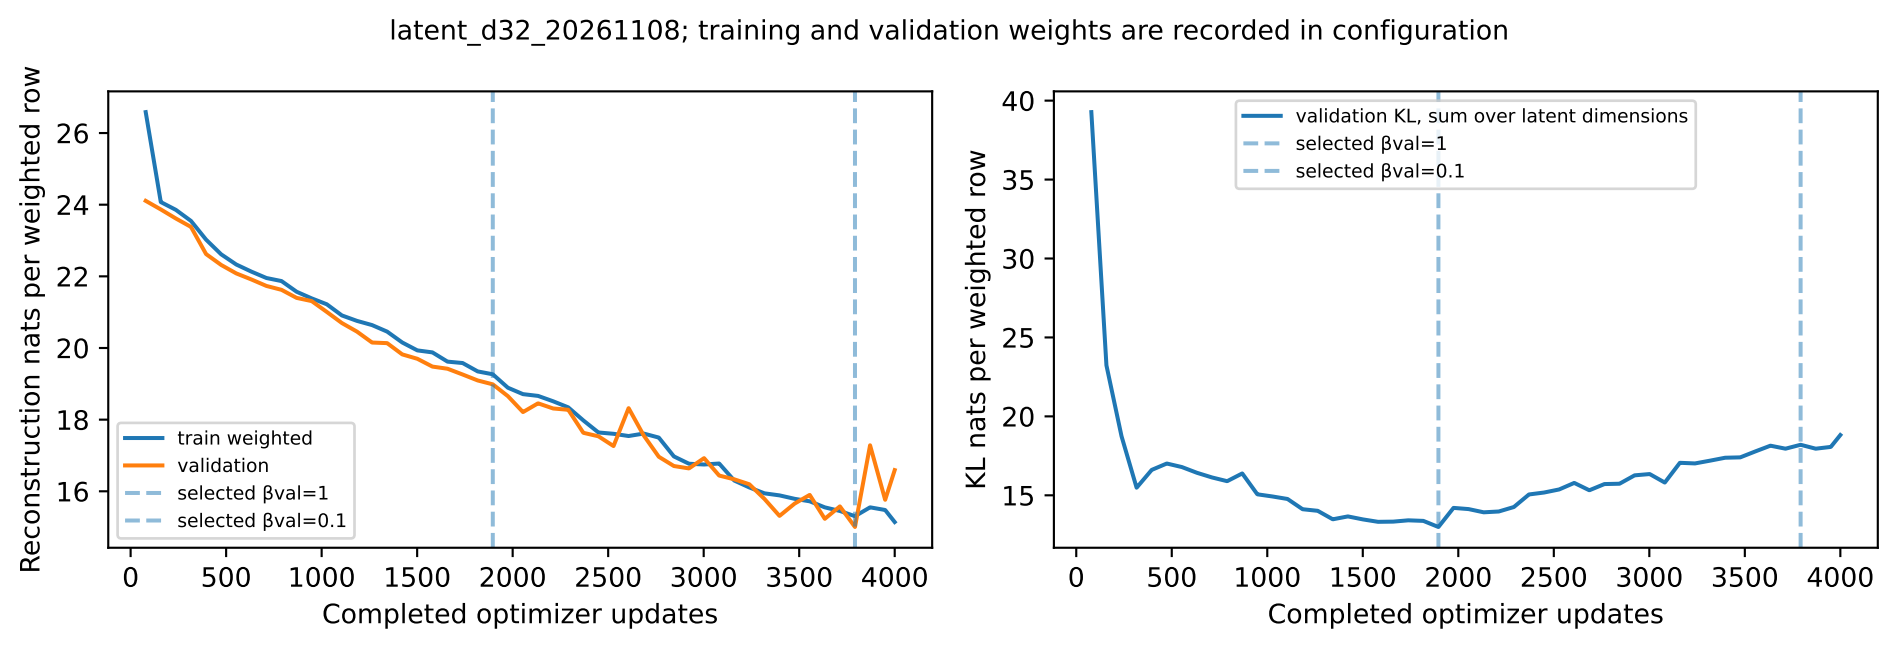

latent_d16_20261106; training and validation weights are recorded in configuration
Reconstruction nats per weighted row
Completed optimizer updates
train weighted
validation
selected βval=1
selected βval=0.1
KL nats per weighted row
Completed optimizer updates
validation KL, sum over latent dimensions
selected βval=1
selected βval=0.1

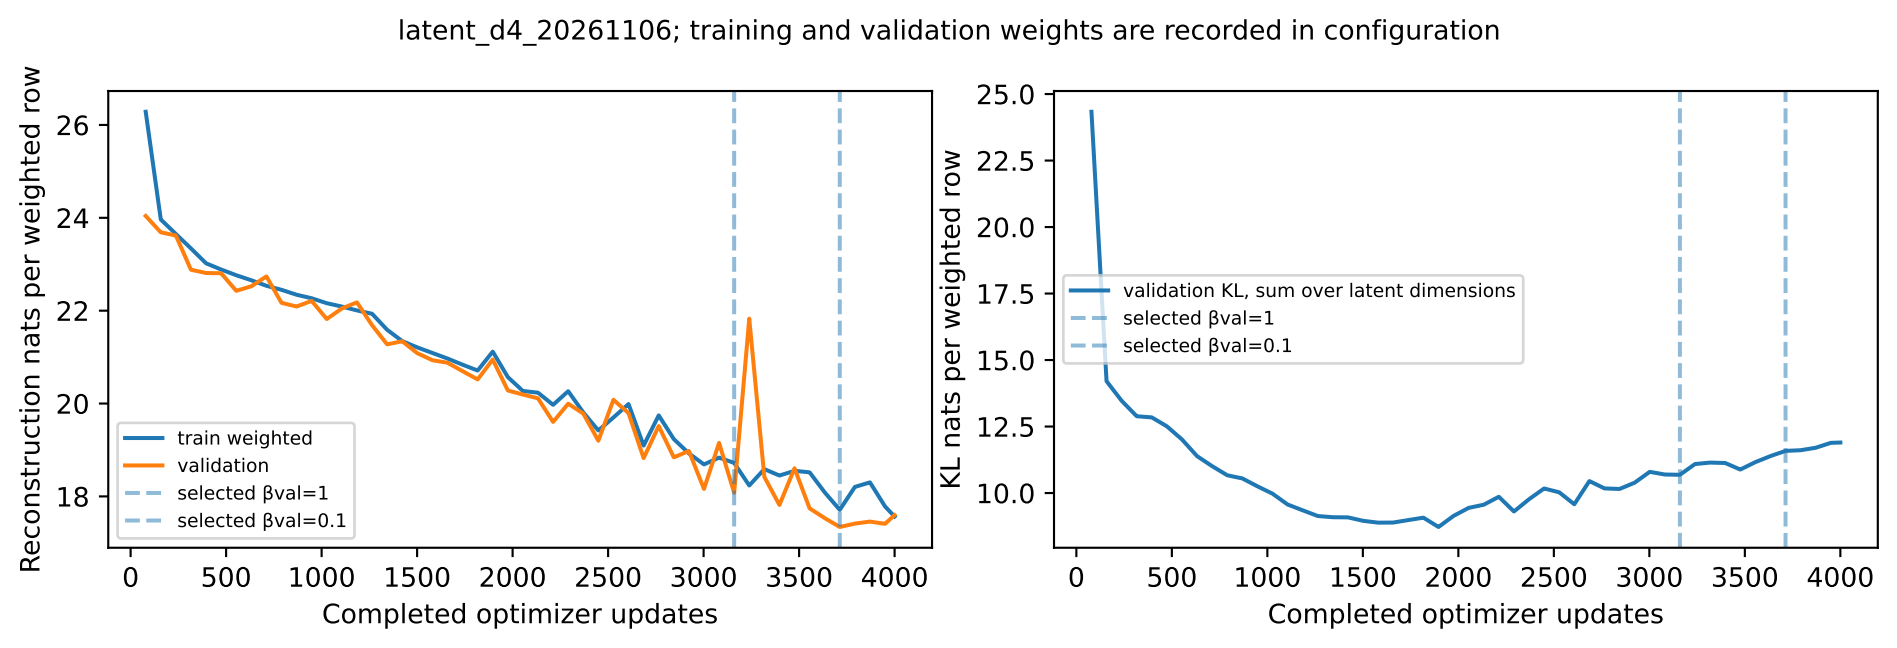

latent_d16_20261107; training and validation weights are recorded in configuration
Reconstruction nats per weighted row
Completed optimizer updates
train weighted
validation
selected βval=1
selected βval=0.1
KL nats per weighted row
Completed optimizer updates
validation KL, sum over latent dimensions
selected βval=1
selected βval=0.1

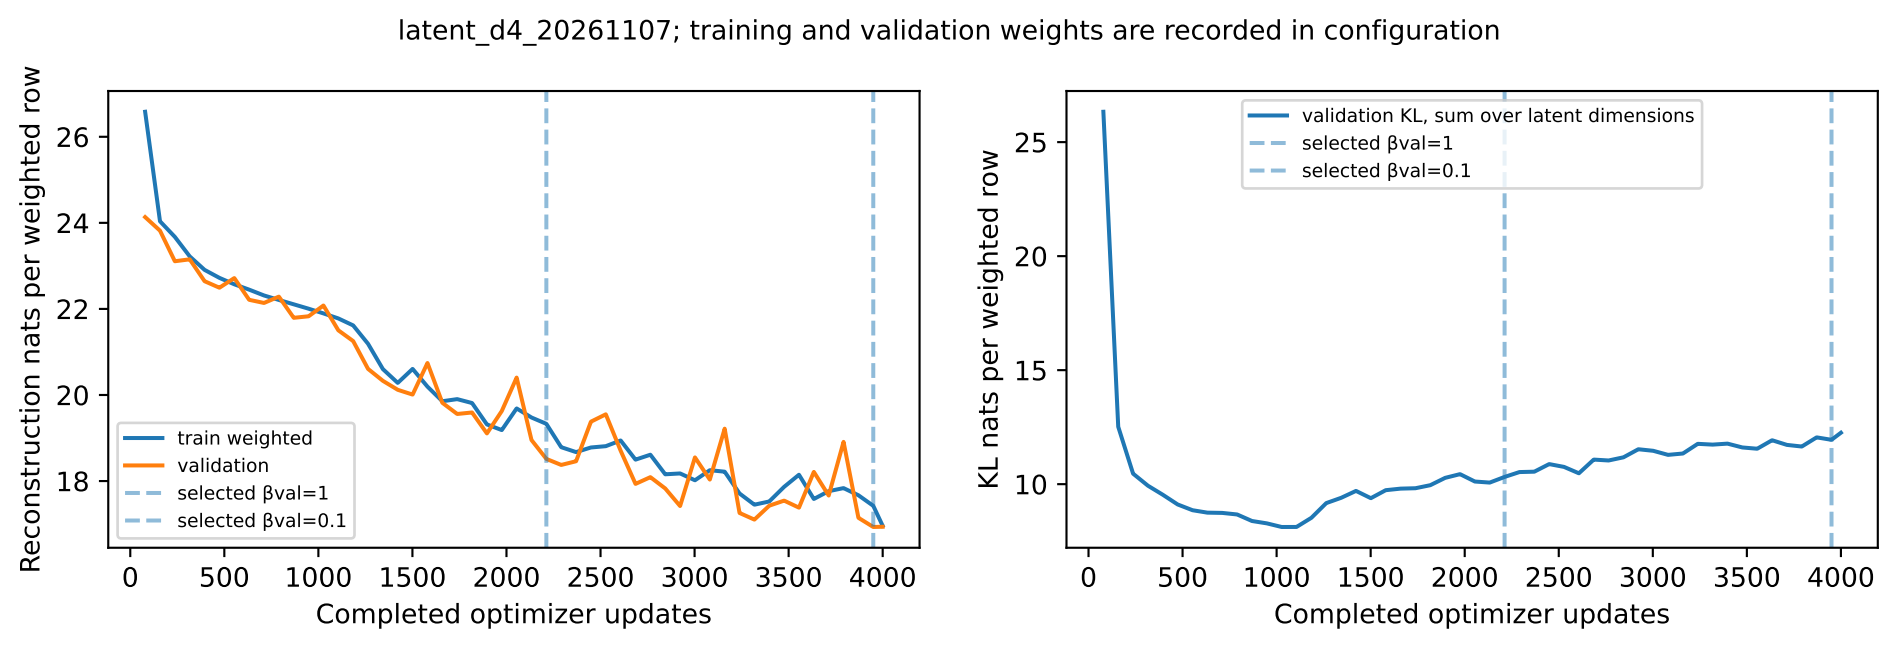

latent_d16_20261108; training and validation weights are recorded in configuration
Reconstruction nats per weighted row
Completed optimizer updates
train weighted
validation
selected βval=1
selected βval=0.1
KL nats per weighted row
Completed optimizer updates
validation KL, sum over latent dimensions
selected βval=1
selected βval=0.1

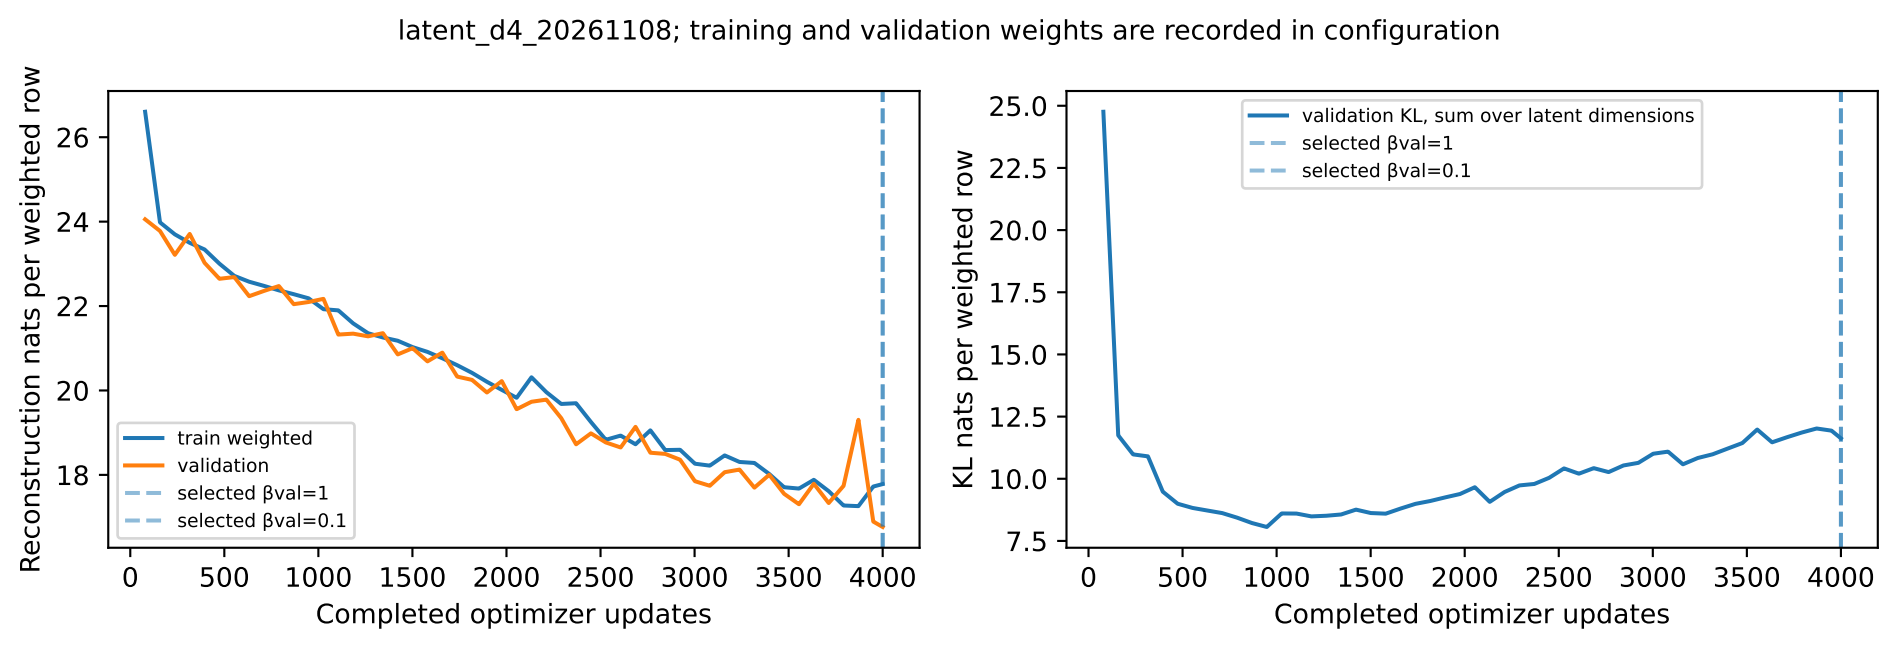

latent_d32_20261106; training and validation weights are recorded in configuration
Reconstruction nats per weighted row
Completed optimizer updates
train weighted
validation
selected βval=1
selected βval=0.1
KL nats per weighted row
Completed optimizer updates
validation KL, sum over latent dimensions
selected βval=1
selected βval=0.1

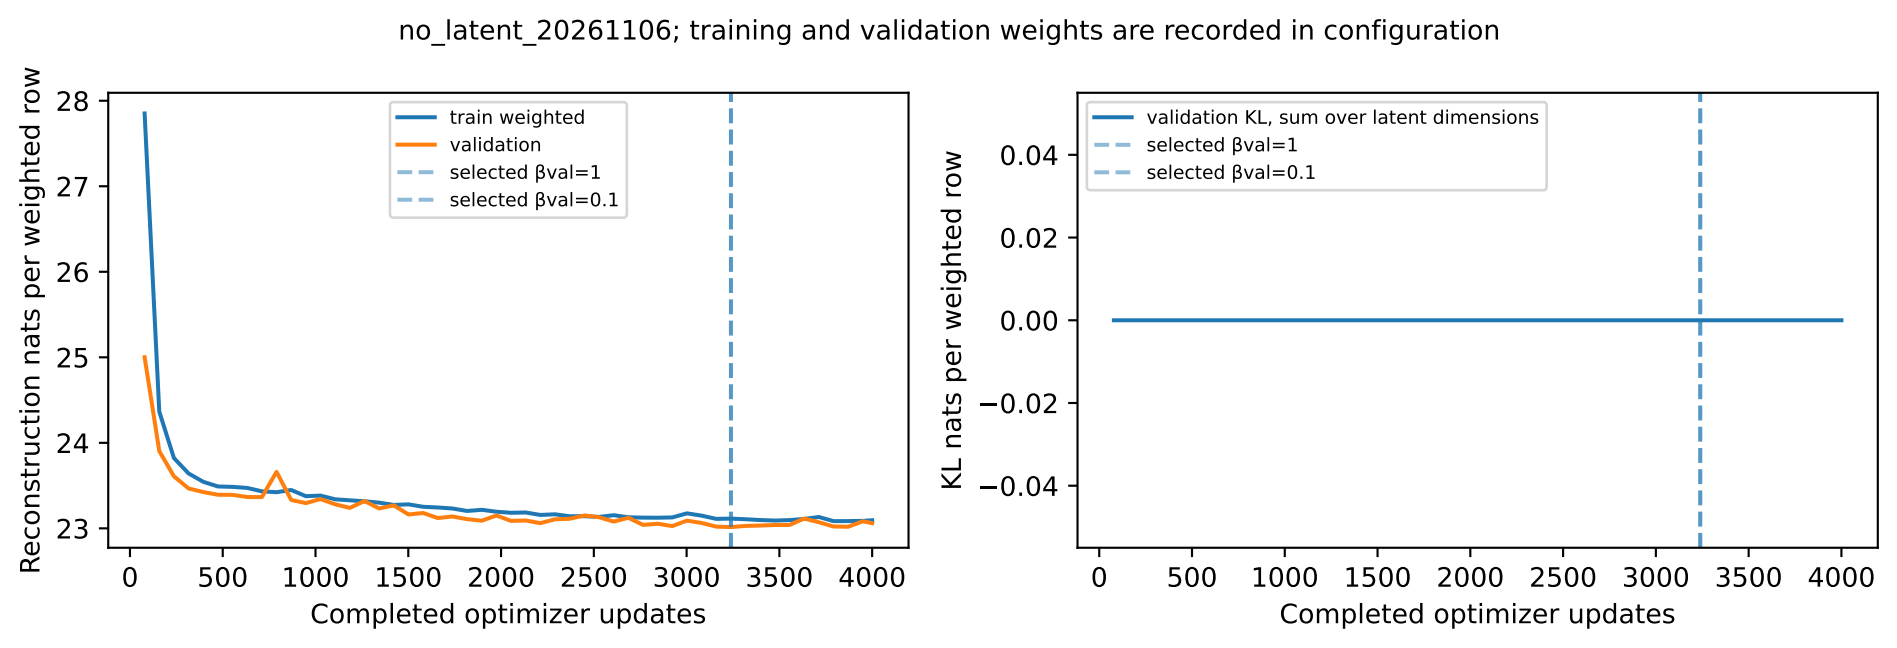

latent_d32_20261107; training and validation weights are recorded in configuration
Reconstruction nats per weighted row
Completed optimizer updates
train weighted
validation
selected βval=1
selected βval=0.1
KL nats per weighted row
validation KL, sum over latent dimensions
selected βval=1
selected βval=0.1
Completed optimizer updates

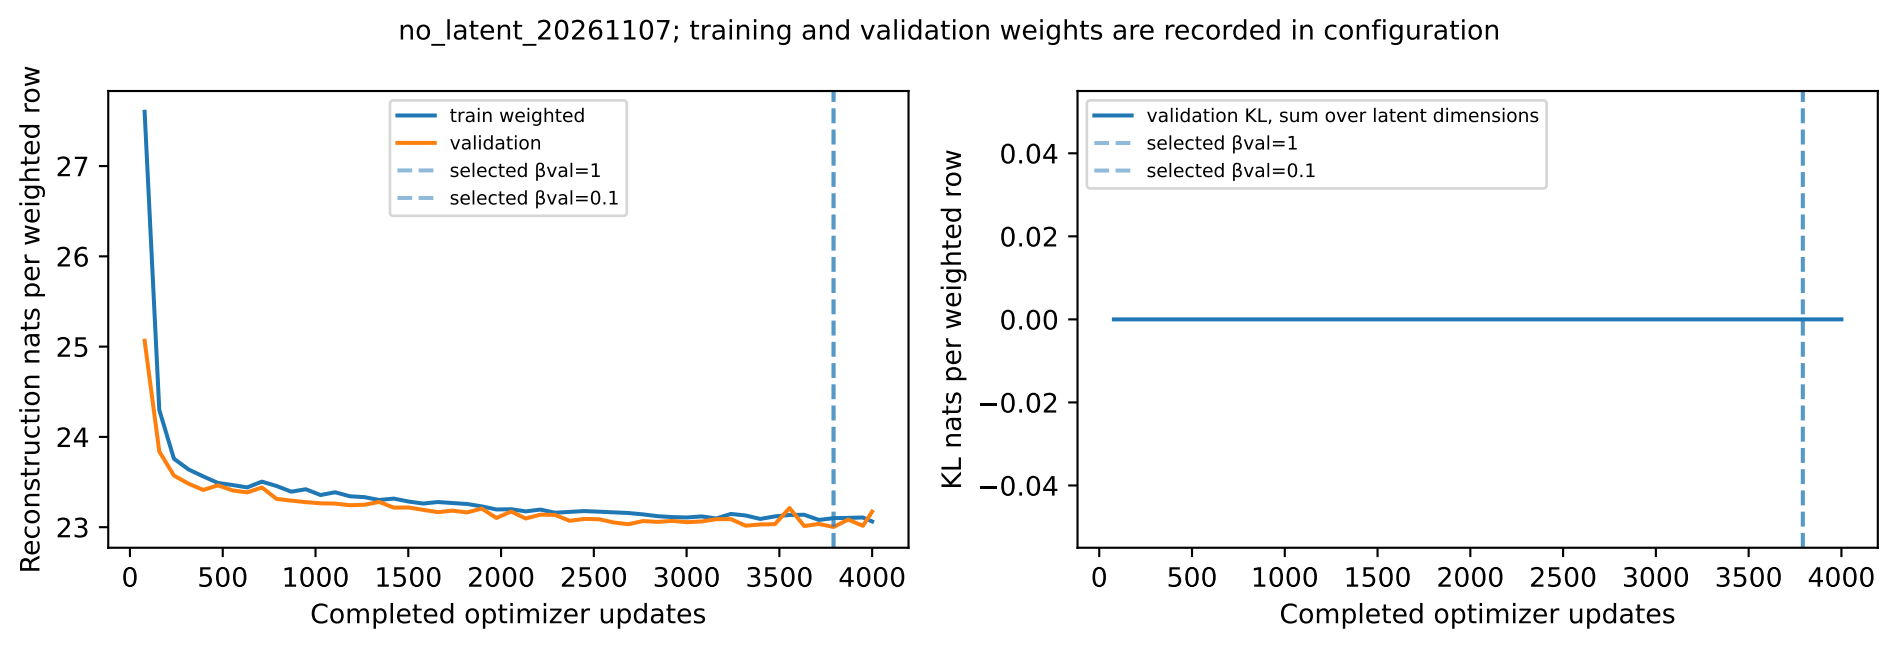

latent_d32_20261108; training and validation weights are recorded in configuration
Reconstruction nats per weighted row
Completed optimizer updates
train weighted
validation
selected βval=1
selected βval=0.1
KL nats per weighted row
Completed optimizer updates
validation KL, sum over latent dimensions
selected βval=1
selected βval=0.1

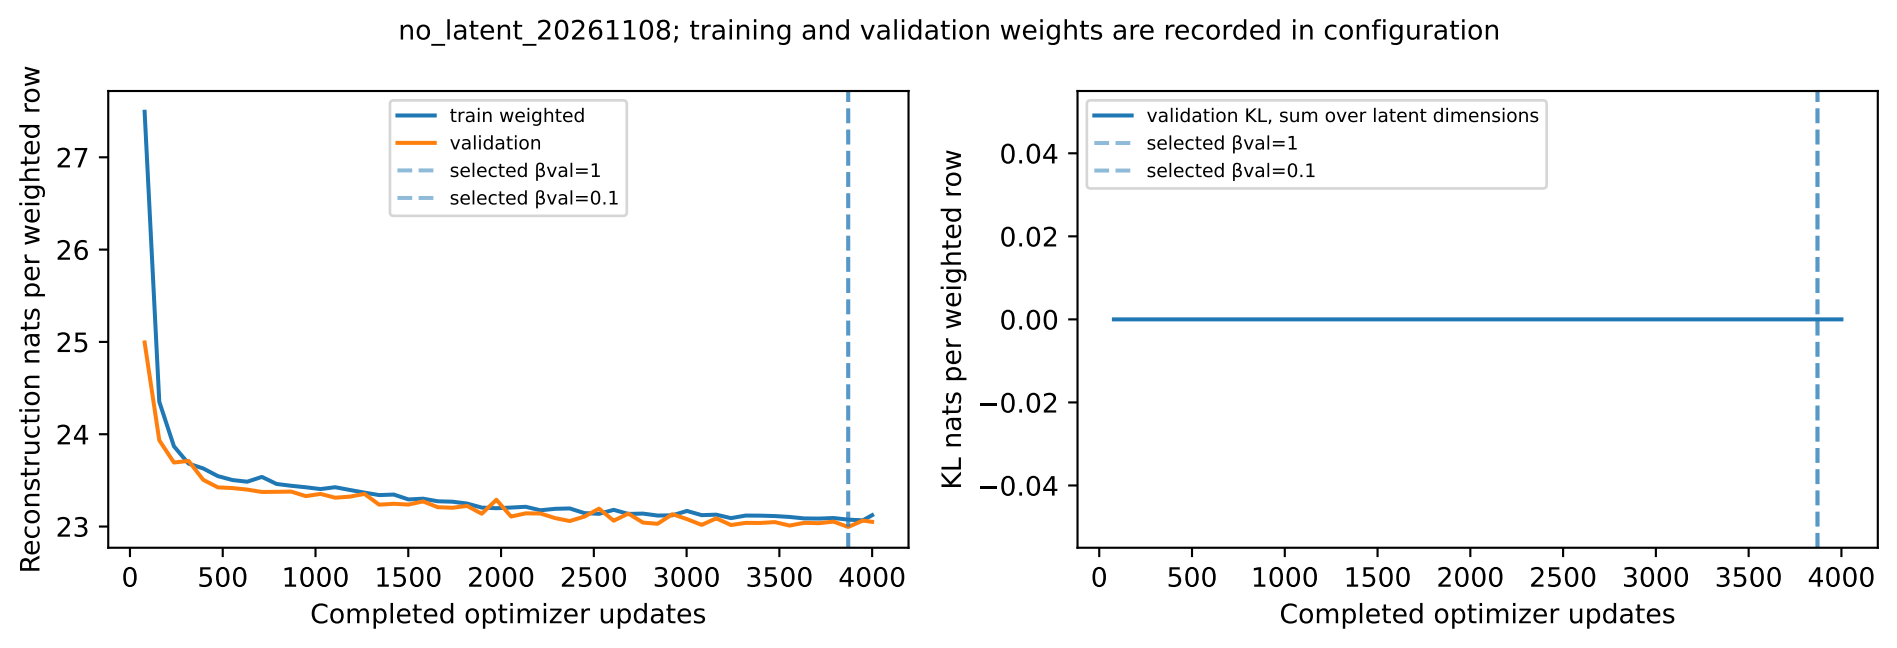

latent_d4_20261106; training and validation weights are recorded in configuration
Reconstruction nats per weighted row
Completed optimizer updates
train weighted
validation
selected βval=1
selected βval=0.1
KL nats per weighted row
Completed optimizer updates
validation KL, sum over latent dimensions
selected βval=1
selected βval=0.1


latent_d4_20261107; training and validation weights are recorded in configuration
Reconstruction nats per weighted row
Completed optimizer updates
train weighted
validation
selected βval=1
selected βval=0.1
KL nats per weighted row
Completed optimizer updates
validation KL, sum over latent dimensions
selected βval=1
selected βval=0.1


latent_d4_20261108; training and validation weights are recorded in configuration
Reconstruction nats per weighted row
Completed optimizer updates
train weighted
validation
selected βval=1
selected βval=0.1
KL nats per weighted row
Completed optimizer updates
validation KL, sum over latent dimensions
selected βval=1
selected βval=0.1


no_latent_20261106; training and validation weights are recorded in configuration
Reconstruction nats per weighted row
28
27
26
25
24
23
train weighted
validation
selected βval=1
selected βval=0.1
0
500
1000
1500
2000
2500
3000
3500
4000
Completed optimizer updates
KL nats per weighted row
0.04
0.02
0.00
−0.02
−0.04
validation KL, sum over latent dimensions
selected βval=1
selected βval=0.1
0
500
1000
1500
2000
2500
3000
3500
4000
Completed optimizer updates


no_latent_20261107; training and validation weights are recorded in configuration
Reconstruction nats per weighted row
Completed optimizer updates
train weighted
validation
selected βval=1
selected βval=0.1
KL nats per weighted row
validation KL, sum over latent dimensions


no_latent_20261108; training and validation weights are recorded in configuration
Reconstruction nats per weighted row
Completed optimizer updates
train weighted
validation
selected βval=1
selected βval=0.1
KL nats per weighted row
validation KL, sum over latent dimensions