E-Classroom Display Server

1

Generated by Doxygen 1.8.13

Contents

1	E-CI	assroor	n Display	server												1
	1.1	Introdu	ction					 	 	 	 	 		 		1
	1.2	Using t	he softwar	re				 	 	 	 	 		 		1
		1.2.1	neccesar	y packa	iges .			 	 	 	 	 		 		1
		1.2.2	Running	the soft	ware .			 	 	 	 	 		 		1
2	Clas	s Index														3
	2.1		₋ist					 	 	 	 	 		 		3
3	File	Index														5
	3.1	File Lis	t					 	 	 	 	 	•	 		5
4	Clas	s Docui	mentation	ı												7
	4.1	CurlHa	ndler Clas	s Refer	ence .			 	 	 	 	 		 		7
		4.1.1	Member	Functio	n Docu	ument	ation	 	 	 	 	 		 		8
			4.1.1.1	curlRe	equest()		 	 	 	 	 		 		8
			4.1.1.2	format	tFullTin	ne() .		 	 	 	 	 		 		9
			4.1.1.3	format	tTime()	١		 	 	 	 	 		 		9
			4.1.1.4	getCu	rlURL())		 	 	 	 	 		 		9
			4.1.1.5	getCu	rrentTii	me() .		 	 	 	 	 		 		10
			4.1.1.6	getDa	te()			 	 	 	 	 		 		10
			4.1.1.7	getDa	teField	()		 	 	 	 	 		 		10
			4.1.1.8	getFre	eFrom	()		 	 	 	 	 		 		11
			4.1.1.9	getldF	ield() .			 	 	 	 	 		 		11
			4.1.1.10	getLes	ssonInf	fo() .		 	 	 	 	 		 		11

ii CONTENTS

		4.1.1.11	getLessonTeachers()	. 12
		4.1.1.12	getLessonTime()	. 12
		4.1.1.13	moveLessonTimes()	. 12
		4.1.1.14	outputInfo()	. 13
		4.1.1.15	parseJson()	. 13
		4.1.1.16	WriteCallback()	. 13
4.2	ECDH	Class Ref	ference	. 14
	4.2.1	Member	Function Documentation	. 14
		4.2.1.1	getMAC()	. 14
		4.2.1.2	getRoomld()	. 15
		4.2.1.3	string_to_mac()	. 15
4.3	Mysqll	Handler Cla	lass Reference	. 15
	4.3.1	Member	Function Documentation	. 16
		4.3.1.1	close()	. 16
		4.3.1.2	connect()	. 16
		4.3.1.3	executeSQL()	. 16
		4.3.1.4	printMysqlRes()	. 16
4.4	Server	Class Ref	ference	. 17
	4.4.1	Construc	ctor & Destructor Documentation	. 17
		4.4.1.1	Server()	. 17
	4.4.2	Member	Function Documentation	. 18
		4.4.2.1	connect()	. 18
		4.4.2.2	disconnect()	. 18
		4.4.2.3	getData()	. 18
		4.4.2.4	sendData()	. 18
		4.4.2.5	startup()	. 18
		4.4.2.6	toString()	. 18
	4.4.3	Member	Data Documentation	. 18
		4.4.3.1	data	. 18

CONTENTS

5	File I	Docume	entation		19
	5.1	/home/	rso16/proj	ects/ECDS/src/CurlHandler/CurlHandler.cpp File Reference	19
	5.2	/home/	rso16/proj	ects/ECDS/src/CurlHandler/CurlHandler.h File Reference	19
		5.2.1	Macro De	efinition Documentation	20
			5.2.1.1	BUFFER_SIZE	20
		5.2.2	Variable	Documentation	21
			5.2.2.1	BaseURL	21
			5.2.2.2	RequestClassData	21
	5.3	/home/	rso16/proj	ects/ECDS/src/ECDH/ECDH.cpp File Reference	21
	5.4	/home/	rso16/proj	ects/ECDS/src/ECDH/ECDH.h File Reference	22
		5.4.1	Macro De	efinition Documentation	23
			5.4.1.1	STDC_FORMAT_MACROS	23
			5.4.1.2	BEGIN_OF_MAC	23
			5.4.1.3	BOX	23
			5.4.1.4	DATABASE	23
			5.4.1.5	MAC_SIZE	23
			5.4.1.6	PASSWORD	24
			5.4.1.7	PI_BOX	24
			5.4.1.8	SERVER	24
			5.4.1.9	SQL_SIZE	24
			5.4.1.10	SQL_STM	24
			5.4.1.11	U_BOX	24
			5.4.1.12	USER	24
	5.5	/home/	rso16/proj	ects/ECDS/src/main.cpp File Reference	25
		5.5.1	Function	Documentation	25
			5.5.1.1	main()	25
	5.6	/home/	rso16/proj	ects/ECDS/src/main.h File Reference	25
		5.6.1	Function	Documentation	26
			5.6.1.1	main()	26
		5.6.2	Variable	Documentation	26
			5.6.2.1	cHandler	26
			5.6.2.2	eHandler	27
			5.6.2.3	mHandler	27
			5.6.2.4	server	27
	5.7	/home/	rso16/proj	ects/ECDS/src/MysqlHandler/MysqlHandler.cpp File Reference	27
	5.8	/home/	rso16/proj	ects/ECDS/src/MysqlHandler/MysqlHandler.h File Reference	28
	5.9	/home/	rso16/proj	ects/ECDS/src/Server/Server.cpp File Reference	29
	5.10	/home/	rso16/proj	ects/ECDS/src/Server/Server.h File Reference	29
Inc	dex				31

Chapter 1

E-Classroom Display server

Author

Rick Ovehorst, Gerjon Eilander & Gerben van 't Ooster

Version

1.0

1.1 Introduction

This server program sends schedule data from the Windesheim's systems to the modules upon request.

1.2 Using the software

1.2.1 neccesary packages

The packages that are neccesary, can be optained by using folowing commands :

```
sudo apt-get install libmysqlclient-dev
sudo apt-get install libcurl4-nss-dev
sudo apt-get install libjsoncpp-nss-dev
sudo apt-get install mysql-server
sudo apt-get install mysql-client
```

Packages neccesary for compiling:

```
sudo apt-get install gcc
sudo apt-get install make
```

1.2.2 Running the software

To run the software use the following command: sudo bin/server <ip> <port>

Chapter 2

Class Index

2.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

urlHandler	7
CDH	14
ysqlHandler	15
erver	17

4 Class Index

Chapter 3

File Index

3.1 File List

Here is a list of all files with brief descriptions:

/home/rso16/projects/ECDS/src/main.cpp	5
/home/rso16/projects/ECDS/src/main.h	5
/home/rso16/projects/ECDS/src/CurlHandler/CurlHandler.cpp	9
/home/rso16/projects/ECDS/src/CurlHandler/CurlHandler.h	9
/home/rso16/projects/ECDS/src/ECDH/ECDH.cpp	1
/home/rso16/projects/ECDS/src/ECDH/ECDH.h	2
/home/rso16/projects/ECDS/src/MysqlHandler/MysqlHandler.cpp	7
/home/rso16/projects/ECDS/src/MysqlHandler/MysqlHandler.h	8
/home/rso16/projects/ECDS/src/Server/Server.cpp	9
/home/rso16/projects/ECDS/src/Server/Server.h	9

6 File Index

Chapter 4

Class Documentation

4.1 CurlHandler Class Reference

#include <CurlHandler.h>

Collaboration diagram for CurlHandler:

CurlHandler

- + getLessonInfo()
- + curlRequest()
- + getCurlURL()
- + getDateField()
- + getDate()
- + getIdField()
- + parseJson()
- + getCurrentTime()
- + moveLessonTimes()
- + getLessonTime()
- + formatFullTime()
- + formatTime() + getLessonTeachers() + getFreeFrom()
- + outputInfo()
- + WriteCallback()

Public Member Functions

char * getLessonInfo (int classId)

This function retrieves & parses json.

8 Class Documentation

std::string curlRequest (int ID)

This function requests Room data from roostertest.windesheim.nl by RoomID.

• std::string getCurlURL (int ID)

This function creates the curl request URL with Date & RoomID.

std::string getDateField ()

This function creates Date part of the curl request URL.

• std::string getDate ()

This function returns current date.

std::string getIdField (int ID)

This function creates RoomID part of the curl request URL.

void parseJson (std::string *buffer)

This function parses json and saves lesson data.

int getCurrentTime ()

This function returns current time.

void moveLessonTimes (int lesson)

This function movesLessonTimes.

• std::string getLessonTime (Json::Value obj, int lessonId, int lesson)

This function gets the endTime of a lesson and returns lessontime.

• std::string formatFullTime (std::string startTime, std::string endTime)

This function merges startTime & endTime String into single formatted string.

std::string formatTime (std::string time)

This function adds: to time string HHMM -> HH:MM.

std::string getLessonTeachers (Json::Value obj, int i)

This function gets the teachers from a lesson.

void getFreeFrom ()

This function calculates when the room is free.

char * outputInfo ()

Outputs Lesson info in used format.

Static Public Member Functions

• static size_t WriteCallback (void *contents, size_t size, size_t nmemb, void *userp)

This function is used by curlRequest as WriteCallback.

4.1.1 Member Function Documentation

```
4.1.1.1 curlRequest()
```

This function requests Room data from roostertest.windesheim.nl by RoomID.

Returns

none

Note

needs a pointer to a string buffer & RoomID int

4.1.1.2 formatFullTime()

This function merges startTime & endTime String into single formatted string.

Returns

String with lesson times in following format: HH:MM - HH:MM

Note

4.1.1.3 formatTime()

```
std::string CurlHandler::formatTime (
    std::string time )
```

This function adds : to time string HHMM -> HH:MM.

Returns

String with times in following format: HH:MM

Note

4.1.1.4 getCurlURL()

This function creates the curl request URL with Date & RoomID.

Returns

String of URL

Note

Needs a RoomID

10 Class Documentation

4.1.1.5 getCurrentTime() int CurlHandler::getCurrentTime () This function returns current time. Returns int with hour and minutes in following format: HHMM Note 4.1.1.6 getDate() std::string CurlHandler::getDate () This function returns current date. Returns String with date in following format: YYYYMMDD Note 4.1.1.7 getDateField() std::string CurlHandler::getDateField () This function creates Date part of the curl request URL. Returns String with date in following format: data=YYYYMMDD& Note

```
4.1.1.8 getFreeFrom()
void CurlHandler::getFreeFrom ( )
This function calculates when the room is free.
Returns
     none
Note
     sets the freeFrom String
4.1.1.9 getIdField()
std::string CurlHandler::getIdField (
              int ID )
This function creates RoomID part of the curl request URL.
Returns
     String with RoomID in following format: elementId=RoomID.
Note
     Needs a RoomID
4.1.1.10 getLessonInfo()
char * CurlHandler::getLessonInfo (
              int classID )
This function retrieves & parses json.
```

Note

Returns

none

12 Class Documentation

4.1.1.11 getLessonTeachers()

This function gets the teachers from a lesson.

Returns

String with teacher(s) of a lesson

Note

4.1.1.12 getLessonTime()

This function gets the endTime of a lesson and returns lessontime.

Returns

String with lesson times in following format: HH:MM - HH:MM

Note

4.1.1.13 moveLessonTimes()

This function movesLessonTimes.

Returns

None

Note

moves until given lesson;

```
4.1.1.14 outputInfo()
```

```
char * CurlHandler::outputInfo ( )
```

Outputs Lesson info in used format.

Returns

none

Note

4.1.1.15 parseJson()

This function parses json and saves lesson data.

Returns

none

Note

4.1.1.16 WriteCallback()

This function is used by curlRequest as WriteCallback.

Returns

Note

The documentation for this class was generated from the following files:


- /home/rso16/projects/ECDS/src/CurlHandler/CurlHandler.h
- /home/rso16/projects/ECDS/src/CurlHandler/CurlHandler.cpp

14 Class Documentation

4.2 ECDH Class Reference

```
#include <ECDH.h>
```

Collaboration diagram for ECDH:



Public Member Functions

• uint64_t getMAC (char *serverRequest)

This Function gets the MAC-address from the server request and changes it to an int (the way the MAC-address is stored in the db).

int getRoomId (uint64_t MAC)

Gets the room id from the db.

• uint64_t string_to_mac (std::string const &s)

This Function turns the MAC-address into an int (the way the MAC-address is stored in the db).

4.2.1 Member Function Documentation

4.2.1.1 getMAC()

This Function gets the MAC-address from the server request and changes it to an int (the way the MAC-address is stored in the db).

Returns

The MAC-address in database form.

Author

Rick Overhorst

4.2.1.2 getRoomld()

Gets the room id from the db.

Returns

The room Id.

Author

Rick Overhorst

4.2.1.3 string_to_mac()

```
uint64_t ECDH::string_to_mac (  std::string \ const \ \& \ s \ )
```

This Function turns the MAC-address into an int (the way the MAC-address is stored in the db).

Returns

The MAC-address in database form.

Author

Maxim Egorushkin

The documentation for this class was generated from the following files:

- /home/rso16/projects/ECDS/src/ECDH/ECDH.h
- /home/rso16/projects/ECDS/src/ECDH/ECDH.cpp

4.3 MysqlHandler Class Reference

```
#include <MysqlHandler.h>
```

Collaboration diagram for MysqlHandler:

MysqlHandler

- + connect()
- + executeSQL()
- + printMysqlRes()
- + close()

16 Class Documentation

Public Member Functions

```
- int connect (char *server, char *user, char *pass, char *db_name)
```

- MYSQL_RES executeSQL (char *sql)
- int printMysqlRes (MYSQL_RES *res_set)
- int close ()

4.3.1 Member Function Documentation

```
4.3.1.1 close()

int MysqlHandler::close ( )
```

4.3.1.2 connect()

4.3.1.3 executeSQL()

```
\label{eq:mass_mass_loss}  \mbox{MYSQL\_RES MysqlHandler::executeSQL (} \\ \mbox{char } * \mbox{\it sql )}
```

4.3.1.4 printMysqlRes()

The documentation for this class was generated from the following files:

- /home/rso16/projects/ECDS/src/MysqlHandler/MysqlHandler.h
- /home/rso16/projects/ECDS/src/MysqlHandler/MysqlHandler.cpp

4.4 Server Class Reference 17

4.4 Server Class Reference

```
#include <Server.h>
```

Collaboration diagram for Server:

Server + data + Server() + startup() + getData() + sendData() + connect() + disconnect() + toString()

Public Member Functions

```
• Server (int port=80, char *ip_addr=(char *) "localhost")
```

```
• void startup ()
```

- char * getData ()
- void sendData (char *data)
- void connect ()
- void disconnect ()
- char * toString ()

Public Attributes

• char data [100]

4.4.1 Constructor & Destructor Documentation

4.4.1.1 Server()

```
Server::Server (
    int port = 80,
    char * ip_addr = (char *) "localhost")
```

18 Class Documentation

4.4.2 Member Function Documentation

```
4.4.2.1 connect()
void Server::connect ( )
4.4.2.2 disconnect()
void Server::disconnect ( )
4.4.2.3 getData()
char * Server::getData ( )
4.4.2.4 sendData()
void Server::sendData (
              char * data )
4.4.2.5 startup()
void Server::startup ( )
4.4.2.6 toString()
char * Server::toString ( )
```

4.4.3 Member Data Documentation

```
4.4.3.1 data

char Server::data[100]
```

The documentation for this class was generated from the following files:


- /home/rso16/projects/ECDS/src/Server/Server.h
- /home/rso16/projects/ECDS/src/Server/Server.cpp

Chapter 5

File Documentation


5.1 /home/rso16/projects/ECDS/src/CurlHandler/CurlHandler.cpp File Reference

#include "CurlHandler.h"
Include dependency graph for CurlHandler.cpp:

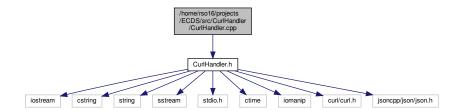


5.2 /home/rso16/projects/ECDS/src/CurlHandler/CurlHandler.h File Reference

```
#include <iostream>
#include <cstring>
#include <string>
#include <sstream>
#include <stdio.h>
#include <ctime>
#include <iomanip>
#include <curl/curl.h>
#include <jsoncpp/json/json.h>
Include dependency graph for CurlHandler.h:
```



20 File Documentation

This graph shows which files directly or indirectly include this file:

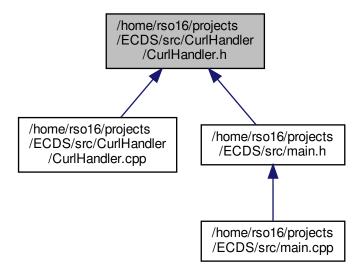

Classes

· class CurlHandler

Macros

• #define BUFFER_SIZE 500

Variables

- const std::string BaseURL = "https://roostertest.windesheim.nl/WebUntis/Timetable.do?request.prevent ← Cache=1543327601812&"

5.2.1 Macro Definition Documentation

5.2.1.1 BUFFER_SIZE

#define BUFFER_SIZE 500

5.2.2 Variable Documentation


5.2.2.1 BaseURL

 $\verb|const| std::string BaseURL = "https://roostertest.windesheim.nl/WebUntis/Timetable.do?request. \leftarrow preventCache=1543327601812&" \\$

5.2.2.2 RequestClassData

5.3 /home/rso16/projects/ECDS/src/ECDH/ECDH.cpp File Reference


#include "ECDH.h"
Include dependency graph for ECDH.cpp:

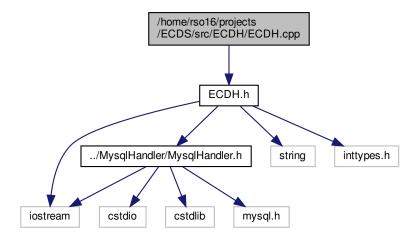


22 File Documentation

5.4 /home/rso16/projects/ECDS/src/ECDH/ECDH.h File Reference

```
#include "../MysqlHandler/MysqlHandler.h"
#include <iostream>
#include <string>
#include <inttypes.h>
Include dependency graph for ECDH.h:
```

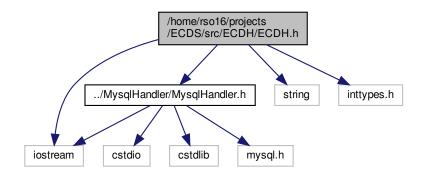

This graph shows which files directly or indirectly include this file:

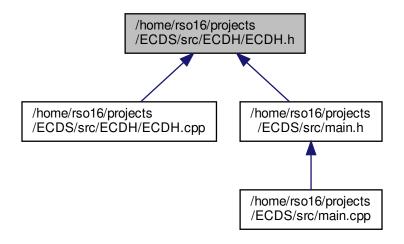

Classes

• class ECDH

Macros

- #define BEGIN_OF_MAC 0
- #define MAC_SIZE 17
- #define SQL_SIZE 53
- #define SQL_STM "select RID from Boards where MAC = "
- #define __STDC_FORMAT_MACROS
- #define PI_BOX 0
- #define U_BOX 1
- #define BOX U_BOX
- #define SERVER "localhost"
- #define USER "root"
- #define PASSWORD ""
- #define DATABASE "windesheim"

5.4.1 Macro Definition Documentation

5.4.1.1 __STDC_FORMAT_MACROS

#define ___STDC_FORMAT_MACROS

5.4.1.2 BEGIN_OF_MAC

#define BEGIN_OF_MAC 0

5.4.1.3 BOX

#define BOX U_BOX

5.4.1.4 DATABASE

#define DATABASE "windesheim"

5.4.1.5 MAC_SIZE

#define MAC_SIZE 17

24 File Documentation

5.4.1.6 PASSWORD

#define PASSWORD ""

5.4.1.7 PI_BOX

#define PI_BOX 0

5.4.1.8 SERVER

#define SERVER "localhost"

5.4.1.9 SQL_SIZE

#define SQL_SIZE 53

5.4.1.10 SQL_STM

#define SQL_STM "select RID from Boards where MAC = "

5.4.1.11 U_BOX


#define U_BOX 1

5.4.1.12 USER

#define USER "root"

5.5 /home/rso16/projects/ECDS/src/main.cpp File Reference

#include "main.h"
Include dependency graph for main.cpp:

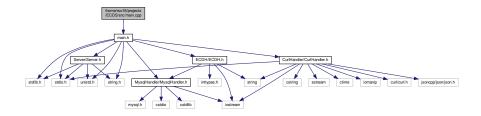

Functions

• int main (int argc, const char *argv[])


5.5.1 Function Documentation

5.5.1.1 main()

```
int main (
          int argc,
          const char * argv[] )
```


5.6 /home/rso16/projects/ECDS/src/main.h File Reference

```
#include <stdio.h>
#include "Server/Server.h"
#include <stdlib.h>
#include <unistd.h>
#include <string.h>
#include "MysqlHandler/MysqlHandler.h"
#include "ECDH/ECDH.h"
#include "CurlHandler/CurlHandler.h"
Include dependency graph for main.h:
```



26 File Documentation

This graph shows which files directly or indirectly include this file:



Functions

• int main (int argc, const char *argv[])

Variables

- MysqlHandler mHandler
- · ECDH eHandler
- · Server server
- · CurlHandler cHandler

5.6.1 Function Documentation

```
5.6.1.1 main()
```

```
int main (
          int argc,
          const char * argv[] )
```

5.6.2 Variable Documentation

5.6.2.1 cHandler

CurlHandler cHandler

5.6.2.2 eHandler

ECDH eHandler

5.6.2.3 mHandler


MysqlHandler mHandler

5.6.2.4 server

Server server

5.7 /home/rso16/projects/ECDS/src/MysqlHandler/MysqlHandler.cpp File Reference

#include "MysqlHandler.h"
Include dependency graph for MysqlHandler.cpp:

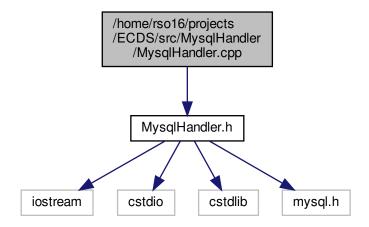


28 File Documentation


5.8 /home/rso16/projects/ECDS/src/MysqlHandler/MysqlHandler.h File Reference

```
#include <iostream>
#include <cstdio>
#include <cstdlib>
#include <mysql.h>
```

Include dependency graph for MysqlHandler.h:

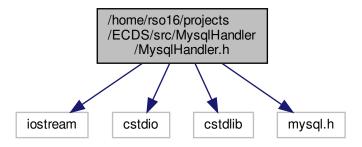

This graph shows which files directly or indirectly include this file:

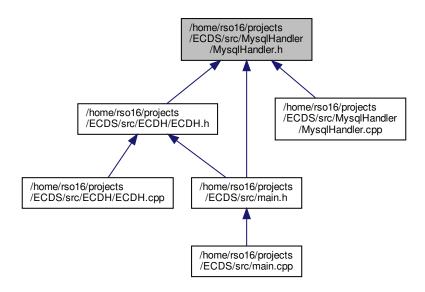


Classes

· class MysqlHandler

5.9 /home/rso16/projects/ECDS/src/Server/Server.cpp File Reference


#include "Server.h"
Include dependency graph for Server.cpp:

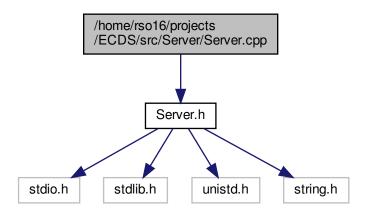

5.10 /home/rso16/projects/ECDS/src/Server/Server.h File Reference


```
#include <stdio.h>
#include <stdlib.h>
#include <unistd.h>
#include <string.h>
```

Include dependency graph for Server.h:

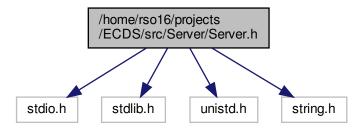

30 File Documentation

This graph shows which files directly or indirectly include this file:

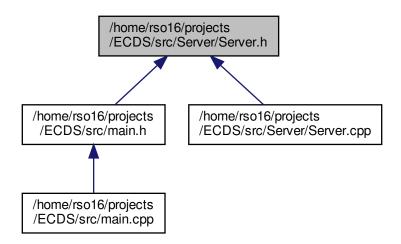

Classes

class Server

Index

/home/rso16/projects/ECDS/src/CurlHandler/Curl←	CurlHandler.h
Handler.cpp, 19	BUFFER_SIZE, 20
/home/rso16/projects/ECDS/src/CurlHandler/Curl←	BaseURL, 21
Handler.h, 19	RequestClassData, 21
/home/rso16/projects/ECDS/src/ECDH/ECDH.cpp, 21	curlRequest
/home/rso16/projects/ECDS/src/ECDH/ECDH.h, 22	CurlHandler, 8
/home/rso16/projects/ECDS/src/MysqlHandler/Mysql↔	
Handler.cpp, 27	DATABASE
/home/rso16/projects/ECDS/src/MysqlHandler/Mysql←	ECDH.h, 23
Handler.h, 28	data
/home/rso16/projects/ECDS/src/Server/Server.cpp, 29	Server, 18
/home/rso16/projects/ECDS/src/Server/Server.h, 29	disconnect
/home/rso16/projects/ECDS/src/main.cpp, 25	Server, 18
/home/rso16/projects/ECDS/src/main.h, 25	
STDC FORMAT MACROS	ECDH.h
ECDH.h, 23	STDC_FORMAT_MACROS, 23
,	BEGIN_OF_MAC, 23
BEGIN_OF_MAC	BOX, 23
ECDH.h, 23	DATABASE, 23
BOX	MAC_SIZE, 23
ECDH.h, 23	PASSWORD, 23
BUFFER SIZE	PI BOX, 24
CurlHandler.h, 20	SERVER, 24
BaseURL	SQL SIZE, 24
CurlHandler.h, 21	SQL STM, 24
	U BOX, 24
cHandler	USER, 24
main.h, 26	ECDH, 14
close	getMAC, 14
MysqlHandler, 16	getRoomld, 14
connect	string_to_mac, 15
MysqlHandler, 16	eHandler
Server, 18	main.h, <mark>26</mark>
CurlHandler, 7	executeSQL
curlRequest, 8	MysqlHandler, 16
formatFullTime, 8	7 - 4 7
formatTime, 9	formatFullTime
getCurlURL, 9	CurlHandler, 8
getCurrentTime, 9	formatTime
getDate, 10	CurlHandler, 9
getDateField, 10	
getFreeFrom, 10	getCurlURL
getIdField, 11	CurlHandler, 9
getLessonInfo, 11	getCurrentTime
getLessonTeachers, 11	CurlHandler, 9
getLessonTime, 12	getData
moveLessonTimes, 12	Server, 18
outputInfo, 12	getDate
parseJson, 13	CurlHandler, 10
WriteCallback, 13	getDateField
•	-

32 INDEX

CurlHandler, 10	ECDH.h, 24
getFreeFrom	sendData
CurlHandler, 10	Server, 18
getIdField	Server, 17
CurlHandler, 11	connect, 18
getLessonInfo	data, 18
CurlHandler, 11	disconnect, 18
getLessonTeachers	getData, 18
CurlHandler, 11	sendData, 18
getLessonTime	Server, 17
CurlHandler, 12	startup, 18
getMAC	toString, 18
ECDH, 14	server
getRoomld	main.h, 27
ECDH, 14	startup
MAC SIZE	Server, 18 string_to_mac
ECDH.h, 23	ECDH, 15
mHandler	LODII, 13
main.h, 27	toString
main	Server, 18
main.cpp, 25	,
main.h, 26	U_BOX
main.cpp	ECDH.h, 24
main, 25	USER
main.h	ECDH.h, 24
cHandler, 26	144 ': O III I
eHandler, 26	WriteCallback
mHandler, 27	CurlHandler, 13
main, 26	
server, 27	
moveLessonTimes	
CurlHandler, 12	
MysqlHandler, 15	
close, 16	
connect, 16	
executeSQL, 16	
printMysqlRes, 16	
outputInfo	
CurlHandler, 12	
PASSWORD	
ECDH.h, 23	
PI BOX	
ECDH.h, 24	
parseJson	
CurlHandler, 13	
printMysqlRes	
MysqlHandler, 16	
,	
RequestClassData	
CurlHandler.h, 21	
SERVER	
ECDH.h, 24	
ECDH.h, 24 SQL_SIZE	
ECDH.h, 24	