




R Studio Education
education.rstudio.com

R Markdown and Interactive Dashboards

Client-side Dashboards

R Markdown and Dashboards Workshop

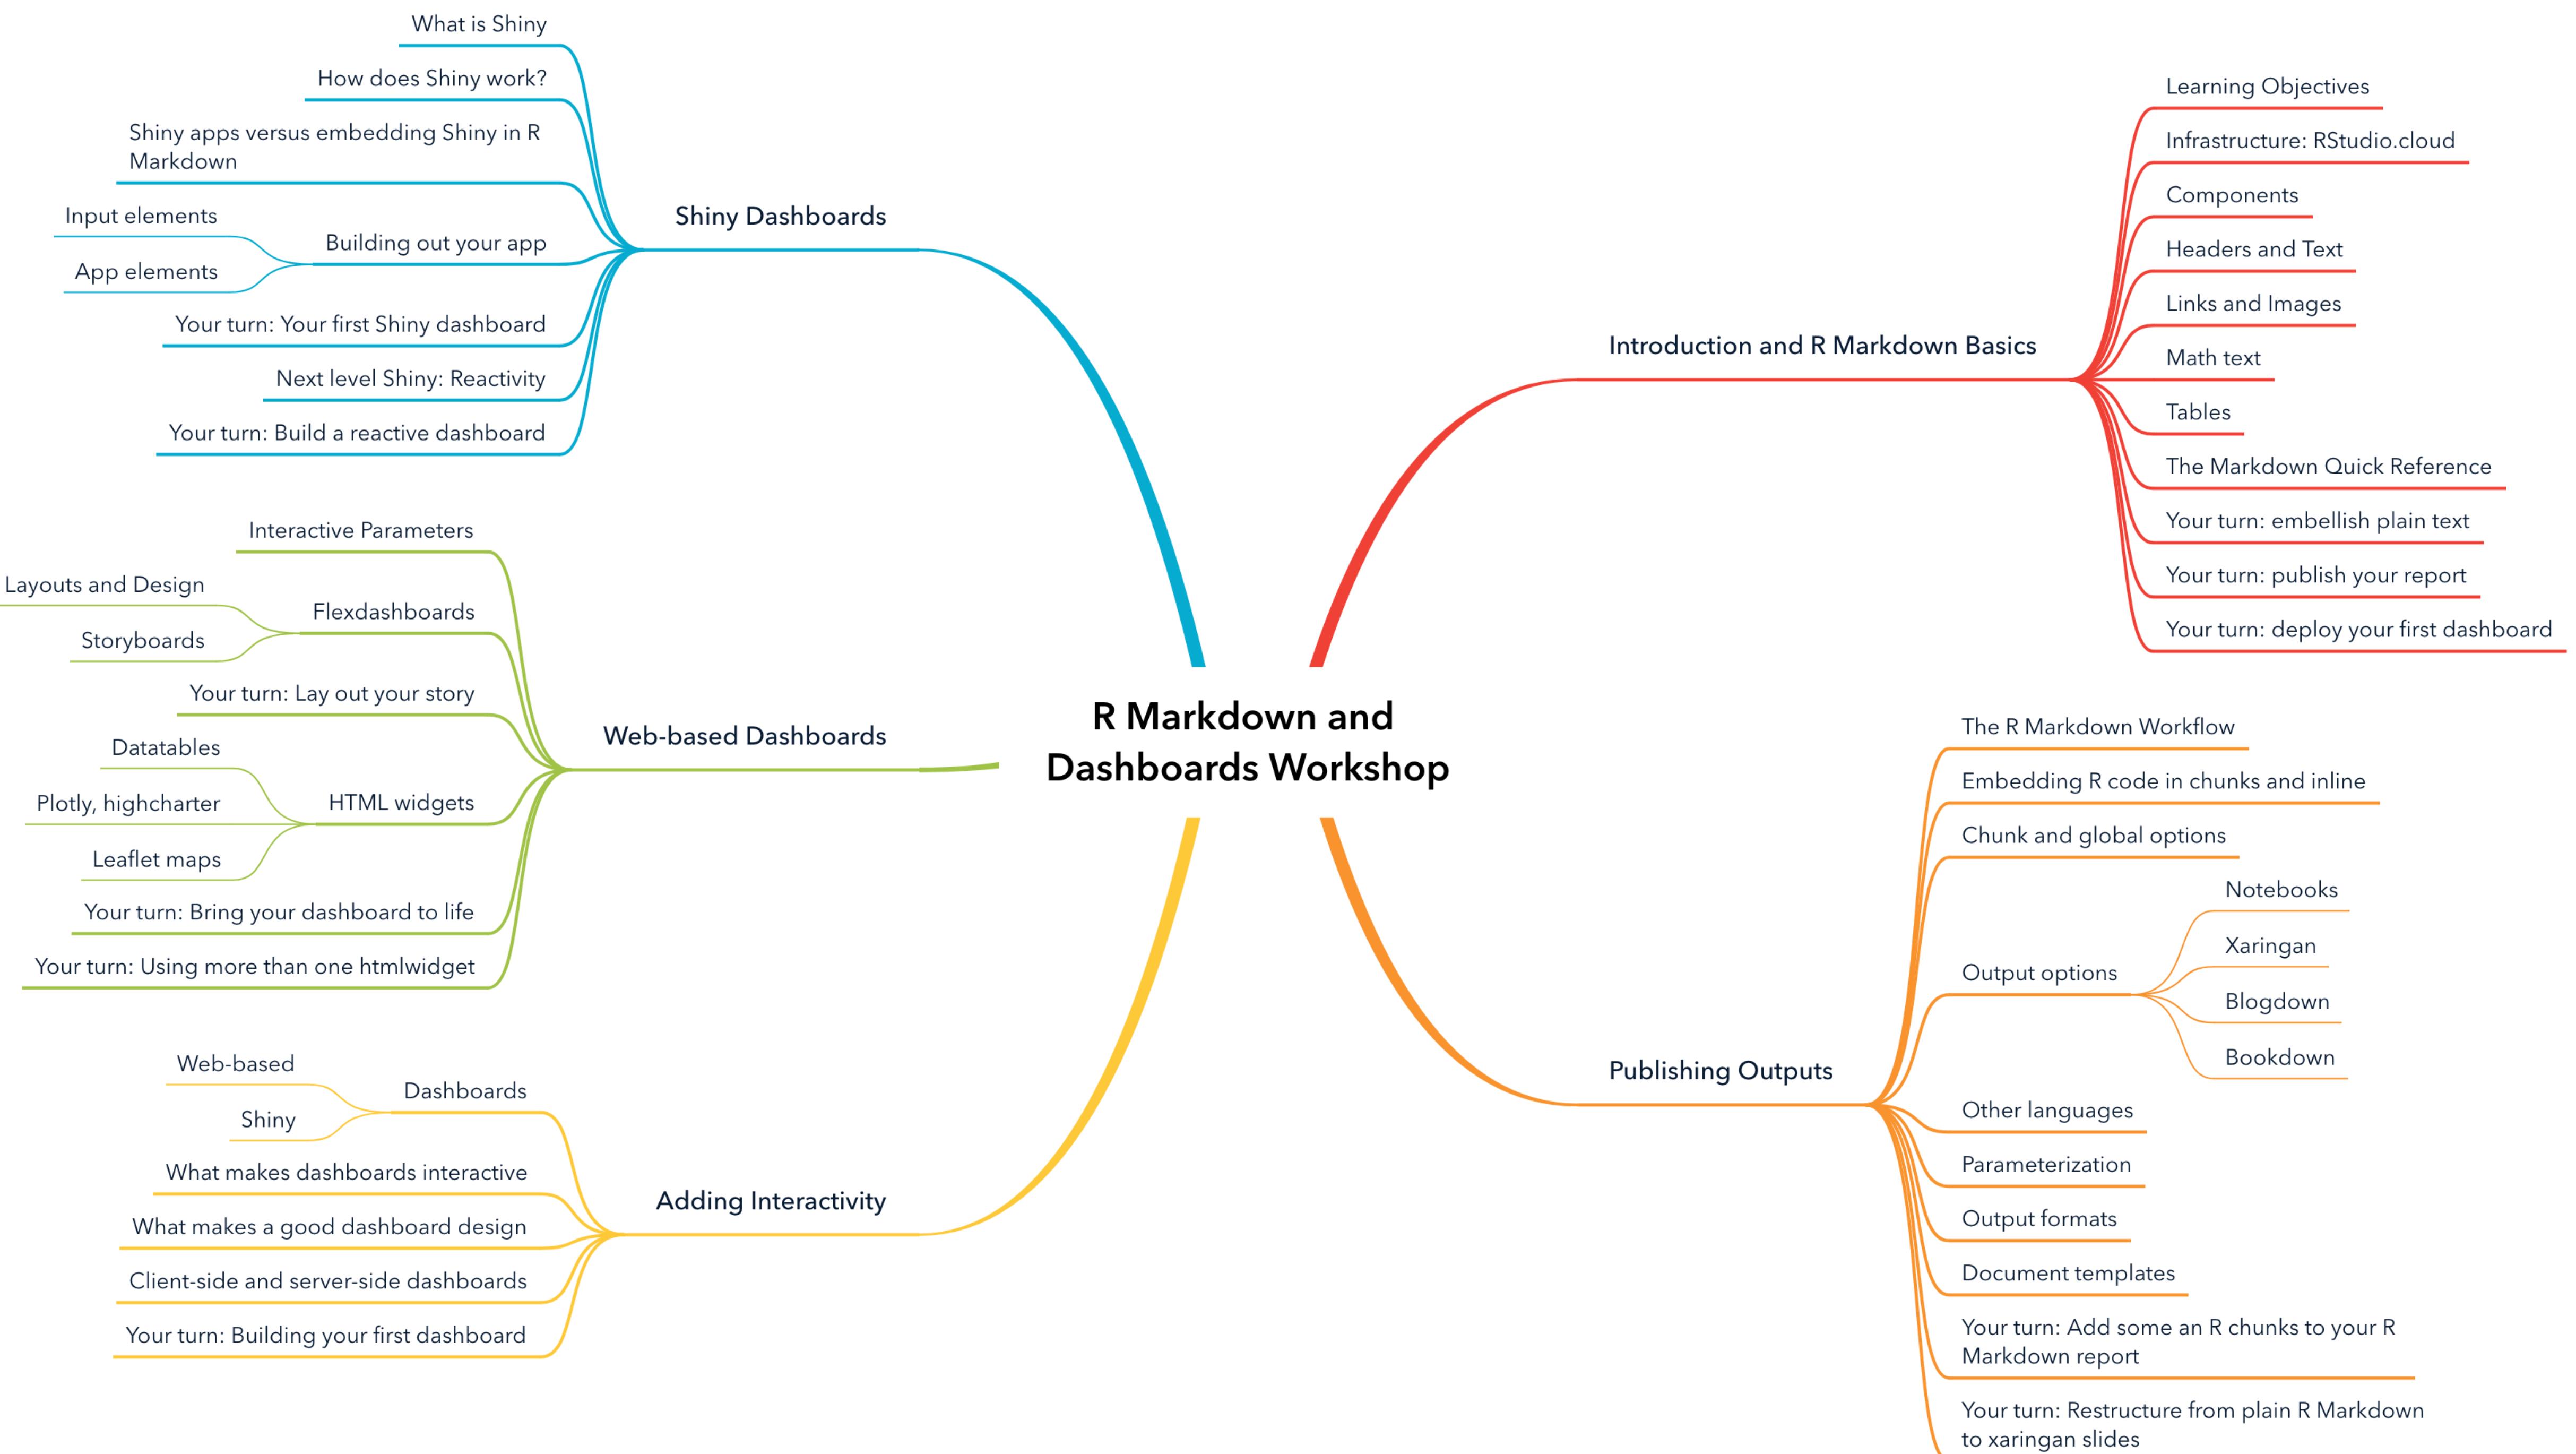

Leaflet maps

Your turn: Bring your dashboard to life

Your turn: Using more than one htmlwidget

Web-based

Shiny

Dashboards

What makes dashboards interactive

What makes a good dashboard design

Client-side and server-side dashboards

Your turn: Building your first dashboard

Adding Interactivity


Why Interactivity?

In your groups, discuss:

1. What constitutes interactivity in the context of data exploration?
2. Why is interactivity desirable?
3. How long do you think it should take to craft an interactive dashboard?




INTERACTIVITY...

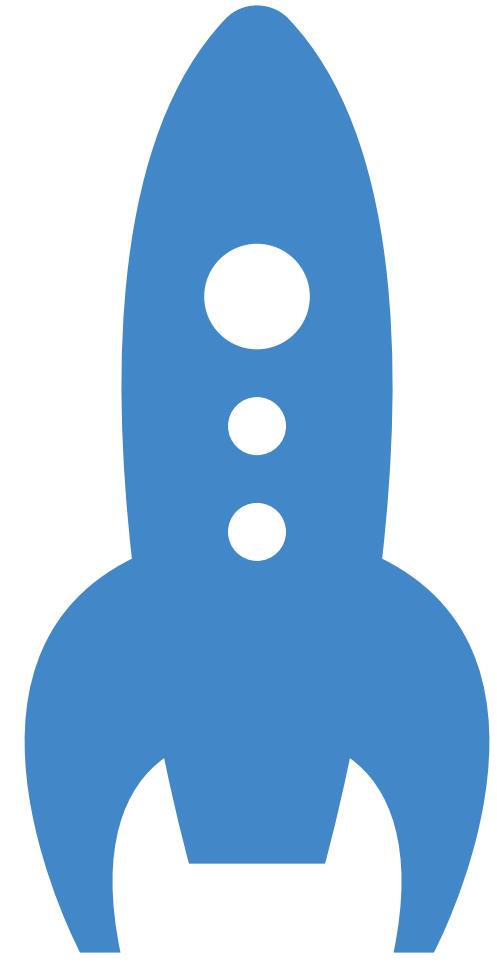

Encourages exploration



Drives engagement

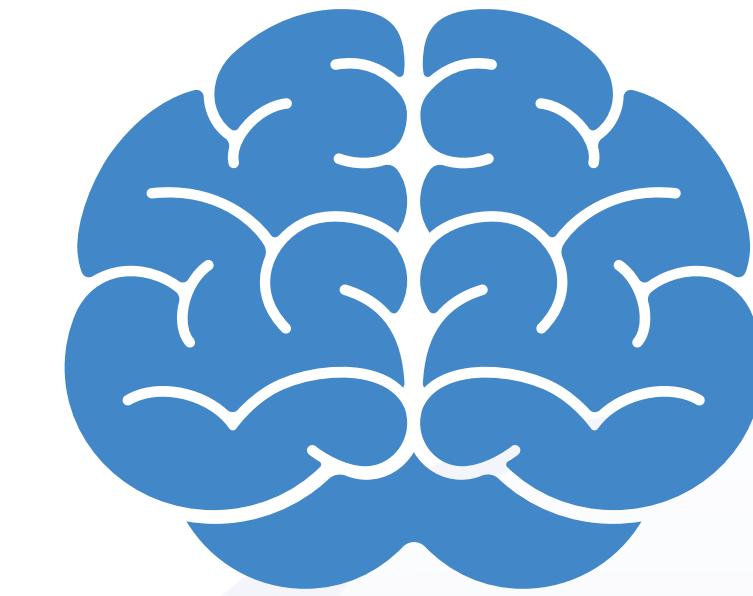

Improves retention

*Interactivity is the gateway
drug that hooks users on your
content*

Let's run some experiments

THE BABYNAMES DATASET

- US babynames from 1880 to 2017 as registered with US Social Security
- About 2 million entries in total
- Categorized by male and female gender

EXERCISE 31

(Don't be concerned that you missed a bunch of exercises. Each module has its own unique exercise numbers, but exercise numbers aren't consecutive between modules)

Parameterize A Report

1. Open project **03-Adding-Interactivity**
2. Click on **31-Babynames-params.Rmd** in the Files pane to open that file
3. Knit the file and observe the result
4. Now edit the names and/or years in the RStudio IDE and re-knit your file to compare different names. Don't forget to adjust genders appropriately.

3m 00s



Wake me when it's
interactive



EXERCISE 32

Interactive Parameters

1. Use the same **31-Babynames-params.Rmd** we used in the last exercise.
 2. Select *Knit with Parameters* from the Knit pull down menu.
 3. Change the names and/or years and view the result.
 4. Repeat as needed. You'll have to re-knit the document for each variable change.

3m 00s

The screenshot shows the RStudio interface with two open files: "33-babynames-shiny.Rmd" and "31-babynames-params.Rmd". A context menu is open over the code editor, specifically over the line "3 Knit with Parameters...". The menu items are:

- 1 Knit to flexdashboard
- 2 Knit with Parameters...
- 3 Knit Directory
- 4 Clear Knitr Cache...

The file "31-babynames-params.Rmd" contains the following R code:

```
comparison_name: Garrett
comparison_gender: M
beginning_year: 1880
ending_year: 2017
---
```{r setup, include=FALSE}
library(ggplot2)
library(dplyr)
library(magrittr)
library(babynames)
knitr::opts_chunk$set(echo = FALSE)
```
```




Really now.
You woke me for that?

EXERCISE 32

Client-side Interactivity With Plotly

1. Open **32-babynames-plotly.Rmd**
2. Knit the file
3. Move your mouse over the graph to view values.
4. Click and drag across the graph to zoom in.

3m 00s

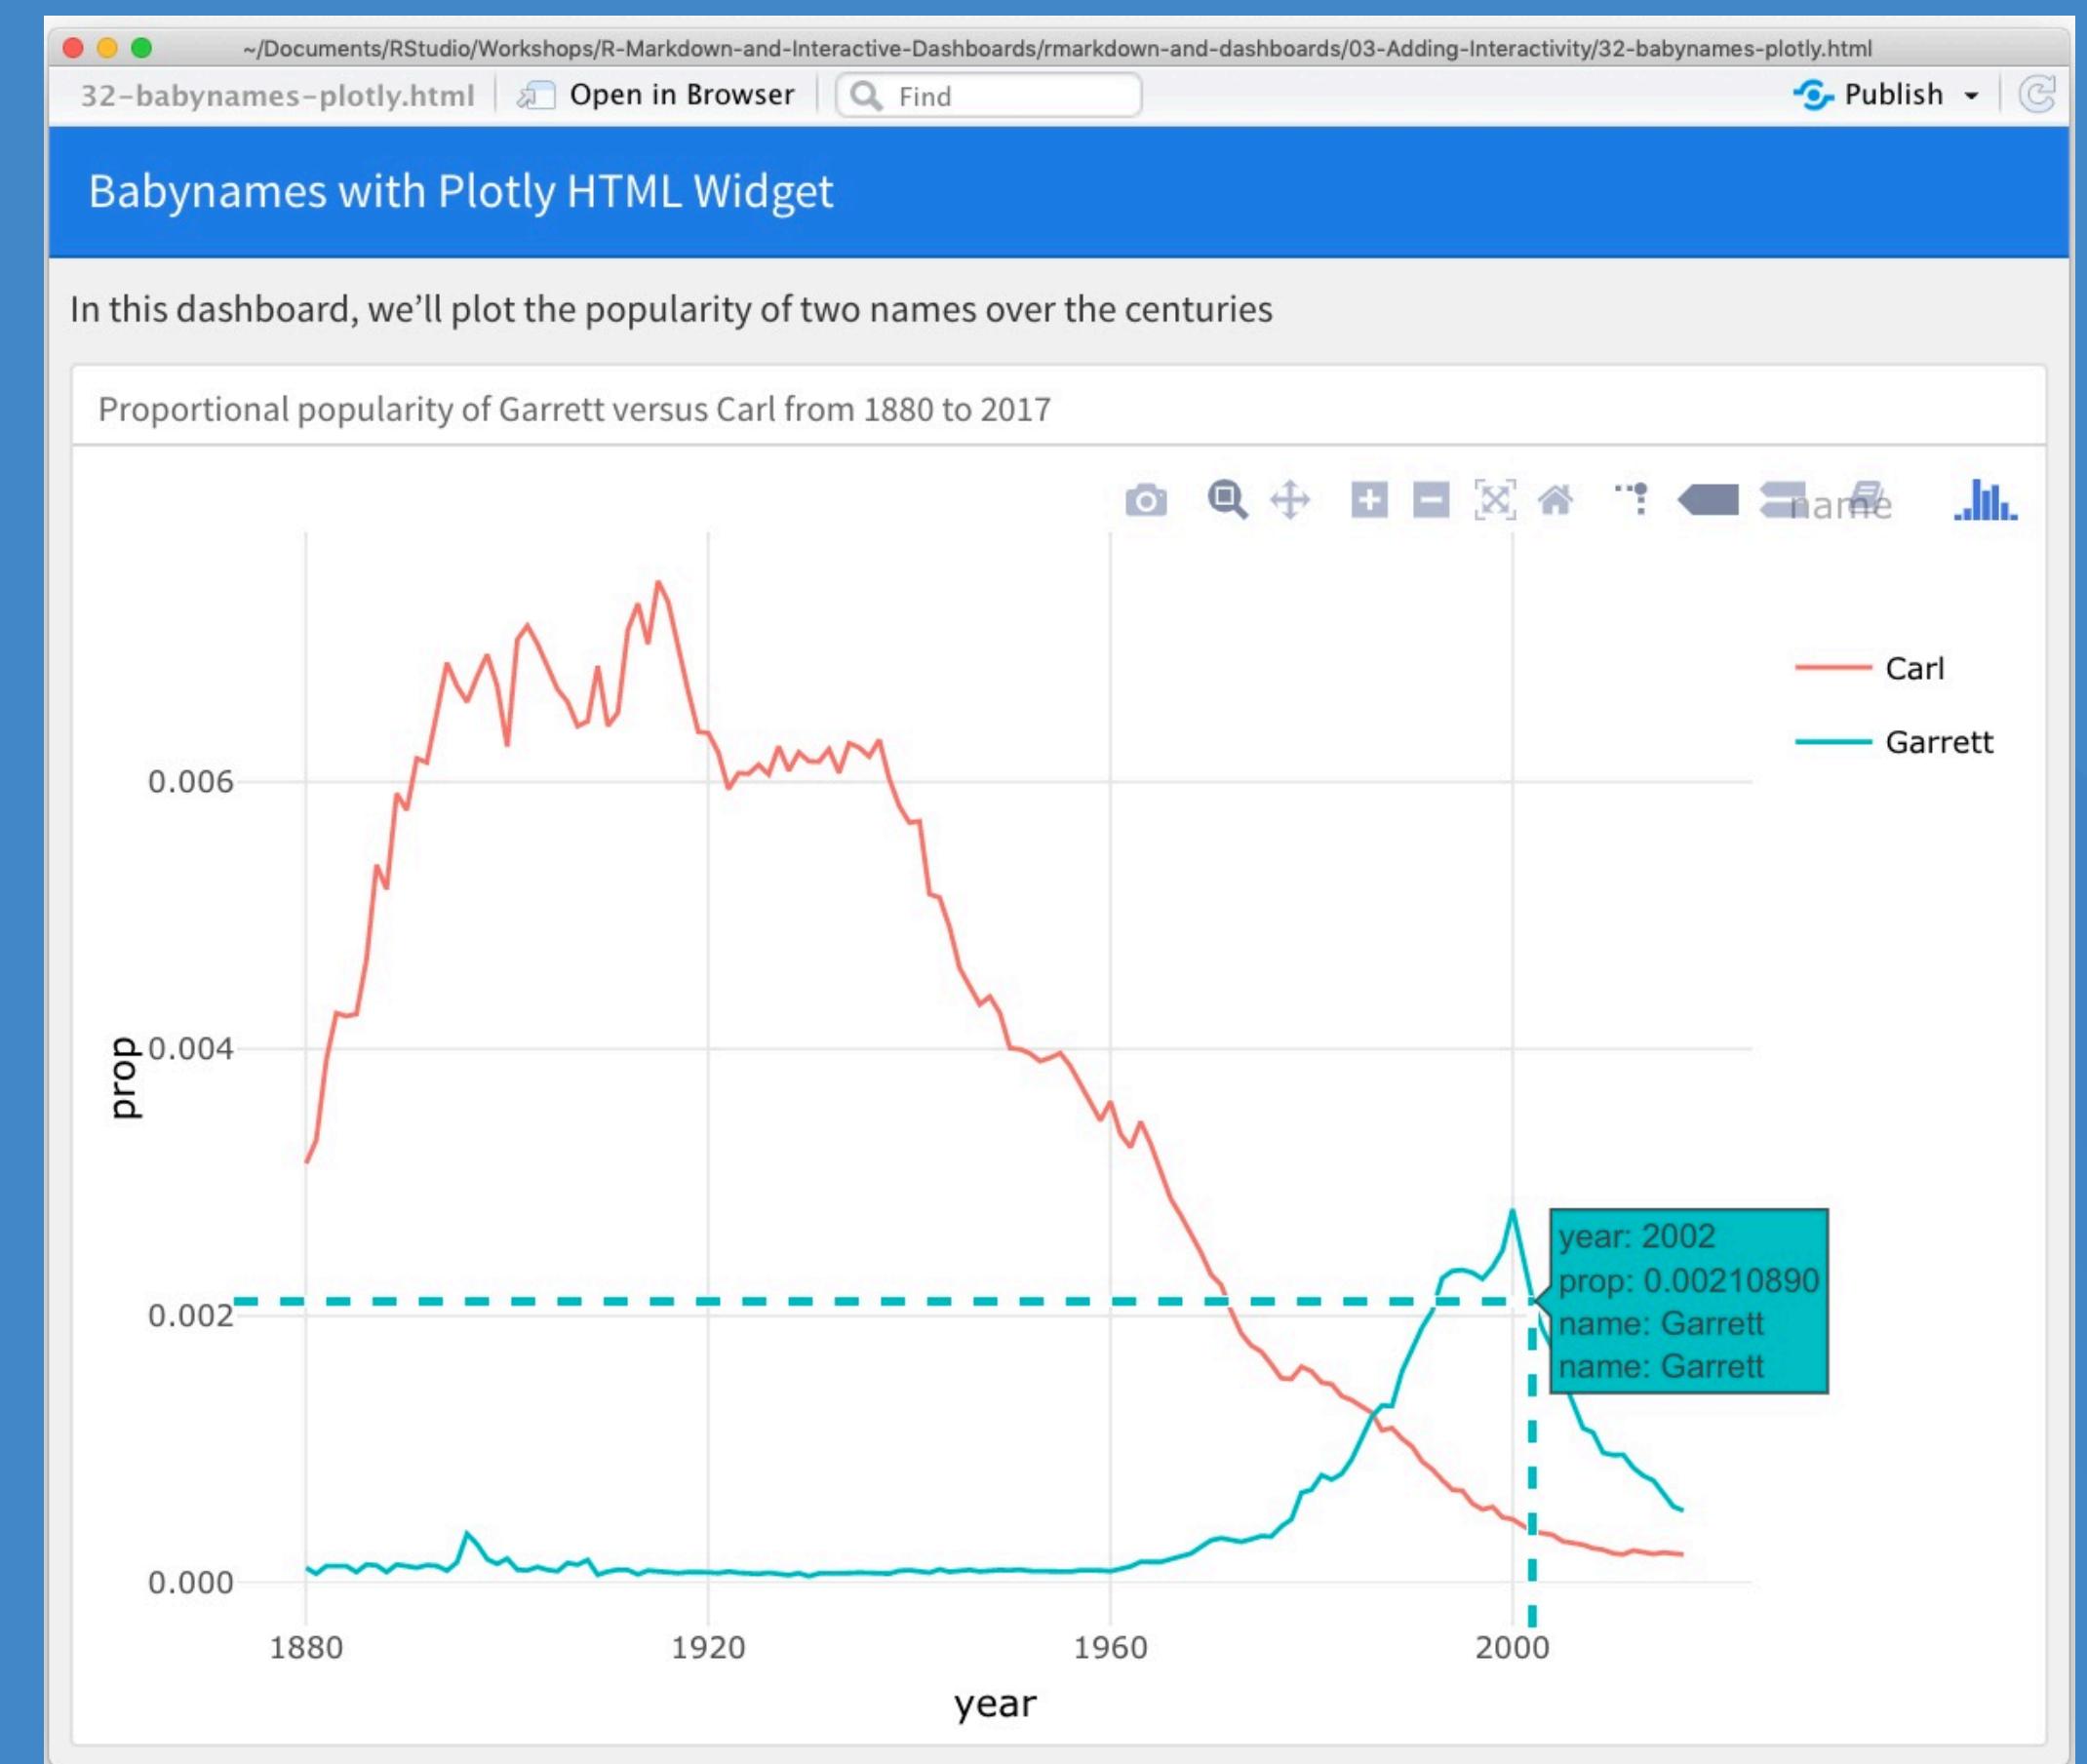



More. I want more.

Client-side Interactivity With Plotly

1. Open **33-babynames-shiny.Rmd**
2. Run the app using the Run Document button where Knit used to be.
3. Play with the parameters and see how the graph changes.

3m 00s

A close-up photograph of a brown tabby cat with green eyes, sitting on a light-colored desk. The cat is looking directly at the camera with a slightly weary expression. In the background, a computer monitor displays a desktop screen with various icons and a window open, showing some text and images. The overall lighting is warm and focused on the cat.

Your efforts are acceptable.
You may now pet me.

Buffy the Catfood Slayer appears by
special arrangement

How did these experiences differ?

Together, let's discuss:

1. Which version did you enjoy most?
2. Look through the code for each version. Which version required the fewest changes?
3. Which version took the longest to start?



*R Markdown supports three
different types of interactivity:
one-time, web-based, and
server-side*


INTERACTIVE COMPONENTS



⌚ 💫 🌎 ☀️
(I love R)

User

Browser

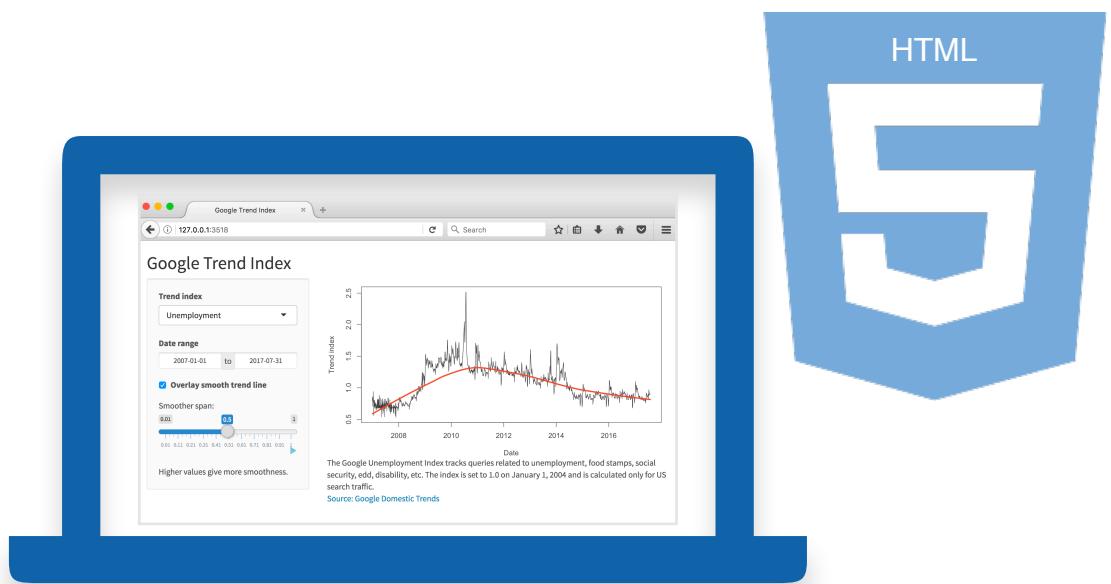

Server



rstd.io/RMAID

TYPES OF INTERACTIVITY


Interactivity



One-time



Browser

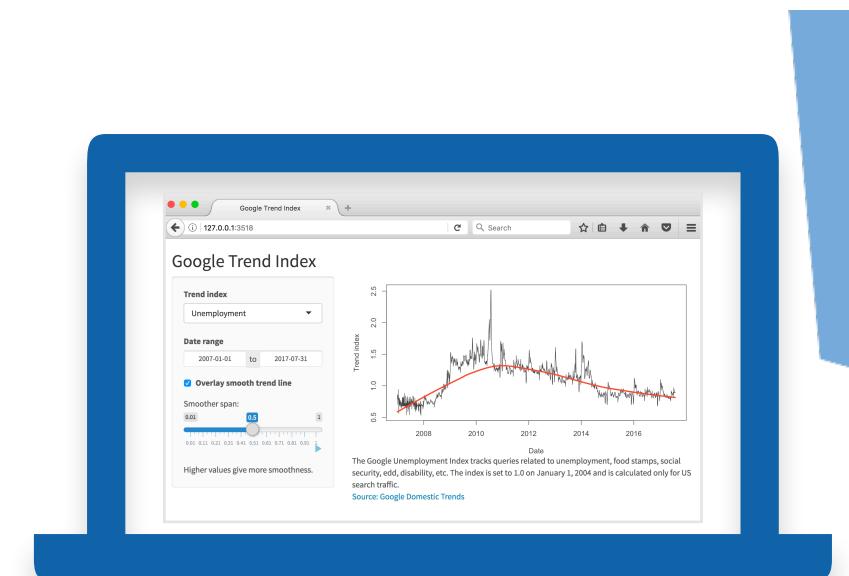

One Time Only!

Server



TYPES OF INTERACTIVITY


Interactivity




Web-based



Browser

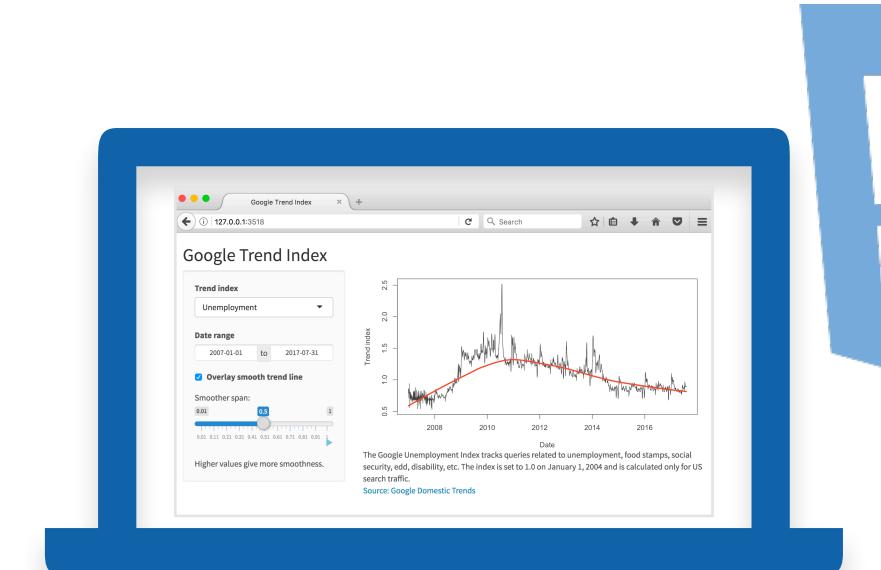

One Time Only!

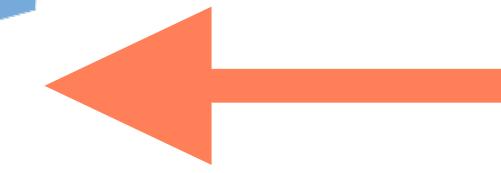


Server



TYPES OF INTERACTIVITY

Interactivity

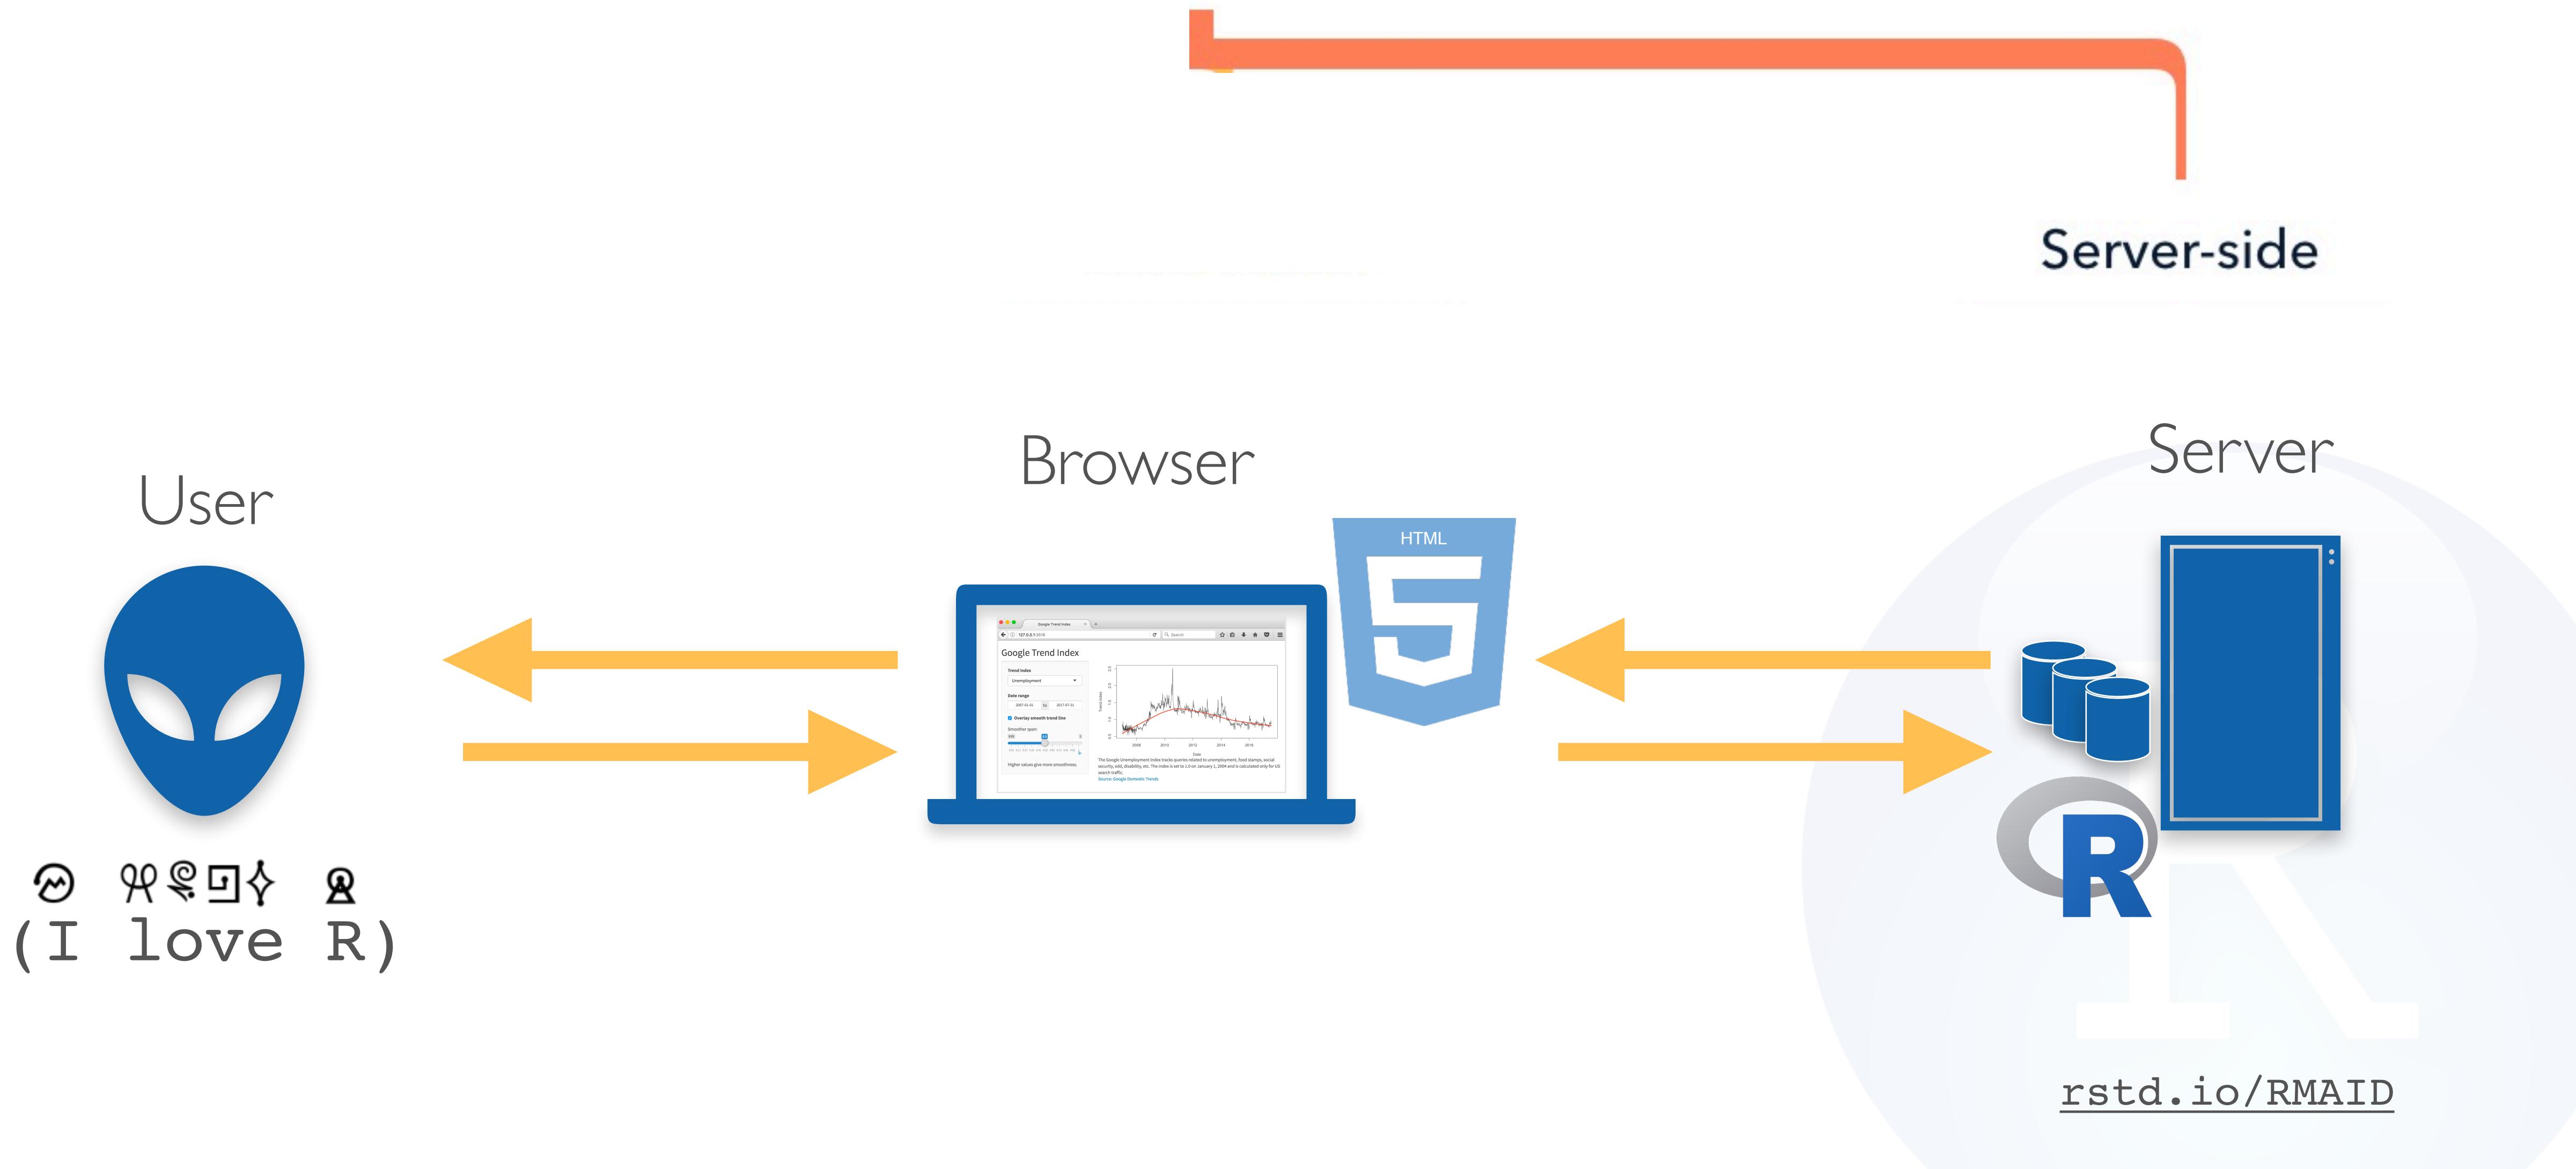


TYPES OF INTERACTIVITY

Interactivity



TYPES OF INTERACTIVITY

Interactivity

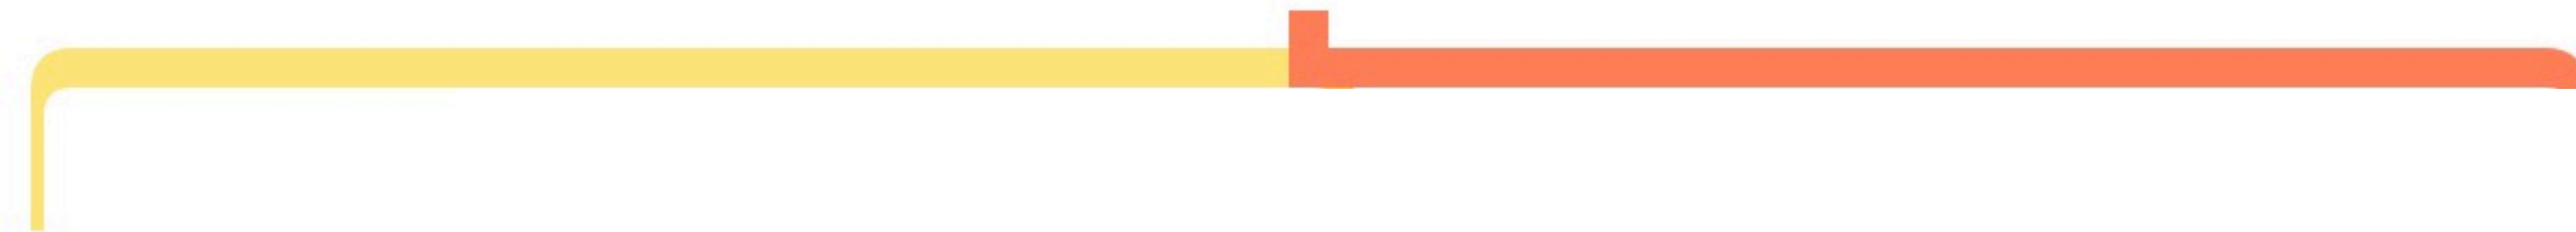


One-time




Parameterization

TYPES OF INTERACTIVITY

Interactivity

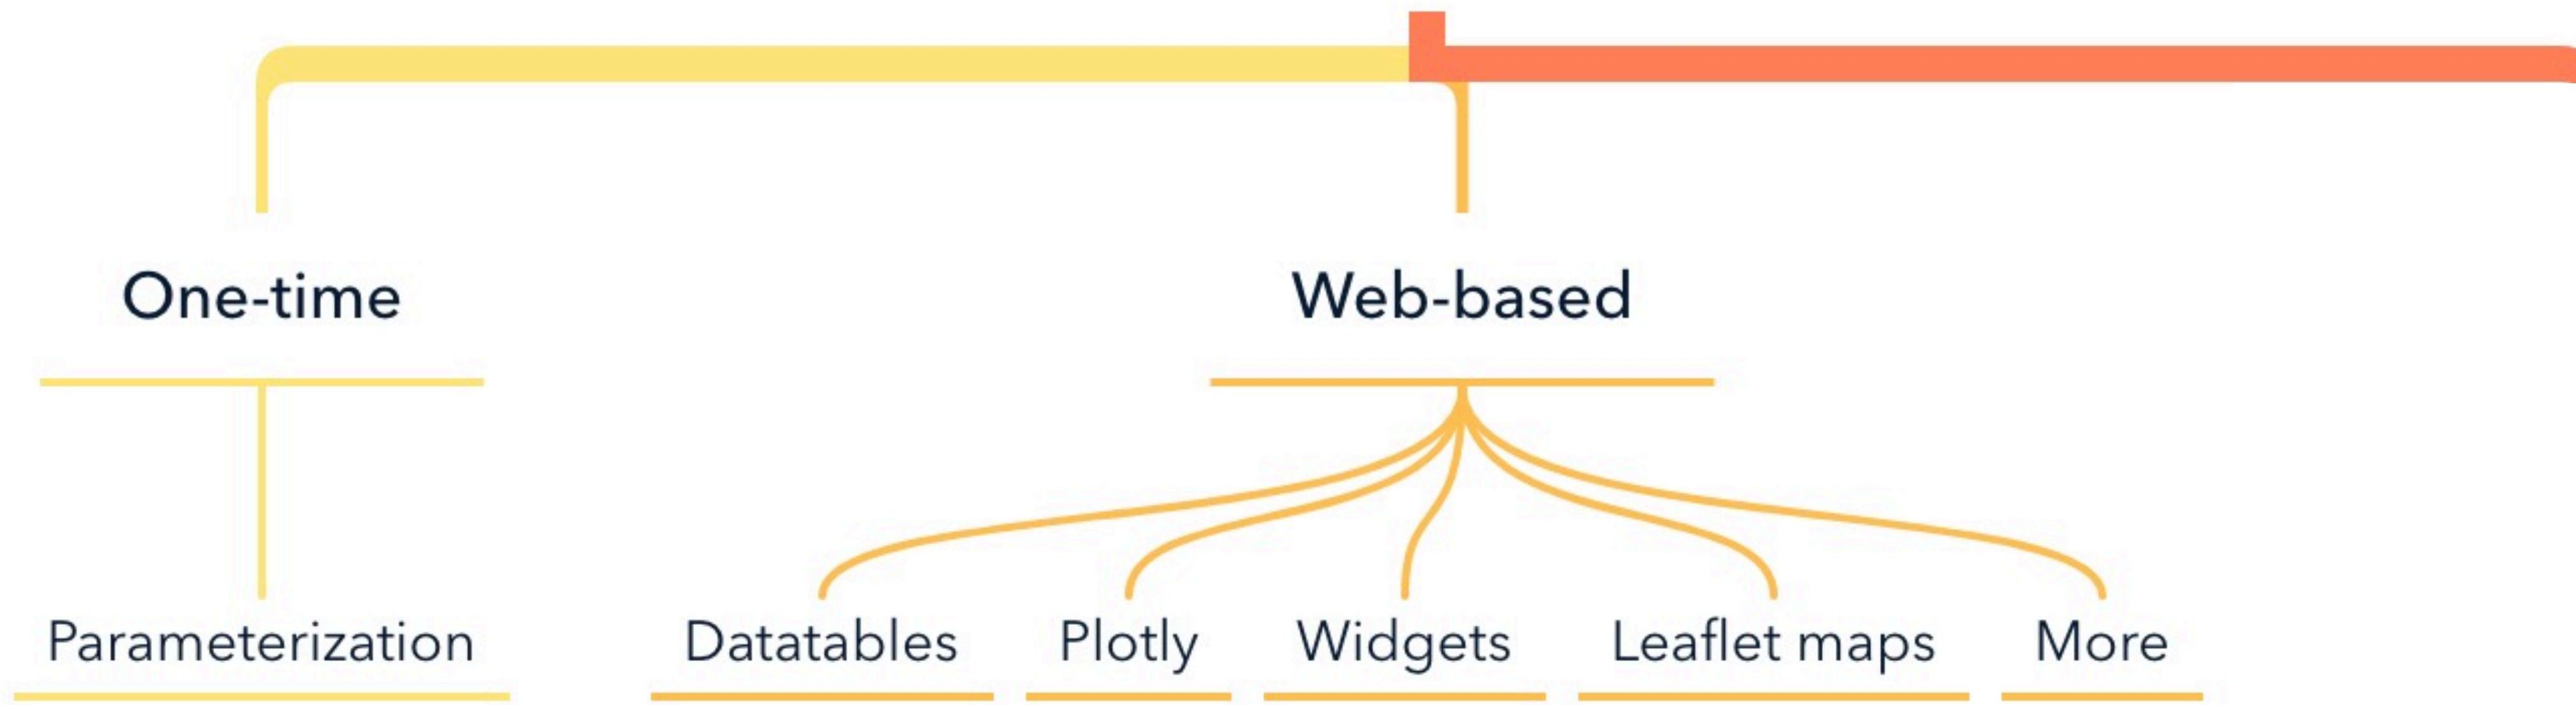

TYPES OF INTERACTIVITY

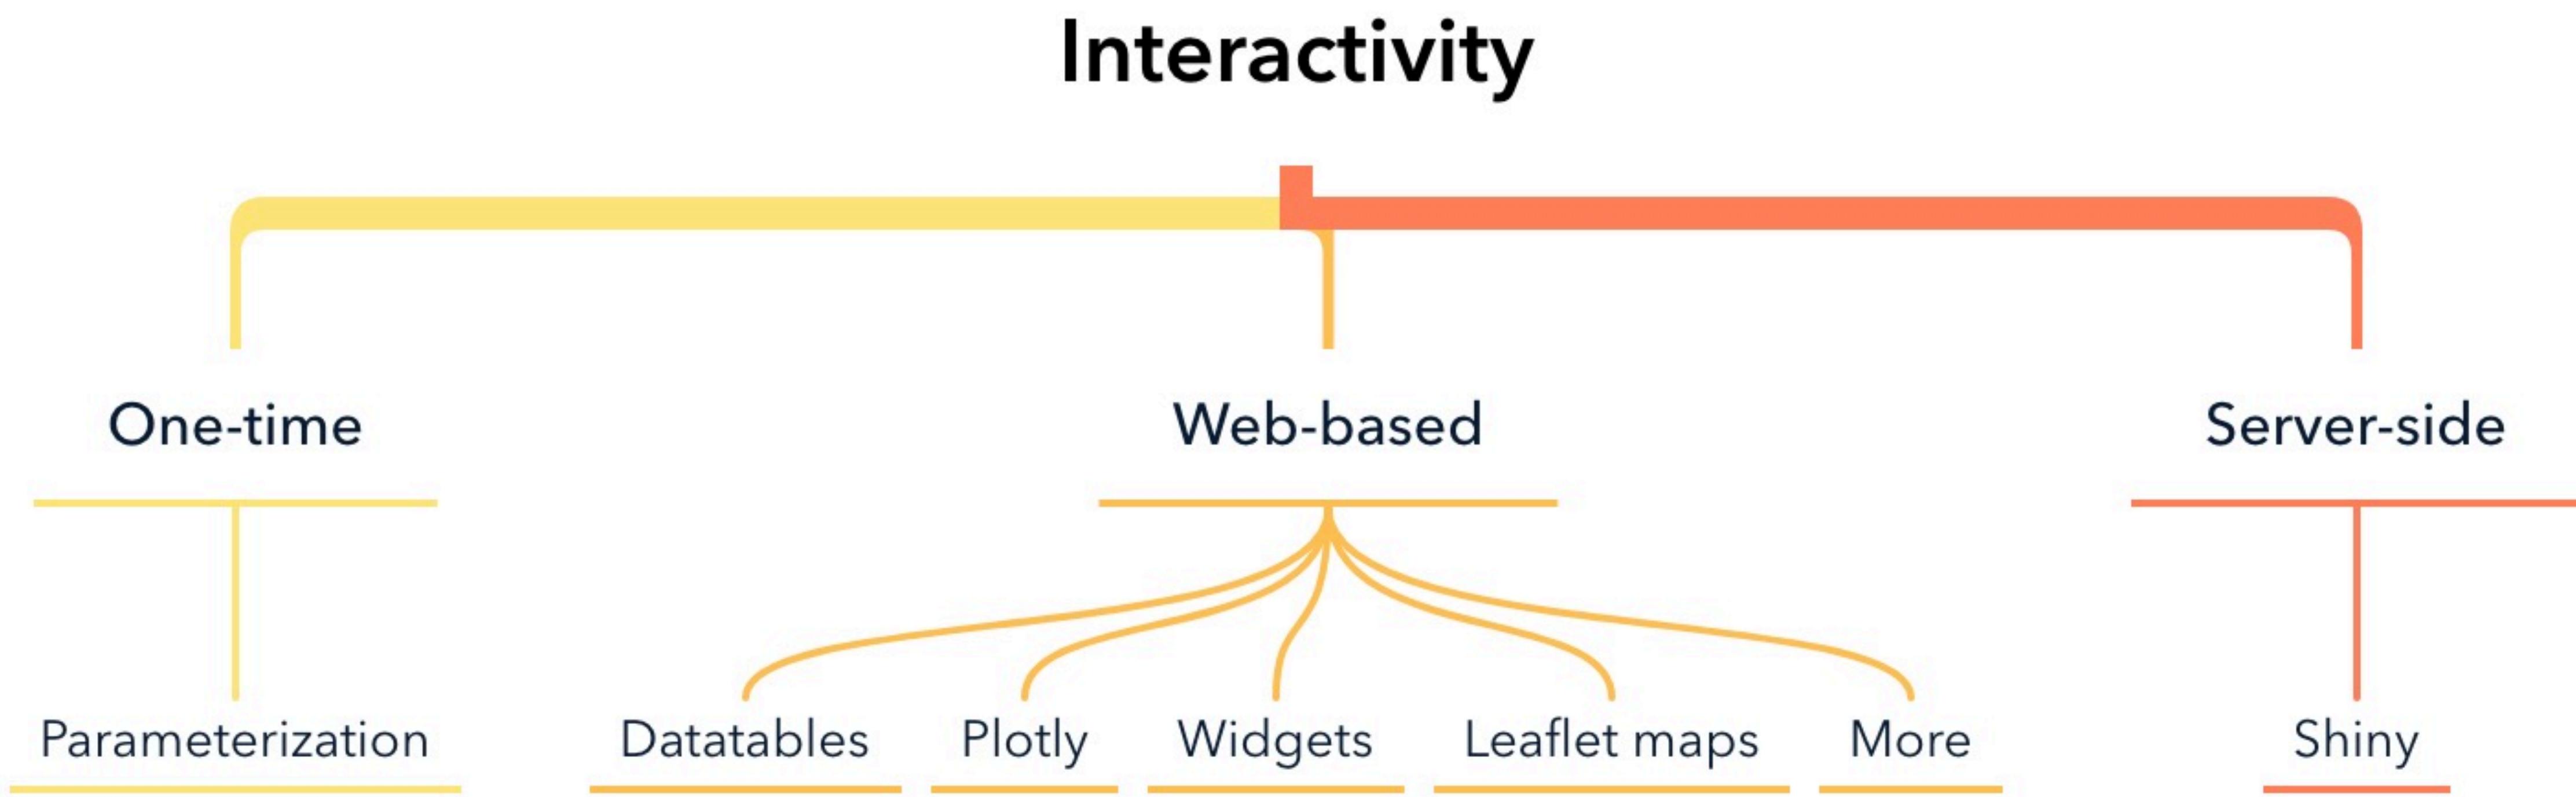


INTERACTION COMPARISONS

| | One-time Interactivity | Web-based Interactivity | Server-side Interactivity |
|------------|-----------------------------|--|----------------------------------|
| Complexity | Low | Medium | High |
| | Low | High | Medium |
| | Minimal code changes | Small to large changes in code | Requires code restructuring |
| | None | Data must fit in browser memory | None |
| | Little | None | Lots |
| | Bespoke (i.e., Full Custom) | Limited | Bespoke (i.e., Full Custom) |
| | Web server* | Web server | RStudio Shiny or Connect servers |
| | Limited data exploration | Data exploration addressed by HTML widgets | Full custom applications |

* One-time interactive documents using the interactive *Knit with parameters* feature must publish to an RStudio Connect Server.

*Tailor your interactivity plan
to your data and user goals*

INTERACTION TYPE FLOWCHART

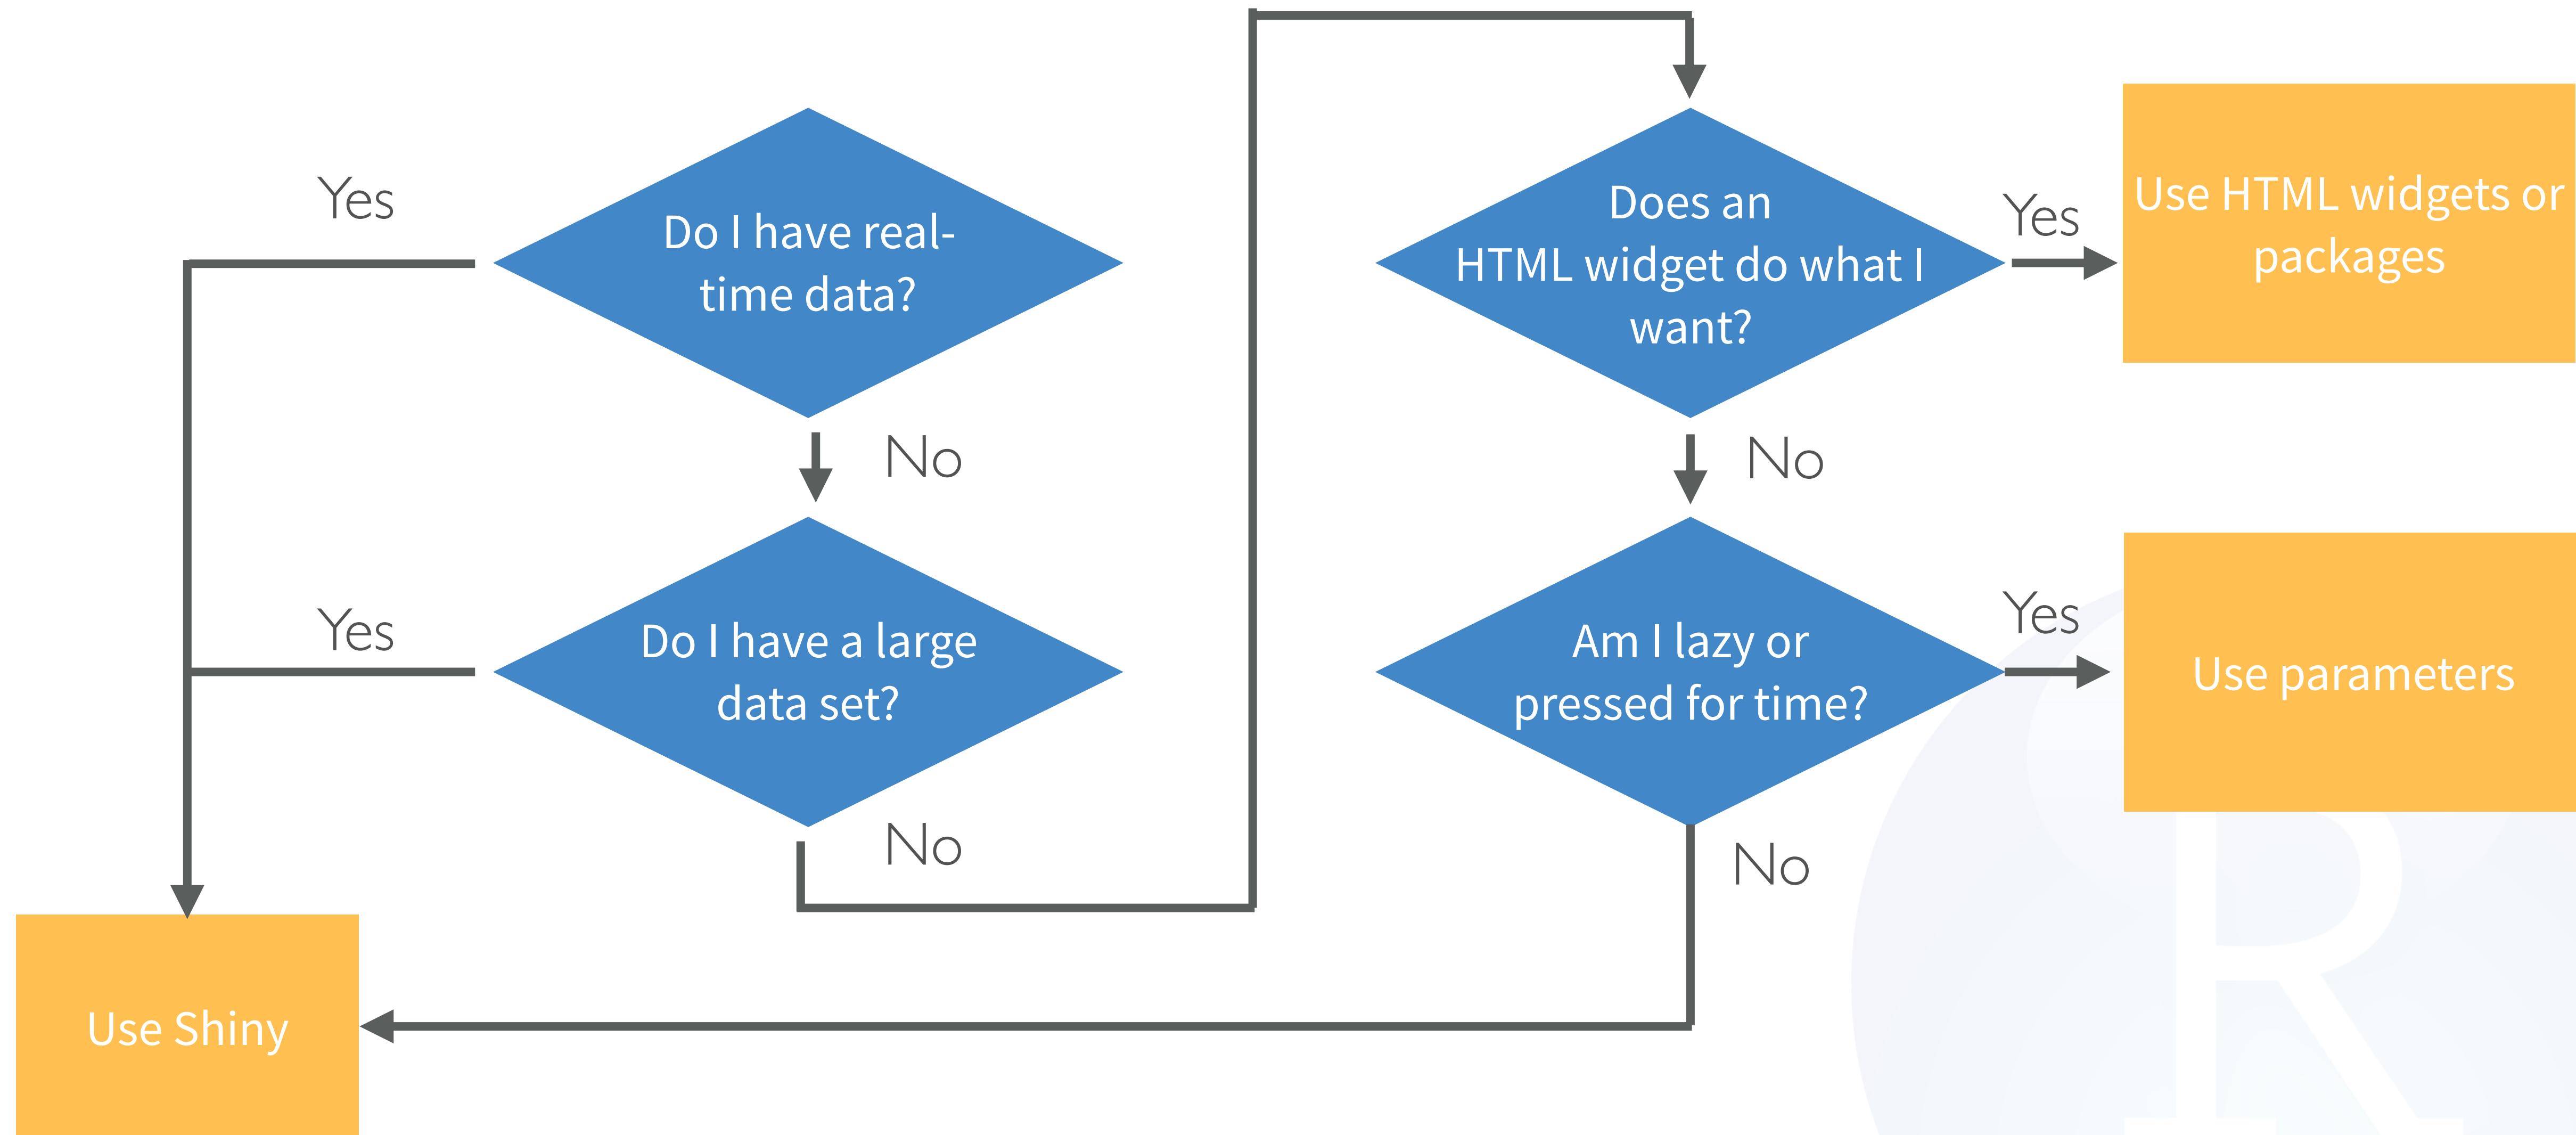

SUMMARY

- Interactivity is the gateway drug that hooks users on your content
- R Markdown supports three different types of interactivity:
 - one-time interactivity using parameterization
 - Web-based interactivity using HTML widgets, and
 - server-side interactivity using Shiny
- Tailor your interactivity plan to your analysis goals