NETSTAT - CAPT ANUJ KUMAR

```
anuj@kali: ~
Session  Actions  Edit  View  Help
┌──(anuj㉿kali)-[~]
└─$ ip route
default via 172.20.10.1 dev eth0 proto dhcp src 172.
20.10.10 metric 100
172.20.10.0/28 dev eth0 proto kernel scope link src
172.20.10.10 metric 100

┌──(anuj㉿kali)-[~]
└─$ netsat -rn
Command 'netsat' not found, did you mean:
  command 'netstat' from deb net-tools
Try: sudo apt install <deb name>

┌──(anuj㉿kali)-[~]
└─$ netstat -rn
Kernel IP routing table
Destination     Gateway         Genmask         Flag
s   MSS Window  irtt Iface
0.0.0.0         172.20.10.1     0.0.0.0         UG
      0 0          0 eth0
172.20.10.0     0.0.0.0         255.255.255.240 U
      0 0          0 eth0
```

```
anuj@kali: ~
Session  Actions  Edit  View  Help
      0 0          0 eth0

┌──(anuj㉿kali)-[~]
└─$ netstat -ano
Active Internet connections (servers and established
)
Proto Recv-Q Send-Q Local Address           Foreign
Address         State       Timer
tcp        0      0 0.0.0.0:23              0.0.0.0:
*               LISTEN      off (0.00/0/0)
tcp        0      0 0.0.0.0:22              0.0.0.0:
*               LISTEN      off (0.00/0/0)
tcp        0      0 127.0.0.1:3306          0.0.0.0:
*               LISTEN      off (0.00/0/0)
tcp6       0      0 :::21                   :::*
                LISTEN      off (0.00/0/0)
tcp6       0      0 :::23                   :::*
                LISTEN      off (0.00/0/0)
tcp6       0      0 :::22                   :::*
                LISTEN      off (0.00/0/0)
tcp6       0      0 :::80                   :::*
                LISTEN      off (0.00/0/0)
udp        0      0 172.20.10.10:68         172.20.1
0.1:67          ESTABLISHED off (0.00/0/0)
udp6       0      0 fe80::918:329d:a5e6:546 :::*
```

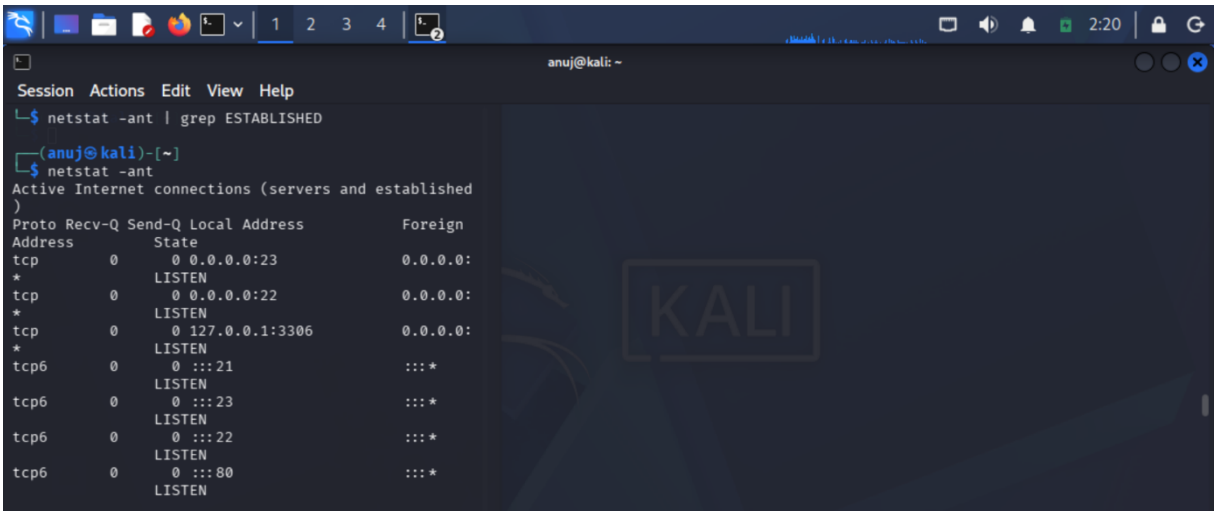

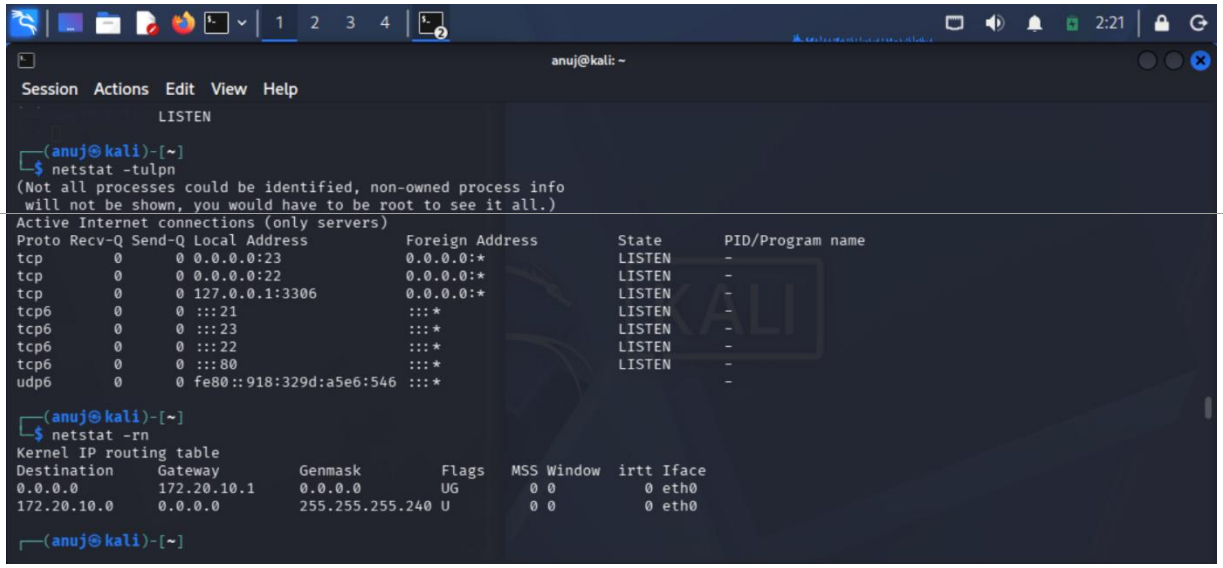

Recommend containment steps

1. Isolate the System (Immediate Priority)

- Disconnect from network:
  - Windows: Disable adapter
  - netsh interface set interface "Ethernet" admin=disable
  - Linux:
  - ifconfig eth0 down
- If in enterprise → move system to quarantine VLAN

2. Kill Suspicious Processes

- Identify using:
- netstat -ano (Windows)
- netstat -tulpn (Linux)

- Then terminate:
    - Windows:
    - taskkill /PID <pid> /F
    - Linux:
    - kill -9 <pid>

3. Block Malicious IPs

- If suspicious foreign IP found:
    - Windows Firewall:
    - netsh advfirewall firewall add rule name="Block IP" dir=out action=block remoteip=<IP>
    - Linux (iptables):
    - iptables -A OUTPUT -d <IP> -j DROP

4. Disable Compromised Accounts

- If attack involves login/session abuse:
    - Disable user:
    - net user username /active:no (Windows)
    - passwd -l username (Linux)

5. Preserve Evidence (Very Important)

- Before deep cleanup:
    - Save outputs:

    - netstat -ano > netstat_log.txt
    - tasklist > processes.txt
    - Collect:
        - Logs (Event Viewer / syslog)
        - Memory dump (if advanced lab)

6. Stop Malicious Services / Ports

- If unknown service listening:
    - Disable service:
    - sc stop <service_name> (Windows)
    - systemctl stop <service> (Linux)
- Close unnecessary open ports via firewall

7. Patch & Remove Persistence

- Check:
    - Startup programs
    - Scheduled tasks
    - Registry (Windows)
- Remove backdoors:
    - Reverse shells
    - Cron jobs (Linux)

8. Run Security Tools

- Antivirus / EDR scan
- Tools:

    - Windows Defender
    - ClamAV (Linux)
    - Sysinternals (Autoruns, Process Explorer)

9. Reset Network Configuration

- If routing/DNS tampered:
- ipconfig /flushdns
- ipconfig /release
- ipconfig /renew

10. Change Credentials

- Change:
    - System passwords
    - SSH keys
    - Admin credentials