


Renan Eizo Miyazaki Takushi 240382312

1. Python

Saída: [1] e [1, 2]

Conceito: parâmetro padrão.

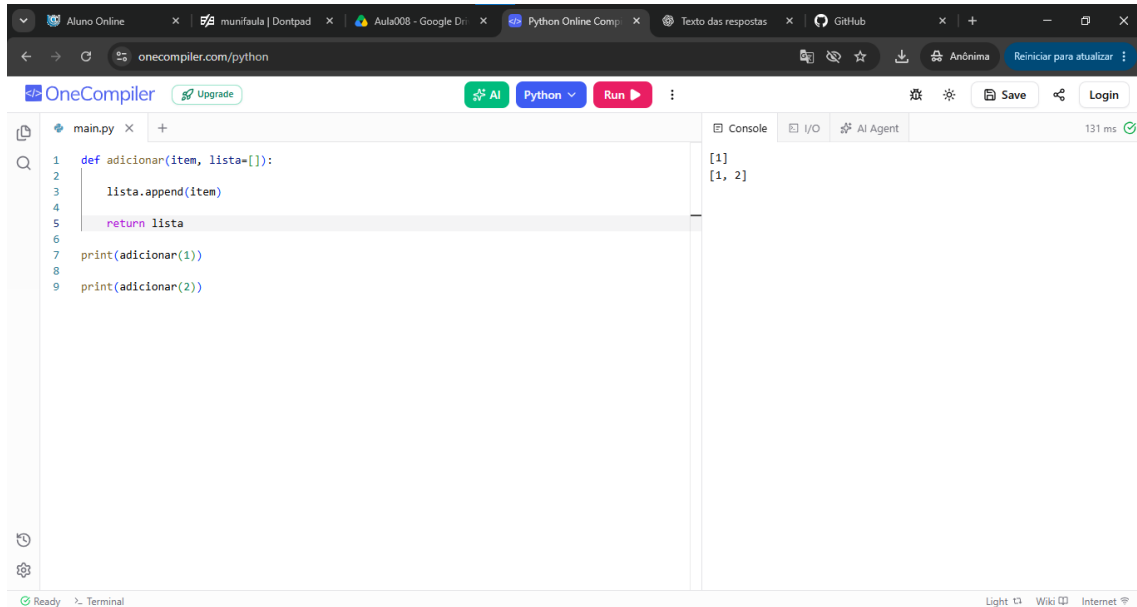


```
def adicionar(item, lista=[]):  
    lista.append(item)  
    return lista  
  
print(adicionar(1))  
print(adicionar(2))
```

Console: [1]
[1, 2]

2. Java

Saída: 0 5

Conceito: passagem por valor.

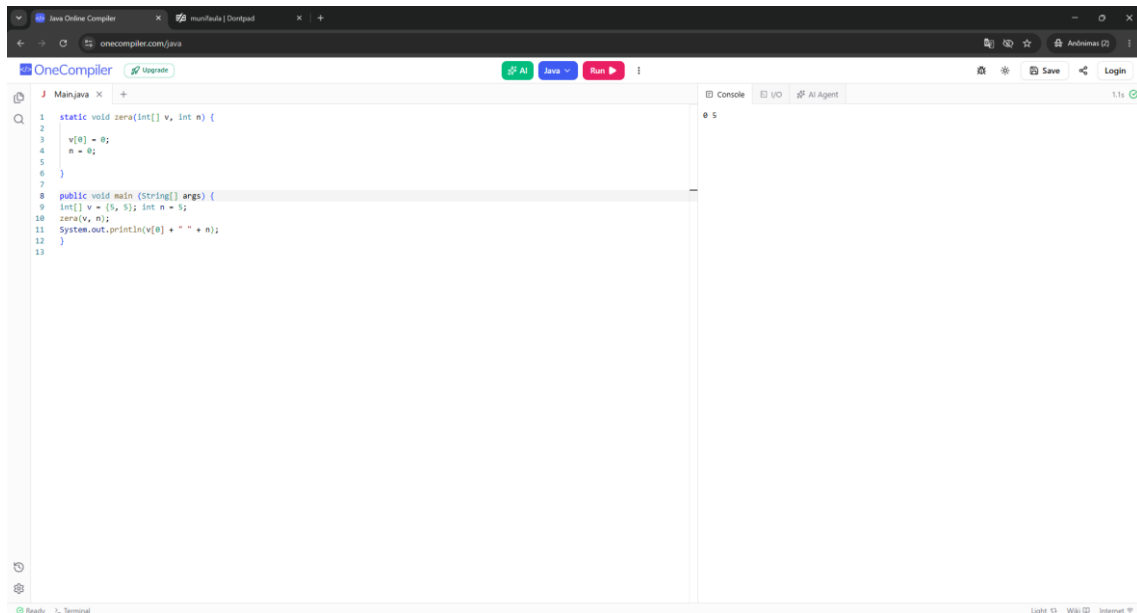

```
static void zera(int[] v, int n) {  
    v[0] = 0;  
    n = 0;  
}  
  
public void main (String[] args) {  
    int[] v = {5, 5}; int n = 5;  
    zera(v, n);  
    System.out.println(v[0] + " " + n);  
}
```

Console: 0 5

3. Python

Saída: [2, 2, 2]

Conceito: fechamento e late binding.

The screenshot shows the OneCompiler Python IDE interface. The browser tabs include 'Aluno Online', 'munifaula | Dontpad', 'Aula008 - Google D...', 'Python Online Comp...', 'Texto das respostas', and 'GitHub'. The address bar shows 'onecompiler.com/python'. The IDE has a top bar with 'OneCompiler', 'Upgrade', 'AI', 'Python', 'Run', and 'Login' buttons. The main editor area contains the following Python code:

```
1 fs = [lambda: i for i in range(3)]
2
3 print([f() for f in fs])
```

The console on the right displays the output: `[2, 2, 2]`. The status bar at the bottom indicates 'Ready', 'Terminal', 'Light', 'Wiki', and 'Internet'.


4. C
Saída: 3
Conceito: variável local estática.

The screenshot shows the OneCompiler C IDE interface. The browser tabs include 'C Online Compiler', 'munifaula | Dontpad', and 'onecompiler.com/c'. The address bar shows 'onecompiler.com/c'. The IDE has a top bar with 'OneCompiler', 'Upgrade', 'AI', 'C', 'Run', and 'Login' buttons. The main editor area contains the following C code:

```
1 #include <stdio.h>
2 int contador(void) {
3     static int n = 0;
4     return ++n;
5 }
6
7 int main()
8 {
9     contador(); contador();
10    printf("%d\n", contador());
11 }
12
```

The console on the right displays the output: `3`. The status bar at the bottom indicates 'Ready', 'Terminal', 'Light', 'Wiki', and 'Internet'.

5. Rust
Saída: não compila.
Conceito: ownership e move.

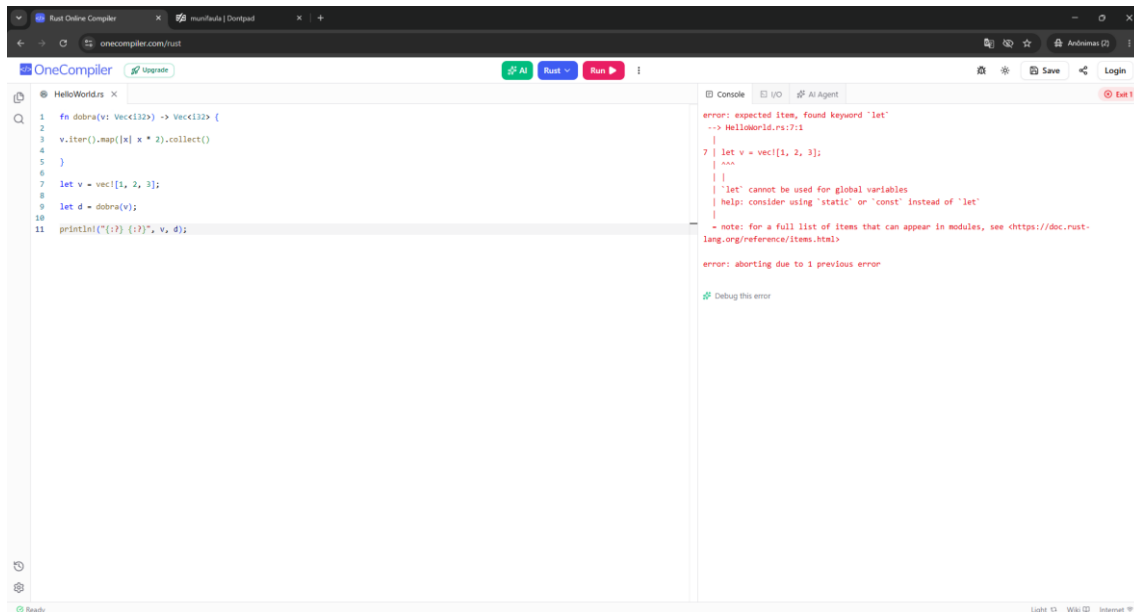

6. Python

Saída: `UnboundLocalError`

Conceito: escopo de variáveis.

