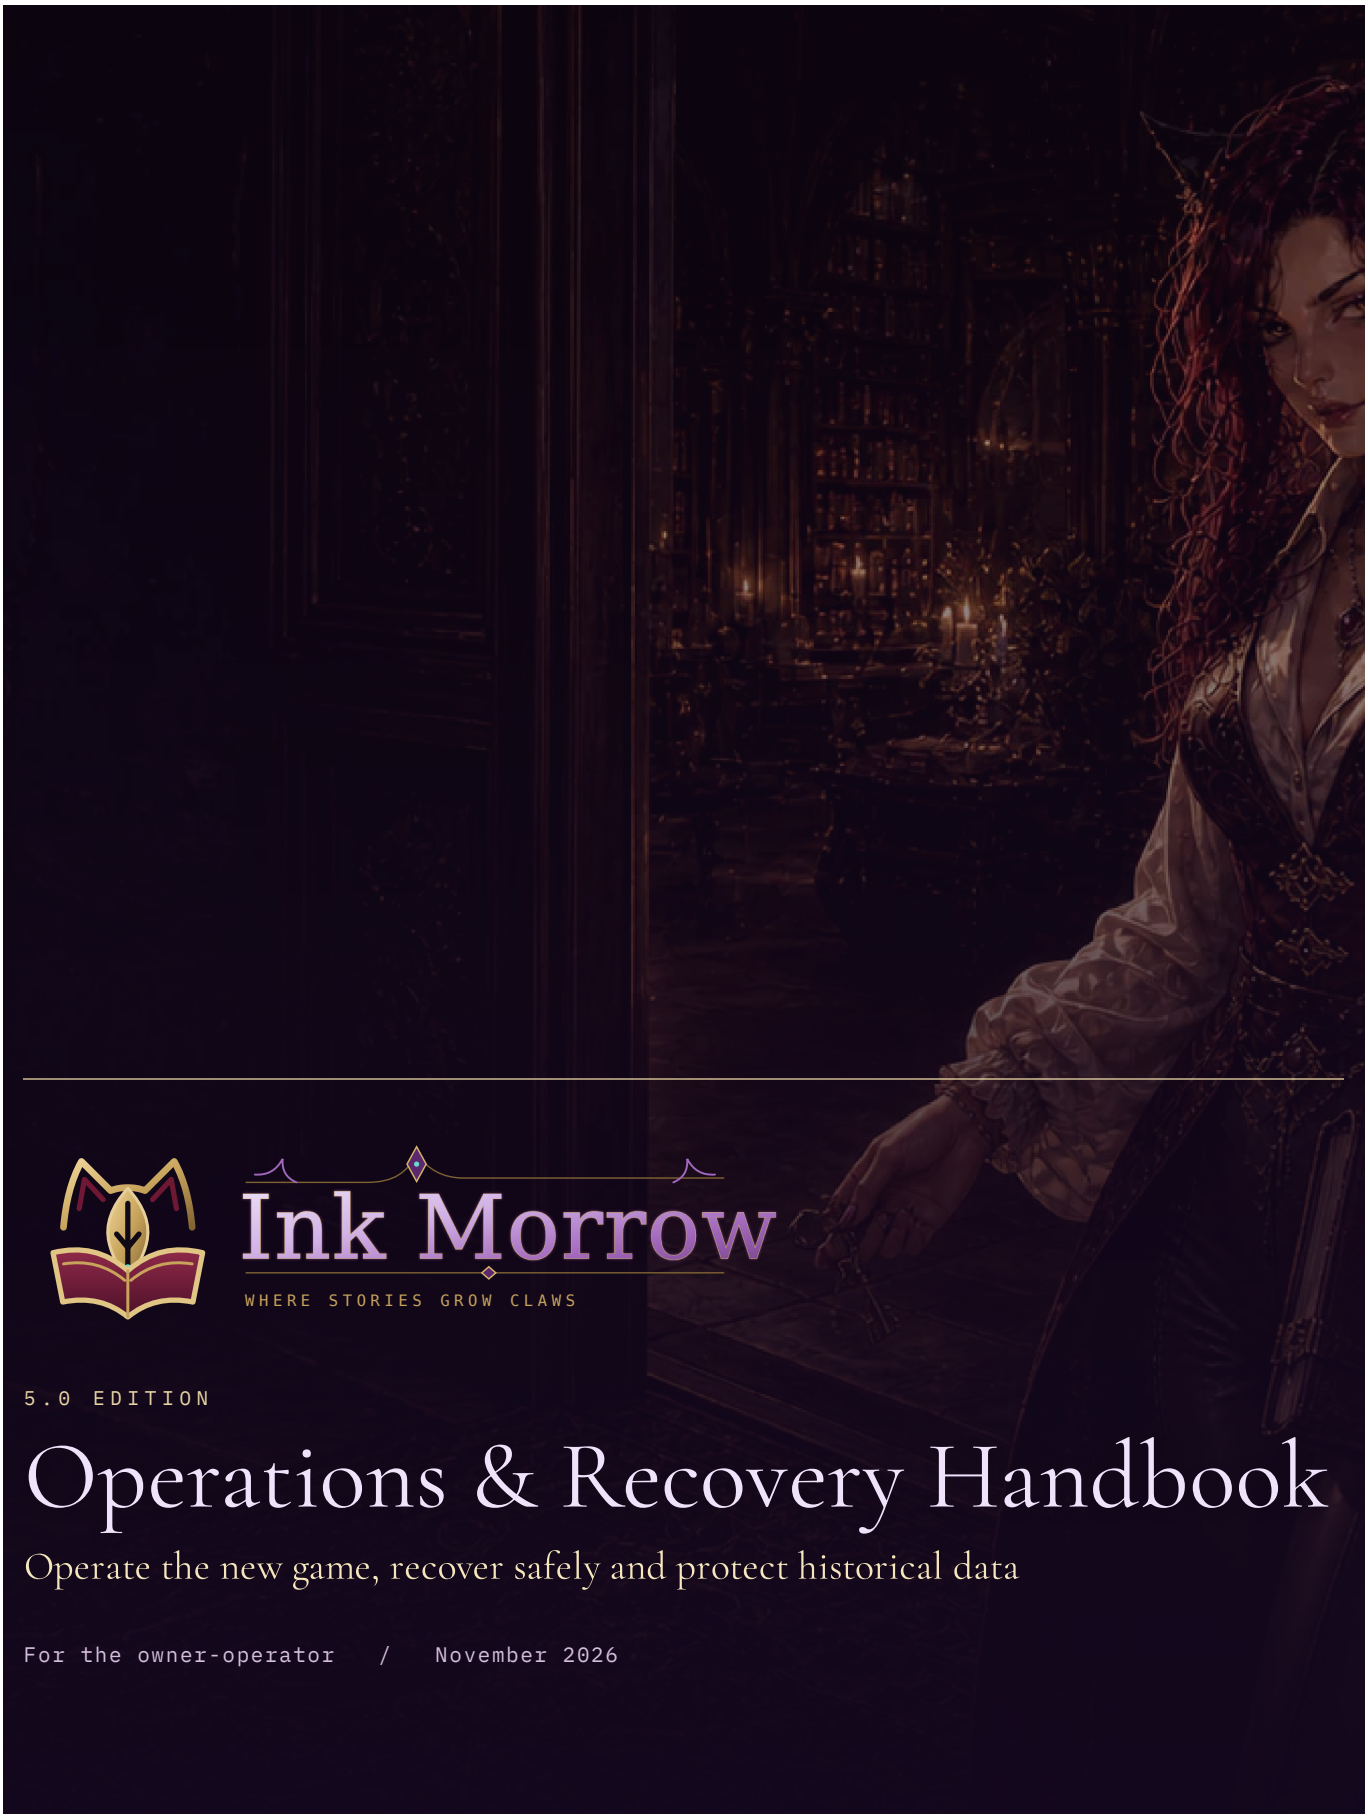


Ink Morrow

WHERE STORIES GROW CLAWS

5.0 EDITION

Operations & Recovery Handbook

Operate the new game, recover safely and protect historical data

For the owner-operator / November 2026

Operations & Recovery Handbook

Operate a private, single-owner InkMorrow 5.0 installation. Protect data first, distinguish a failed purchase from a free operation, and recover without replaying work.

Contents

Narrative context operations
B7 readable books, Bookshelf and reading copies
B6 listening to saved fiction
B5 retained visual collection
B4 editorial operating checkpoint
B3 operating checkpoint
The installation you are operating
Install without touching old data
Resolve configuration and storage
First-run and access recovery
Provider roles and explicit purchases
Two different backup products
Restore and update safely
Network exposure is an operator decision
Incident triage and healthy completion
Optional consistency operations
Episode and relationship support
Fourth-wall support
Direction and memory support

01 Narrative context operations

Continuity/handoff projections are read-only and derived from current branch records, source evidence, character references and editorial anchors. There is no new worker, model service, scheduler, migration, background purchase or recovery queue. Restart does not replay narration. Current stories receive the guidance on future explicit requests; existing accepted prose/references remain intact.

Model review includes selected exact evidence (potentially private owner assertions or submitted input), earlier outcomes and chapter handoff. Input size/cost may grow inside the reviewed bound without changing the one/four/six-call ceilings. If the protected context cannot fit the configured model, choose a suitable capacity or shorter supported plan; no paid call is dispatched by that preflight rejection. Current-format save copies preserve original ledger/evidence and remap source IDs; the projections are rebuilt rather than imported as authority.

The owner has waived backward compatibility as an acceptance requirement. Keep current runtime/formats as the target and protect owner files; this waiver does not authorize destructive storage changes. No paid narrative evaluation or production startup/deployment has occurred. See the opt-in evaluation protocol for what a separately approved rolling comparison would require.

02 B7 readable books, Bookshelf and reading copies

Gate separates **Make a readable book** from **Keep playing elsewhere**. A book uses the viewed path and inspection moment without activating it. Set title, author credit, language and optional front/back matter. Details are private server drafts and recover after reload; edits invalidate the current preview. Preview shows contents, included cover/placed art, sample prose and exclusions. Empty planned groups, Ask, directions, private references, other paths and audio do not enter the frozen PublicationDocument. Prose itself may contain fictional secrets.

Build frozen edition renders selected formats or all nine locally: DOCX, ODT, RTF, EPUB, PDF, HTML, Markdown, plain text and JSON. Every adapter uses the same immutable source. EPUB places art on a separate page immediately before its prose. A build is a durable job, independent of later story changes. Reopen a retained edition to inspect/cancel a running job. Restart marks abandoned jobs interrupted; navigation/restart never silently rebuilds. A partial failure retains successful formats. Missing/damaged files remain unavailable until an explicit local build; verified identical files can be reused for free. Earlier editions stay frozen.

Bookshelf loads bounded pages of retained books, audio and owner-only story art. Filter the collection, download available formats, play prepared MP3, or return to the source story. Older source, interrupted jobs and unavailable bytes are labelled. Loading the collection starts no renderer, model request or full-story download. Removing a book edition revokes its links and releases only files with no other edition pins. Source fiction remains intact. Private `.inkmorrow5` saves preserve all paths and source images, but exclude prepared books/audio, jobs and reading-link authority. Download prepared editions separately.

Reading links appear only when an administrator configures `PUBLIC_SHARE_BASE_URL` as an HTTP(S) origin and separately provides reachable hosting/allowed-host/proxy configuration. Local export works with sharing unconfigured. Review the exact frozen contents, choose expiry and explicitly create a link. Anyone possessing it can read that copy until expiry/revocation; downloaded copies cannot be retracted. Copy the URL, or select it manually if clipboard access fails. Stored link listings show expiry/revocation, never recoverable bearer tokens. Create a new link if lost.

The new current-fiction adapter stores only a SHA-256 capability hash. Its token travels in a URL fragment and an Authorization header, not a query/path or request log. The unauthenticated adapter serves only the immutable reader-safe document; all owner edition/assets/job APIs remain behind owner/origin/CSRF guards. Reader responses and pages use no-store/noindex/no-referrer, render text safely and make no AI call. Retired authoring and legacy share APIs remain disabled in production. This feature supplies no automatic hosting/deployment or promise of public reachability.

Schema 29 is appended without altering earlier migration source checksums. Source snapshots embed bounded art bytes in one synchronous read cut, independent of later media removal. Initial limits: 96 MiB per source, 1,000 sources / 512 MiB aggregate, 20 queued/running jobs, 10,000 retained jobs, 256 MiB per output and 2 GiB available rendered files. GC marks unreferenced files unavailable before unlink; new pins require availability. No story prose, private state or provider spend is rewritten.

03 B6 listening to saved fiction

Desk and Gallery offer **Listen to saved text**. Choose the configured MP3-capable Narrator voice, Read aloud, Auto-read or an audiobook edition, and a saved passage, path, chapter or volume. **Preview listening plan (free)** freezes that selection and shows segment counts, cached reuse, maximum synthesis calls and exposure. Only selected narrative prose goes to the Narrator: no Ask, private references, owner directions, correction records or sibling paths. Generated prose itself may contain fictional secrets; this is not semantic spoiler filtering.

A new purchase needs consent scoped to that immutable plan. Synthesis is sequential, with no transport retry, recursive splitting or purchased PCM fallback. Read aloud caps at 16 segments; Auto-read/audiobooks at 512. A unit caps at 16 MiB and an edition at 512 MiB. Choose a smaller passage/chapter/volume if preflight rejects the range. There is a 20-job installation queue and a conservative 4 GiB retained-audio quota.

The shared player keeps a labelled source, preparation progress, cancellation and Return action across rooms. Pause/Stop playback differs from **Cancel remaining synthesis**. Voice choice and playback speed are device preferences; changing speed and replaying a cached edition are free. A story/path change pauses Auto-read and requests cancellation of its remaining synthesis. A failed cancellation is reported rather than treated as confirmation. Tap to resume handles browser autoplay refusal without another purchase. Lock clears private playback UI.

Cancellation prevents undispatched units; dispatched work may still cost money and produce reusable cache bytes. Restart interrupts unfinished work without automatic resumption. Review a new plan to reuse completed units and purchase only permitted missing units. A disappeared or corrupt reviewed cache hit fails instead of silently buying a replacement. Retained job status shows known dollars and unknown-cost attempts separately. A late status reply cannot revive a cancelled player display.

Audio editions retain their source and are labelled older when the selected path has moved on. Download the MP3 separately. Private playable saves carry aggregate spend but exclude synthesized audio, listening plans/jobs, credentials and resumable purchase authority. Keep cold installation backups for configured database/media.

04 B5 retained visual collection

Gallery now lists the story-owned image collection in metadata pages of forty, including unplaced uploads and painting results. Thumbnails load lazily; Preview shows the full image, provenance and bounded retained-use metadata. Choose a cover, private reference or ancestral passage before placing an existing image. Placement and removal are local actions; earlier path snapshots and retained collection bytes remain available. New painting is one explicitly reviewed Illustrator purchase. A changed path, cancellation or restart cannot silently attach a late result: validated bytes remain ready and unplaced, and known/unknown spend remains visible. There is no automatic retry or reference-image conditioning.

The existing 400-image story ceiling remains. Every inventory member is an owned retained root; this batch exposes no permanent asset deletion or garbage collection. Playable save v2 carries all owned images and optional inventory descriptions and provenance, but no painting jobs, action keys, consent or provider credentials. Import creates new image identities and a fresh inventory concurrency value.

Visual Library offers selected-reference bundles (`.inkrefs`): worlds, characters and Scribes with normalized images and private lore/motives. Preview names matching existing entries; import always makes independent copies. A repeated identical import action returns the original copies, changed bytes conflict, and deleted results are reported rather than recreated. Bundles omit credentials, purchase journals and image-conditioning permission. They are unencrypted private files, not reader-safe books or full installation backups.

05 B4 editorial operating checkpoint

Current storage is schema 29; B4 introduced schema 26. Public version remains 5.0.0 in `ink-morrow-5`. Migration 24/25 and historical snapshots are preserved. Existing episode-based book layout stays virtual until explicit adoption. No deployment or live migration is performed by this development batch; retain the normal consistent-backup procedure before upgrading an owner installation.

An editorial save is a local command with expected story revision, active path, head and layout base. Draft acknowledgement precedes command dispatch. Lost-response receipts and cancellation fences prevent duplicate or delayed changes; never retry with a fresh key before reviewing the old result. Recover an older proposal by comparing/copying fields into a fresh current-target draft. Invalid bounds fail a free preview before preparing a new action key. Offline text is honestly unsaved.

Playable-save v2 carries optional editorial revisions and remaps anchors/heads on copy. Current-format copies retain grouping without rewriting accepted beats. Empty plans remain empty; book exports omit them. Reading/export of large automatic layouts remains available even above new-record adoption limits. Current sources/PDFs cover B5 Gallery, B6 listening and B7 frozen book jobs. D1 prose wording editing remains disabled; those media features are independent of editorial grouping.

06 B3 operating checkpoint

Current storage is schema 29; B3 introduced schema 25 in the existing `ink-morrow-5` family; application 5.0.0 and its isolated data directory remain. Migration 25 appends creative revision/source/plan tables and preserves migration 24 and older ledgers. Take the usual stopped/consistent backup before upgrading an owner installation; rollback tests are not a live-backup procedure. This development batch performs no deployment.

Unknown narration capacity is repaired by provider model discovery or Settings → Advanced model capacity for the assigned Storyteller/Memory model. Use documented context and maximum-output limits. Discovery never overwrites an owner declaration. Model, capacity, length, quality or reference changes can invalidate a prepared purchase; review a fresh plan instead of retrying an old key. Local reading and creative editing remain available. Invalid/oversized paid results can still cost money; inspect known/unknown usage and keep the draft rather than auto-retrying.

Story-local and campaign drafts have destination/base scope, optimistic revisions and acknowledged local-command identities. A missing response is **unknown** until receipt inspection establishes success or a cancellation fence prevents an undispatched action. Recovery compares earlier fields and copies into a fresh current-target proposal; it never replays the prior mutation. Lock clears the private interface; unsaved offline memory is not durable device-loss recovery.

Private playable saves retain creative revisions, bindings, actual goal outcomes, scene provenance and exact narrative source assemblies. Import creates new IDs and preserves prose bytes. Credentials, provider capacities, paid permissions, plans and drafts do not travel. Use current-format saves; backwards compatibility is not a support/acceptance requirement. All six source manuals and PDFs cover the completed recovery checkpoint.

07 The installation you are operating

InkMorrow serves its static browser interface and authenticated API from one Node process. The production entry point is backend/server.js; its default address is 127.0.0.1:3000. It is a playable-fiction game, not the retired manuscript suite. Opening the interface, reading, local state changes and backup do not buy prose.

The current surfaces are Your stories, Visual Library, Start a story, Settings and the Desk/Chronicle/Codex/Gallery/Gate workspace, with Bookshelf and the shared player. The default player stays outside the cast. New narration is deliberate; there is no speculative next-page queue, automatic portrait backfill or background memory extraction. Current-fiction listening has an explicit reviewed queue; opening a room or restarting never starts an audiobook purchase.

Use one process per data directory. SQLite state, normalized images and encrypted provider-vault records form one installation. Downloaded .inkmorrow5 saves are portable story copies, not full installation backups. A dense story can hit the 128 MiB portable-byte ceiling before its 10,000-moment count ceiling; keep a cold full-installation backup rather than dropping history to make an archive fit.

For this project's development, the authoritative checkout is /home/rthorman/src/ink-morrow-5 under WSL. Windows tools may operate on that tree; do not maintain an independent Windows source copy. Production deployment and starting a server remain explicit operator actions, separate from merging code.

B1 is the five-room current-fiction workspace, not the isolated B0 demonstration. On an updated checkout, `bash setup.sh` followed by `npm start` runs the real application; there is no frontend build. `npm run prototype:recovery` still starts only the fictional B0 preview on a separate loopback port. Never use the demo as evidence that production data migrated or a live installation was updated.

Device reading position and acknowledged private drafts survive reload. Drafts expire after 30 days without saving; an offline or conflicted draft needs copying before closing. Schema 23 upgrades transactionally to 24 within the same V5 family; genuine old-ledger fixtures test rollback and reopening. New playable saves use version 2 as the supported interchange format; older formats are not an acceptance requirement. Import receipts recover the same copy when a response is lost. Drafts are private installation data and excluded from portable story saves. A missing saved position falls back visibly without changing the story. Password change is in Settings. Lock hides private content immediately; if session revocation fails, the access error remains visible rather than claiming the server session ended. Back up the configured database/media using the existing cold-backup procedure before operational upgrades.

08 Install without touching old data

Use a supported Node 22 runtime providing node:sqlite and a compatible sharp binary; the package declares Node 22.5 or newer. Verify the actual installed runtime, especially when mixing WSL and Windows tools. The setup script checks prerequisites and prints actionable errors instead of starting a partial server.

From the repository root, run bash setup.sh. It installs production dependencies, creates missing configuration and prepares the new data location. An existing dependency tree is updated in place; --dev includes developer packages. Only explicit --clean authorises replacing the listed node_modules directories. Do not use clean setup as a casual response to a runtime error.

Review backend/.env before the first launch. Supply a provider key only if you want generated play; a curated opening and existing local records can be read without one. Placeholder keys cannot generate. A provider rejection (401) means repair its credential, not the owner login. Use a separate profile for a UI-entered key; the environment profile is read-only. Do not copy old storage overrides.

The default new database is database-v5/ink-morrow-5.db relative to the repository. A recognized 4.x database is refused without adoption. Keep older installations and data separate; there is no supported in-place upgrade from that series.

When you are ready to run, npm start from the repository launches the backend. Keep the printed one-time setup code private and use it in the browser to set the owner password. A successful launch is not permission to expose the port to the internet.

09 Resolve configuration and storage

backend/.env is loaded by the executable and password-reset command. Existing process environment values take precedence. Both resolve relative DATA_DIR and DB_PATH values from backend/, not from the shell's current directory.

Configuration	Database	Media root
Neither override	database-v5/ink-morrow-5.db	database-v5
DATA_DIR only	DATA_DIR/ink-morrow-5.db	DATA_DIR
DB_PATH only	That exact file	Its containing directory
Both	That exact file	DATA_DIR
DB_PATH=:memory:, no DATA_DIR	In-memory database	Unique disposable temporary directory

DATA_DIR must be a directory, never :memory:. In-memory mode is for isolated tests and deliberate ephemeral use; it is not persistent storage. An explicit DATA_DIR with an in-memory database does not make its story records durable.

PORT defaults to 3000 and HOST to 127.0.0.1. OPENROUTER_API_KEY supplies the built-in read-only credential; Settings stores explicit role assignments and optional vault credentials. AI_TIMEOUT_MS and IMAGE_TIMEOUT_MS bound individual calls, not a guaranteed end-to-end completion time.

CONTINUITY_MODEL and old authoring/retry settings do not revive the retired runtime. Memory support is assigned through Settings. Quality Off makes no separate memory request; enabling quality is a story-path choice.

10 First-run and access recovery

First-run setup requires the terminal code and a 15–128-character password. Use a distinctive passphrase. Browser sessions use an HttpOnly, SameSite=Strict cookie; state-changing requests also need the session CSRF token and same-origin request. The executable remains sealed even with NODE_ENV=test.

Lock revokes the current browser session. Password change revokes other sessions. After a process restart, a remembered browser login may still be valid while vault credentials remain locked; re-enter the owner password to unlock them. Do not overwrite a provider profile merely to solve a locked vault.

If the password is lost, stop the exact installation, confirm its DATA_DIR and DB_PATH, and keep a cold backup. From backend, run npm run auth:reset -- --yes. This removes the owner, browser sessions and saved provider credentials from the selected database. Stories and media remain. The next start prints a new setup code.

The reset command refuses a missing database or :memory: and never creates a blank recovery database. An old family is rejected before any reset. If it says nothing was removed, inspect the path rather than deleting files or guessing.

Terminal access is powerful: someone able to read or replace the data files is outside the browser-password security boundary. Use operating-system protections and encrypted storage where appropriate.

11 Provider roles and explicit purchases

Settings separates the storyteller (internal Scribe role), memory support (Archivist role) and Illustrator. A role names one provider profile and model. Saving a choice is local; browsing its model catalogue contacts that provider but does not purchase story generation.

The built-in OpenRouter profile reads environment credentials. User-supplied profiles can use process-session credentials or the encrypted vault. An unavailable role is not silently replaced. Do not place secrets in story fields or assume an arbitrary OpenAI-compatible endpoint supports every operation.

Standard play purchases one text response. Quality can add bounded checks using standard, memory or both roles. Painting is a separate one-attempt operation. There is no auto-retry after uncertain transport failure, automatic successor, or background recap generation.

Before authorising a request, read its role/model, data exposure and call ceiling. An estimate is not a price cap; configure an upstream spending limit where supported. Failed or rejected work can still have known or unknown charges. Changing providers does not refund a previous attempt.

Use a fresh explicit action only after free state reconciliation. Do not replay a POST with a new idempotency key merely because the browser waited too long.

12 Two different backup products

Download a playable save for each important story. It contains all paths, cast, private facts, settings, illustrations and aggregate spend. It excludes credentials, provider configuration, consent and pending request identities. Import always creates a new story. Keep saves private and unencrypted-file risks visible.

Story saves also include frozen world/Scribe/character references, covers and portraits, but not the reusable catalogues or their separate AI journals. Use the full installation backup for catalogue entries and reference-development or image spend. Deleting an entry scrubs its reusable content and image, retains its spend record, and leaves every story copy alone. This catalogue deletion has no in-app undo.

A cold installation backup preserves the complete configured database and media roots, including auth and encrypted vault data. Stop the process and confirm it has exited before copying. If database and media use different roots, capture both. Protect a separate copy of necessary configuration; provider keys in .env are secrets and should not enter ordinary issue attachments or shared archives.

Copy the database with any associated -wal, -shm and -journal files still present after shutdown. Never discard a WAL because the main database looks complete. Keep the directory relationship intact. A live ordinary filesystem copy is not a transactionally coherent SQLite backup.

Name and date backups, record the app version, and keep a copy off the same device when device-loss recovery matters. Test restoration to a separate location. A synced folder or downloaded EPUB alone is not proof of recovery.

The application's private scratch-copy database inspection protects older source files during startup preflight. It is not a backup service and not a substitute for stopping writers before an operator copy.

13 Restore and update safely

Schema 23 adds durable AI reference-development records without rewriting schema-22 catalogues, story history or earlier migration checksums. This is a supported 5.0 migration, not 4.x adoption. Keep a matched cold backup before updating; older code cannot read the new schema.

For a playable save, use Import a playable save, check the preview, then Import as a new story. Verify an old moment, another path and an illustration. Configure provider roles separately and review any future purchase. Import never starts an interrupted operation.

For an installation restore, stop the target process and retain its current data in a separate recoverable location. Restore the complete cold backup into a fresh destination, including media and any retained database sidecars. Point the matching application version at that destination. Do not overlay files from two backups or replace only the database while leaving mismatched media.

Check the family/version acceptance, unlock, inspect several stories and paths, and export a reading copy before declaring success. A refused database is a reason to investigate its provenance, not to edit the family marker manually.

Before updating within 5.0, record the exact code revision, stop the process, take a cold backup, and read release notes. Test on an isolated copy where practical. Migration checksums and SQLite integrity checks must pass; failure does not authorise ledger surgery.

Rolling back code alone is not a safe schema rollback. Use a matched prior code-and-data backup in a separate destination if a later version cannot be read. The 4.x line is not a rollback target for a newly created 5.0 database.

14 Network exposure is an operator decision

Keep the default loopback bind for local use. WSL and Windows networking details can differ; verify the actual listening address rather than assuming a terminal message proves remote reachability or firewall isolation.

For remote access, prefer an HTTPS reverse proxy on loopback with an explicit ALLOWED_HOSTS list and TRUST_PROXY=1. Trust is limited to the loopback proxy, not arbitrary client-supplied forwarding headers. Configure the proxy and its certificate deliberately, then verify Secure cookies and rejected unapproved Host headers.

Direct non-loopback HTTP requires ALLOW_INSECURE_LAN=1. This is a warning-bearing opt-in, not encryption. Passwords, sessions, story content and provider traffic to the local application would cross that connection in clear text. Do not expose it directly to the public internet.

This is one local owner's installation, not a hosted multi-user account system. The access password does not encrypt the database, media or downloaded files. Do not treat Living-world resistance as a security control; fictional authority does not govern real API access.

The Security handbook describes the threat boundaries. Changing exposure, proxy trust or credential handling is a security change requiring verification, not an incidental convenience setting.

15 Incident triage and healthy completion

First identify whether the problem is access, storage, provider configuration, network transport, invalid model output or stale story state. Record the visible error code and request time without exporting private prose or credentials.

Symptom	Safe next check
Database refused	Verify family, path, version and stopped writers
Vault unavailable after restart	Re-enter the owner password
Missing model role	Inspect its saved provider/model assignment
Reply failed or timed out	Refresh freely; inspect known/unknown call costs
Repeated approach unchanged	Read the existing ruling; no purchase is needed
Image/book unavailable	Check the exact retained media files and storage
Fact seems missing	Check path, visibility, retirement and older recall
Another tab changed the story	Refresh before another deliberate mutation

Do not run the old continuity repair pipeline, restore manual APIs, or remove history to solve a 5.0 memory complaint. The working set is bounded, but immutable fact history remains available for retrieval. Corrections are explicit local records, not paid background extraction.

A healthy maintenance result includes an accepted 5.0 database, successful unlock, local reading, correct path state, intact illustrations and a verified save. Test a paid operation only with explicit spending authority; deterministic fixtures are sufficient for regression checks.

Keep the prior backup until the owner has verified the result. Report exactly what changed, what was tested and what remains uncertain. A successful code merge does not mean the running installation was deployed or restarted.

16 Optional consistency operations

Quality is off by default. Story preferences select Standard, Memory or Both; Settings assigns the standard storyteller and memory-support provider/model independently. Saving a role or changing a preference makes no model call. All selected roles must resolve before a paid operation begins, and are rechecked between calls and before commit. A changed role, missing credential, locked vault or changed story stops work rather than silently downgrading quality.

Off permits one call. A single reviewer role permits four total calls; Both permits six. A first-pass acceptance needs two or three respectively. The sole repair is followed by all selected reviews. Invalid reviewer output or transport failure stops immediately, with no automatic retry. Review shows the role models, bounded private context exposure and cost/latency tradeoff; previous standard-play consent is not authority for quality purchases.

Inspect story totals and Recent model calls & costs after failure. Each dispatched call is journalled before transport. Known earlier charges and later unknown attempts remain separate; do not interpret a failed scene as free. Restart marks pending calls and their parent request interrupted. A late return may improve billing knowledge but cannot save the abandoned draft. Use a new explicit action only after reviewing the error; never replay paid POSTs to recover a lost response. No rejected draft or reviewer explanation is persisted as story history.

17 Episode and relationship support

Catch me up is a local read, not an AI repair pipeline. It returns current-path public reminders and evidence links. A temporarily unreachable server can prevent the recap from loading, but opening it never buys narration. Private motives and other paths are excluded. Return after an absence does not advance the world.

Relationship descriptions distinguish caring, trust, cooperation and expectations. Check recorded evidence before correcting an apparent disagreement. Corrections do not rewrite earlier prose. Episode phases describe development, payoff and aftermath; only the player ends an episode. Ending early is valid, and a retired goal is not treated as an automatically completed one.

Rewind and playable saves preserve these fields and remap payoff evidence into the copied story. Failed path and episode saves retain their dialog text. Refresh after a conflicting change; no automatic paid retry or alternate-path creation is attempted. Optional consistency-model calls follow the reviewed quality pipeline described above; local path and episode actions never start that pipeline.

18 Fourth-wall support

In Living-world Story preferences, Characters may break the fourth wall offers Never, Rarely and Freely. Never is the default. Rarely is permission for at most one structured address in six narrated passages, not a promise to produce an address on schedule. It stays inactive in Story-shaping and for outside-story Ask. Changing the setting costs nothing and does not reset its cooldown.

The preference and cooldown restore through reload, rewind and playable saves. The character's named address remains in its passage and book exports. If a provider returns a forbidden address, the response fails without saving partial text; its charge can still count. Refresh does not retry it. Ordinary model prose can still violate instructions; inspect the selected mode and storyteller, and never represent this control as proof that a model will preserve immersion.

19 Direction and memory support

If a story keeps returning to a topic, inspect its visible ongoing focus. A new Steer defaults to this moment; Keep this focus must be selected explicitly. Clear ongoing focus is local and does not alter previous prose. Style changes affect future play and do not revoke an already granted structured outcome.

Recall older facts searches public history without a model. Use distinctive words; results are bounded to 32. A missing fact may be retired, secret, or on another path, not lost through compaction. Source links distinguish local corrections from narrated evidence. Never retire a fact merely to keep the game running. Shelf pagination exposes older stories through More stories and Previous stories.