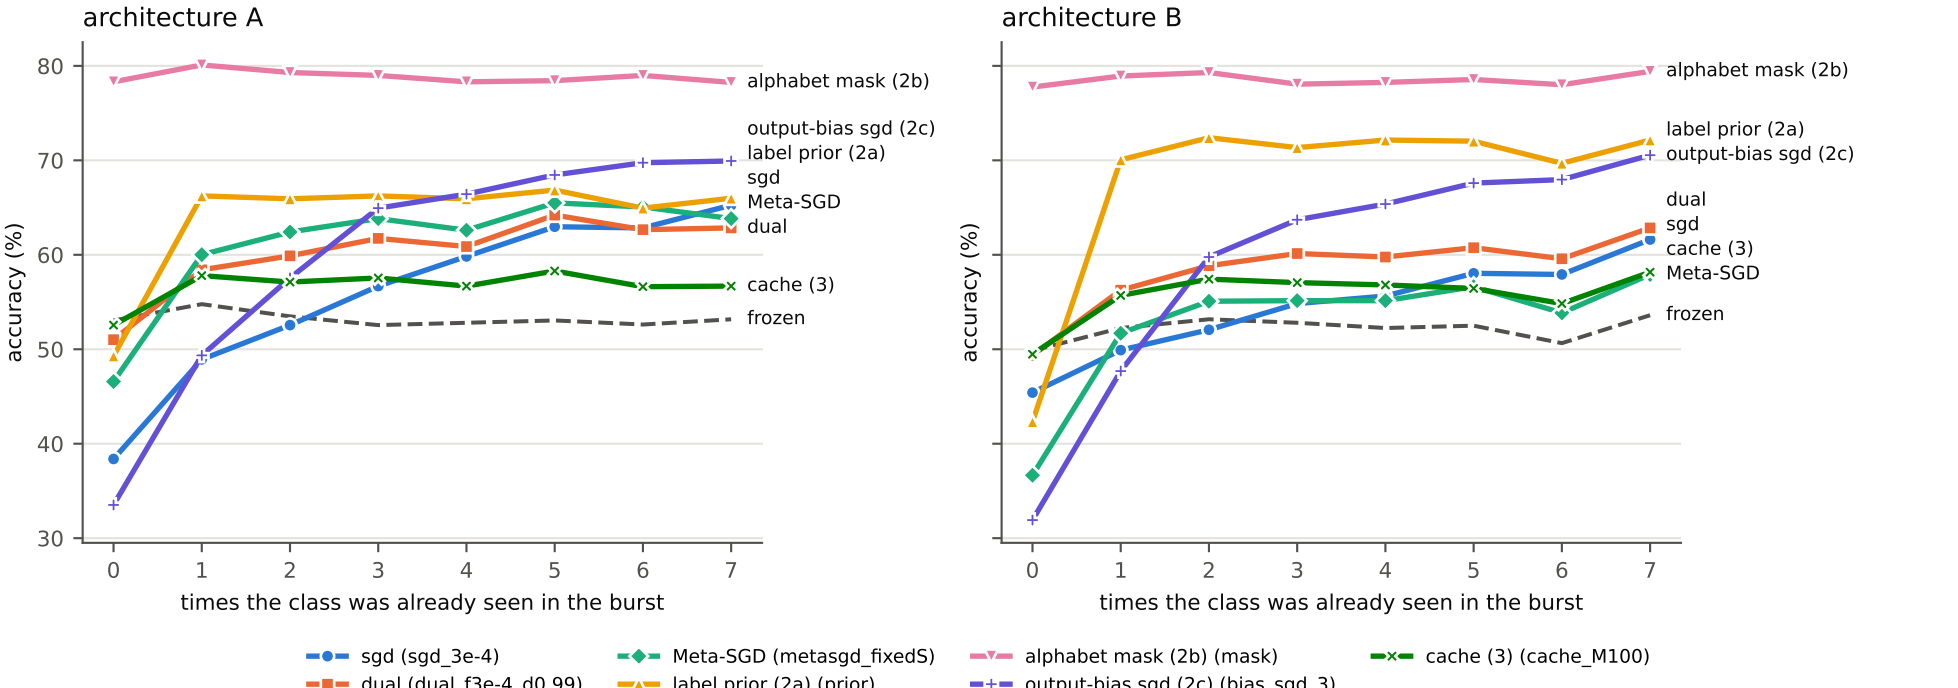
architecture A
architecture B
accuracy (%)
times the class was already seen in the burst
alphabet mask (2b)
output-bias sgd (2c)
label prior (2a)
sgd
Meta-SGD
dual
cache (3)
frozen
sgd (sgd_3e-4)
dual (dual_f3e-4_d0.99)
Meta-SGD (metasgd_fixedS)
label prior (2a) (prior)
alphabet mask (2b) (mask)
output-bias sgd (2c) (bias_sgd_3)
cache (3) (cache_M100)