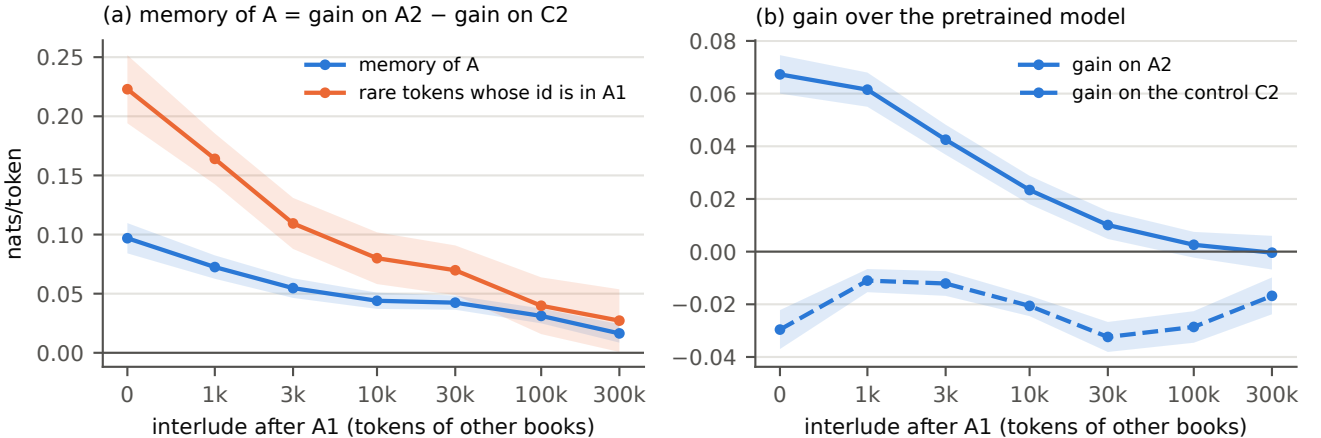
(a) memory of A = gain on A2 − gain on C2
memory of A
rare tokens whose id is in A1
nats/token
0.25
0.20
0.15
0.10
0.05
0.00
0
1k
3k
10k
30k
100k
300k
interlude after A1 (tokens of other books)
(b) gain over the pretrained model
gain on A2
gain on the control C2
0.08
0.06
0.04
0.02
0.00
−0.02
−0.04
0
1k
3k
10k
30k
100k
300k
interlude after A1 (tokens of other books)