







Q


Swagger

Web3 RPC API

POST https://api.1inch.dev/web3/{chainId}/{nodeType}

Perform RPC calls

Performs JSON-RPC calls on the blockchain identified by the given chainId. If nodeType is not provided, a default nodeType will be used.

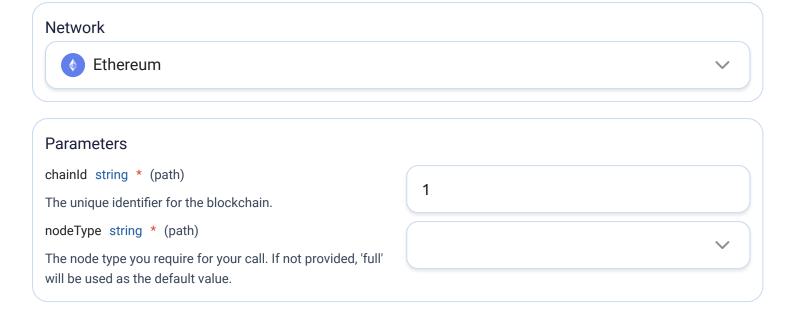

Request Body

Content type application/json

Click in to adjust the request body:

```
{
    "jsonrpc": "2.0",
    "method": "eth_blockNumber",
    "params": [],
    "id": 1
```

Request Body Schema:

~

object

```
jsonrpc string
method string

✓ params array
items string
id integer
```

```
swagger.response

Code: 200

JSON-RPC response

Schema:

v object
    jsonrpc string
    result string
    id integer

Code: 400

Invalid request format

Code: 404
```

Authorization - API KEY

API KEY

ChainId not found

Sign in for automatic API key authentication.

Q Try it NodeJS Python cURL Go const axios = require("axios"); async function httpCall() { const url = "https://api.1inch.dev/web3/1/{nodeType}"; const config = { headers: undefined, params: {}, paramsSerializer: { indexes: null, }, **}**; const body = { jsonrpc: "2.0", method: "eth_blockNumber",



Response

Click the try-it button to test your API call and see the real-time response right here.

Previous

Next

Perform RPC calls against full nodes

Introduction >

© 2025 1inch Limited | Privacy Policy | Terms of Service | Commercial API Terms of Use