







Q


Swagger

1inch Transaction Gateway API

POST https://api.1inch.dev/tx-gateway/v1.1/{chain}/broadcast

Broadcast public transaction

Takes the raw transaction data as input and returns the transaction hash in case of Evm Chains and transaction signature in case of Solana

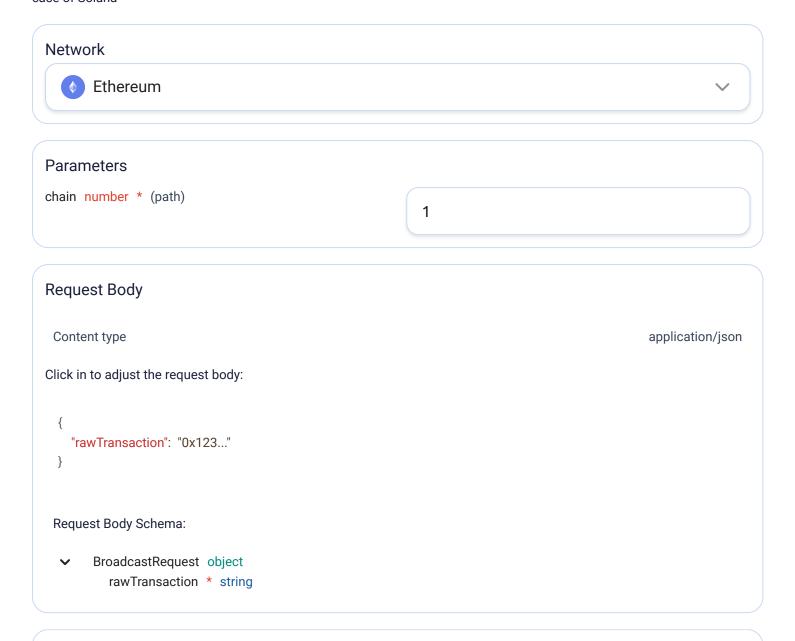

swagger.response

Code: 200

The transaction was successfully broadcasted

Schema:

BroadcastResponse object
 transactionHash * string

Code: 400

The provided input data is invalid

Authorization - API KEY

API KEY

Sign in for automatic API key authentication.

```
ф
    Try it
NodeJS
               Python
                          cURL
                                        Go
    const axios = require("axios");
    async function httpCall() {
     const url = "https://api.1inch.dev/tx-gateway/v1.1/1/broadcast";
     const config = {
      headers: undefined,
      params: {},
      paramsSerializer: {
       indexes: null,
     },
     };
     const body = {
      rawTransaction: "0x123...",
    };
     try {
      const response = await axios.post(url, body, config);
      console.log(response.data);
     } catch (error) {
```

Response

Click the try-it button to test your API call and see the real-time response right here.

Previous

Next

Broadcast private transaction >

Quickstart guide

© 2025 1inch Limited | Privacy Policy | Terms of Service | Commercial API Terms of Use