One PR becomes one row: mine_pr and the ordered consumer

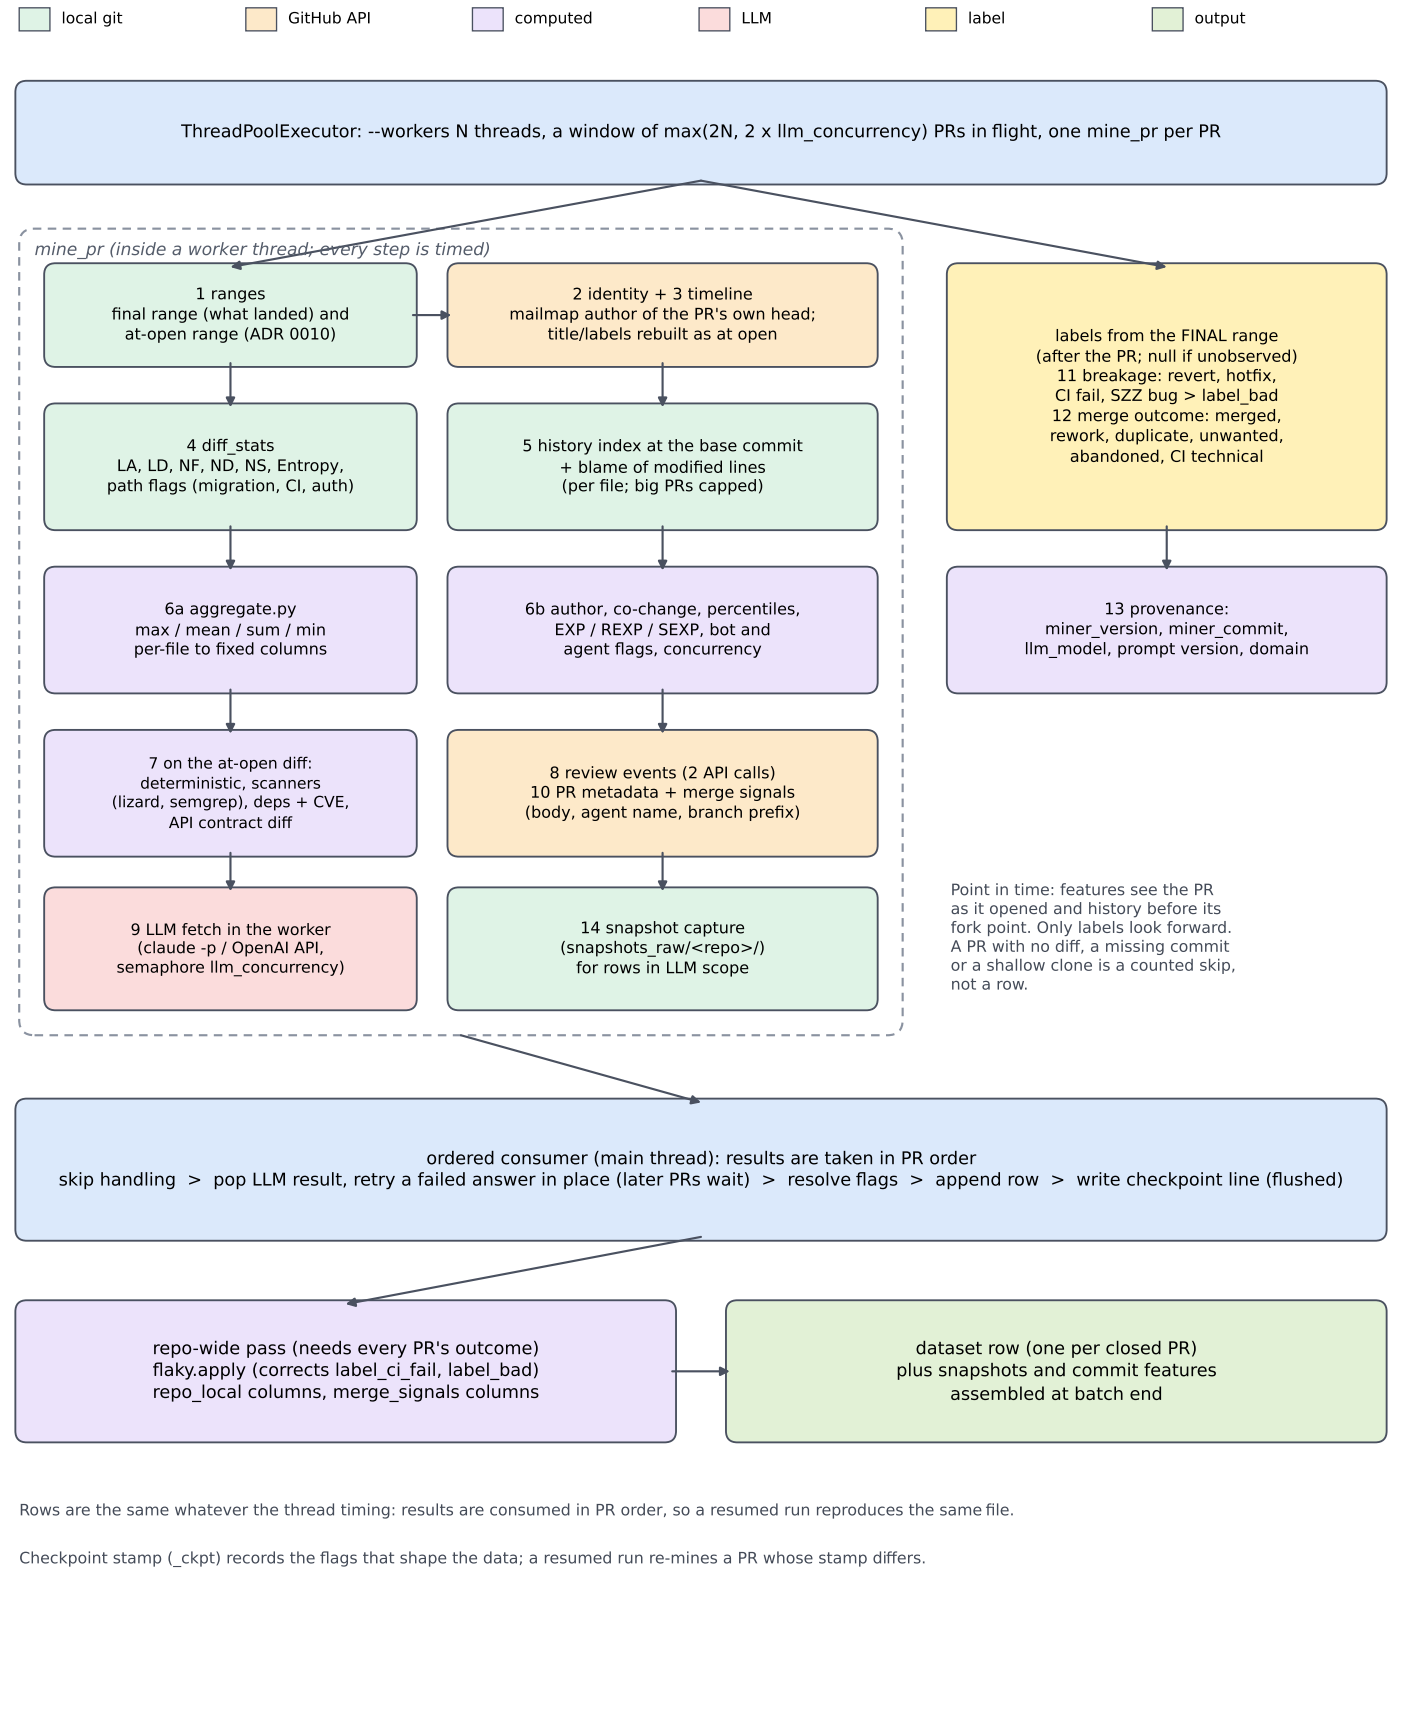

Rows are the same whatever the thread timing: results are consumed in PR order, so a resumed run reproduces the same file.

Checkpoint stamp (_ckpt) records the flags that shape the data; a resumed run re-mines a PR whose stamp differs.