

PRODUCT INVENTORY MANAGEMENT SYSTEM

Team ID	SWTID-2026-3680
Project Title	Product Inventory Management System
Team Leader	M. Pavithra
Leader Email	pavithramuthukrishnan2@gmail.com

Team Members

Team Members	Email ID
S. Rubika	rubikasathiyanarayanan702@gmail.com
U. Dharshini	dharshiniu468@gmail.com
M. Asha Bhavanaa	ashabhavanaa@gmail.com
S. Vaishnavi	ajayavp2008@gmail.com

Product Inventory Management System

PROJECT OVERVIEW

The **Product Inventory Management System** is a backend-focused web application developed using **Node.js**, **Express.js**, and **MongoDB**, designed to provide a secure and scalable solution for managing product data through RESTful APIs. The system enables users to create accounts, log in securely, and access protected routes using **JWT-based authentication**, ensuring that only authorized users can perform operations. It supports complete **CRUD functionality**, allowing users to add new products, view their inventory, update product details such as price or quantity, and delete items when needed.

Key Objectives:

- Provide secure JWT-based user authentication and authorization for protected API access.
- Enable efficient product inventory management through RESTful CRUD operations.
- Ensure user-specific data isolation so each user can manage only their own products.
- Implement scalable backend architecture using Node.js, Express.js, and MongoDB.
- Deliver fast and reliable API responses with proper validation and error handling.

Target Users:

- Small business owners managing product stock and inventory records.
- Freelancers or sellers tracking items or services in a structured way.
- Developers learning backend API development and authentication workflows.
- Students working on backend or full-stack development projects.
- Anyone needing a secure and simple backend system for managing product data.

PROJECT INSTRUCTION

- Create backend project folder
- Configure server using Express.js
- Setup MongoDB database connection
- Implement authentication APIs
- Implement product CRUD APIs
- Test APIs using Thunder Client in VS Code

PRE-REQUISITES

Software	Purpose
Node.js	JavaScript runtime for backend
MongoDB	Database storage
npm	Package manager
VS Code	Development environment

Knowledge Requirements


- JavaScript ES6 concepts
- Node.js and Express.js REST API development
- MongoDB and Mongoose ODM
- JWT authentication
- Middleware architecture

Project Thumbnail:



PROJECT ARCHITECTURE

High-level architecture diagram illustrating the three-tier backend structure.

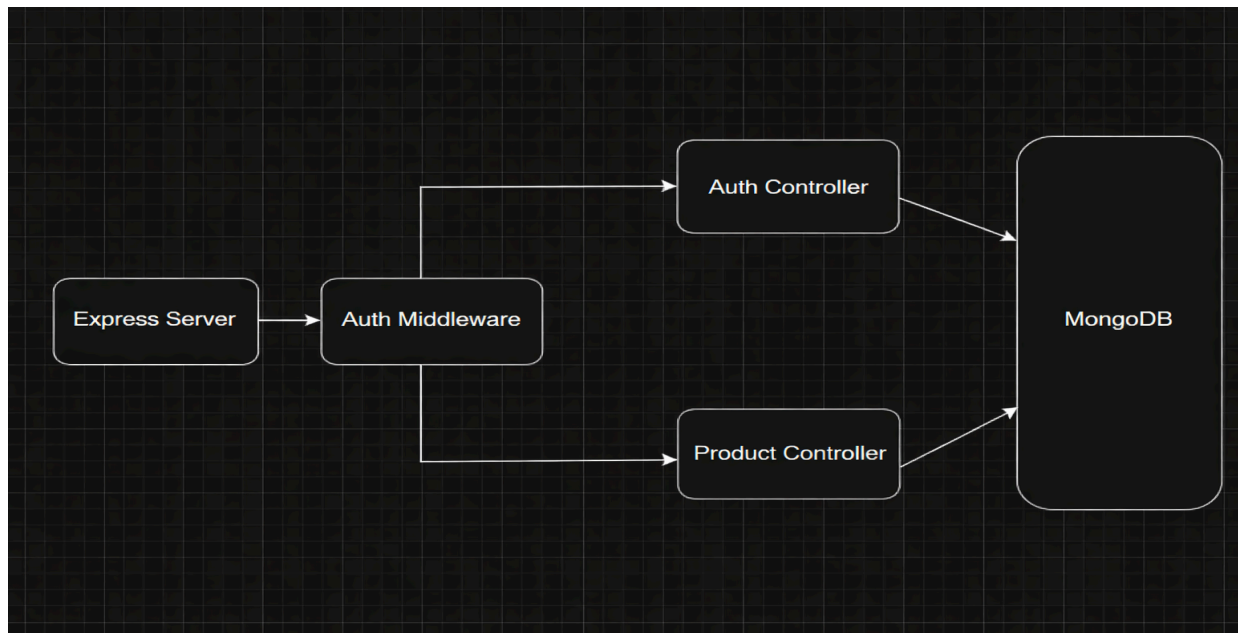

Node.js + Express Backend

- RESTful API architecture
- JWT authentication middleware
- MVC pattern (Models, Controllers, Routes)
- Input validation and error handling

MongoDB Database

- Document-based NoSQL storage
- Mongoose ODM for schema modeling
- Two collections: Users and Contacts
- Indexed fields for optimized queries

TECHNICAL ARCHITECTURE

Backend Architecture (Node.js + Express)

- **Controllers:** Handle authentication and product logic
- **Models:** Define database schema
- **Routes:** API endpoints for authentication and products
- **Middleware:** JWT verification and error handling
- **Configuration:** Environment variables and database connection

Database Architecture (MongoDB)

Users Collection:

- `_id`
- `name`
- `email`
- `password` (hashed)
- `timestamps`

Products Collection:

- `_id`
- `userId` (reference to user)
- `name`
- `price`
- `quantity`
- `description`
- `timestamps`


Relationship: One User → Many Products

Indexes:

- `email` (unique)
- `userId`
- `product name`

ER Diagram

ER diagram showing User → Product relationship:

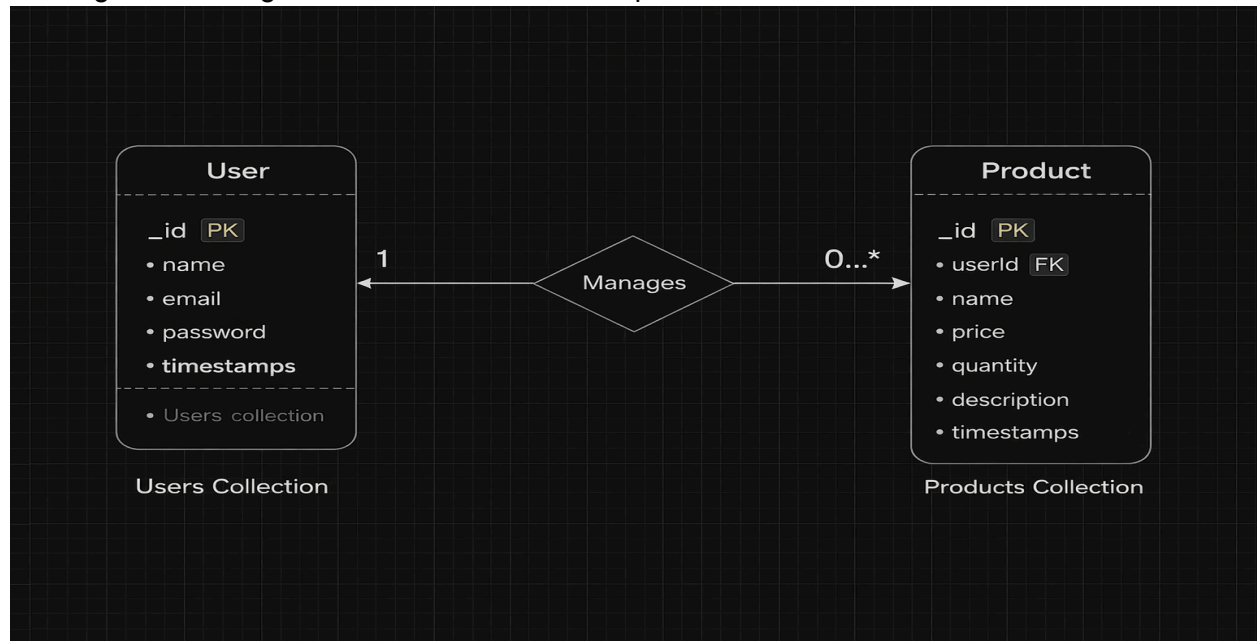

Features:

Core Features

S.No	Feature	Description
1	User Authentication	JWT-based register and login system
2	Product CRUD	Add, view, update and delete products
3	Private Data Access	Users access only their own products
4	Product Search	Search products by name
5	Secure API	Middleware protected routes

Roles and Responsibility

User

Registration: Register using name, email and password

Login: Login using registered credentials

Add Product: Create product with name, price, quantity and description


Edit Product: Update existing product

Delete Product: Remove product from inventory

Search Product: Search products using keyword

User Flow


1. The user sends a register/login request.
2. The backend generates a JWT token.
3. The user sends a token in the Authorization header.
4. Middleware verifies the token.
5. The controller performs CRUD operations.
6. MongoDB stores or retrieves product data.
7. API sends response.

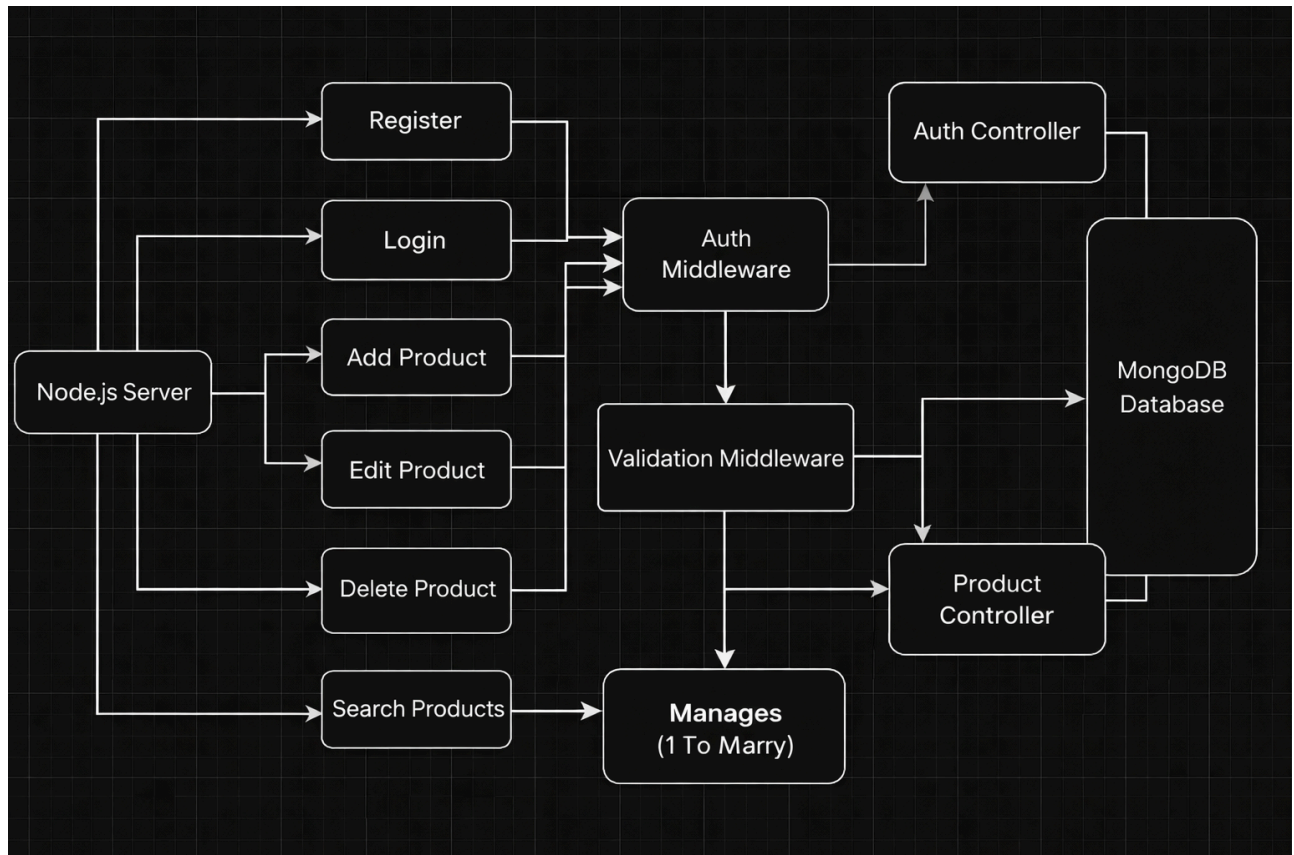

Project Setup and Configuration

Folder Structure

```
server/
├── node_modules/
├── src/
│   ├── controllers/
│   ├── db/
│   ├── middlewares/
│   ├── models/
│   ├── routes/
│   └── server.js
├── .env
├── .gitignore
├── package-lock.json
└── package.json
```

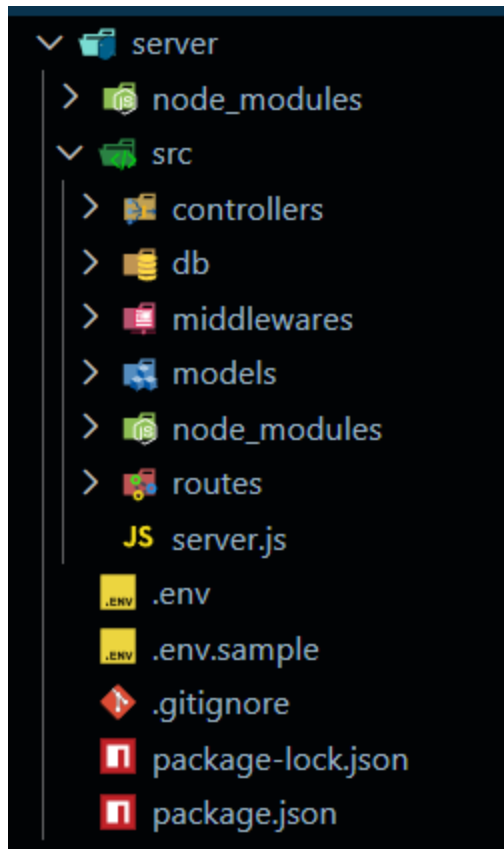

Initialize Node.js Project:

Open terminal inside the server folder and run:

```
npm init -y
```

This creates the package . json file which manages project dependencies.

Install Required Packages:

Install backend dependencies:

```
npm install express mongoose cors dotenv jsonwebtoken bcryptjs
```

Package Purpose:

- express → Backend framework
- mongoose → MongoDB connection
- cors → Cross-origin requests
- dotenv → Environment variables
- jsonwebtoken → Authentication
- bcryptjs → Password hashing

Create Environment File:

Create a `.env` file in the root of the server folder.

Example:


```
PORT=5000
MONGO_URI=your_mongodb_connection_string
JWT_SECRET=your_secret_key
```

Backend Development

Setup Express Server:

Inside `src/server.js`, create the basic Express server.

```
const express = require('express')
const app = express()
const port = 3000

app.get('/', (req, res) => {
  res.send('Hello World!')
})

app.listen(port, () => {
  console.log(`Example app listening on port ${port}`)
})
```

Create Controllers

Inside: `src/controllers/`

Create:

`auth.controller.js`

```
export const registerUser = async (req, res) => {
  try { ...
  } catch (error) {
    res.status(500).json({ message: error.message });
  }
};

export const loginUser = async (req, res) => {
  try { ...
  } catch (error) {
    res.status(500).json({ message: error.message });
  }
};
```

Auth Controllers

The Auth Controller manages all user authentication-related operations in the system. It handles user registration and login functionality while ensuring secure access using JWT tokens.

Responsibilities:

- Register new users
- Validate user input data
- Hash passwords using bcrypt before storing
- Authenticate users during login
- Generate JWT tokens for authorized access
- Send appropriate success and error responses

Main Functionalities:

- Register User: Creates a new user account after validating email uniqueness and encrypting the password.
- Login User: Verifies credentials and returns a JWT token for protected API access.

product.controller.js

```
export const createProduct = async (req, res) => {
>   try { ...
    } catch (error) {
      res.status(500).json({ message: error.message });
    }
  };

export const getProducts = async (req, res) => {
>   try { ...
    } catch (error) {
      res.status(500).json({ message: error.message });
    }
  };

export const updateProduct = async (req, res) => {
>   try { ...
    } catch (error) {
      res.status(500).json({ message: error.message });
    }
  };

export const deleteProduct = async (req, res) => {
>   try { ...
    } catch (error) {
      res.status(500).json({ message: error.message });
    }
  };
};
```

Product Controller

The **Product Controller** handles all product inventory operations and contains the business logic for managing products linked to individual users.

Responsibilities:

- Add new products to inventory
- Fetch products belonging to logged-in users
- Update product details like price, quantity, or description
- Delete products securely
- Perform product search functionality

Main Functionalities:

- **Create Product:** Adds a new product with a reference to the authenticated user.
- **Get Products:** Retrieves only the products created by the logged-in user.
- **Update Product:** Modifies product details while verifying ownership.
- **Delete Product:** Removes a product safely from the database.
- **Search Product:** Allows filtering products based on name.

Create Middleware

Inside: src/middlewares/

Create: auth.middleware.js

```
export const protect = (req, res, next) => {
  const authHeader = req.headers.authorization;

  if (!authHeader || !authHeader.startsWith("Bearer ")) {
    return res.status(401).json({ message: "Not authorized" });
  }

  try {
    const token = authHeader.split(" ")[1];
    const decoded = jwt.verify(token, process.env.JWT_SECRET);

    req.user = decoded;
    next();
  } catch (error) {
    res.status(401).json({ message: "Token invalid" });
  }
};
```

Auth Middleware (protect)

The **Auth Middleware** secures protected routes by verifying the JSON Web Token (JWT) sent in the request header. It checks for a valid Authorization header starting with "Bearer " and validates the token using the secret key. If the token is valid, the decoded user information is attached to `req.user` and the request proceeds to the next controller. If the token is missing or invalid, the middleware returns a **401 Unauthorized** response, preventing access to private APIs.

Create Routes

Inside: `src/routes/`

Create:

`auth.routes.js`

```
const authRoutes = express.Router();

authRoutes.post("/register", registerUser);

authRoutes.post("/login", loginUser);

export default authRoutes;
```

Auth Routes:

Auth routes handle user authentication by providing endpoints for registration and login. These routes connect incoming requests to the Auth Controller to create new users and generate JWT tokens for secure access.

product.routes.js

```
const productRouter = express.Router();

productRouter.post("/", protect, createProduct);
productRouter.get("/", protect, getProducts);
productRouter.get("/:id", protect, getProductById);
productRouter.put("/:id", protect, updateProduct);
productRouter.delete("/:id", protect, deleteProduct);

export default productRouter;
```

Product Routes:

Product routes manage all inventory-related operations such as creating, retrieving, updating, and deleting products. These routes are protected using authentication middleware to ensure only authorized users can access their own product data.

Connect Routes to Server

Import all routes into server . js

```
27
28 app.use("/api/v1/auth", authRoutes);
29 app.use("/api/v1/products", productRoutes);
30
```

These route configurations connect the authentication and product APIs to the main Express server using versioned endpoints. The `/api/v1/auth` path handles all user authentication requests, while `/api/v1/products` manages product-related operations, helping maintain a structured and scalable API architecture.

Database Configuration and Setup

- Create MongoDB Atlas cluster
- Add connection string to `.env`
- Connect DB before API testing.

Database Connection:

Create a file inside: `src/db/db.js`

Purpose: Connect backend to MongoDB using mongoose.

```
import mongoose from "mongoose";

const connectDB = async () => {
  try {
    const connectionInstance = await mongoose.connect(`${process.env.MONGODB_URI}`)
    console.log(`MongoDB connected !!`);
  } catch (error) {
    console.log("MONGODB connection FAILED ", error);
    process.exit(1)
  }
}

export default connectDB
```

The connectDB function establishes a connection between the application and MongoDB using Mongoose and environment-based configuration. It ensures the server starts only after a successful database connection and logs an error message if the connection fails.

Create Models:

Inside src/models/ create:

- User.js
- Product.js

User Model:

```
const userSchema = new mongoose.Schema(
  {
    name: {
      type: String,
      required: true,
      trim: true,
    },
    email: {
      type: String,
      required: true,
      unique: true,
      lowercase: true,
    },
    password: {
      type: String,
      required: true,
      minlength: 6,
    },
  },
  { timestamps: true }
);

export default mongoose.model("User", userSchema);
```

User Schema:

The User schema defines the structure for storing user details such as name, email, and hashed password in the database. It supports secure authentication and maintains timestamps for record tracking.

Product Model:

```
const productSchema = new mongoose.Schema({
  name: {
    type: String,
    required: true,
    trim: true,
  },
  price: {
    type: Number,
    required: true,
    min: 0,
  },
  quantity: {
    type: Number,
    required: true,
    min: 0,
    default: 0,
  },
  description: {
    type: String,
    default: "",
  },
  userId: {
    type: mongoose.Schema.Types.ObjectId,
    ref: "User",
    required: true,
  },
}, { timestamps: true });
export default mongoose.model("Product", productSchema);
```

Product Schema:

The Product schema represents inventory items and includes fields like name, price, quantity, description, and a userId reference. It ensures each product is linked to its owner, enabling private data access and management.

Project Execution

Execution Steps

1. Open terminal in server folder.
2. Make sure you have a start script in the package.js file.
3. Run:

```
npm start
```

3. Console should display:


```
Server running on PORT
Database Connected
```

API Testing :

Use Thunder Client to test APIs:

Test APIs:

Register User:

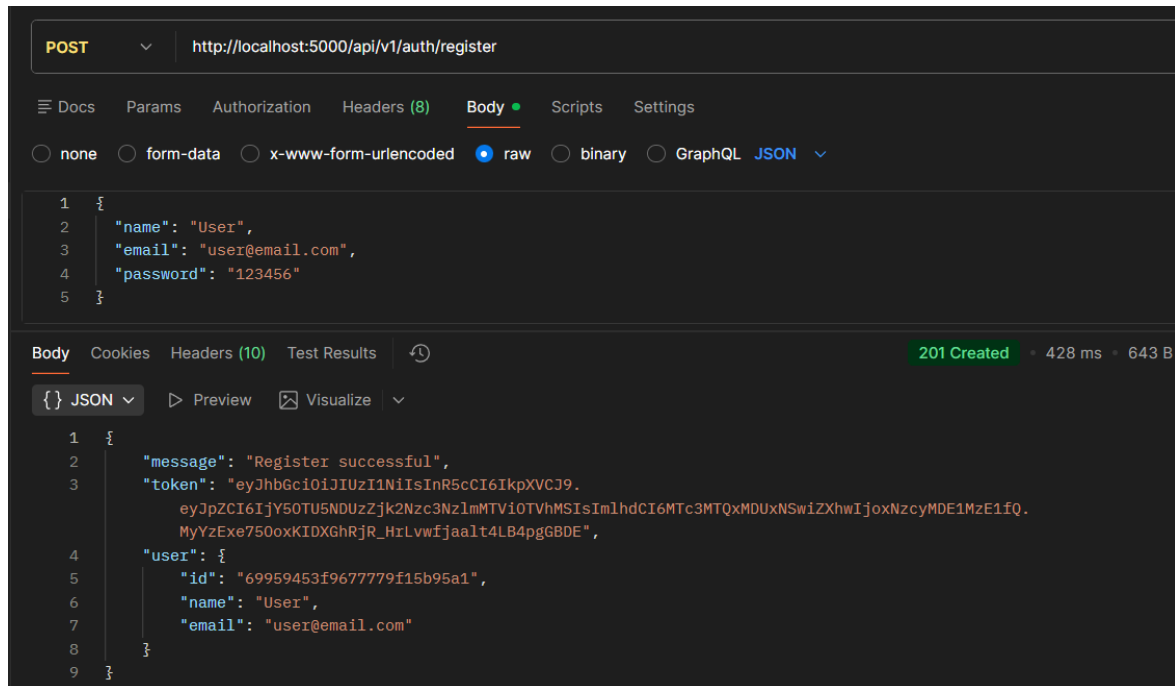

Register:

The register functionality allows new users to create an account by submitting their details, which are validated and securely stored with a hashed password. It ensures unique user creation before granting access to the system.

Login User

A screenshot of the Postman application showing a successful POST request to `http://localhost:5000/api/v1/auth/login`. The request body is raw JSON: `{ "email": "user@email.com", "password": "123456" }`. The response status is `200 OK`. The response body is JSON: `{ "message": "Login successful", "token": "eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJpZCI6IjY5OTU5NDUzZjYk2Nzc3NzlmMTViOTVhMSIsIm1hdCI6MTc3MTQxMDU4NCwiZXhwIjoxNzcyMDE1Mzg6fQ.PyUXxz-6-4J1kg0TLBj862vTftt161szZW9Ak8VoGhM", "user": { "id": "69959453f967779f15b95a1", "name": "User", "email": "user@email.com" } }`.

```
POST http://localhost:5000/api/v1/auth/login

{
  "email": "user@email.com",
  "password": "123456"
}
```

```
{
  "message": "Login successful",
  "token": "eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJpZCI6IjY5OTU5NDUzZjYk2Nzc3NzlmMTViOTVhMSIsIm1hdCI6MTc3MTQxMDU4NCwiZXhwIjoxNzcyMDE1Mzg6fQ.PyUXxz-6-4J1kg0TLBj862vTftt161szZW9Ak8VoGhM",
  "user": {
    "id": "69959453f967779f15b95a1",
    "name": "User",
    "email": "user@email.com"
  }
}
```

Login:

The login functionality verifies user credentials and generates a JWT token upon successful authentication. This token is used to access protected routes securely.

Create Product

A screenshot of the Postman application showing a successful POST request to `http://localhost:5000/api/v1/products`. The request body is raw JSON: `{ "name": "iPhone 15", "price": 90000, "quantity": 5, "description": "Apple mobile phone" }`. The response status is `201 Created` with a response time of 14 ms and a body size of 625 B. The response body is JSON: `{ "message": "Product created", "product": { "name": "iPhone 15", "price": 90000, "quantity": 5, "description": "Apple mobile phone", "userId": "6992994965747f02ccabc5a7", "_id": "6995954ef9677779f15b95a4", "createdAt": "2026-02-18T10:32:46.935Z", "updatedAt": "2026-02-18T10:32:46.935Z", "__v": 0 } }`.

```
POST http://localhost:5000/api/v1/products


{
  "name": "iPhone 15",
  "price": 90000,
  "quantity": 5,
  "description": "Apple mobile phone"
}
```

```
{
  "message": "Product created",
  "product": {
    "name": "iPhone 15",
    "price": 90000,
    "quantity": 5,
    "description": "Apple mobile phone",
    "userId": "6992994965747f02ccabc5a7",
    "_id": "6995954ef9677779f15b95a4",
    "createdAt": "2026-02-18T10:32:46.935Z",
    "updatedAt": "2026-02-18T10:32:46.935Z",
    "__v": 0
  }
}
```

Create Product:

Allows an authenticated user to add a new product to their inventory by submitting product details. The product is saved with the user's ID to maintain ownership.

Get all Products

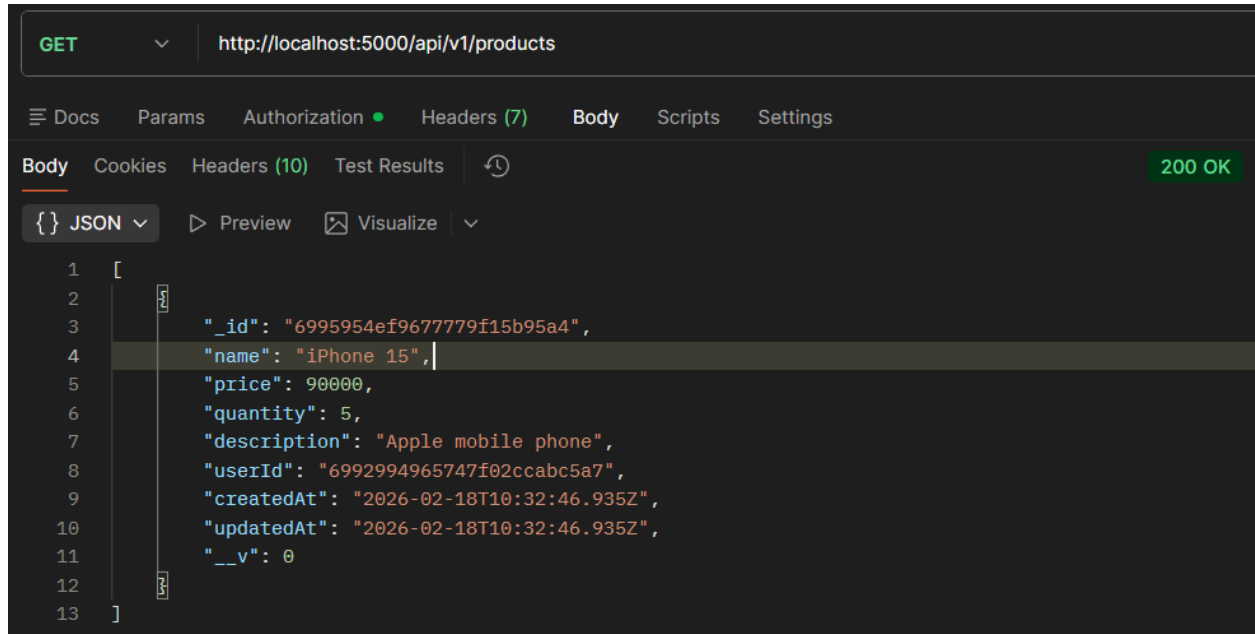

Get all Products:

Fetches all products that belong to the logged-in user. It ensures users can view only their own inventory data.

Update Product

The screenshot shows a REST client interface with a PUT request to `http://localhost:5000/api/v1/products/6995954ef9677779f15b95a4`. The request body is a JSON object with the following fields:

```
1 {  
2   "name": "iPhone 19 Pro",  
3   "price": 95000,  
4   "quantity": 10,  
5   "description": "Updated phone"  
6 }  
7
```


The response is a 200 OK status with a response time of 37 ms. The response body is a JSON object with the following fields:

```
1 {  
2   "message": "Product updated",  
3   "product": {  
4     "_id": "6995954ef9677779f15b95a4",  
5     "name": "iPhone 19 Pro",  
6     "price": 95000,  
7     "quantity": 10,  
8     "description": "Updated phone",  
9     "userId": "6992994965747f02ccabc5a7",  
10    "createdAt": "2026-02-18T10:32:46.935Z",  
11    "updatedAt": "2026-02-18T10:35:11.547Z",  
12    "__v": 0  
13  }  
14 }
```

Update Product:

Enables users to modify existing product details such as name, price, or quantity. The system verifies ownership before allowing any updates.

Delete Product

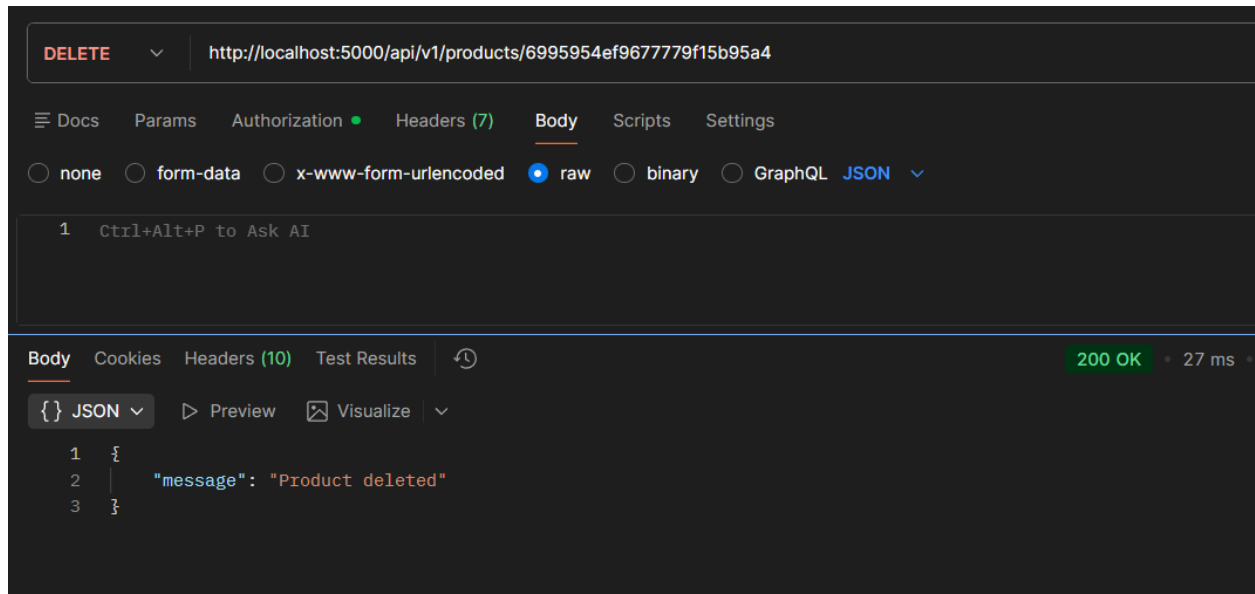

Delete Product:

Allows users to permanently remove a product from their inventory. The operation is protected to ensure only the product owner can delete it.

Project Demo Video:  Nm project vd.mp4