

Experiment 10

K-Means Clustering.


Program:

```
import numpy as np
import pandas as pd
import matplotlib.pyplot as plt
import seaborn as sns
%matplotlib inline
df=pd.read_csv('Mall_Customers.csv')
df.info()
df.head()
sns.pairplot(df)
features=df.iloc[:,[3,4]].values
from sklearn.cluster import KMeans
model=KMeans(n_clusters=5)
model.fit(features)
Final=df.iloc[:,[3,4]]
Final['label']=model.predict(features)
Final.head()
sns.set_style("whitegrid")
sns.FacetGrid(Final,hue="label",height=8) \
.map(plt.scatter,"Annual Income (k$)", "Spending Score (1-100)") \
.add_legend()
plt.show()
features_el=df.iloc[:,[2,3,4]].values
from sklearn.cluster import KMeans
wcss=[]
for i in range(1,10):
    model=KMeans(n_clusters=i)
    model.fit(features_el)
    wcss.append(model.inertia_)
plt.plot(range(1,10),wcscs)
```

Output

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 200 entries, 0 to 199
Data columns (total 5 columns):
0   CustomerID                200 non-null    int64
1   Gender                    200 non-null    object
2   Age                       200 non-null    int64
3   Annual Income (k$)         200 non-null    int64
4   Spending Score (1-100)     200 non-null    int64
dtypes: int64(4), object(1)
memory usage: 7.9+ KB
```

	CustomerID	Gender	Age	Annual Income (k\$)	Spending Score (1-100)
0	1	Male	19	15	39
1	2	Male	21	15	81
2	3	Female	20	16	6
3	4	Female	23	16	77
4	5	Female	31	17	40

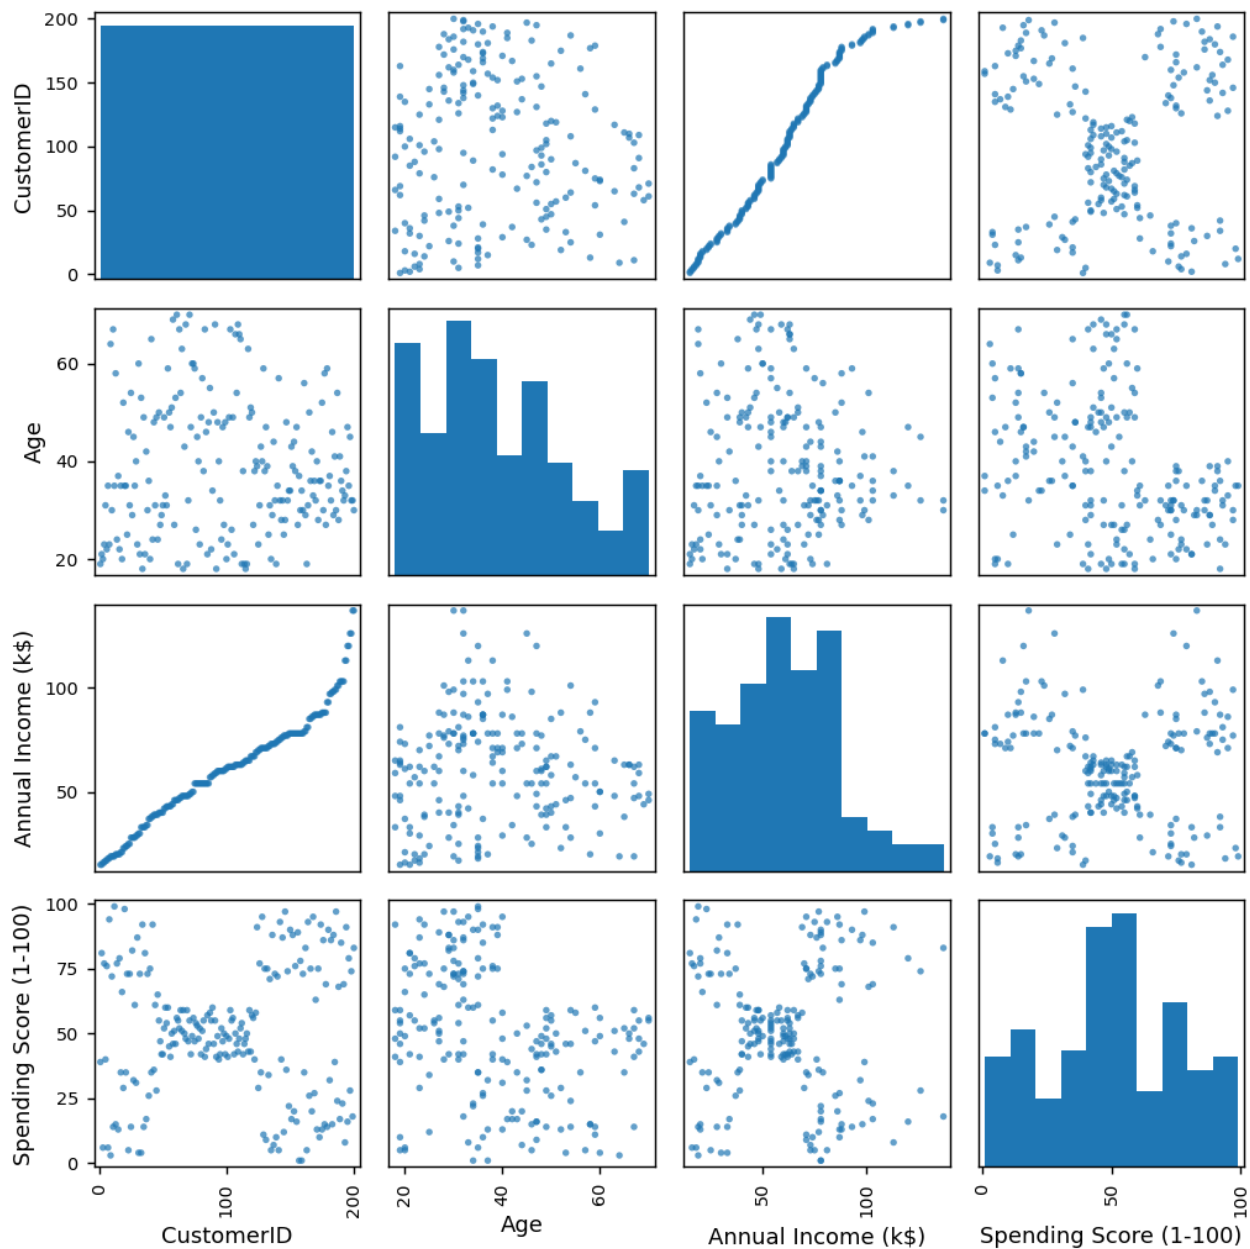

Output

	Annual Income (k\$)	Spending Score (1-100)	label
0	15	39	3
1	15	81	4
2	16	6	3
3	16	77	4
4	17	40	3

