

Employee Data Sync with SCIM to MoveInSync/WorkInSync -Azure AD

Document Control	
Document Name	Employee Data Sync with SCIM to MoveInSync / WorkInSync
Version No	1.1
Classification	Confidential
Date	Sep 15, 2021

Version Control				
Ver No.	Author	Approved by	Approved Date	Description
1.0	Nitin Awasthi	Ujjwal Trivedi		First Version
1.1	Rishabh M	Ujjwal Trivedi		Added detailed process for Azure AD

WorkInSync application supports automatic synchronization of employee data between source identity management system of client and WorkInSync systems. WorkInSync provides SCIM (System for cross domain identity management <https://datatracker.ietf.org/doc/html/rfc7644>) compliant API interface for this purpose.

Entities Supported

1. Users

Entities not supported

1. Groups


The process below describes the steps to enable employee data sync between WorkInSync and Azure active directory. However, this can be extended to any SCIM compliant source system such as a HRMS or a Identity provider.

Prerequisite (For MoveInSync Team)


Please reach out to KDV/EI-Auth Team to get the auth token to be shared with the client in the next steps.

Configuring WorkInSync app on your Azure Active Directory for SCIM


1. Login to your Azure Portal (<https://portal.azure.com>) with administrator credentials
2. Go to 'Enterprise Applications' either from 'frequently used apps' list of front page or via global search on top

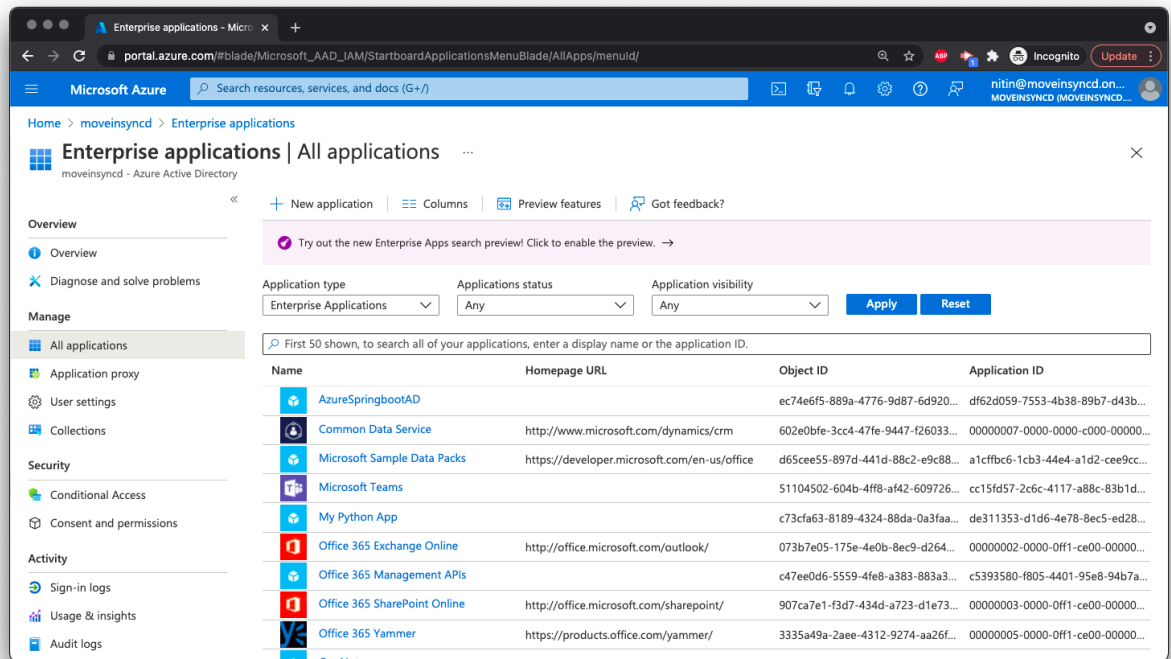


3. Click on 'New Application' and then 'Create your own application'

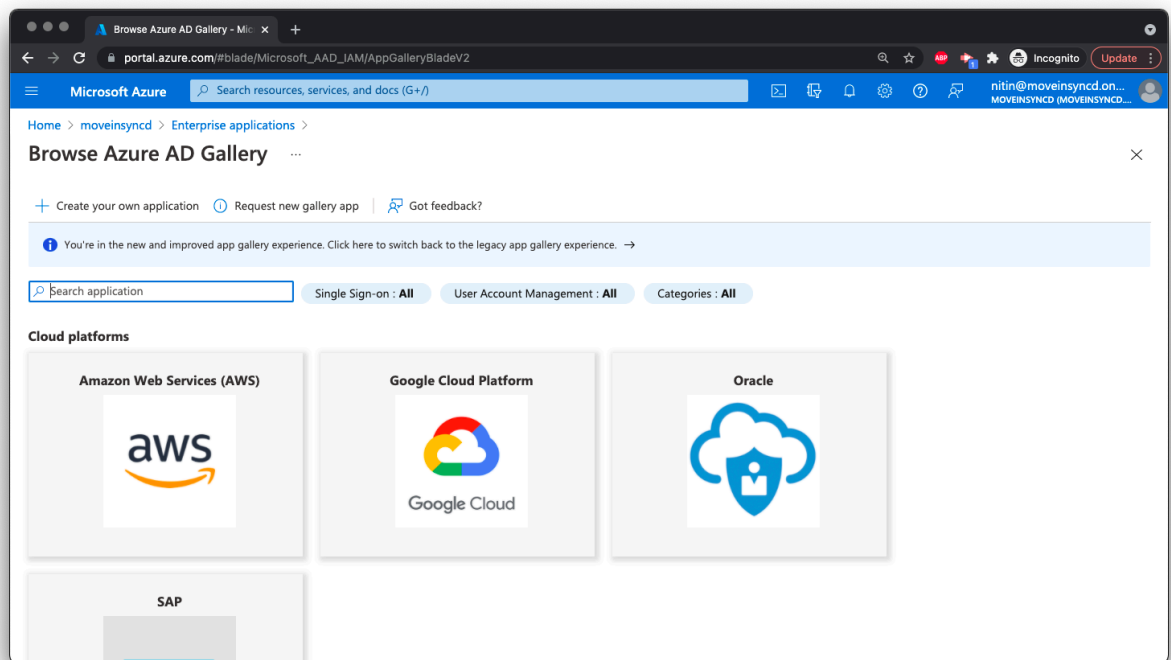


4. Give a name you can recollect later if needed e.g. 'MoveInSync/WorkInSync SCIM'. In the radio options let 'Integrate any other application you don't find in the gallery (Non-gallery)' option remain selected.

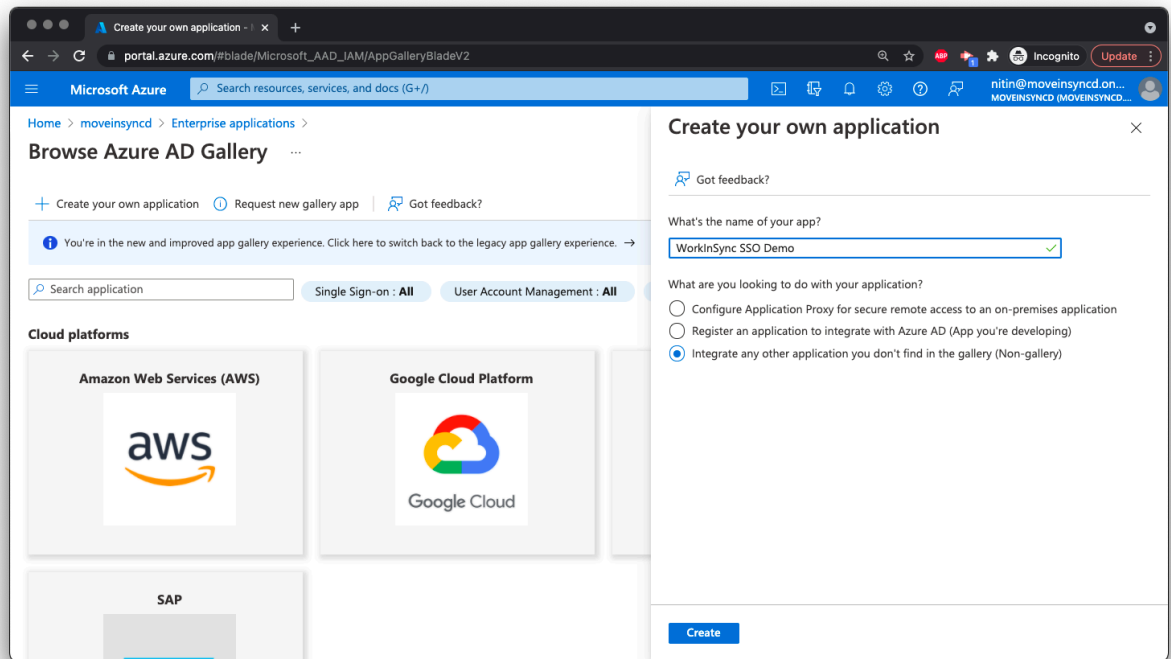


5. Select 'Get Started' in the 'Provision User Accounts' tile and then on next page again

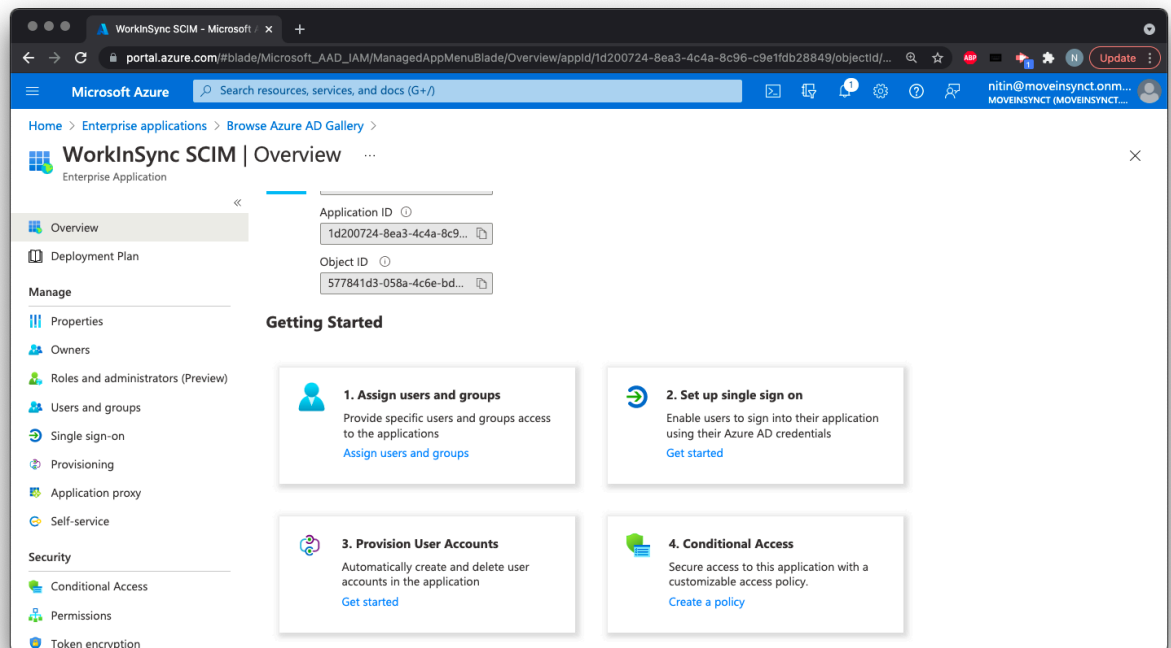

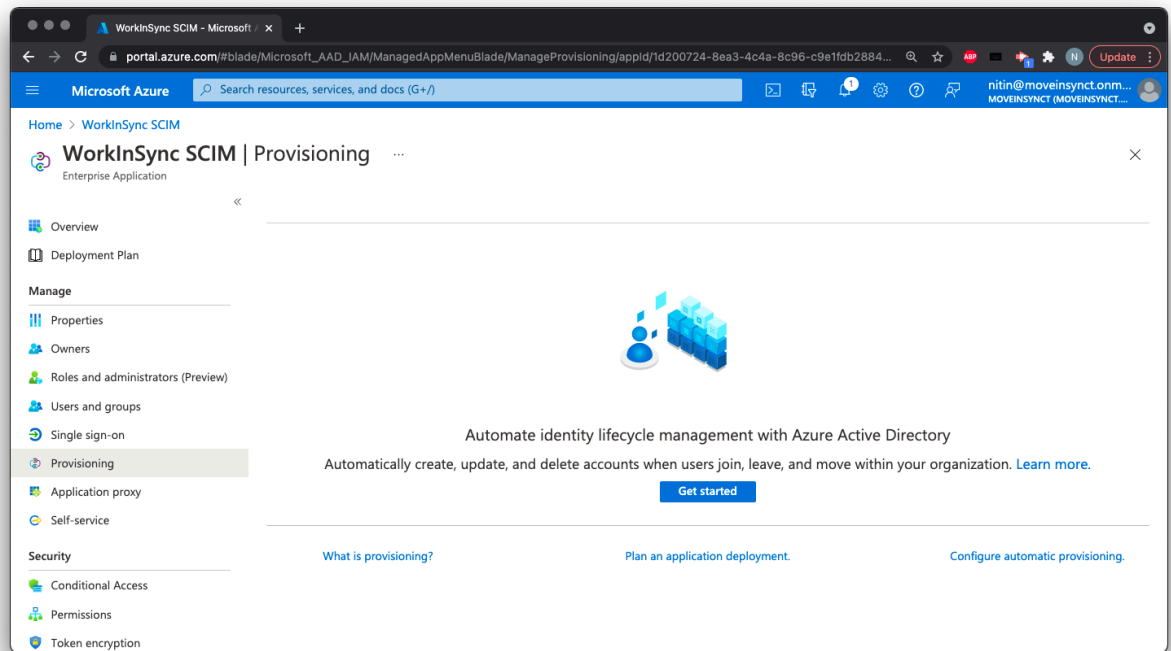

6.

7. Select Provisioning mode as 'Automatic' instead of manual, enter tenant url as <https://scim.workinsync.io/scim/v2> (AWS Singapore hosted tenants)
For EU hosted tenants use <https://scim.eu.workinsync.io/scim/v2/>
And secret token as the unique token generated and shared by your MoveInsync/WorkInSync account manager with you.

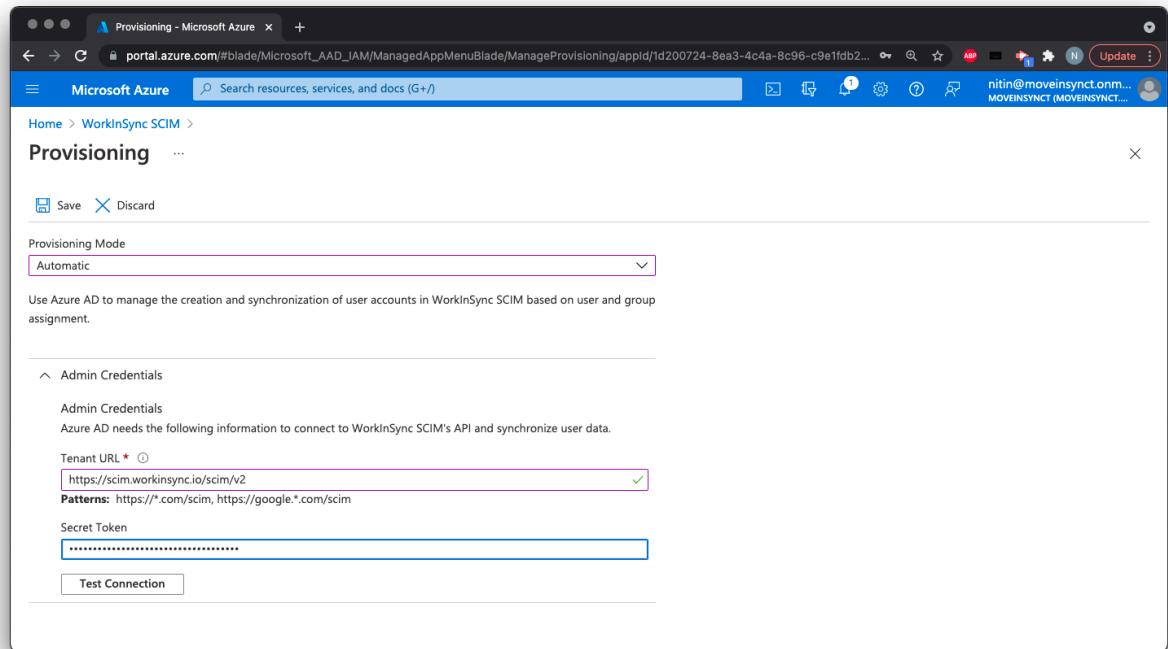

The screenshot shows the 'Provisioning' configuration page in the Microsoft Azure portal. The page is titled 'Provisioning' and has a 'Save' button and a 'Discard' button. The 'Provisioning Mode' is set to 'Automatic'. Below this, there is a section for 'Admin Credentials' which includes a 'Tenant URL' field with the value 'https://scim.workinsync.io/scim/v2' and a 'Secret Token' field with a masked value. A 'Test Connection' button is located at the bottom of the 'Admin Credentials' section. The page also includes a search bar and a user profile in the top right corner.

Provisioning - Microsoft Azure

Home > WorkInSync SCIM >

Provisioning

Save Discard

Provisioning Mode

Automatic

Use Azure AD to manage the creation and synchronization of user accounts in WorkInSync SCIM based on user and group assignment.

Admin Credentials

Admin Credentials

Azure AD needs the following information to connect to WorkInSync SCIM's API and synchronize user data.

Tenant URL *


https://scim.workinsync.io/scim/v2

Patterns: https://*.com/scim, https://google.*.com/scim


Secret Token

Test Connection

8. Click on 'Test connection'. If your token is valid, you should see a success message and a 'mapping' option should get enabled below 'Admin credentials'.

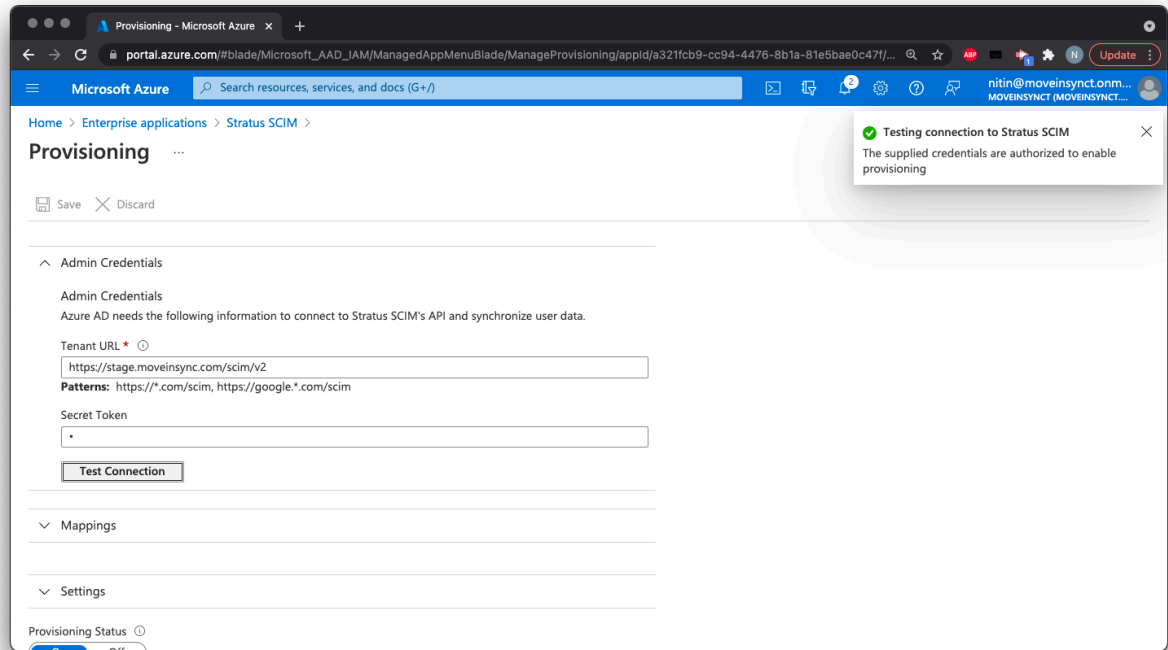


9. Expand the mappings.
 - Make sure 'Provision Azure Active Directory Groups' is disabled.
 - Make sure 'Provision Azure Active Directory Users' is enabled.

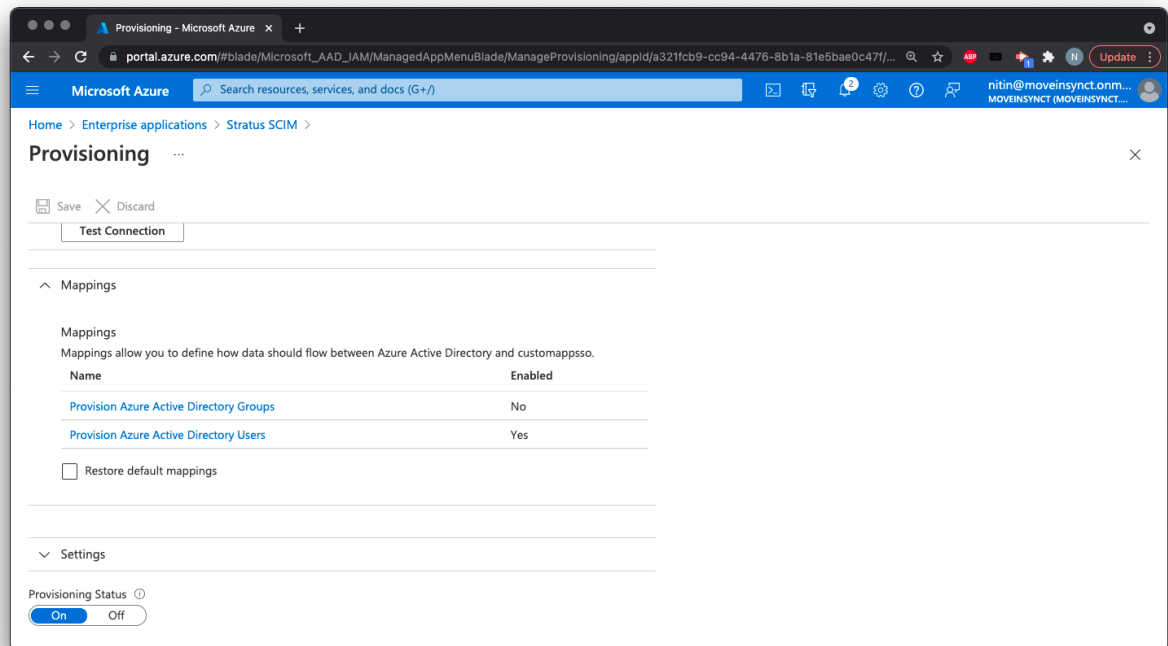

10. Under the users page, review the


- a. Source object scope - Default is active accounts. However you can define your own filters based on active directory fields and more.
For e.g if only users from one office are going to be using WorkInSync,
- b. Target object actions - Leave them as is with all of 'create, update and delete' selected.
- c. Attribute mappings - We will cover this in more detail in the next step.

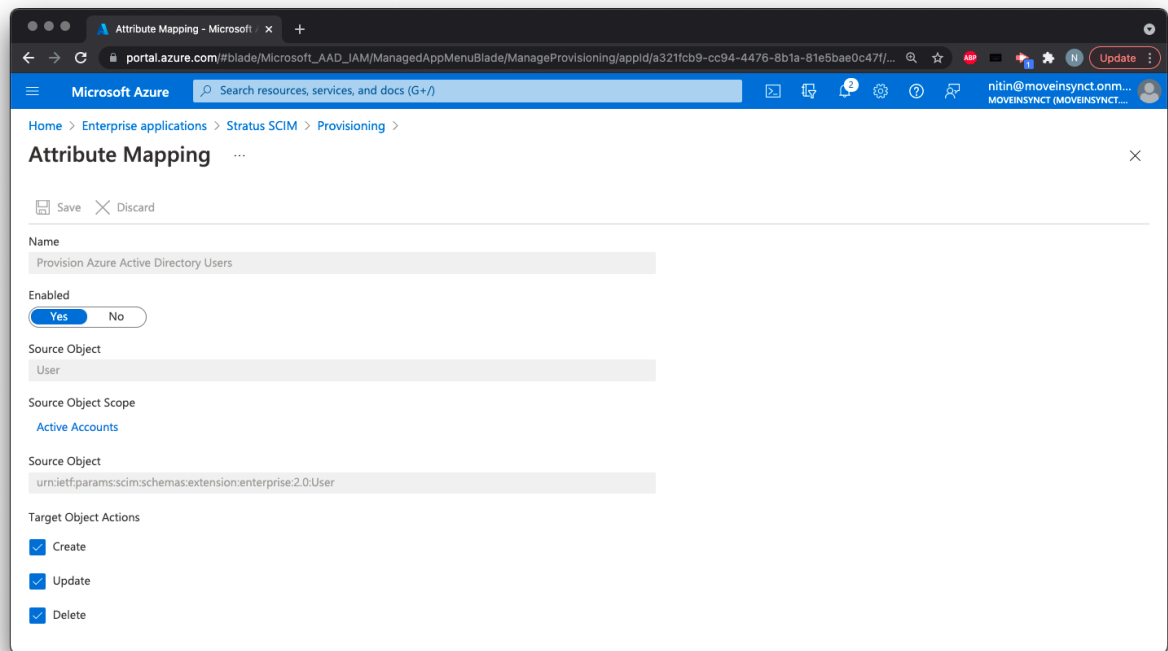

The screenshot shows the 'Attribute Mapping' configuration page in the Microsoft Azure portal. The page is titled 'Attribute Mapping' and has a breadcrumb trail: Home > Enterprise applications > Stratus SCIM > Provisioning > Attribute Mapping. The configuration is for the application 'Provision Azure Active Directory Users'. The 'Enabled' toggle is set to 'Yes'. The 'Source Object' is 'User'. The 'Source Object Scope' is 'Active Accounts'. The 'Source Object' field contains the value 'urn:ietf:params:scim:schemas:extension:enterprise:2.0:User'. The 'Target Object Actions' section has three checkboxes: 'Create', 'Update', and 'Delete', all of which are checked.

11.

12. Review Attribute mappings - Azure AD will provide a default list of attribute mappings between AD user field and SCIM name of those fields.

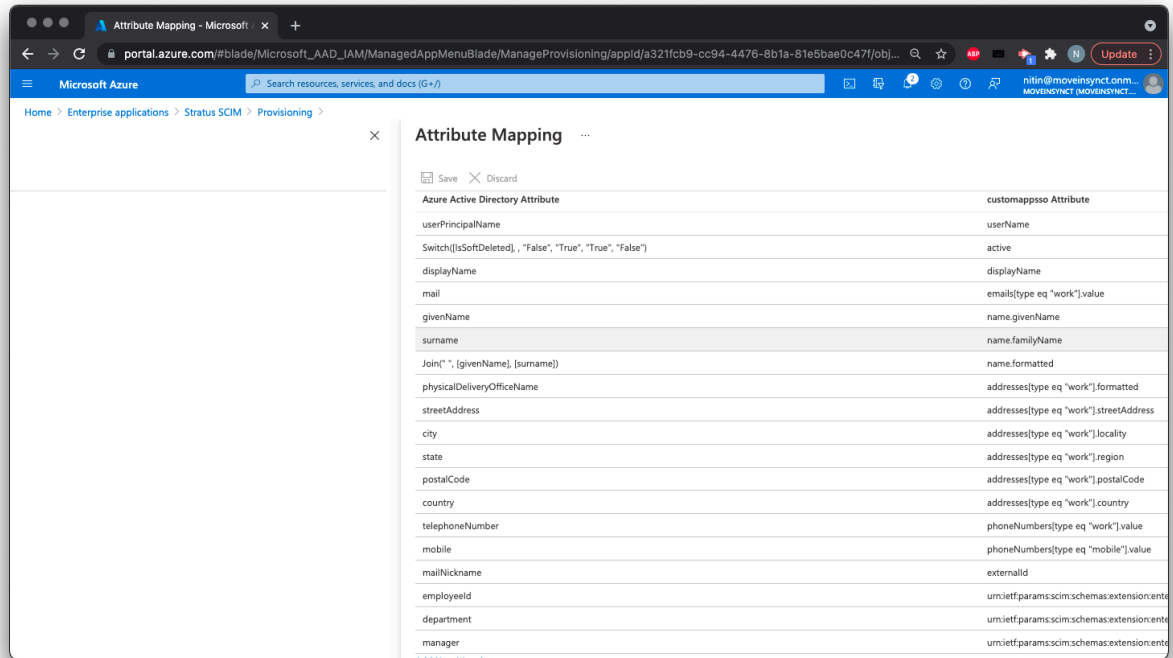

WorkInSync supports following attributes out of the box as described in the table below. Any extra field even if present in the mapping is not captured or processed by WorkInSync.


AD Attribute	SCIM Attribute	WorkInSync field or description of how we use it
userPrincipalName	userName	Primary unique ID in Workinsync
displayName	displayName	used as is for name field in workinsync, if not available, given name + last name is used
mail	emails[type eq "work"].value	email
givenName	name.givenName	First name
surname	name.familyName	Last name
physicalDeliveryOfficeName	addresses[type eq "work"].formatted	office
streetAddress	addresses[type eq "work"].streetAddress	Applicable only for commute clients
city	addresses[type eq "work"].locality	Applicable only for commute clients
state	addresses[type eq "work"].region	Applicable only for commute clients

postalCode	addresses[type eq "work"].postalCode	Applicable only for commute clients
country	addresses[type eq "work"].country	Applicable only for commute clients
telephoneNumber	phoneNumbers[type eq "work"].value	Applicable only for commute clients
mailNickname	externalId	required by SCIM protocol
employeeId	urn:ietf:params:scim:schemas:extension:enterprise:2.0:User:employeeNumber	Optional Employee ID (Preferred for commute clients)
department	urn:ietf:params:scim:schemas:extension:enterprise:2.0:User:department	team
manager	urn:ietf:params:scim:schemas:extension:enterprise:2.0:User:manager	manager (foreign key relationship to the user object which is manager)

If any additional field is present in default attribute mapping, and the client doesn't want to send it to WorkInSync, they should delete the mappings.

WorkInSync only will be concerned with the mapped SCIM attribute. So if the required information is being stored in a different field than the one specified above in the source system, the same mapping should be created instead of the sample mapping specified.

13. In the 'Settings' section you can configure an email address which can be notified in case of errors. Leave scope to 'all users and groups'

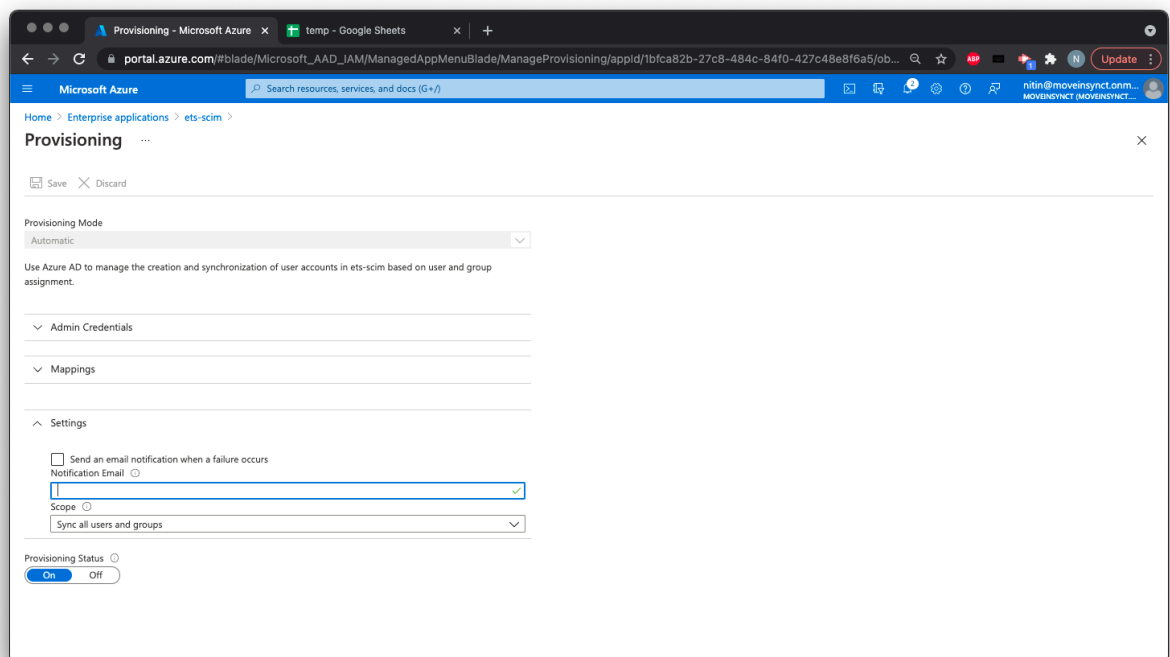

Save changes and Turn on provisioning.

Once setup, by default data is synced every 40 minutes. The 'Provisioning' option against the app you just created will give you an overview of the current state of sync and any errors which have happened recently.

You can also turn on and off employee sync to workinsync from here.

For any specific records which failed, you can retry with the 'Provision on Demand' option to resync a specific employee record with WorkInSync.

