

HTTP http://localhost:4000/api/feedback

POST

http://localhost:4000/api/feedback

Params Authorization Headers (8) **Body** Pre-request Script Tests Settings

☐ none ☐ form-data ☐ x-www-form-urlencoded ☒ raw ☐ binary **JSON** ▾

```
1  {
2    "title": "Dark Mode",
3    "description": "Need dark theme",
4    "category": "Feature Request",
5    "createdBy": "6a314b426d1d142eca1ec0aa"
6  }
```

Body Cookies Headers (7) Test Results

Pretty

Raw

Preview

Visualize

JSON ▾



```
1  {
2    "_id": "6a314be16d1d142eca1ec0ad",
3    "title": "Dark Mode",
4    "description": "Need dark theme",
5    "category": "Feature Request",
6    "status": "Open",
7    "createdBy": {
8      "_id": "6a314b426d1d142eca1ec0aa",
9      "name": "John Doe",
10     "email": "john@gmail.com"
11   },
12   "createdAt": "2026-06-16T13:13:05.269Z",
13   "updatedAt": "2026-06-16T13:13:05.269Z",
14   "__v": 0
15 }
```

search

The screenshot displays a REST client interface with a GET request to `http://localhost:4000/api/feedback/search?keyword=dark`. The 'Body' tab is selected, showing the request body in JSON format. Below the request, the 'Body' tab of the response is also selected, showing the response body in JSON format, which is a list of two feedback objects.

Request:

```
1 {
2   "title": "Dark Mode",
3   "description": "Need dark theme",
4   "category": "Feature Request",
5   "createdBy": "6a314b426d1d142eca1ec0aa"
6 }
```

Response:

```
1 {
2   {
3     "_id": "6a3008da56a6f97560905fc8",
4     "title": "Dark Mode",
5     "description": "Application should support dark theme.",
6     "category": "Feature Request",
7     "status": "Planned",
8     "createdAt": "2026-06-15T14:14:50.705Z",
9     "updatedAt": "2026-06-15T14:16:27.797Z",
10    "__v": 0
11  },
12  {
13    "_id": "6a314be16d1d142eca1ec0ad",
14    "title": "Dark Mode",
15    "description": "Need dark theme",
16    "category": "Feature Request",
17    "status": "Open",
18    "createdBy": {
19      "_id": "6a314b426d1d142eca1ec0aa",
20      "name": "John Doe",
21      "email": "john@gmail.com"
22    },
23    "createdAt": "2026-06-16T13:13:05.269Z",
24    "updatedAt": "2026-06-16T13:13:05.269Z",
25    "__v": 0
26  }
27 }
```


Filter by status

The screenshot shows a REST client interface with the following details:

- URL:** `http://localhost:4000/api/feedback?status=Open`
- Method:** `GET`
- Body Tab:** Selected, showing a JSON response.
- JSON Response:**

```
{  "_id": "6a314be16d1d142eca1ec0ad",  "title": "Dark Mode",  "description": "Need dark theme",  "category": "Feature Request",  "status": "Open",  "createdBy": {    "_id": "6a314b426d1d142eca1ec0aa",    "name": "John Doe",    "email": "john@gmail.com"  },  "createdAt": "2026-06-16T13:13:05.269Z",  "updatedAt": "2026-06-16T13:13:05.269Z",  "__v": 0}
```

Filter by category

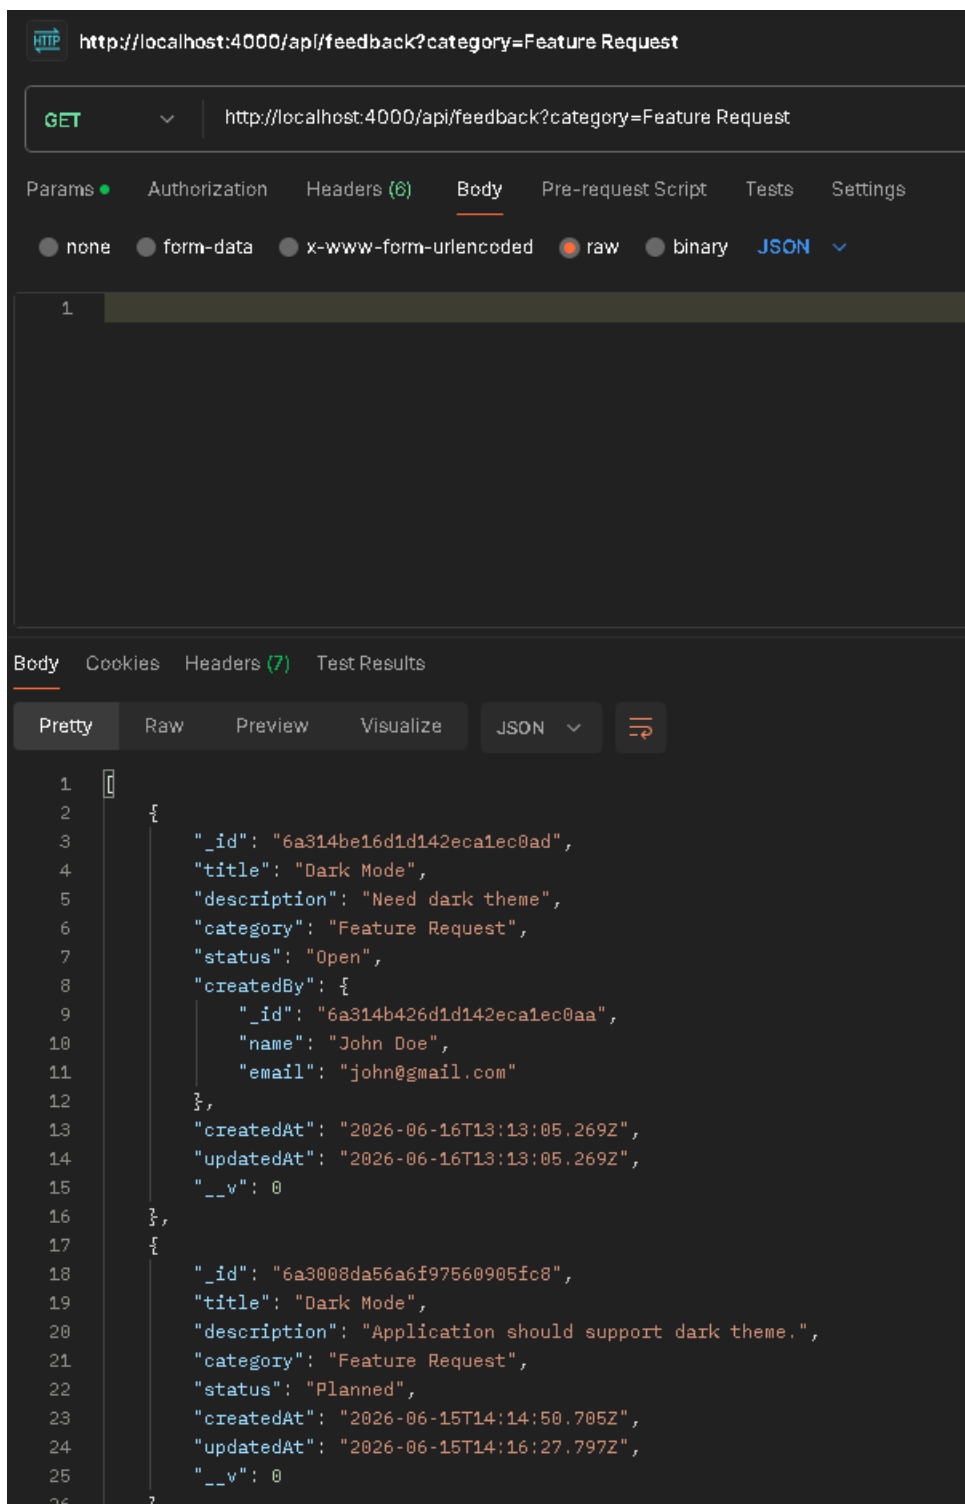

HTTP **http://localhost:4000/api/feedback?category=Feature Request**

GET **http://localhost:4000/api/feedback?category=Feature Request**

Params • Authorization Headers (6) **Body** Pre-request Script Tests Settings

• none • form-data • x-www-form-urlencoded **raw** • binary **JSON** ▾

1

Body Cookies Headers (7) Test Results

Pretty Raw Preview Visualize JSON ▾

```
1  [
2    {
3      "_id": "6a314be16d1d142eca1ec0ad",
4      "title": "Dark Mode",
5      "description": "Need dark theme",
6      "category": "Feature Request",
7      "status": "Open",
8      "createdBy": {
9        "_id": "6a314b426d1d142eca1ec0aa",
10       "name": "John Doe",
11       "email": "john@gmail.com"
12     },
13     "createdAt": "2026-06-16T13:13:05.269Z",
14     "updatedAt": "2026-06-16T13:13:05.269Z",
15     "__v": 0
16   },
17   {
18     "_id": "6a3008da56a6f97560905fc8",
19     "title": "Dark Mode",
20     "description": "Application should support dark theme.",
21     "category": "Feature Request",
22     "status": "Planned",
23     "createdAt": "2026-06-15T14:14:50.705Z",
24     "updatedAt": "2026-06-15T14:16:27.797Z",
25     "__v": 0
26   }
27 ]
```

Test Voting

Create Vote

The screenshot displays a REST client interface with a POST request to `http://localhost:4000/api/votes`. The request body is a JSON object with `user` and `feedback` fields. The response body is a JSON object containing the same fields plus `_id`, `createdAt`, `updatedAt`, and `__v`.

Request:

```
POST http://localhost:4000/api/votes
```

Body:

```
{
  "user": "6a314b426d1d142eca1ec0aa",
  "feedback": "6a3008da56a6f97560905fc8"
}
```

Response:

```
{
  "user": "6a314b426d1d142eca1ec0aa",
  "feedback": "6a3008da56a6f97560905fc8",
  "_id": "6a314e1854a831c61d0304ca",
  "createdAt": "2026-06-16T13:22:32.713Z",
  "updatedAt": "2026-06-16T13:22:32.713Z",
  "__v": 0
}
```

View Votes

The screenshot shows a REST client interface with a GET request to `http://localhost:4000/api/votes`. The request body is a JSON object with `user` and `feedback` fields. The response body is a JSON object containing a vote record with fields like `_id`, `user`, `feedback`, `createdAt`, `updatedAt`, and `__v`.

Request:

```
GET http://localhost:4000/api/votes
```

Request Body (JSON):

```
{  "user": "6a314b426d1d142eca1ec0aa",  "feedback": "6a3008da56a6f97560905fc8"}
```

Response Body (JSON):

```
{  "_id": "6a314e1854a831c61d0304ca",  "user": {    "_id": "6a314b426d1d142eca1ec0aa",    "name": "John Doe",    "email": "john@gmail.com"  },  "feedback": {    "_id": "6a3008da56a6f97560905fc8",    "title": "Dark Mode"  },  "createdAt": "2026-06-16T13:22:32.713Z",  "updatedAt": "2026-06-16T13:22:32.713Z",  "__v": 0}
```

Status Analytics

The screenshot shows a REST client interface with a GET request to `http://localhost:4000/api/analytics/status`. The response body is displayed in JSON format, showing an array of two objects. The first object has `"_id": "Planned"` and `"total": 1`. The second object has `"_id": "Open"` and `"total": 1`.

```
1
{
  "_id": "Planned",
  "total": 1
},
{
  "_id": "Open",
  "total": 1
}
```

Monthly Trends

The screenshot shows a REST client interface with the following details:

- URL:** `http://localhost:4000/api/analytics/monthly-trends`
- Method:** `GET`
- Body:** Empty
- Response:** A JSON object with the following structure:

```
1 {
2   "_id": {
3     "month": 6,
4     "year": 2026
5   },
6   "total": 2
7 }
```


Top Features

The screenshot displays a REST client interface with a dark theme. At the top, the URL bar shows `http://localhost:4000/api/analytics/top-features`. Below it, the request method is set to `GET`. The interface includes tabs for `Params`, `Authorization`, `Headers (6)`, `Body` (which is selected), `Pre-request Script`, `Tests`, and `Settings`. Under the `Body` tab, there are radio buttons for `none`, `form-data`, `x-www-form-urlencoded`, `raw` (selected), and `binary`, along with a `JSON` dropdown menu. The main area shows a single line of the request body, labeled `1`. Below the request section, there are tabs for `Body` (selected), `Cookies`, `Headers (7)`, and `Test Results`. Under the `Body` tab, there are buttons for `Pretty` (selected), `Raw`, `Preview`, and `Visualize`, along with a `JSON` dropdown menu and a refresh icon. The response body is displayed in a code editor with line numbers 1 through 6, showing a JSON object:

```
1 [
2   {
3     "_id": "6a3008da56a6f97560905fc8",
4     "totalVotes": 1
5   }
6 ]
```

Dashboard

The screenshot displays a REST client interface with a dark theme. At the top, the URL bar shows `http://localhost:4000/api/analytics/top-features`. Below it, the method is set to `GET`. The interface includes tabs for `Params`, `Authorization`, `Headers (6)`, `Body` (which is active), `Pre-request Script`, `Tests`, and `Settings`. Under the `Body` tab, there are radio buttons for `none`, `form-data`, `x-www-form-urlencoded`, `raw` (selected), and `binary`, along with a `JSON` dropdown menu. The main area shows a single tab labeled `1`. At the bottom, there are tabs for `Body` (active), `Cookies`, `Headers (7)`, and `Test Results`. The `Body` tab has sub-tabs for `Pretty` (selected), `Raw`, `Preview`, and `Visualize`, a `JSON` dropdown, and a refresh icon. The response body is displayed in a code editor with line numbers 1 through 7, showing a JSON object:

```
1 [
2   {
3     "totalVotes": 1,
4     "title": "Dark Mode",
5     "category": "Feature Request"
6   }
7 ]
```

Top features

The screenshot shows a web browser's developer tools interface. At the top, the address bar displays the URL `http://localhost:4000/api/analytics/top-features`. Below the address bar, the **GET** method is selected, and the same URL is shown in the request bar. The **Headers** tab is active, showing 6 headers. The **Body** tab is also visible. Below the tabs, the **JSON** format is selected. The response body is displayed in the **Body** tab, showing a JSON object with the following structure:

```
1 {
2   "totalVotes": 1,
3   "title": "Dark Mode",
4   "category": "Feature Request"
5 }
```

GET http://localhost:4000/api

+

...

HTTP

http://localhost:4000/api/analytics/dashboard

GET

▼

http://localhost:4000/api/analytics/dashboard

Params

Authorization

Headers (6)

Body

Pre-request Script

Tests

Settings

☐ none

☐ form-data

☐ x-www-form-urlencoded

☒ raw

☐ binary

JSON ▼

1

Body

Cookies

Headers (7)

Test Results

Pretty

Raw

Preview

Visualize

JSON ▼

1

5

2

"totalUsers": 20,

3

"totalFeedback": 50,

4

"totalVotes": 100,

5

"openRequests": 11,

6

"completedRequests": 8

7

2

HTTP http://localhost:4000/api/analytics/top-features

GET

http://localhost:4000/api/analytics/top-features

Params Authorization Headers (6) Body Pre-request Script Tests Settings

☐ none ☐ form-data ☐ x-www-form-urlencoded ☒ raw ☐ binary JSON ☐

1

Body Cookies Headers (7) Test Results

Pretty

Raw

Preview

Visualize

JSON ☐



```
1  [
2    {
3      "totalVotes": 5,
4      "title": "utilize compelling relationships",
5      "category": "Bug Report"
6    },
7    {
8      "totalVotes": 4,
9      "title": "architect robust ROI",
10     "category": "Bug Report"
11   },
12   {
13     "totalVotes": 4,
14     "title": "benchmark interactive convergence",
15     "category": "Bug Report"
16   },
17   {
18     "totalVotes": 4,
19     "title": "reinvent immersive paradigms",
20     "category": "Bug Report"
21   },
22   {
23     "totalVotes": 3,
24     "title": "unleash back-end web services",
25     "category": "Bug Report"
26   },
27   {
```

