When to Trust the Accessibility Tree:
Measuring Tree, Vision, and Hybrid Grounding for Computer-Use Agents

Rudra Naresh
[affiliation] [email]

Preprint, October 18, 2026

Abstract

A computer-use agent must turn an instruction such as "click Save" into a point on the screen. Two sources can supply it: the accessibility tree, which is exact when the target is exposed and named, and a vision model, which works on any pixels but can miss. Agents increasingly combine them, typically by asking the tree first and falling back to vision, but when each source should be trusted has not been measured. We first train a 2B-parameter vision grounder (Qwen2-VL-2B + LoRA) on 1,572 examples labelled automatically by Windows UI Automation, on one free T4 GPU: on four Windows applications it never saw, click accuracy rises from 1.5% to 46.5%, and on ScreenSpot-v2 from 19.2 to 62.8. We then compare tree, vision and hybrid policies per failure condition, with ground truth independent of both sources, on generated pages (five conditions, 1,000 items) and on real Windows screens whose trees we damage on purpose. The "tree first, else vision" policy is *worse than vision alone* whenever the tree is incomplete (-12.0 and -9.5 points). We show that this loss equals the tree's answer rate times the gap between its precision and vision's accuracy on the items it answers. The tree keeps answering when the target is ambiguous or drawn on a canvas, and on the items it answers it is right 54% of the time, where vision is right 80%. A gate that trusts an LLM's reading of the tree only when the chosen element has a name reaches 85.2% against 66.4% for vision (chosen on dev, tested once), is never below vision on any condition, and its gain is predicted exactly by the same decomposition. We also describe an agent that enforces this gate at run time, in which the language model only decides what to act on, and a suite of tasks whose success is checked from application state rather than from the agent's claim.

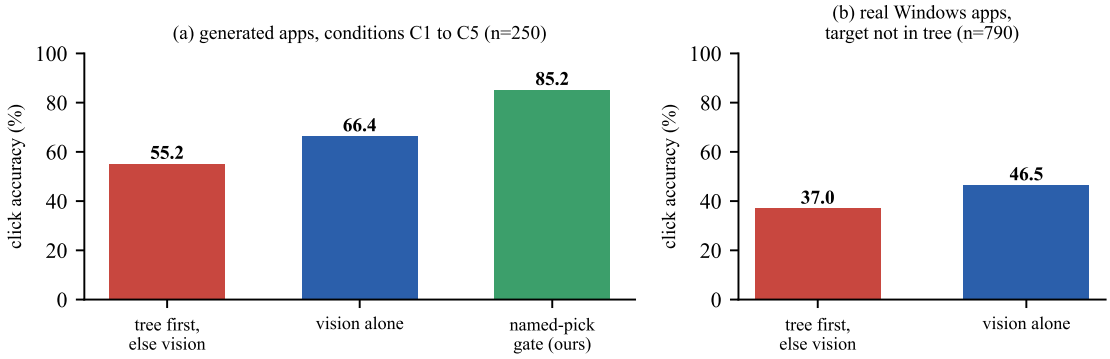


Figure 1: Trusting the accessibility tree first makes grounding worse than vision alone. (a) On generated applications covering five ways a tree can fail (Test A), the common "tree first, else vision" policy loses 11.2 points to our 2B vision grounder on the same 250 items; a gate that trusts the tree only when an LLM's chosen element has a name gains 18.8. (b) On real Windows applications whose tree lacks the target (Test B), the tree still answers a quarter of the time and drags accuracy 9.5 points below vision.

1 Introduction

Every action of a graphical-user-interface (GUI) agent starts with *grounding*: mapping a description of an element to screen coordinates. Desktop and web platforms expose an *accessibility tree* (UI Automation on Windows, the DOM accessibility tree in browsers): a list of elements with roles, names and bounding boxes, built for screen readers. When the tree contains the target and names it, grounding is a lookup. Trees, however, are often incomplete. Icon buttons ship without names, custom toolkits draw their own controls, and everything inside a canvas (a spreadsheet grid, a CAD viewport, a whiteboard) is invisible to them. On the web, 29.6% of the top million home pages contain at least one button with no accessible name [17]; on the Windows desktop, GIMP's main window exposes seven UI Automation elements in total (Appendix E).

Pure-vision grounders [3, 7, 10, 18, 21] avoid the tree entirely, and frontier models now ground from screenshots directly [1, 13]. Practical systems nevertheless combine the two: UFO2 merges UI Automation controls with a vision parser [22], and production browser agents read the accessibility snapshot by default and request a screenshot only when an element is missing from it [14]. The implicit policy is *tree first, else vision*.

This policy is safe only if the tree abstains whenever it cannot resolve the target. A name matcher does not behave that way. Asked for a target that has no name, it returns the element with the closest name; given two buttons named "Archive", it returns the first. In the terms of selective prediction [4, 6], the tree is a predictor with an abstention option whose abstention decisions are poorly aligned with its errors. This paper measures the consequences of that for tree-first agents and proposes a gate that corrects it.

Contributions.

1. **A cheap UIA-supervised grounder** (§4). The tree labels its own named elements for free; 1,572 such examples from ten Windows apps and one free T4 GPU lift Qwen2-VL-2B by +44.9 points on four unseen apps and +46.1 on ScreenSpot-v2, including +57.5 on phones it never trained on.
2. **A controlled per-condition comparison** of tree, vision and hybrid policies with ground truth from neither source: generated pages in five conditions (Test A), and real Windows trees damaged on purpose (Test B) (§6).
3. **The naive merge underperforms vision alone**, with an exact decomposition of why (Proposition 1): loss = answer rate × (tree precision − vision accuracy on the answered items).
4. **A gate that works.** Requiring that the LLM's tree pick *has a name* recovers the tree's strengths without its blindness: 85.2 vs 66.4, and never below vision; the decomposition reproduces its measured gain (§6.3).
5. **An agent that enforces the gate** (§7): a loop of perceive, decide, ground, act and verify in which the LLM only states *what* to act on; a router applies the gate, our grounder supplies *where*, and task success is read from application state, so false claims of success are counted.

We also list the pipeline failures that would have silently invalidated these results (Appendix B); several apply to any fine-tuning of a VLM on free hardware.

2 Related work

Vision grounders. SeeClick introduced GUI-grounding pre-training and the ScreenSpot benchmark [3]. ShowUI [10] shares our base model and trains on ~256K examples; UGround [7] and Aria-UI [21] scale synthetic web data; OS-Atlas [18] synthesises cross-platform data and releases ScreenSpot-v2; GroundCUA [5] provides 56K human-annotated desktop screenshots; ScreenSpot-Pro [9] targets high-resolution professional

work	reads tree	vision	arbitration measured	per-condition truth	grounder training data
SeeClick [3]	no	✓	no	no	~1M examples
ShowUI-2B [10]	no	✓	no	no	~256K examples
OS-Atlas [18]	labels only	✓	no	no	13M elements
UFO2 [22]	✓	✓	no	no	off-the-shelf parser
browser agent [14]	✓	on miss	no	no	none
SafeGround [16]	no	✓	grounder only	no	none
this work	✓	✓	✓	✓	1.6K, one free T4

Table 1: Positioning. "Arbitration measured": when to trust the tree versus vision, per failure condition, with ground truth from neither source.

software. Using accessibility metadata to *label* grounding data is therefore not new; our grounder applies the same idea at a small scale on free hardware, and serves as the vision side of the comparison.

Hybrid perception in agents. Set-of-Mark [20] and OmniParser [12] turn pixels into candidate elements for a language model; SeeAct [24] shows that grounding, not planning, is the bottleneck of web agents. UFO2 [22] fuses UI Automation with OmniParser detections on Windows, for controls the tree misses. OS-World [19] and Windows Agent Arena [2] evaluate agents on real desktop tasks and report grounding as a main source of failure; ScaleCUA [11] scales cross-platform agent data. We found no work that measures *when the tree's answer should not be trusted*, or that shows a tree-first merge falling below vision alone.

Uncertainty and abstention. Selective classification studies predictors that may abstain [4, 6]. For GUI grounding, SafeGround [16] calibrates a grounder's own uncertainty from the spread of sampled clicks, and HyperClick [23] trains grounders to report calibrated confidence. Both ask when to trust the *grounder*. We ask the complementary question for the *tree*, and how to arbitrate between the two sources; the two lines compose (a calibrated grounder could replace our vision branch).

3 Problem setup

A grounding item is a screenshot s, an instruction q and a target region $B^\star$. A grounder maps (s, q) to a point $g \in [0, 1000)^2$ in normalised coordinates. The tree $T(s)$ is a set of elements $e = (\text{role}, \text{name}, \text{box})$. A tree resolver maps (T, q) to an element or to $\perp$ (abstain); its point is the centre of the element's box. A point *hits* if it lies in $B^\star$; the same rule scores every method.

Five conditions. The relation between q and T defines where each source should win: **C1 named** (the target is in T under the name q uses), **C2 unnamed** (in T, empty name: an icon), **C3 reworded** (in T, but q paraphrases its name: "revert what I just did" for Undo), **C4 canvas** (drawn on a canvas, absent from T), **C5 ambiguous** (several elements share the target's name; q disambiguates by context, e.g. the row it is in; Figure 2).

Policies. TREE: fuzzy name matching (≥0.6 similarity after dropping action words; ties to the first element in tree order). VISION: the grounder's point. FALLBACK: TREE if it answers, else VISION. SNAP: VISION's point moved to the centre of the smallest tree element containing it, or the nearest within 20 units. GUARDED: TREE only when exactly one element's name equals the instruction's target words. TREE_LLM: an LLM reads T as text and answers one element or NONE. LLM_GUARDED: TREE_LLM's pick, else VISION on NONE. LLM_NAMED: the pick only if that element has a non-empty name, else VISION.

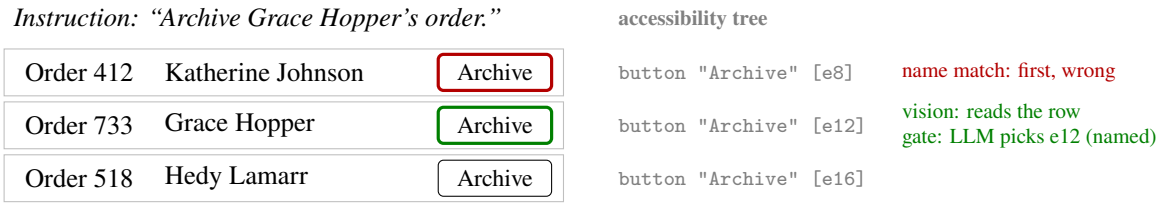


Figure 2: An example of condition C5. The tree lists three identically named buttons; name matching answers with the first and is wrong, and a tree-first merge never consults vision. An LLM reading the same tree uses the row text to pick e12; because e12 has a name, the gate trusts it.

Proposition 1 (Decomposition of a tree-first merge)**.** *Let A be the event that the resolver answers ($r \neq \perp$), and h_r, h_g the hit indicators of the tree's and the grounder's points. Then*

$$\begin{aligned}\mathrm{Acc}(\textsc{fallback}) - \mathrm{Acc}(\textsc{vision}) &= \Pr(A)\left(\Pr(h_r \mid A) - \Pr(h_g \mid A)\right) \\ &= \underbrace{\Pr(A, h_r, \neg h_g)}_{\textit{help}} - \underbrace{\Pr(A, \neg h_r, h_g)}_{\textit{harm}}.\end{aligned}$$

Proof. On $\neg A$ both policies output the grounder's point. On A, FALLBACK outputs the tree's, so the difference is $\Pr(A)\,\mathbb{E}[h_r - h_g \mid A]$; expanding $h_r - h_g$ over the four joint outcomes gives the second form. □

Corollary 1. *Any policy that uses the tree on a subset S of items and the grounder elsewhere gains $\Pr(S)\,(\Pr(h_r \mid S) - \Pr(h_g \mid S))$ over VISION. A gate should therefore select the items on which the tree is* more precise than vision on those same items*; a high precision of the tree in general is not enough.*

The identity is elementary. Its use is in what it says to measure: not the tree's overall accuracy, but its answer rate and its precision on the items it answers, compared with vision's accuracy on those same items. An incomplete tree causes harm only on items where it still answers.

4 A UIA-supervised grounder


4.1 Data

A declarative registry drives 14 Windows applications through 6 to 10 states each, at 2 or 3 window sizes, and records the screenshot and the foreground window's UI Automation tree. Each named interactive element (buttons, menu items, tabs, check boxes, edits, list and tree items, …) becomes a target with an instruction from a per-control-type template ("Click Save", "Open the Find tab"). The result is 200 screenshots and 3,163 targets: train 1,572 and dev 555 from ten apps; *test_same_app* 246 (new screenshots of those apps); *test_held_out_app* 790 from four apps never trained on (Audacity, Character Map, Device Manager, Notepad++). Geometry variants of one state share its split. Targets are small: the median box covers 0.11% of the screen on the held-out apps.

An earlier version of the data passed every schema check but was wrong. Rendering every label onto its screenshot showed that 36% of the rows came from the wrong window (focus was lost mid-collection and the collector walked the code editor's tree), including 100% of one held-out app. The collector now verifies the foreground window against the expected application before every state, and a validation gate rejects wrong-window, out-of-frame and ambiguous rows; privacy guards refuse to collect when an application restores a previous user session. Appendix B lists these failures.

	zero-shot	fine-tuned	Δ [95% CI, screenshot-clustered]
test_same_app (n=246)	14.2	64.6	+50.4 [43.0, 57.8]
test_held_out_app (n=790)	1.5	**46.5**	+44.9 [41.1, 48.7]
ScreenSpot-v2, 6-cell mean (n=1,272)	19.2	62.8	+46.1 [42.9, 49.1]

Table 2: Click accuracy (%). H1 (same apps) and H3 (unseen apps) are supported; the gain holds on each unseen app: Audacity 3.1→48.0, Character Map 1.7→52.1, Device Manager 0.0→37.2, Notepad++ 1.6→51.0.

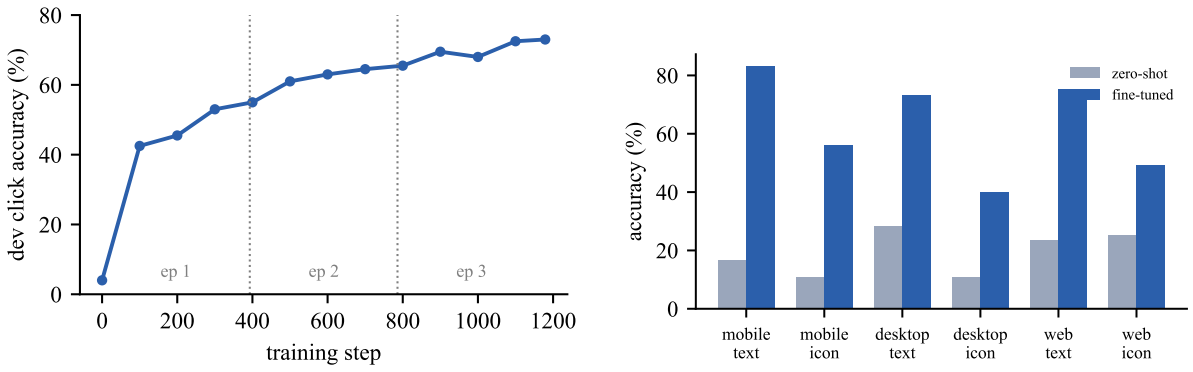

(a) Dev accuracy by step (zero-shot = step 0).

(b) ScreenSpot-v2 by platform and target type.

Figure 3: The grounder is still improving at the last step (4.0→73.0% on dev), and the gain transfers to every ScreenSpot-v2 platform, phones most (+57.5), though it trained only on Windows.

4.2 Model and training

Qwen2-VL-2B-Instruct [15] with LoRA [8] (r=16, α=32, dropout 0.1) on the language model's attention and MLP projections. The vision tower is frozen and *run without autograd*: under gradient checkpointing, the library re-enables input gradients on every sub-model, which put the frozen 32-layer tower into the backward pass. This caused an out-of-memory error on the T4; earlier runs that fit averaged about 57 s per step, against 20.8 s after the fix. Training uses fp16 on a Kaggle T4 with the adapter held in fp32 and loss scaling, learning rate 10^{-4}, 3% warm-up, effective batch 4, three epochs (1,179 steps, 8.0 h, 8.5 GB peak). The model answers a point `(x,y)` in [0, 1000) coordinates.

4.3 Evaluation protocol

Hypotheses H1 to H6 were committed before the data they concern existed. The checkpoint was chosen by click accuracy on a seeded 200-example dev subset among all saved steps, and the choice was pushed before any test example was scored; each test set was scored once, with greedy decoding. The parser is deliberately generous to the zero-shot baseline, which answers in its pre-training box format on 517 of 1,591 items: boxes in any of three syntaxes are scored at their centre. Intervals are paired bootstrap 95% CIs, resampled by *screenshot*, since targets on one screen are correlated.

5 Grounder results

Table 2 and Figure 3 summarise the grounder. On ScreenSpot-v2 every cell improves: mobile text 16.6→83.1 and icons 10.9→55.9; desktop text 28.4→73.2 and icons 10.7→40.0; web text 23.5→75.2 and icons 25.1→49.3. Text targets beat icons on every platform. On the original ScreenSpot our 6-cell mean is

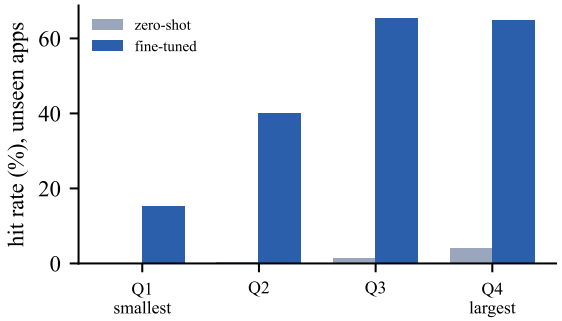


Figure 4: Hit rate on unseen apps by quartile of target area (median areas 540 to 4,050 units^2 of 10^6). The grounder is weakest on small targets such as toolbar icons and tree-view arrows.

policy	C1 named	C2 unnamed	C3 reworded	C4 canvas	C5 ambiguous	mean
TREE (name match)	**100.0**	0.0	0.0	0.0	26.5	25.3
VISION, zero-shot	60.5	7.5	0.0	47.5	40.5	31.2
VISION, fine-tuned	94.0	40.0	31.0	**99.0**	65.0	65.8
FALLBACK (tree, else vision)	100.0	37.5	29.5	75.5	26.5	53.8
SNAP	94.5	41.0	33.0	99.0	70.5	67.6
GUARDED	100.0	40.0	31.0	99.0	65.0	67.0

Table 3: Test A, click accuracy (%), 200 items per condition. The tree wins only C1 (H4: +6.0 [3.0, 9.5]); vision wins unnamed icons (+40.0) and canvas (+99.0) (H5). FALLBACK loses 12.0 points [9.7, 14.4] to vision alone (page-clustered).

61.9, between SeeClick's 53.4 (9.6B parameters, ~1M examples) and ShowUI-2B's 75.1 (same base model, ~256K examples); cross-paper numbers differ in prompts and resolution and are for orientation only.

How it misses. Target size dominates (Figure 4): on unseen apps hit rate is 15.2% for the smallest quartile of boxes and about 65% for the two largest. By control type, menu items (65.0%, n=240) and combo boxes (69.0%) are easy; buttons (36.0%, n=278), tree items (29.1%) and edits (21.1%) are hard. Half the misses on unseen apps land within 50 units of the right box (18.7% within 10 units, 33.3% between 10 and 50): the model found the right region but chose a neighbouring element. On ScreenSpot two thirds of the misses are farther than 50 units, which indicates that the instruction itself was not understood.

6 Tree, vision, or both


6.1 Test A: generated pages

We generate web pages in which every target's true box comes from the DOM or the canvas geometry, so that neither method grades itself. Each page carries one target per condition; the condition is verified on the rendered tree and pixels. Dev pages (seeds 0 to 11 and 100 to 159) were used to design rules; the frozen test set is seeds 1000 to 1199: 1,000 items, 200 per condition.

Table 3 shows the comparison and Table 4 its decomposition. The loss of the naive merge comes from items where the tree answers and is wrong: on C5 it answers every item, picks the first of the same-named buttons, and overrides a correct vision click on 49.5% of items; on C4 a similarly named element elsewhere on the page overrides vision on 23.5%. Where the tree abstains (C2, C3) the merge costs little. SNAP is

	C1	C2	C3	C4	C5	all
tree answers, Pr(A)	100.0	4.5	6.0	23.5	100.0	46.8
tree precision when answering	100.0	0.0	0.0	0.0	26.5	54.1
vision accuracy on those items	94.0	55.6	25.0	100.0	65.0	79.7
help: tree right, vision wrong	6.0	0.0	0.0	0.0	11.0	3.4
harm: tree wrong, vision right	0.0	2.5	1.5	23.5	49.5	15.4
FALLBACK − VISION	+6.0	−2.5	−1.5	−23.5	−38.5	−12.0

Table 4: Proposition 1 on Test A (% of items). The tree abstains on most unnamed and reworded targets, but answers every ambiguous item and a quarter of canvas items (where another page element has a similar name). Over all items it answers, it is right 54% of the time, against 80% for vision on the same items.

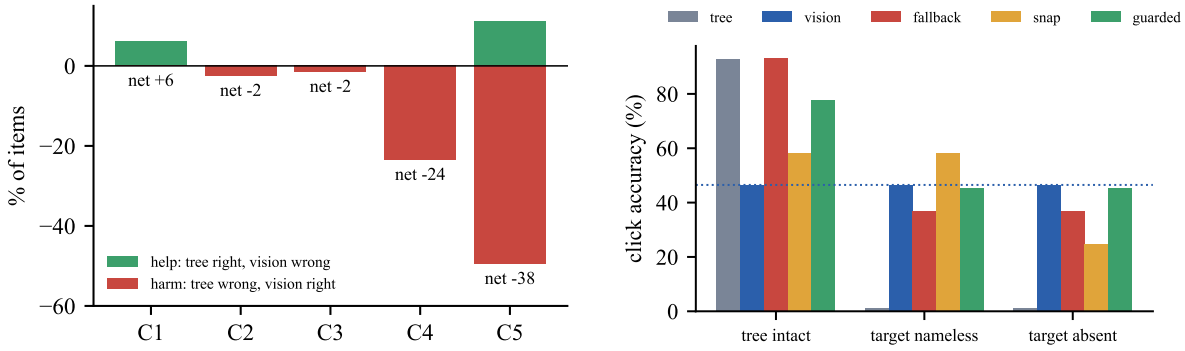

(a) Test A: help and harm of FALLBACK per condition.

(b) Test B: unseen apps, three tree states.

Figure 5: (a) The merge loses because of harm (tree wrong, vision right), not because of missing help. (b) On real screens, VISION (dotted) is unaffected by the tree; FALLBACK and SNAP fall below it once the target is missing, GUARDED does not.

the best rule without an LLM (+1.8 [1.1, 2.6] over vision), and GUARDED fixes the grounder's C1 slips and otherwise equals it.

6.2 Test B: real Windows trees, damaged on purpose

The grounder never reads the tree, so its saved answers on the real test screenshots can be re-scored against the real UI Automation tree in three states: *intact*; *nameless* (the target's name blanked, a real-screen C2); and *absent* (the target removed, a real-screen C4). The stored tree holds the named elements of each screenshot, so it is cleaner than a live one; the results are therefore favourable to the tree.

The same failure appears on real screens (Table 5). With the target missing, the tree still answers on 25.8% of unseen-app items, because another element shares or resembles the target's name, and it is right on 3.9% of those, against 40.7% for vision: $0.258 \times (3.9 - 40.7) = -9.5$. On the same apps the loss is −18.3. Even an intact tree is imperfect for name matching: 23.2% of same-app targets share their exact name with another element on screen (the real-world C5), and with the intact same-app tree FALLBACK helps on 28.9% of items but harms on 8.5%. Snapping vision onto the tree helps when the target is in the tree, named or not, and costs 21.6 points when it is not. A good hybrid therefore needs to know whether the tree contains the target, which is the signal the gates below provide.

split	tree state	TREE	VISION	FALLBACK	SNAP	GUARDED
unseen apps (n=790)	intact	92.8	46.5	93.0	58.0	77.8
	nameless	1.0	46.5	37.0	58.0	45.3
	absent	1.0	46.5	37.0	24.8	45.3
same apps (n=246)	intact	85.0	64.6	85.0	67.9	85.0
	nameless	0.4	64.6	46.3	67.9	63.8
	absent	0.4	64.6	46.3	47.6	63.8

Table 5: Test B, click accuracy (%). Screenshot-clustered differences against VISION on unseen apps: FALLBACK with a blind tree −9.5 [−11.8, −7.4]; SNAP +11.5 [9.4, 13.9] intact and −21.6 [−25.6, −17.8] absent; GUARDED +31.4 [27.1, 35.9] intact and −1.1 [−1.9, −0.5] blind.

policy	C1	C2	C3	C4	C5	mean
TREE (name match)	100	0	0	0	32	26.4
FALLBACK						55.2
VISION	98	38	28	100	68	66.4
GUARDED	100	38	28	100	68	66.8
TREE_LLM	88	2	88	0	100	55.6
LLM_GUARDED (pre-registered)	92	32	92	100	100	83.2
LLM_NAMED (chosen on dev)	94	38	94	100	100	**85.2**

Table 6: The 250-item LLM subset of Test A (first 50 test pages, fixed in advance), all policies on the same items. LLM_NAMED − VISION +18.8 [15.2, 22.4]; − LLM_GUARDED +2.0 [0.4, 4.0] (pages resampled). The LLM (gpt-oss-120b, temperature 0) used 555 tokens per item.

6.3 Gates: letting the tree say "I don't know"

An LLM reading the tree (TREE_LLM) removes the tree's wording and ambiguity problems (C3 88, C5 100) but not its blindness (C2 2, C4 0). We pre-registered LLM_GUARDED: the LLM's NONE hands the item to vision. It reached 83.2, but lost 6 points to vision on unnamed icons: on 15 of the 50, the LLM picked an element instead of answering NONE, 8 of them nameless. Four candidate repairs and a selection rule were then frozen before any dev answer existed; on 300 new dev items LLM_NAMED tied for best (84.3) and, being simplest, was chosen; it was scored once on the test subset (Table 6). It is never below vision on any condition.

Table 7 explains the result. The LLM's named picks are 93.2% precise where vision is 61.5% on the same items; its nameless picks are 10% precise where vision is 60%. Requiring a name selects the subset on which the tree's pick beats vision, which is the condition the corollary sets for a gate. The remaining errors are C1 slips on one-word instructions ("Translate" answered with Sort) and, on dev only, two canvas targets for which the LLM named a similarly named page element.

7 Enforcing the gate in an agent

In an agent the decision-making LLM already reads the tree, so it can play the role of the gate's LLM at no extra cost. Figure 6 shows the loop. Each turn the LLM returns one intent, for example

```
{"action": "click", "target": "the floppy-disk save icon"}  or
    {"action": "type", "element": "e27", "text": "..."}
```

The router enforces LLM_NAMED: an element id is accepted only if that element is named; a description is sent to the grounder; bare click coordinates are refused (drawing on an empty canvas, where there is nothing

LLM answer	share of items	LLM precision	vision accuracy on these items
a named element	59.2	**93.2**	61.5
a nameless element	4.0	10.0	60.0
NONE	36.8	n/a	75.0

Table 7: Why a name is the right abstention signal (250 items, %). A named pick is far more precise than vision on the same items; a nameless pick is far less. By the corollary of Proposition 1, LLM_NAMED should gain $0.592 \times (93.2 - 61.5) = +18.8$ points over vision, and LLM_GUARDED $0.632 \times (87.9 - 61.4) = +16.8$: both are the measured differences.

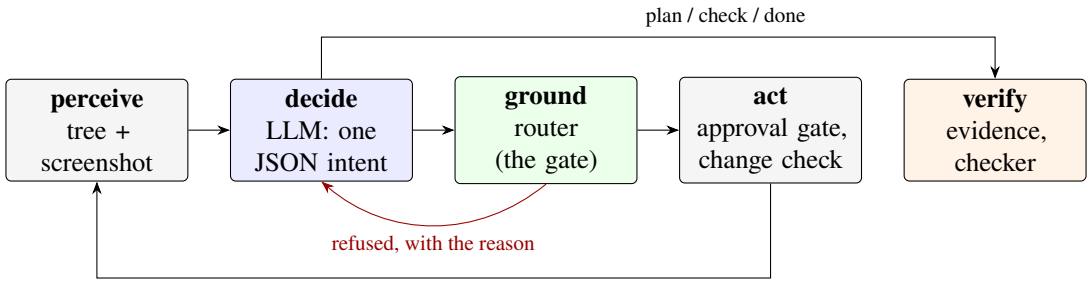


Figure 6: The loop (LangGraph). Only *decide* is a language model; it states what to act on. The router places it: a named tree element through the tree, a description through our grounder, a nameless id or bare coordinates are refused with a reason. Success is read from the application, not from the LLM.

to ground, is the one exception, and is labelled as such). Every action records which channel placed it (tree, grounder, or the LLM's own reading). The approval gate for consequential actions (send, delete, purchase) inspects the element *under* the point, so coordinates cannot bypass it. "Done" is a claim: plan steps must be checked with evidence the system verifies (text on screen, a fresh file, a changed screen, a URL), and a task-specific checker reads the application's state; a claim the checker rejects is a *false success*.

Sandbox suite. Five web tasks, one per condition, regenerated per seed, each with a checker that reads application state: a sign-up form whose labels differ from the goal's words (C1/C3); a notes app whose only working save control is a nameless icon (C2); a mixer whose buttons are drawn on a canvas (C4); three rows with identically named "Archive" buttons (C5); and drawing a line between two dots (drag). Four arms vary what the brain sees and who places clicks: A, the LLM on screenshots placing its own clicks; B, the LLM on the tree only; C, the LLM with tree and screenshot behind the router and our grounder; D, a free text-only LLM behind the router and our grounder.

Serving the grounder. On the development laptop the grounder fits in memory only with 8-bit dynamic quantisation of every linear layer, and quantised it hit 1 of 12 held-out targets, answering in the base model's formats (`<ref>Window 1</ref>`) rather than points: naive quantisation of the vision tower and adapter erased the fine-tuning. We therefore serve the unmodified model from a free T4 over an authenticated tunnel; on 40 held-out examples its answers are identical, coordinate for coordinate, to the stored evaluation predictions (65% on that sample), at a median of 4.7 s per call round trip.

[PENDING: Task-level results for arms A to D over 5 tasks × 3 seeds: pass rate with CI, pass-all-seeds, false-success rate, actions, tokens, channel mix.]

Case study. On Excalidraw, the toolbar is fully named in the accessibility tree, while shapes drawn on the board are absent from it: after drawing two labelled boxes and an arrow, neither label appears in the snapshot. A checker reading the application's autosave confirms labels and that arrows are bound to both shapes. Tool

selection is a tree action; anything referring to existing drawings must go through the grounder. [PENDING: demo episode and its channel trace.]

8 Discussion and limitations

Abstention, not merging. The tree is exact when it has the target, and it does not report when it lacks it. The results point to a better abstention signal rather than a better merge rule, and Proposition 1 states the criterion: a gate should hand an item to the tree when the tree is more precise than vision *on that item*. Whether the selected element has a name is a cheap proxy for that criterion, and in our data a strong one. The argument is not specific to UI Automation; it applies to any structured source an agent might trust first: DOM selectors, OCR, or an API index.

Limitations.

- One training seed [PENDING: second seed's evaluation (trained)]; four unseen apps, so app-level intervals are wide (GUARDED intact: [20.9, 41.6] resampling apps).
- **The teacher labels only what it names.** Every training target is a named element, yet the grounder's role in the gate is the nameless and the absent; unnamed icons remain vision's weakest condition (38 to 40%). [PENDING: Test C: real targets the tree cannot see, ~250 hand-drawn boxes across 8 apps.]
- Test A is synthetic; Test B's stored tree is cleaner than a live one; the LLM gate was confirmed on 250 synthetic items and costs one LLM call per grounding outside an agent.
- Instructions are templated from names; reworded instructions (C3) score 31 for vision alone.
- Element-level results; task-level results are pending (§7).

9 Conclusion

Asking the accessibility tree first is a common design for computer-use agents. When the tree is incomplete, it lowers grounding accuracy below that of vision alone, because the tree keeps answering on items it cannot resolve and its errors override a more accurate vision model. The tree's answer rate and its precision on the items it answers account for the loss exactly. A gate that trusts only named tree picks keeps the tree's advantage on named targets without the loss, and a 2B grounder trained on the tree's own labels on free hardware is accurate enough to serve as the vision side.

Reproducibility. Code, notebooks pinned to commits, the sandbox generator, the per-example results and `scripts/paper_numbers.py` (which regenerates every number and figure here) are at https://github.com/rudranaresh0201/computer-use. The dataset is not released pending a privacy audit.

References

[1] Anthropic. Introducing computer use, a new Claude 3.5 Sonnet, and Claude 3.5 Haiku. https://www.anthropic.com/news/3-5-models-and-computer-use, 2024.

[2] Rogerio Bonatti et al. Windows agent arena: Evaluating multi-modal OS agents at scale. *arXiv preprint arXiv:2409.08264*, 2024.

[3] Kanzhi Cheng, Qiushi Sun, Yougang Chu, Fangzhi Xu, Yantao Li, Jianbing Zhang, and Zhiyong Wu. SeeClick: Harnessing GUI grounding for advanced visual GUI agents. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (ACL)*, 2024. arXiv:2401.10935.

[4] Ran El-Yaniv and Yair Wiener. On the foundations of noise-free selective classification. *Journal of Machine Learning Research*, 11:1605–1641, 2010.

[5] Aarash Feizi et al. Grounding computer use agents on human demonstrations. In *International Conference on Learning Representations (ICLR)*, 2026. arXiv:2511.07332.

[6] Yonatan Geifman and Ran El-Yaniv. Selective classification for deep neural networks. In *Advances in Neural Information Processing Systems (NeurIPS)*, pages 4878–4887, 2017.

[7] Boyu Gou, Ruohan Wang, Boyuan Zheng, Yanan Xie, Cheng Chang, Yiheng Shu, Huan Sun, and Yu Su. Navigating the digital world as humans do: Universal visual grounding for GUI agents. In *International Conference on Learning Representations (ICLR)*, 2025. arXiv:2410.05243.

[8] Edward J. Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. LoRA: Low-rank adaptation of large language models. In *International Conference on Learning Representations (ICLR)*, 2022. arXiv:2106.09685.

[9] Kaixin Li, Ziyang Meng, Hongzhan Lin, Ziyang Luo, Yuchen Tian, Jing Ma, Zhiyong Huang, and Tat-Seng Chua. ScreenSpot-Pro: GUI grounding for professional high-resolution computer use. In *Proceedings of the 33rd ACM International Conference on Multimedia*, 2025. arXiv:2504.07981.

[10] Kevin Qinghong Lin, Linjie Li, Difei Gao, Zhengyuan Yang, Shiwei Wu, Zechen Bai, Weixian Lei, Lijuan Wang, and Mike Zheng Shou. ShowUI: One vision-language-action model for GUI visual agent. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 19498–19508, 2025. arXiv:2411.17465.

[11] Zhaoyang Liu et al. ScaleCUA: Scaling open-source computer use agents with cross-platform data. *arXiv preprint arXiv:2509.15221*, 2025.

[12] Yadong Lu, Jianwei Yang, Yelong Shen, and Ahmed Awadallah. OmniParser for pure vision based GUI agent. *arXiv preprint arXiv:2408.00203*, 2024.

[13] Yujia Qin et al. UI-TARS: Pioneering automated GUI interaction with native agents. *arXiv preprint arXiv:2501.12326*, 2025.

[14] Aram Vardanyan. Building browser agents: Architecture, security, and practical solutions. *arXiv preprint arXiv:2511.19477*, 2025.

[15] Peng Wang, Shuai Bai, et al. Qwen2-VL: Enhancing vision-language model's perception of the world at any resolution. *arXiv preprint arXiv:2409.12191*, 2024.

[16] Qingni Wang, Yue Fan, and Xin Eric Wang. SafeGround: Know when to trust GUI grounding models via uncertainty calibration. *arXiv preprint arXiv:2602.02419*, 2026.

[17] WebAIM. The WebAIM million: The 2025 report on the accessibility of the top 1,000,000 home pages. https://webaim.org/projects/million/2025, 2025.

[18] Zhiyong Wu et al. OS-ATLAS: A foundation action model for generalist GUI agents. In *International Conference on Learning Representations (ICLR)*, 2025. arXiv:2410.23218. Introduces ScreenSpot-v2.

[19] Tianbao Xie et al. OSWorld: Benchmarking multimodal agents for open-ended tasks in real computer environments. In *Advances in Neural Information Processing Systems (NeurIPS), Datasets and Benchmarks Track*, 2024. arXiv:2404.07972.

[20] Jianwei Yang, Hao Zhang, Feng Li, Xueyan Zou, Chunyuan Li, and Jianfeng Gao. Set-of-mark prompting unleashes extraordinary visual grounding in GPT-4V. *arXiv preprint arXiv:2310.11441*, 2023.

[21] Yuhao Yang, Yue Wang, Dongxu Li, Ziyang Luo, Bei Chen, Chao Huang, and Junnan Li. Aria-UI: Visual grounding for GUI instructions. In *Findings of the Association for Computational Linguistics (ACL)*, 2025. arXiv:2412.16256.

[22] Chaoyun Zhang, He Huang, et al. UFO2: The desktop AgentOS. *arXiv preprint arXiv:2504.14603*, 2025.

[23] Shaojie Zhang, Pei Fu, Ruoceng Zhang, Jiahui Yang, Anan Du, Xiuwen Xi, Shaokang Wang, Ying Huang, Bin Qin, Zhenbo Luo, and Jian Luan. HyperClick: Advancing reliable GUI grounding via uncertainty calibration. *arXiv preprint arXiv:2510.27266*, 2025.

[24] Boyuan Zheng, Boyu Gou, Jihyung Kil, Huan Sun, and Yu Su. GPT-4V(ision) is a generalist web agent, if grounded. *arXiv preprint arXiv:2401.01614*, 2024.

A Training and evaluation details

base model	Qwen2-VL-2B-Instruct; vision tower frozen, run under `no_grad`
adapter	LoRA r=16, α=32, dropout 0.1, attention and MLP projections of the language model
optimisation	AdamW, lr 10^{-4}, linear decay, 3% warm-up, effective batch 4, 3 epochs = 1,179 steps
precision	fp16 base, fp32 adapter, loss scaling (T4: no bf16 tensor cores)
hardware	one Kaggle T4 (16 GB): 20.8 s/step, 8.5 GB peak, 8.0 h, checkpoints pushed to the Hub
output	`(x,y)` in $[0, 1000)$; greedy decoding, 48 new tokens
selection	click accuracy on a seeded 200-item dev subset over all snapshots; step 1179 chosen
images	1568×882 (training pixel budget); ScreenSpot images scaled down only, aspect kept

B Pipeline failures that would have invalidated results

Each of these passed tests and produced plausible numbers.

failure	symptom	how found / fixed
labels from the wrong window	36% of rows (100% of one held-out app) described another application	rendering labels onto images; foreground verification per state
first-N sampling per control type	tree order visits window chrome first: data collapsed to Minimize/Close	audit; random sampling within the cap
fp16 without loss scaling	adapter updates underflowed to zero; sane loss, unstable runs	audit; fp32 adapter + GradScaler
frozen tower in backward pass	OOM; ~3× slower steps	memory arithmetic of the OOM; tower under `no_grad`
emulated bf16 on a T4	math attention kernel, full attention matrix	checking compute capability, not `is_bf16_supported`
per-chunk LR schedule	LR would decay to zero at each chunk's end	reading the notebook before running
box answers scored at a corner	zero-shot penalised for syntax, inflating H1	eval smoke; boxes scored at centre in all syntaxes
session restore on cold launch	a previous user's file tab entered the data	label review; refuse unexpected tabs

C Pre-registration and freezes

Hypotheses H1 to H6 and every rule were committed before the data they concern: training code `d1e135a`; evaluation `ad1446a`; GUARDED `d665c19`; TREE_LLM `938f46a`; LLM_GUARDED `1ad9836`; gate candidates and selection rule `1cc4d26`; final GPU run `c089d74`.

D The tree prompt

```
You see the accessibility tree of an application window, the way a screen reader
sees it: one element per line as  role "name" [ref=...], indented by nesting.
Headings and regions give context. Buttons with no name have no text in the tree.

Instruction: {instruction}

Which ONE element should be clicked to follow the instruction? Answer with only its
ref (for example e12). If no element in the tree can be identified as the target,
answer NONE.

Tree:
{tree}
```

Model `openai/gpt-oss-120b` (Groq), temperature 0, reasoning effort low. The tree keeps interactive elements, headings and landmark regions, without boxes.

E What UI Automation exposes on eight real applications

application (main window)	UIA elements	named interactive	nameless interactive
GIMP	7	4	0
VLC	36	12	11
Excalidraw (in Chrome)	44	17	0
Git GUI	62	12	0
Notepad++	68	21	32
Audacity	151	56	2
VS Code	162	71	0
Paint	173	111	1

Table 8: One capture per application. Counts describe what the tree exposes, not what a person can click; measuring the latter needs hand-drawn labels [PENDING: Test C/D].