Tree First, Else Vision Is Worse Than Vision: When to Trust the Accessibility Tree in GUI Grounding

Rudra Naresh
[affiliation] [email]

Abstract

Computer-use agents often ground an instruction by asking the accessibility tree first and falling back to a vision model when the tree has no answer. We measure this policy with ground truth that comes from neither source. On generated pages covering five ways a tree can fail, and on real Windows screens whose trees we damage on purpose, the tree-first policy is less accurate than vision alone (-12.0 and -9.5 points). The loss equals the tree's answer rate times the gap between its precision and vision's accuracy on the items it answers: the tree keeps answering on ambiguous and canvas-drawn targets, and is then right 54% of the time where vision is right 80%. A gate that trusts an LLM's reading of the tree only when the chosen element has a name reaches 85.2% against 66.4% for vision, and is never below vision on any condition. The vision side is a 2B grounder trained on 1,572 examples labelled for free by Windows UI Automation on one T4 GPU, which raises accuracy on unseen applications from 1.5% to 46.5%.

1 Introduction

Grounding maps a description such as "click Save" to a point on the screen. The accessibility tree (UI Automation on Windows, the DOM accessibility tree in browsers) lists elements with names and boxes, and is exact when it contains and names the target. It often does not: 29.6% of the top million web home pages have a button with no accessible name [8], and canvas content (spreadsheet grids, CAD viewports, whiteboards) is absent from it. Agent systems therefore combine the tree with vision; UFO2 merges UI Automation with a vision parser [10], and production browser agents read the accessibility snapshot first and request a screenshot only when an element is missing [5].

This tree-first policy is safe only if the tree abstains whenever it cannot resolve the target. A name matcher does not: asked for an unnamed target it returns the element with the closest name, and given two buttons named "Archive" it returns the first. Vision grounders [1, 2, 4, 9] and recent work on their calibration [7, 11] ask when to trust the grounder; we ask when to trust the tree.

Contributions. (1) A per-condition comparison of tree, vision and hybrid policies with ground truth independent of both, on generated pages and on real Windows trees; (2) an exact decomposition of the tree-first loss, which also predicts the gain of any gate; (3) a gate based on whether the chosen element has a name, chosen on dev and tested once; (4) a 2B UIA-supervised grounder trained on free hardware.

2 Setup

An item is a screenshot, an instruction q and a target box; a point *hits* if it lies in the box, and the same rule scores every method. Five conditions relate q to the tree T: **C1** the target is named as q names it; **C2** it is in T without a name; **C3** q paraphrases its name; **C4** it is drawn on a canvas and absent from T; **C5** several elements share its name and q disambiguates by context. Policies: TREE (fuzzy name matching, ties to the first in tree order); VISION (the grounder's point); FALLBACK (TREE if it answers, else VISION); TREE_LLM (an LLM reads T and answers one element or NONE); LLM_GUARDED (its pick, else VISION); LLM_NAMED (its pick only if the element has a name, else VISION).

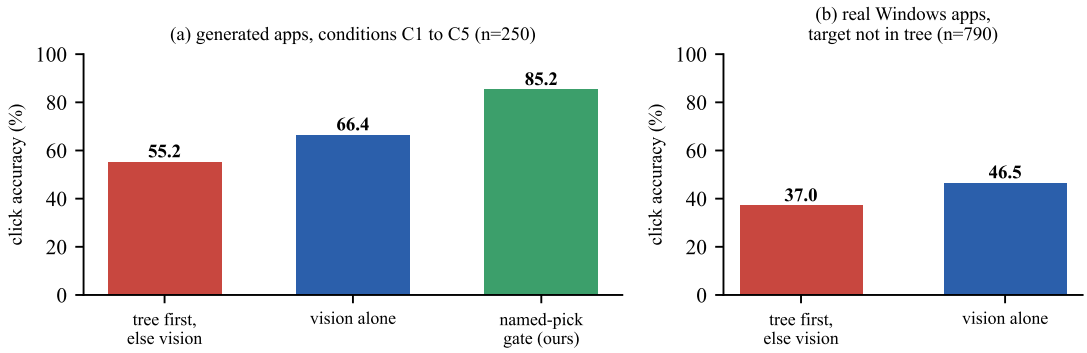


Figure 1: Click accuracy (%). (a) Generated pages, the same 250 items for all three policies. (b) Real Windows applications (four never trained on) with the target missing from the tree.

	C1	C2	C3	C4	C5	all
TREE accuracy	**100.0**	0.0	0.0	0.0	26.5	25.3
VISION accuracy	94.0	**40.0**	**31.0**	**99.0**	**65.0**	**65.8**
FALLBACK accuracy	100.0	37.5	29.5	75.5	26.5	53.8
tree answers, $\Pr(A)$	100.0	4.5	6.0	23.5	100.0	46.8
tree precision on A	100.0	0.0	0.0	0.0	26.5	54.1
vision accuracy on A	94.0	55.6	25.0	100.0	65.0	79.7
FALLBACK − VISION	+6.0	−2.5	−1.5	−23.5	−38.5	−12.0

Table 1: Test A (%, 200 items per condition) and the decomposition of Proposition 1.

Proposition 1. *Let A be the event that the tree answers, and h_r, h_g the hit indicators of the tree's and the grounder's points. Then* $\mathrm{Acc}(\textsc{fallback}) - \mathrm{Acc}(\textsc{vision}) = \Pr(A)\,(\Pr(h_r \mid A) - \Pr(h_g \mid A))$. *More generally, a policy that uses the tree on a subset S and the grounder elsewhere gains* $\Pr(S)\,(\Pr(h_r \mid S) - \Pr(h_g \mid S))$ *over* VISION.

The proof is one line: the policies agree outside S. The quantity to measure is therefore not the tree's accuracy but its answer rate and its precision on the items it answers, against vision on those items.

Grounder. Qwen2-VL-2B [6] with LoRA [3] (r=16), trained on 1,572 targets that Windows UI Automation names and boxes for free (10 apps), three epochs on one Kaggle T4 (8 h). The checkpoint was chosen on dev and pushed before any test item was scored; intervals are paired bootstrap 95% CIs resampled by screenshot. On four unseen apps (790 targets) accuracy rises from 1.5 to 46.5 (+44.9 [41.1, 48.7]); on ScreenSpot-v2 from 19.2 to 62.8 (+46.1 [42.9, 49.1]).

3 Results

Test A: generated pages. True boxes come from the DOM or canvas geometry. The frozen test set has 1,000 items, 200 per condition (Table 1). The tree wins only C1. FALLBACK loses 12.0 points [9.7, 14.4] to vision, and the decomposition locates the loss: the tree answers every C5 item and a quarter of C4 items, and overrides a correct vision click on 49.5% and 23.5% of them.

policy (same 250 items)	C1	C2	C3	C4	C5	mean
FALLBACK						55.2
VISION	98	38	28	100	68	66.4
TREE_LLM	88	2	88	0	100	55.6
LLM_GUARDED (pre-registered)	92	32	92	100	100	83.2
LLM_NAMED (chosen on dev)	94	38	94	100	100	**85.2**

Table 2: Gates on the 250-item subset of Test A (%). LLM_NAMED is never below vision.

Test B: real Windows trees, damaged on purpose. The grounder never reads the tree, so its saved answers on real test screenshots can be re-scored against the real UI Automation tree with the target's name blanked or the target removed. On the unseen apps, VISION is 46.5 in every state and FALLBACK falls to 37.0 when the tree lacks the target (-9.5 [-11.8, -7.4]): the tree still answers on 25.8% of items, through another element with a similar name, and is right on 3.9% of those against 40.7% for vision, which gives $0.258 \times (3.9 - 40.7) = -9.5$. With the tree intact, FALLBACK reaches 93.0, so the tree is valuable when it has the target; the problem is knowing when it does.

Gates. On the first 50 test pages (250 items, fixed in advance), an LLM reading the tree (gpt-oss-120b) fixes rewording and ambiguity (C3 88, C5 100) but not blindness (C2 2, C4 0) (Table 2). The pre-registered LLM_GUARDED reaches 83.2 but loses 6 points to vision on unnamed icons, where the LLM picks an element instead of answering NONE. Among four repairs frozen before any dev answer, LLM_NAMED was chosen on 300 new dev items and scored once: 85.2, +18.8 [15.2, 22.4] over vision. The proposition explains why: the LLM's named picks (59.2% of items) are 93.2% precise where vision is 61.5% on the same items, and $0.592 \times (93.2 - 61.5) = +18.8$, the measured gain. Its nameless picks (4.0%) are 10% precise where vision is 60%, so excluding them is correct.

In an agent. The decision-making LLM of an agent already reads the tree, so the gate costs no extra call. We enforce it in a perceive, decide, ground, act and verify loop: the LLM returns one intent naming an element or describing a target; a router accepts element ids only for named elements, sends descriptions to the grounder, and refuses bare click coordinates; task success is read from application state. [PENDING: task-level results on five sandbox tasks, one per condition.]

4 Limitations and conclusion

Test A is synthetic and Test B's stored tree holds only named elements, so it is cleaner than a live tree; the gate was confirmed on 250 synthetic items; four unseen apps and one training seed [PENDING: second seed]. The grounder is trained only on named elements, yet its role is the nameless and the absent [PENDING: Test C: real targets the tree cannot see]. Within these limits the result is consistent across both test beds: a tree-first merge is less accurate than vision alone once the tree is incomplete, its loss is the tree's answer rate times its precision gap, and a gate that trusts only named tree picks recovers the tree's advantage without the loss.

References

[1] Kanzhi Cheng, Qiushi Sun, Yougang Chu, Fangzhi Xu, Yantao Li, Jianbing Zhang, and Zhiyong Wu. SeeClick: Harnessing GUI grounding for advanced visual GUI agents. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (ACL)*, 2024. arXiv:2401.10935.

[2] Boyu Gou, Ruohan Wang, Boyuan Zheng, Yanan Xie, Cheng Chang, Yiheng Shu, Huan Sun, and Yu Su. Navigating the digital world as humans do: Universal visual grounding for GUI agents. In *International Conference on Learning Representations (ICLR)*, 2025. arXiv:2410.05243.

[3] Edward J. Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. LoRA: Low-rank adaptation of large language models. In *International Conference on Learning Representations (ICLR)*, 2022. arXiv:2106.09685.

[4] Kevin Qinghong Lin, Linjie Li, Difei Gao, Zhengyuan Yang, Shiwei Wu, Zechen Bai, Weixian Lei, Lijuan Wang, and Mike Zheng Shou. ShowUI: One vision-language-action model for GUI visual agent. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 19498–19508, 2025. arXiv:2411.17465.

[5] Aram Vardanyan. Building browser agents: Architecture, security, and practical solutions. *arXiv preprint arXiv:2511.19477*, 2025.

[6] Peng Wang, Shuai Bai, et al. Qwen2-VL: Enhancing vision-language model's perception of the world at any resolution. *arXiv preprint arXiv:2409.12191*, 2024.

[7] Qingni Wang, Yue Fan, and Xin Eric Wang. SafeGround: Know when to trust GUI grounding models via uncertainty calibration. *arXiv preprint arXiv:2602.02419*, 2026.


[8] WebAIM. The WebAIM million: The 2025 report on the accessibility of the top 1,000,000 home pages. https://webaim.org/projects/million/2025, 2025.

[9] Zhiyong Wu et al. OS-ATLAS: A foundation action model for generalist GUI agents. In *International Conference on Learning Representations (ICLR)*, 2025. arXiv:2410.23218. Introduces ScreenSpot-v2.

[10] Chaoyun Zhang, He Huang, et al. UFO2: The desktop AgentOS. *arXiv preprint arXiv:2504.14603*, 2025.

[11] Shaojie Zhang, Pei Fu, Ruoceng Zhang, Jiahui Yang, Anan Du, Xiuwen Xi, Shaokang Wang, Ying Huang, Bin Qin, Zhenbo Luo, and Jian Luan. HyperClick: Advancing reliable GUI grounding via uncertainty calibration. *arXiv preprint arXiv:2510.27266*, 2025.

A Additional results

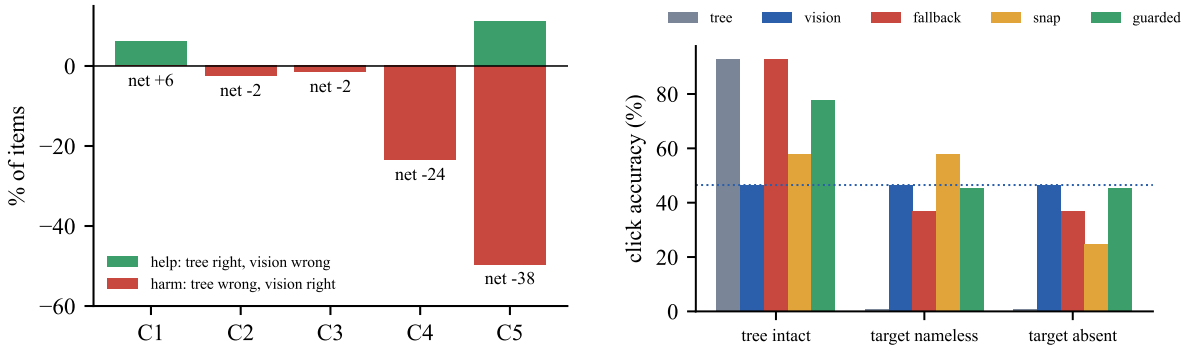

(a) Test A: help and harm of FALLBACK.

(b) Test B: unseen apps, three tree states.

Figure 2: (a) The tree-first loss is harm (tree wrong, vision right), concentrated on C4 and C5. (b) Real screens: FALLBACK and snapping fall below vision once the target is missing; the exact-name guard does not.

	zero-shot	fine-tuned	Δ [95% CI, screenshot-clustered]
same apps, new screenshots (n=246)	14.2	64.6	+50.4 [43.0, 57.8]
four unseen apps (n=790)	1.5	46.5	+44.9 [41.1, 48.7]
ScreenSpot-v2, 6-cell mean (n=1,272)	19.2	62.8	+46.1 [42.9, 49.1]

Table 3: The grounder. Full training and evaluation details, the failure log, and the agent are in the full version.