

exercise1-secant (Score: 12.0 / 14.0)

1. [Test cell](#) (Score: 1.0 / 1.0)
2. [Test cell](#) (Score: 1.0 / 1.0)
3. [Test cell](#) (Score: 1.0 / 1.0)
4. [Written response](#) (Score: 1.0 / 1.0)
5. [Test cell](#) (Score: 1.0 / 1.0)
6. [Written response](#) (Score: 1.0 / 1.0)
7. [Test cell](#) (Score: 1.0 / 1.0)
8. [Coding free-response](#) (Score: 3.0 / 4.0)
9. [Comment](#)
10. [Written response](#) (Score: 2.0 / 3.0)
11. [Comment](#)

Lab 2

1. 提交作業之前，建議可以先點選上方工具列的**Kernel**，再選擇**Restart & Run All**，檢查一下是否程式跑起來都沒有問題，最後記得儲存。
2. 請先填上下方的姓名(name)及學號(student_id)再開始作答，例如：

```
name = "我的名字"  
student_id= "B06201000"
```

3. 四個求根演算法的實作可以參考[lab-2 \(https://yuanyuyuan.github.io/itcm/lab-2.html\)](https://yuanyuyuan.github.io/itcm/lab-2.html)，裡面有教學影片也有範例程式可以套用。
4. **Deadline: 10/9(Wed.)**

In [1]:

```
name = "鄭如芳"  
student_id = "B05602020"
```

Exercise 1 - Secant

Use the secant method to find roots of

$$f(x) = \cosh(x) + \cos(x) - c, \text{ for } c = 1, 2, 3,$$

Import libraries

In [2]:

```
import matplotlib.pyplot as plt  
import numpy as np
```

1. **Define a function $g(c)(x) = f(x) = \cosh(x) + \cos(x) - c$ with parameter $c = 1, 2, 3$.**

In [3]:

(Top)

```
def g(c):
    assert c == 1 or c == 2 or c == 3
    def f(x):
        # Hint: return ...
        # ===== 請實做程式 =====
        return np.cosh(x)+np.cos(x)-c
        # =====
    return f
```

Pass the following assertion.

In [4]:

cell-b59c94b754b1fc9e

(Top)

```
assert g(1)(0) == np.cosh(0) + np.cos(0) - 1
### BEGIN HIDDEN TESTS
assert g(2)(0) == np.cosh(0) + np.cos(0) - 2
assert g(3)(0) == np.cosh(0) + np.cos(0) - 3
### END HIDDEN TESTS
```

2. Implement the algorithm

In [5]:

(Top)

```

def secant(
    func,
    interval,
    max_iterations=5,
    tolerance=1e-7,
    report_history=False,
):
    '''Approximate solution of  $f(x)=0$  on interval  $[a,b]$  by the secant method.

    Parameters
    -----
    func : function
        The target function.
    interval: list
        The initial interval to search
    max_iterations : (positive) integer
        One of the termination conditions. The amount of iterations allowed.
    tolerance: float
        One of the termination conditions. Error tolerance.
    report_history: bool
        Whether to return history.

    Returns
    -----
    result: float
        Approximation of the root.
    history: dict
        Return history of the solving process if report_history is True.
    ...

    # ===== 請實做程式 =====
    a,b=interval
    assert func(a)*func(b)<0
    num_iterations = 0
    a_next, b_next = a, b
    if report_history:
        history = {'estimation': [], 'x_error': [], 'y_error': []}
    while True:
        d_x = - func(a_next) * (b_next - a_next) / (func(b_next) - func(a_next))
        c = a_next + d_x

        x_error = abs(d_x)
        y_error = abs(func(c))

        if report_history:
            history['estimation'].append(c)
            history['x_error'].append(x_error)
            history['y_error'].append(y_error)

        if x_error < tolerance or y_error < tolerance:
            print('Found solution after', num_iterations, 'iterations.')
            return (c, history) if report_history else c

        if num_iterations < max_iterations:
            num_iterations += 1

            value_of_func_c = func(c)
            if func(a_next) * value_of_func_c < 0:
                a_next = a_next
                b_next = c
            elif value_of_func_c * func(b_next) < 0:
                a_next = c
                b_next = b_next
            else:
                return (c, history) if report_history else c

        else:
            print('Terminate since reached the maximum iterations.')
            return (c, history) if report_history else c

    # =====

```

Test your implementation with the assertion below.

In [6]:

cell-4d88293f2527c82d

(Top)

```
root = secant(lambda x: x**2 - x - 1, [1.0, 2.0], max_iterations=100, tolerance=1e-7, report_history=False)
assert abs(root - ((1 + np.sqrt(5)) / 2)) < 1e-7
```

Found solution after 8 iterations.

3. Answer the following questions under the case $c = 1$.

Plot the function to find an interval that contains the zero of f if possible.


In [7]:

(Top)

```
c = 1
f = g(c)

# Hint: search_range = np.arange(左端點, 右端點, 點與點之間距),
# e.g. search_range = np.arange(0.0, 1.0, 0.01)
# ===== 請實做程式 =====
search_range = np.arange(-2.0, 2.0, 0.01)
# =====

fig, ax = plt.subplots(figsize=(9, 4))
ax.plot(search_range, f(search_range))
ax.set_title(r'$f(x)=\cosh(x)+\cos(x)-c$, $c=1$' % c)
ax.grid(True)
ax.axhline(y=0)
ax.axvline(x=0)
plt.show()
```

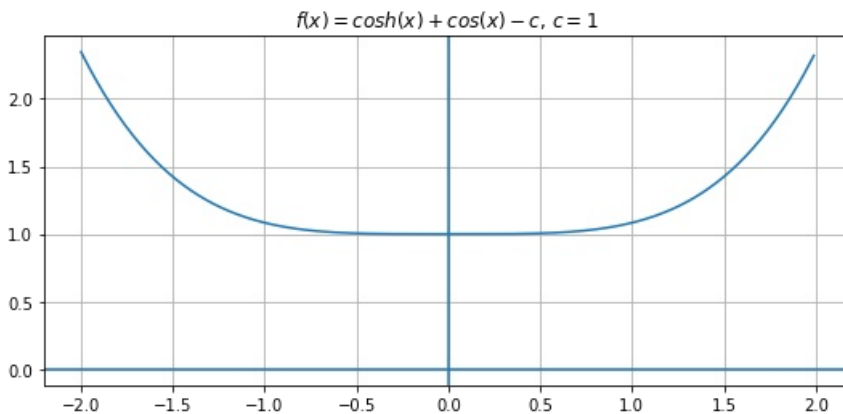

According to the figure above, estimate the zero of f .

For example,

```
root = 3          # 單根
root = -2, 1      # 多根
root = None       # 無解
```

In [8]:

(Top)

```
# Hint: root = ?
# ===== 請實做程式 =====
root=None
# =====
```

In [9]:

cell-d872c7c57f11c968

(Top)

```
print('My estimation of root:', root)
### BEGIN HIDDEN TESTS
if root == None:
    print('Right answer!')
else:
    raise AssertionError('Wrong answer!')
### END HIDDEN TESTS
```

My estimation of root: None
Right answer!

Try to find the zero with a tolerance of 10^{-10} . If it works, plot the error and estimation of each step. Otherwise, state the reason why the method failed on this case.

(Top)

*the graph does not pass through the x - axis so there will be assertion error in our bisection functions since we cannot satisfy $f(a) * f(b) < 0$ this condition*

4. Answer the following questions under the case $c = 2$.

Plot the function to find an interval that contains the zero of f if possible.


In [10]:

(Top)

```
c = 2
f = g(c)

# Hint: search_range = np.arange(左端點, 右端點, 點與點之間距),
# e.g. search_range = np.arange(0.0, 1.0, 0.01)
# ===== 請實做程式 =====
search_range = np.arange(-1.0, 1.0, 0.01)
# =====

fig, ax = plt.subplots(figsize=(9, 4))
ax.plot(search_range, f(search_range))
ax.set_title(r'$f(x)=\cosh(x)+\cos(x)-c$, $c=${d} % c')
ax.grid(True)
ax.axhline(y=0)
ax.axvline(x=0)
plt.show()
```

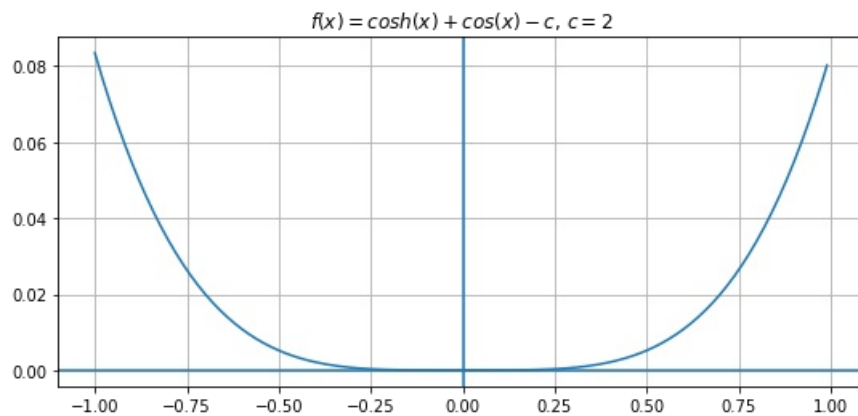

According to the figure above, estimate the zero of f .

For example,

```
root = 3          # 單根
root = -2, 1      # 多根
root = None       # 無解
```

In [11]:

(Top)

```
# Hint: root = ?
# ===== 請實做程式 =====
root=0.0
# =====
```

In [12]:

cell-20fddbe6fa4c437b

(Top)

```
print('My estimation of root:', root)

### BEGIN HIDDEN TESTS
assert type(root) is float or int, 'Wrong type!'
### END HIDDEN TESTS
```

My estimation of root: 0.0

Try to find the zero with a tolerance of 10^{-10} . If it works, plot the error and estimation of each step. Otherwise, state the reason why the method failed on this case.

the graph does not pass through the x - axis so there will be assertion error in our bisection function since we cannot satisfy $f(a) * f(b) < 0$ this condition

5. Answer the following questions under the case $c = 3$.

Plot the function to find an interval that contains the zeros of f if possible.


In [13]:

(Top)

```
c = 3
f = g(c)

# Hint: search_range = np.arange(左端點, 右端點, 點與點之間距),
# e.g. search_range = np.arange(0.0, 1.0, 0.01)
# ===== 請實做程式 =====
search_range = np.arange(-2.0, 2.0, 0.01)
# =====

fig, ax = plt.subplots(figsize=(9, 4))
ax.plot(search_range, f(search_range))
ax.set_title(r'$f(x)=\cosh(x)+\cos(x)-c$, $c={}$d'.format(c))
ax.grid(True)
ax.axhline(y=0)
ax.axvline(x=0)
plt.show()
```

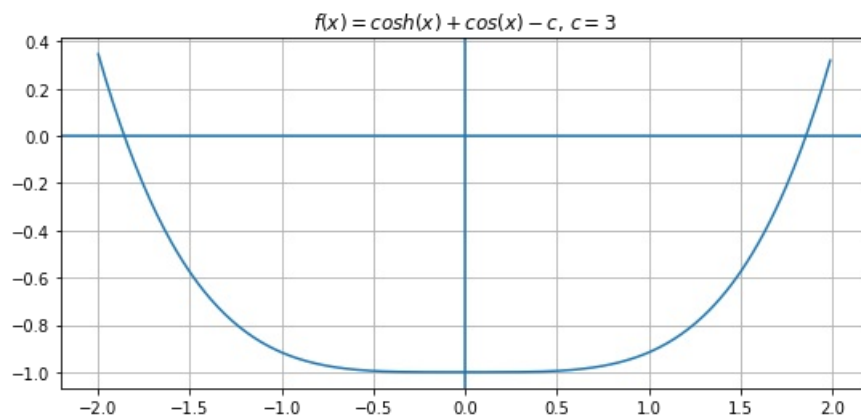

According to the figure above, estimate the zero of f .

For example,

```
root = 3          # 單根
root = -2, 1      # 多根
root = None       # 無解
```

In [14]:

(Top)

```
# Hint: root = ?
# ===== 請實做程式 =====
ans1_interval=[0,2]
ans1=secant(
    f,
    ans1_interval,
    max_iterations=5,
    tolerance=1e-7,
    report_history=False,
)
ans2_interval=[-2,0]
ans2=secant(
    f,
    ans2_interval,
    max_iterations=5,
    tolerance=1e-7,
    report_history=False,
)
root=ans1,ans2
# =====
```

Terminate since reached the maximum iterations.
Terminate since reached the maximum iterations.

In [15]:

cell-06ec0b20844075c7

(Top)

```
print('My estimation of root:', root)

### BEGIN HIDDEN TESTS
assert type(root) == tuple, 'Should be multiple roots!'
### END HIDDEN TESTS
```

My estimation of root: (1.8579137761999887, -1.8579137761999887)

Try to find the zero with a tolerance of 10^{-10} . If it works, plot the error and estimation of each step. Otherwise, state the reason why the method failed on this case.

In [16]:

(Top)

```
$$\,Since\,the\,gragh\,is\,symmatric\,to\,y-axis\
I\,discuss\,the\,postive\,root$$
```

Comments:

For case c=3, there are two roots to be found

```
File "<ipython-input-16-c2070e7d98db>", line 1
  $$\,Since\,the\,gragh\,is\,symmatric\,to\,y-axis\
  ^
```

SyntaxError: invalid syntax

In [17]:

```
ans1_interval=[0,2]
solution, history = secant(
    f,
    ans1_interval,
    max_iterations=100,
    tolerance=1e-7,
    report_history=True
)
print(solution)
```

Found solution after 8 iterations.
1.8579208198096675

In [18]:

```
fig, axes = plt.subplots(3, 1, figsize=(16, 9))
ax1, ax2, ax3 = axes


num_iterations = len(history['estimation'])
iterations = range(num_iterations)
for ax in axes:
    ax.set_xticks(iterations)

# Plot the estimation in history
ax1.plot(iterations, history['estimation'])
ax1.set_ylabel('Estimation')

# Plot the estimation error of x (log(error of x)) in history
ax2.plot(iterations, history['x_error'])
ax2.set_ylabel('Estimated Error of x')
ax2.set_yscale('log')

# Plot the estimation error of y (log(error of y)) in history
ax3.plot(iterations, history['y_error'])
ax3.set_ylabel('Estimated Error of y')
ax3.set_yscale('log')

plt.tight_layout()
plt.show()
```

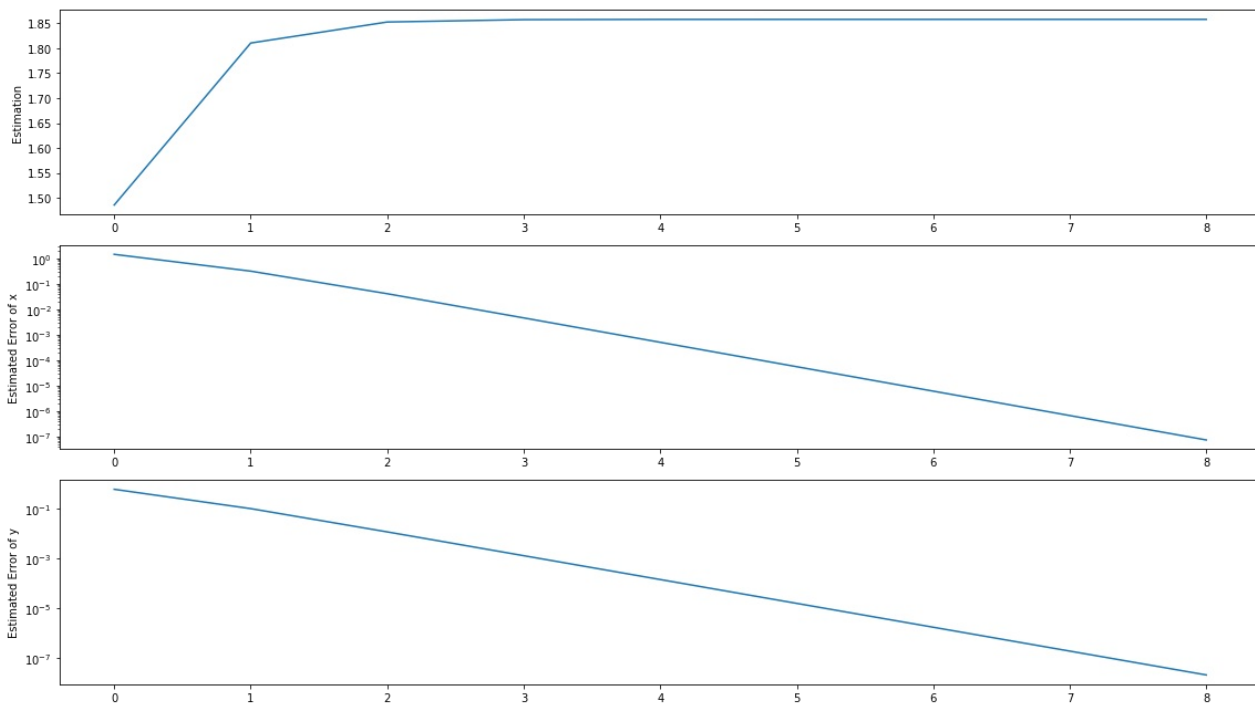

Discussion

For all cases above($c=1,2,3$), do the results(e.g. error behaviors, estimations, etc) agree with the theoretical analysis?

(Top)

The case of $c = 3$ agree with the theoretical analysis

Comments:

Don't simply say agree with the theoretical analysis