

CSE 4345: Big Data Analytics

Week 3, Part 1 — The Big Data Ecosystem: HDFS & the Distributed Storage Foundation

Rokan Uddin Faruqui

Professor

Department of Computer Science & Engineering

University of Chittagong, Chittagong

CSE, PUC, Spring 2026

Course & Lecture Information

Lecture Identity

Course: CSE 4345
Week / Part: 3 of 11 | Part 1 of 2
CLO: CLO1
PLO: PLO(a)

CLO1

“Understand big data characteristics”

Course Progression

Week 1: *What* is Big Data (3Vs)
Week 2: *Why* integration is hard
Week 3: *Where* data is stored (HDFS)
Week 4: *How* data is processed (MapReduce)

Part 1 Covers

- The architecture shift: RDBMS → distributed storage
- The core principle: move computation to data
- The Hadoop ecosystem stack (layered)
- HDFS: NameNode, DataNode, Secondary NameNode
- Block storage and rack-aware replication
- HDFS read & write paths
- High availability (Active / Standby NameNode)
- The small file problem
- Student assessment pool

Lecture Agenda

- 1 The Architecture Motivation
- 2 The Hadoop Ecosystem Stack
- 3 HDFS: Architecture & Design
- 4 HDFS: Replication, Read & Write Paths
- 5 Student Assessment Pool

The Architecture Motivation

Why a New Storage Architecture?

The 2003 Problem Statement

Google's web crawl produced petabytes of data that needed to be:


- **Stored** reliably across thousands of machines
- **Queried** for web indexing (sequential scans of entire datasets)
- **Fault-tolerant**: hardware failure expected daily at this scale
- **Cheap**: commodity PCs, not mainframes

What Existing Systems Could NOT Do

- **NFS / POSIX FS**: single server, no horizontal scale
- **RDBMS**: tuned for random access, not sequential petabyte scans
- **SAN / NAS**: expensive proprietary hardware; single point of failure

Why a New Storage Architecture?

The Paradigm Shift

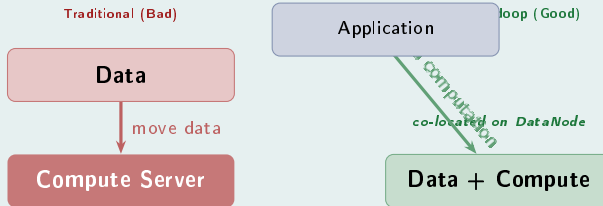

The Fundamental Insight

Moving computation is cheaper than moving data. A 100 GB input file costs seconds to process locally; copying it over a network costs minutes.

The Core Principle: Data Locality

Definition: Data Locality

Running computation **on the same physical node** that holds the required data, avoiding network transfer.

Network transfer cost (2024 estimates):

Transfer medium			Throughput
Local	disk	read	~3,000 MB/s (SSD)
Local	disk	read	~150 MB/s (HDD)
Intra-rack	network		~125 MB/s (1G)
Cross-rack	network		~100 MB/s (1G)


Three Levels of Locality (MapReduce / YARN)

- ➊ **Data-local:** Task runs on the *same node* as the block
 - Best case: no network I/O
- ➋ **Rack-local:** Task runs on a *different node in the same rack*
 - One hop through top-of-rack switch
- ➌ **Off-rack:** Task runs on a *different rack*
 - Crosses the core network; worst case

YARN's scheduler tries level 1 first, falls back to level 2, then 3.

The Hadoop Ecosystem Stack

The Hadoop Ecosystem: Layered Architecture

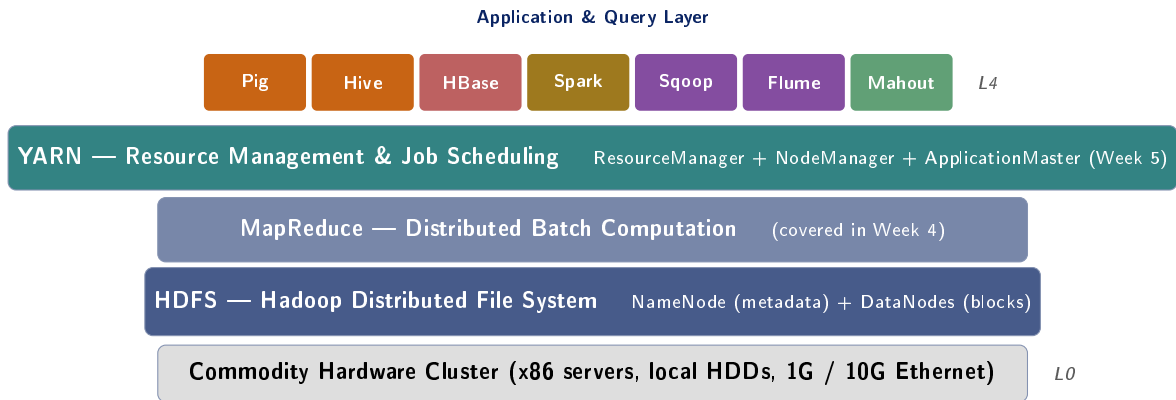

Design Philosophy

Each layer is **independently replaceable**. YARN replaced MapReduce's resource manager in Hadoop 2.0, allowing Spark, Tez, and Storm to share the same HDFS cluster without rewriting data storage.

Ecosystem Components: Roles at a Glance

Component	Week	Role
HDFS	3	Distributed file system; stores data as blocks across DataNodes
MapReduce	4	Parallel batch computation model (Map + Shuffle + Reduce)
YARN	5	Cluster resource manager; schedules CPU/RAM across all frameworks
Pig	4	Dataflow scripting language (Pig Latin) for ETL pipelines
Hive	7	SQL-on-Hadoop; translates HiveQL to MapReduce / Spark jobs
HBase	4	NoSQL column-family store for low-latency random read/write
Spark	6	In-memory distributed computing; 10–100× faster than MapReduce
Sqoop	8	Bulk transfer between RDBMS (MySQL/Oracle) and HDFS
Flume	8	Streaming log/event ingest into HDFS
Mahout	–	Distributed machine learning algorithms on Hadoop

The Economics of Commodity Hardware

Google's Original Design Mandate (GFS, 2003)

"The system is built from many inexpensive commodity components that often fail. It must constantly monitor itself, detect, tolerate, and recover promptly from component failures."

Failure rates at scale:

Failure type	Rate (per year)
Individual disk failure	2–4%
Individual server failure	5–10%
Power supply failure	1–2%
Rack switch failure	0.5–1%
In a 1,000-node cluster	50–100 failures/year

The Economics of Commodity Hardware

Design Consequence

At 1,000+ nodes, hardware failure is not an **exception**—it is **routine**. HDFS must handle failures *transparently* without operator intervention or data loss.

Cost Comparison (2024 estimates)

	SAN Array	HDFS Cluster
Storage (1 PB)	\$500K+	\$50K
Redundancy	RAID	3× replication
Scalability	Vendor	Add nodes
Lock-in	High	None

HDFS achieves **10× cost reduction** while adding fault tolerance by design.

HDFS: Architecture & Design

HDFS Master / Worker Architecture

Three Core Components


- **NameNode** (1 active): the master. Stores all filesystem *metadata* in RAM.
- **DataNode** (n workers): the storage nodes. Store actual data *blocks* on local disks.
- **Secondary NameNode** (1): performs periodic metadata checkpointing. **NOT** a failover.

Two Distinct Planes

- **Metadata plane**: Client $\leftrightarrow$ NameNode
(file names, block locations, permissions)
- **Data plane**: Client $\leftrightarrow$ DataNode
(actual bytes read / written)

Separating these planes is a **critical design choice**: NameNode never touches data, so it can serve thousands of clients simultaneously.

HDFS Master / Worker Architecture

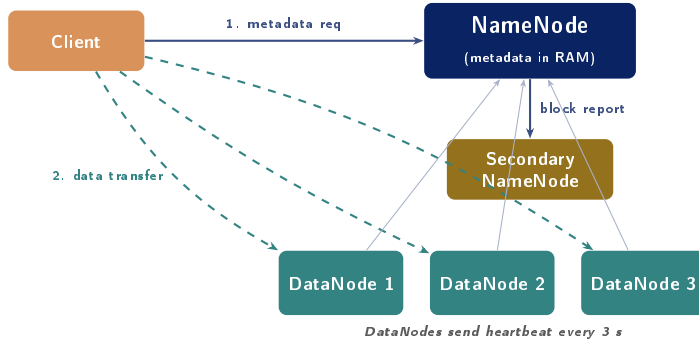

NameNode: The Brain of HDFS

What the NameNode Stores (in RAM)


- **Namespace tree**: complete directory hierarchy of all files and directories
- **File → block mapping**: for each file, which blocks it consists of, in order
- **Block → DataNode mapping**: where each block replica is currently stored (rebuilt from DataNode reports at startup)
- **Permissions**: POSIX-style owner, group, access rights

Why RAM? Why Dangerous?

In-memory metadata = **microsecond lookups** (vs. disk-based = milliseconds). But: the NameNode is a **single point of failure**. If it crashes, the entire cluster is inaccessible until recovered.

NameNode: The Brain of HDFS

NameNode Metadata Persistence

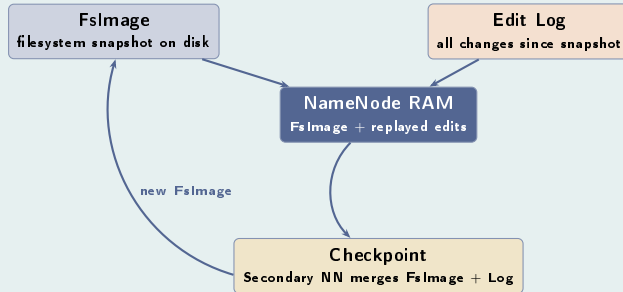

Startup Sequence

NameNode loads **FsImage** from disk → replays all **Edit Log** entries → waits for DataNodes to report block locations → enters *safe mode* until replication factor is met.

Secondary NameNode: The Critical Misconception

Common Exam Mistake

The Secondary NameNode is NOT a failover!

Its name is misleading. If the active NameNode crashes, the Secondary NameNode **cannot automatically take over**. The cluster goes down.

What It Actually Does: Checkpointing

- 1 Periodically fetches the current **FsImage** and **Edit Log** from NameNode
- 2 Merges them into a new, compact **FsImage**
- 3 Pushes the merged FsImage back to NameNode
- 4 Clears the Edit Log on NameNode

Why needed? Without checkpointing, the Edit Log grows indefinitely, making NameNode restart slower and slower (it must replay the entire log).

Secondary NameNode: The Critical Misconception

Analogy: Bank Ledger

- **FsImage** = the bank's *balance sheet* (snapshot at end of month)
- **Edit Log** = the bank's *transaction journal* (every deposit/withdrawal this month)
- **Secondary NameNode** = the *accountant* who reconciles the journal into a new balance sheet at month-end, reducing the journal to zero
- Without the accountant, the journal grows without bound and takes longer to audit each time

True Failover: HDFS HA (Hadoop 2.0+)

Active NameNode + **Standby NameNode** share a **Quorum Journal Manager** (3+ JournalNodes). Standby replays edits in real time. On failover: ZooKeeper triggers automatic switch in <30 seconds.

DataNode: Block Storage in Practice


What a DataNode Does

- Stores data as **flat files on local disk** (one file per HDFS block)
- Sends a **heartbeat** to NameNode every 3 seconds (liveness signal)
- Sends a **block report** to NameNode every 6 hours (full inventory of stored blocks)
- Serves **client read requests** directly (no NameNode involved in data transfer)
- Participates in **replication pipeline** for writes
- Runs **block scanner** to detect silent bit-rot (checksum verification)

NameNode Detection of DataNode Failure

If a DataNode misses **10 consecutive heartbeats** (30 seconds), NameNode marks it as dead and schedules re-replication of all under-replicated blocks.

Block Storage: How a 300 MB File is Stored

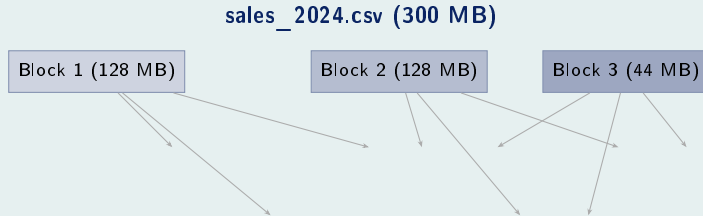

Each block → 3 replicas on different nodes

Block Size: Why 128 MB?

Traditional Filesystem Block Size: 4 KB

In a traditional OS (ext4, NTFS):

- 4 KB block = minimise *internal fragmentation* (wasted space within a block)
- Files are small (KB to MB range)
- **Random access** is common: seek to any byte quickly

HDFS Block Size: 128 MB (default, Hadoop 2.x+)

In HDFS:

- Files are **large** (GB to TB): a 10 GB file = 80 blocks at 128 MB
- Workloads are **sequential reads**: MapReduce scans entire files
- Seek time is **negligible** relative to transfer time at 128 MB
- Fewer blocks = **fewer metadata entries** in NameNode RAM

Block Size: Why 128 MB?

The Small File Problem

HDFS's Achilles' heel: if you store **millions of small files** (e.g., 1 KB each):

- Each file = at least 1 block = 1 metadata entry in NameNode
- 10 million files $\approx$ **10 million metadata objects** in RAM
- NameNode RAM exhaustion $\rightarrow$ cluster unusable
- Each task processes only 1 KB but incurs full task-startup overhead

Solutions:

- **HAR files**: bundle small files into a Hadoop Archive
- **SequenceFile**: merge small files into one large record file
- Ingest via **Kafka** $\rightarrow$ **micro-batch**: accumulate before writing to HDFS

HDFS: Replication, Read & Write Paths

Rack-Aware Replication Strategy

Default Replication Factor: 3


HDFS places three replicas of each block using a **rack-aware** policy to tolerate *both* node failure and rack failure:

- ❶ **Replica 1:** Same node as the writer client (data-local write)
- ❷ **Replica 2:** A different node in a *different rack* (off-rack)
- ❸ **Replica 3:** Another node in the *same rack as Replica 2* (for intra-rack bandwidth)

What Failures Are Tolerated?

- **Any 1 node fails:** 2 replicas remain; replication restored automatically
- **Entire Rack 1 fails:** Replicas 2 and 3 survive on Rack 2
- **Any 2 nodes fail simultaneously:** 1 replica remains; urgent re-replication triggered

Rack-Aware Replication Strategy

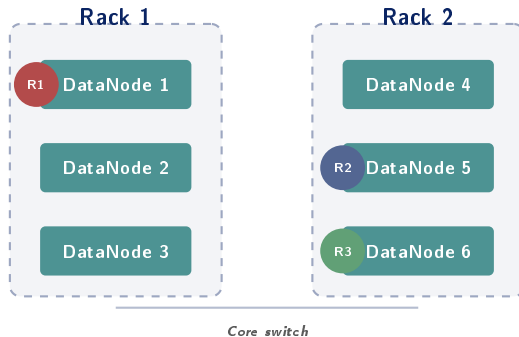


Configuring Replication

Default: `dfs.replication=3`. Change per-file: `hdfs dfs -setrep 2 /path/file`

HDFS Read Path

Read Sequence (6 Steps)

- 1 Client opens file via **DistributedFileSystem API**
- 2 **NameNode** returns ordered list of block locations (sorted by network proximity to client)
- 3 Client connects to the **closest DataNode** for Block 1 and reads it
- 4 Client reads Block 1; **checksum** verified on each chunk
- 5 Client moves to the next block → next-closest DataNode
- 6 Process repeats until all blocks read; client closes the stream

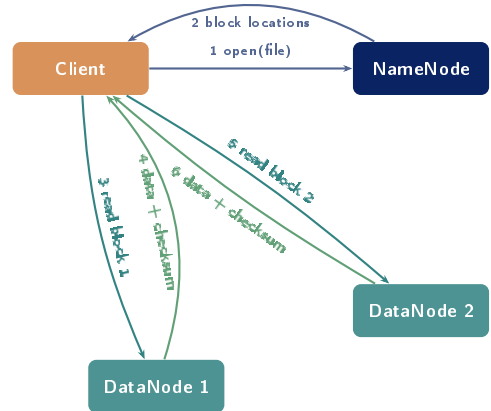

HDFS Write Path: Pipeline Replication


Write Sequence (7 Steps)

- 1 Client calls `create()` on NameNode
- 2 NameNode returns a **pipeline**: $[DN1 \rightarrow DN2 \rightarrow DN3]$
- 3 Client writes packets to **DN1 only**
- 4 DN1 forwards each packet to **DN2** (intra-rack)
- 5 DN2 forwards to **DN3** (cross-rack)
- 6 Acknowledgements flow **back through the pipeline**: $DN3 \rightarrow DN2 \rightarrow DN1 \rightarrow \text{Client}$
- 7 After all blocks written, client calls `close()`; NameNode records the file as complete

Write Failure Handling

If a DataNode fails mid-pipeline, HDFS removes it, forms a **new 2-node pipeline**, and schedules background re-replication later.

HDFS Write Path: Pipeline Replication

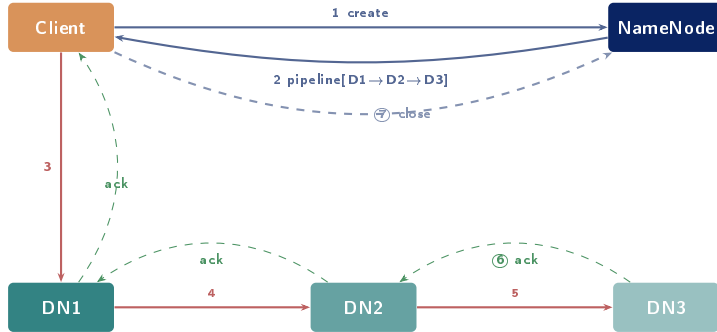

HDFS in Practice: Key CLI Commands

Essential HDFS Shell Commands

```
# List files in HDFS directory
hdfs dfs -ls /user/data/

# Upload local file to HDFS
hdfs dfs -put sales.csv /user/data/

# Download file from HDFS
hdfs dfs -get /user/data/sales.csv ./

# Read file contents
hdfs dfs -cat /user/data/sales.csv

# Delete file
hdfs dfs -rm /user/data/old.csv

# Create directory
hdfs dfs -mkdir /user/data/2024/

# Check cluster health
hdfs fsck / -files -blocks -locations

# Cluster status report
hdfs dfsadmin -report
```

HDFS in Practice: Key CLI Commands

Useful Admin Commands

```
# Change replication factor for a file  
hdfs dfs -setrep 2 /data/file.csv
```

```
# Check NameNode storage info  
hdfs dfs -df -h /
```

```
# Set quota on a directory  
hdfs dfsadmin \  
  -setSpaceQuota 500g \  
  /user/team_data/
```

```
# Safe-mode operations (NN startup)  
hdfs dfsadmin -safemode get  
hdfs dfsadmin -safemode leave
```

```
# Balance data across DataNodes  
hdfs balancer -threshold 10
```

HDFS in Practice: Key CLI Commands

HDFS vs POSIX

HDFS is **not** a POSIX filesystem. No random write support (append-only), no in-place updates, no mmap. Designed exclusively for **write-once, read-many** workloads.

Student Assessment Pool

Instructions

Select the single best answer. Correct answers **bolded** for instructor reference.

- Q1. What is the **default block size** in HDFS (Hadoop 2.x and later)?
- ☐ (a) 32 MB (b) 64 MB (c) **128 MB** (d) 256 MB
- Q2. In HDFS, which component stores the **metadata** (file-to-block mappings, directory tree, permissions)?
- ☐ (a) DataNode (b) **NameNode** (c) Secondary NameNode (d) ResourceManager

Instructor Notes

Q1: Hadoop 1.x default was 64 MB—students who read older textbooks may choose (b). The 128 MB default was introduced in Hadoop 2.0. **Q2:** Many students incorrectly select “Secondary NameNode”—reinforce that it performs checkpointing only, never stores primary metadata.

- Q3. What is the **default replication factor** for blocks in HDFS?
- Ⓐ 1 Ⓑ 2 Ⓒ 3 Ⓓ 5
- Q4. The **Secondary NameNode** in HDFS primarily serves as:
- Ⓐ A hot standby that takes over automatically when the primary NameNode fails
 - Ⓑ **A checkpoint service that periodically merges the Edit Log with the FsImage**
 - Ⓒ A dedicated node for storing small file metadata to reduce NameNode load
 - Ⓓ A load balancer that distributes client read requests across DataNodes

Instructor Notes

Q3: Replication factor 3 is the default but students should know it is *configurable* per-file. **Q4:** Option (a) is the most common wrong answer and represents the #1 misconception about HDFS. Spend class time on this distinction. Option (b) is the exact correct role.

Instructions

State True or False and provide a **one-sentence justification** for full marks.

Statement	Answer
1. HDFS is optimised for low-latency random-access reads of small records.	False
2. The Google File System paper (Ghemawat et al., 2003) directly inspired the design of HDFS.	True
3. In HDFS, computation (MapReduce tasks) is moved to the nodes that hold the data, rather than moving data to a compute server.	True
4. If the active NameNode crashes, the Secondary NameNode automatically becomes the new NameNode and the cluster continues without interruption.	False

Instructions

Answer each question in **100–150 words**. Include a diagram where indicated.

- Q1. Explain the **master/worker architecture** of HDFS. Identify each component's role and describe what happens to **under-replicated blocks** when a DataNode fails permanently.
- Q2. Why does HDFS use a **128 MB block size** rather than the 4 KB blocks used by traditional filesystems? Name one type of workload that *benefits* from large blocks and one that is *harmed* by them (explain why in each case).
- Q3. **Draw and explain** the Hadoop ecosystem stack. For each of the four layers (HDFS, MapReduce, YARN, Applications), state its role and give one concrete component or tool that belongs to that layer.

Instructions

Answer in **200–300 words** with step-by-step reasoning. Marks awarded for correct process, not just conclusion.

A1. Replication Recovery Trace:

A DataNode (DN4) that stores the **only** copies of blocks B7, B8, and B9 crashes permanently (it was hosting the 2nd replica of B7 and 3rd replica of B8, but the *only* replica of B9—the other DataNodes holding B9 also failed earlier).

- What does the NameNode do for B7 and B8 (under-replicated)?
- What is the situation for B9, and what does this mean for data that relied on it?
- How does the rack-aware replication policy determine *which* DataNodes receive the new replicas of B7 and B8?

A2. HDFS vs. NFS:

A university wants to store 50 TB of genomics research data that will be analysed by Spark jobs (sequential scans) but also queried interactively by individual researchers (random access to specific gene records). Compare HDFS and NFS on four dimensions (scale, fault tolerance, access pattern, cost) and recommend the appropriate system. Could a hybrid approach work? Justify.

Textbook & Reading References

Primary Textbooks for Week 3

- **[TW]** Tom White. *Hadoop: The Definitive Guide*, O'Reilly, 4th ed., 2015. **Chapters 1, 3**
 - Ch. 1: Meet Hadoop (motivation, history) · Ch. 3: HDFS (architecture, read/write, HA)
- **[SA]** Acharya & Chellappan. *Big Data and Analytics*, Wiley, 2015. **Chapter 3**
- **[TE]** Erl, Khattak & Buhler. *Big Data Fundamentals*, Prentice Hall, 2016. **Chapter 8**

Supplementary (Covered in Week 3, Part 2 — Research Article)

- Ghemawat, S., Gobioff, H., & Leung, S.-T. (2003). **The Google File System**. *ACM SOSP*, pp. 29–43. **[PRIMARY SEMINAL PAPER]**
- Shvachko, K., Kuang, H., Radia, S., & Chansler, R. (2010). **The Hadoop Distributed File System**. *IEEE MSST*. [How the GFS design was adapted for open-source Hadoop]

Strongly Recommended Online Resource

HDFS Architecture Guide (Apache official documentation):

<https://hadoop.apache.org/docs/stable/hadoop-project-dist/hadoop-hdfs/HdfsDesign.html>

Questions & Discussion

Week 3, Part 1 | CSE 4345 Big Data Analytics

“We have found that at our scale, the most effective approach to fault tolerance is the ruthless elimination of single points of failure, not heroic individual components.”

—Sanjay Ghemawat, Google File System (2003)

Next Lecture: Week 3, Part 2

Research Article: Ghemawat, Gobioff & Leung (2003) — *“The Google File System”*

Design principles · Chunk management · Consistency model · Master recovery

Case Study: Yahoo!’s 10,000-node Hadoop deployment (2008)

Reading before Part 2: [TW] Ch.1 & 3 · GFS paper (see reference slide)