
ProjectForge AI UML Class Diagram

Figure 2.3(a) Project data and specification classes

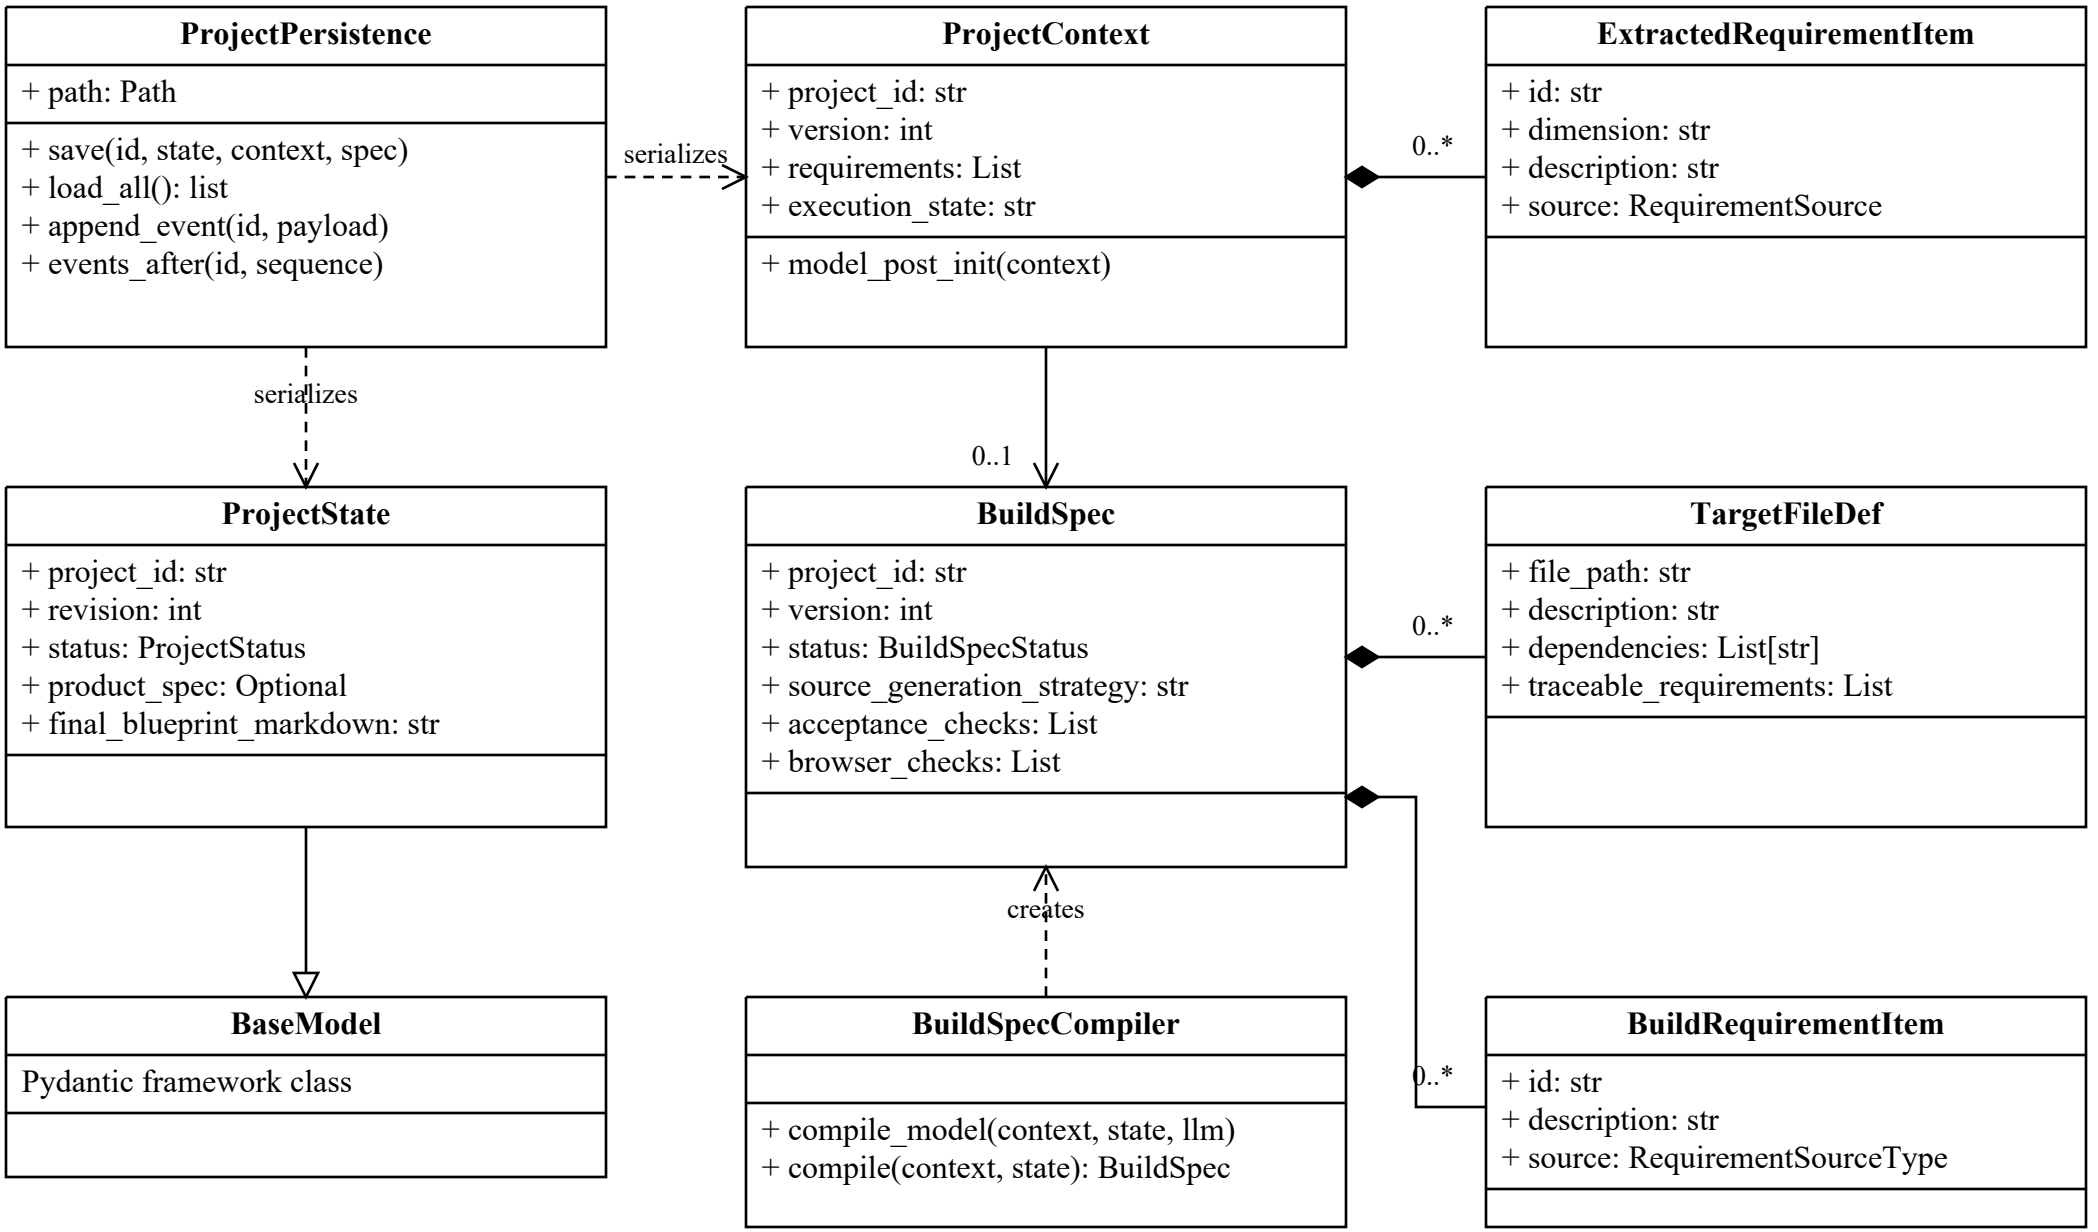


Selected members shown. ProjectState, ProjectContext and BuildSpec are Pydantic models.

SQLite tables: snapshots, history, events. Nested JSON models are not separate SQL tables.

UML: filled diamond = composition; hollow diamond = aggregation; dashed arrow = dependency; hollow triangle = inheritance.

ProjectForge AI UML Class Diagram

Figure 2.3(b) Specialist agents and model access

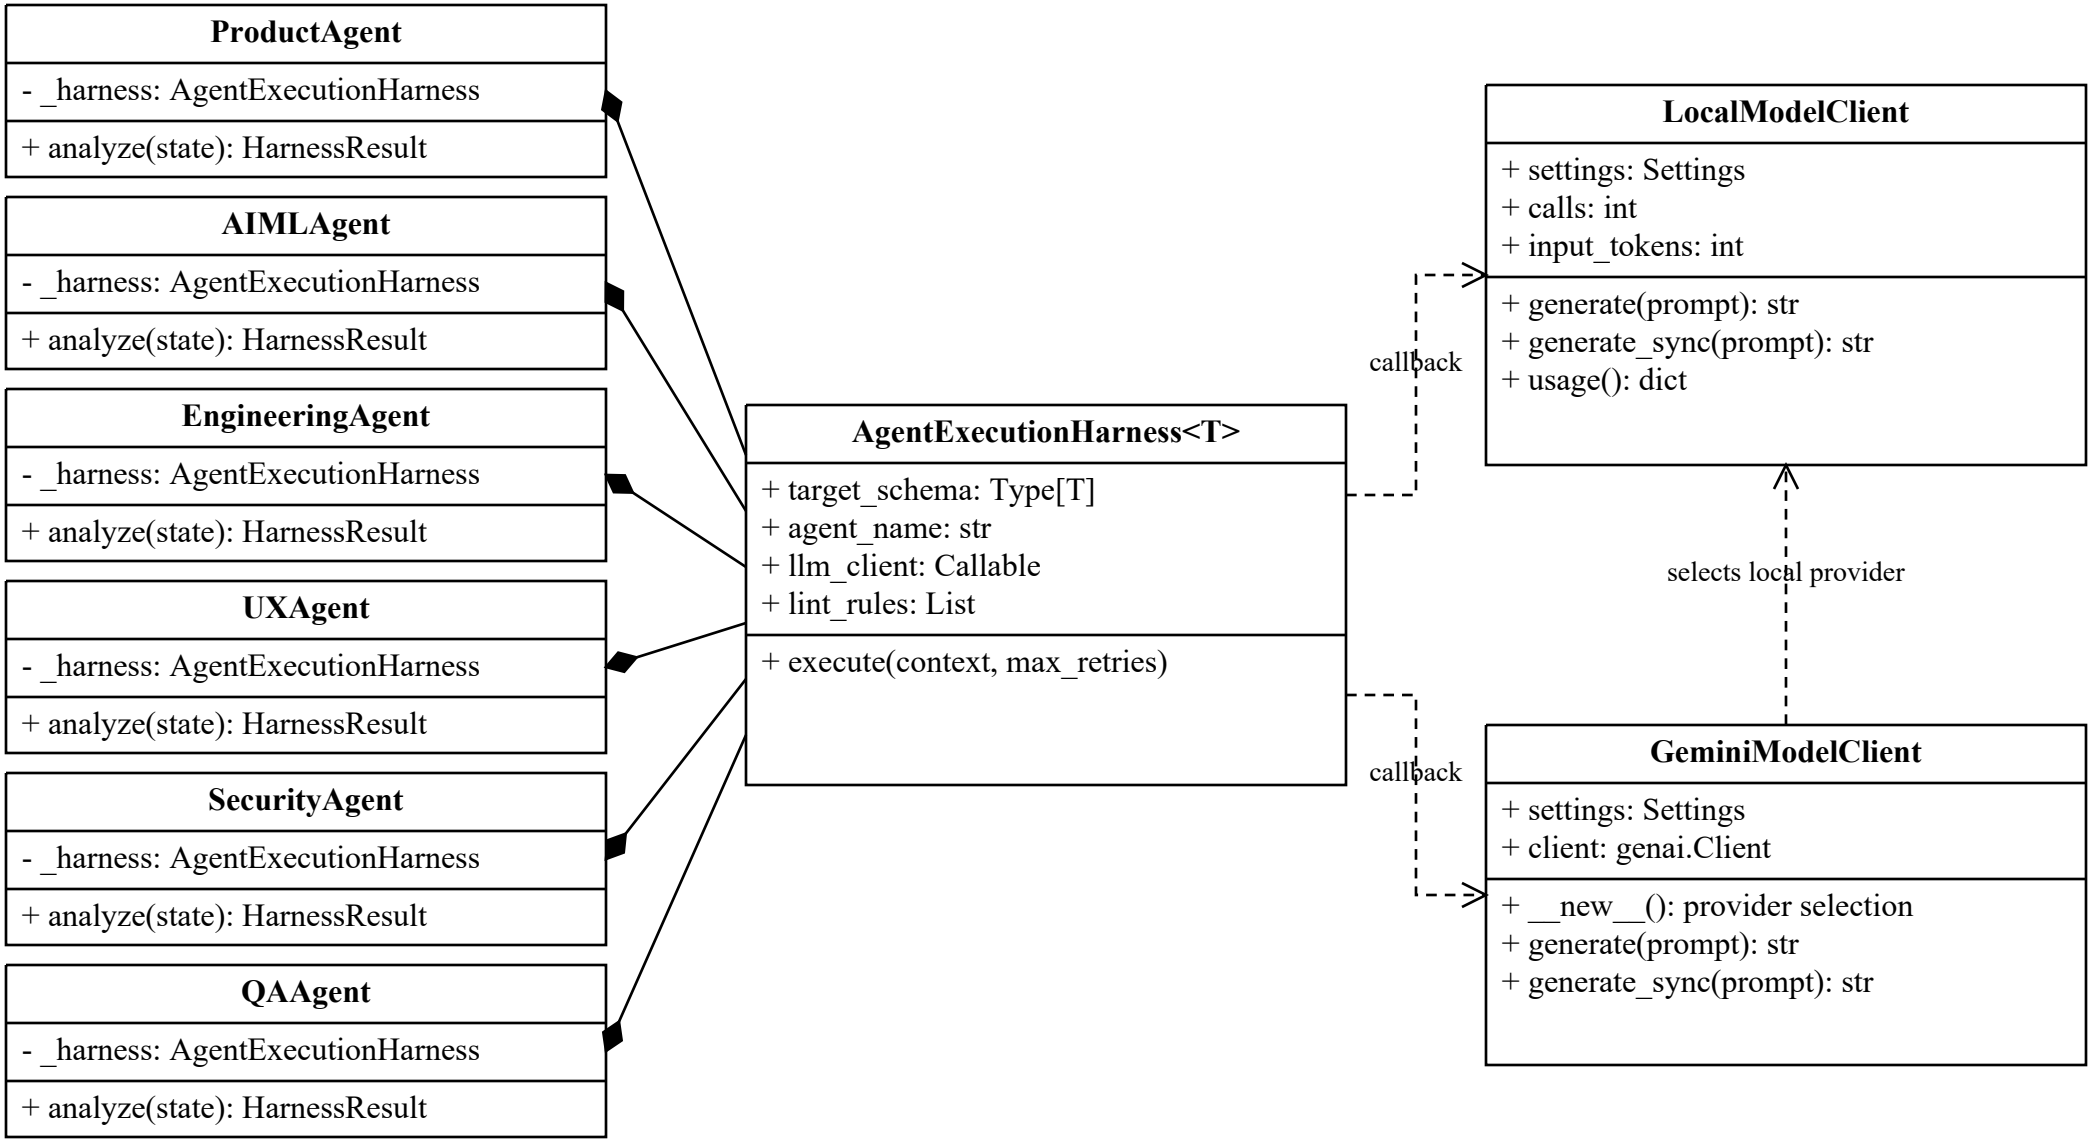


Each agent owns its own harness instance; six agents do not share one harness object.

LocalModelClient and GeminiModelClient are alternative providers, not subclasses of each other.

UML: filled diamond = composition; hollow diamond = aggregation; dashed arrow = dependency; hollow triangle = inheritance.

ProjectForge AI UML Class Diagram

Figure 2.3(c) Source generation and isolated verification

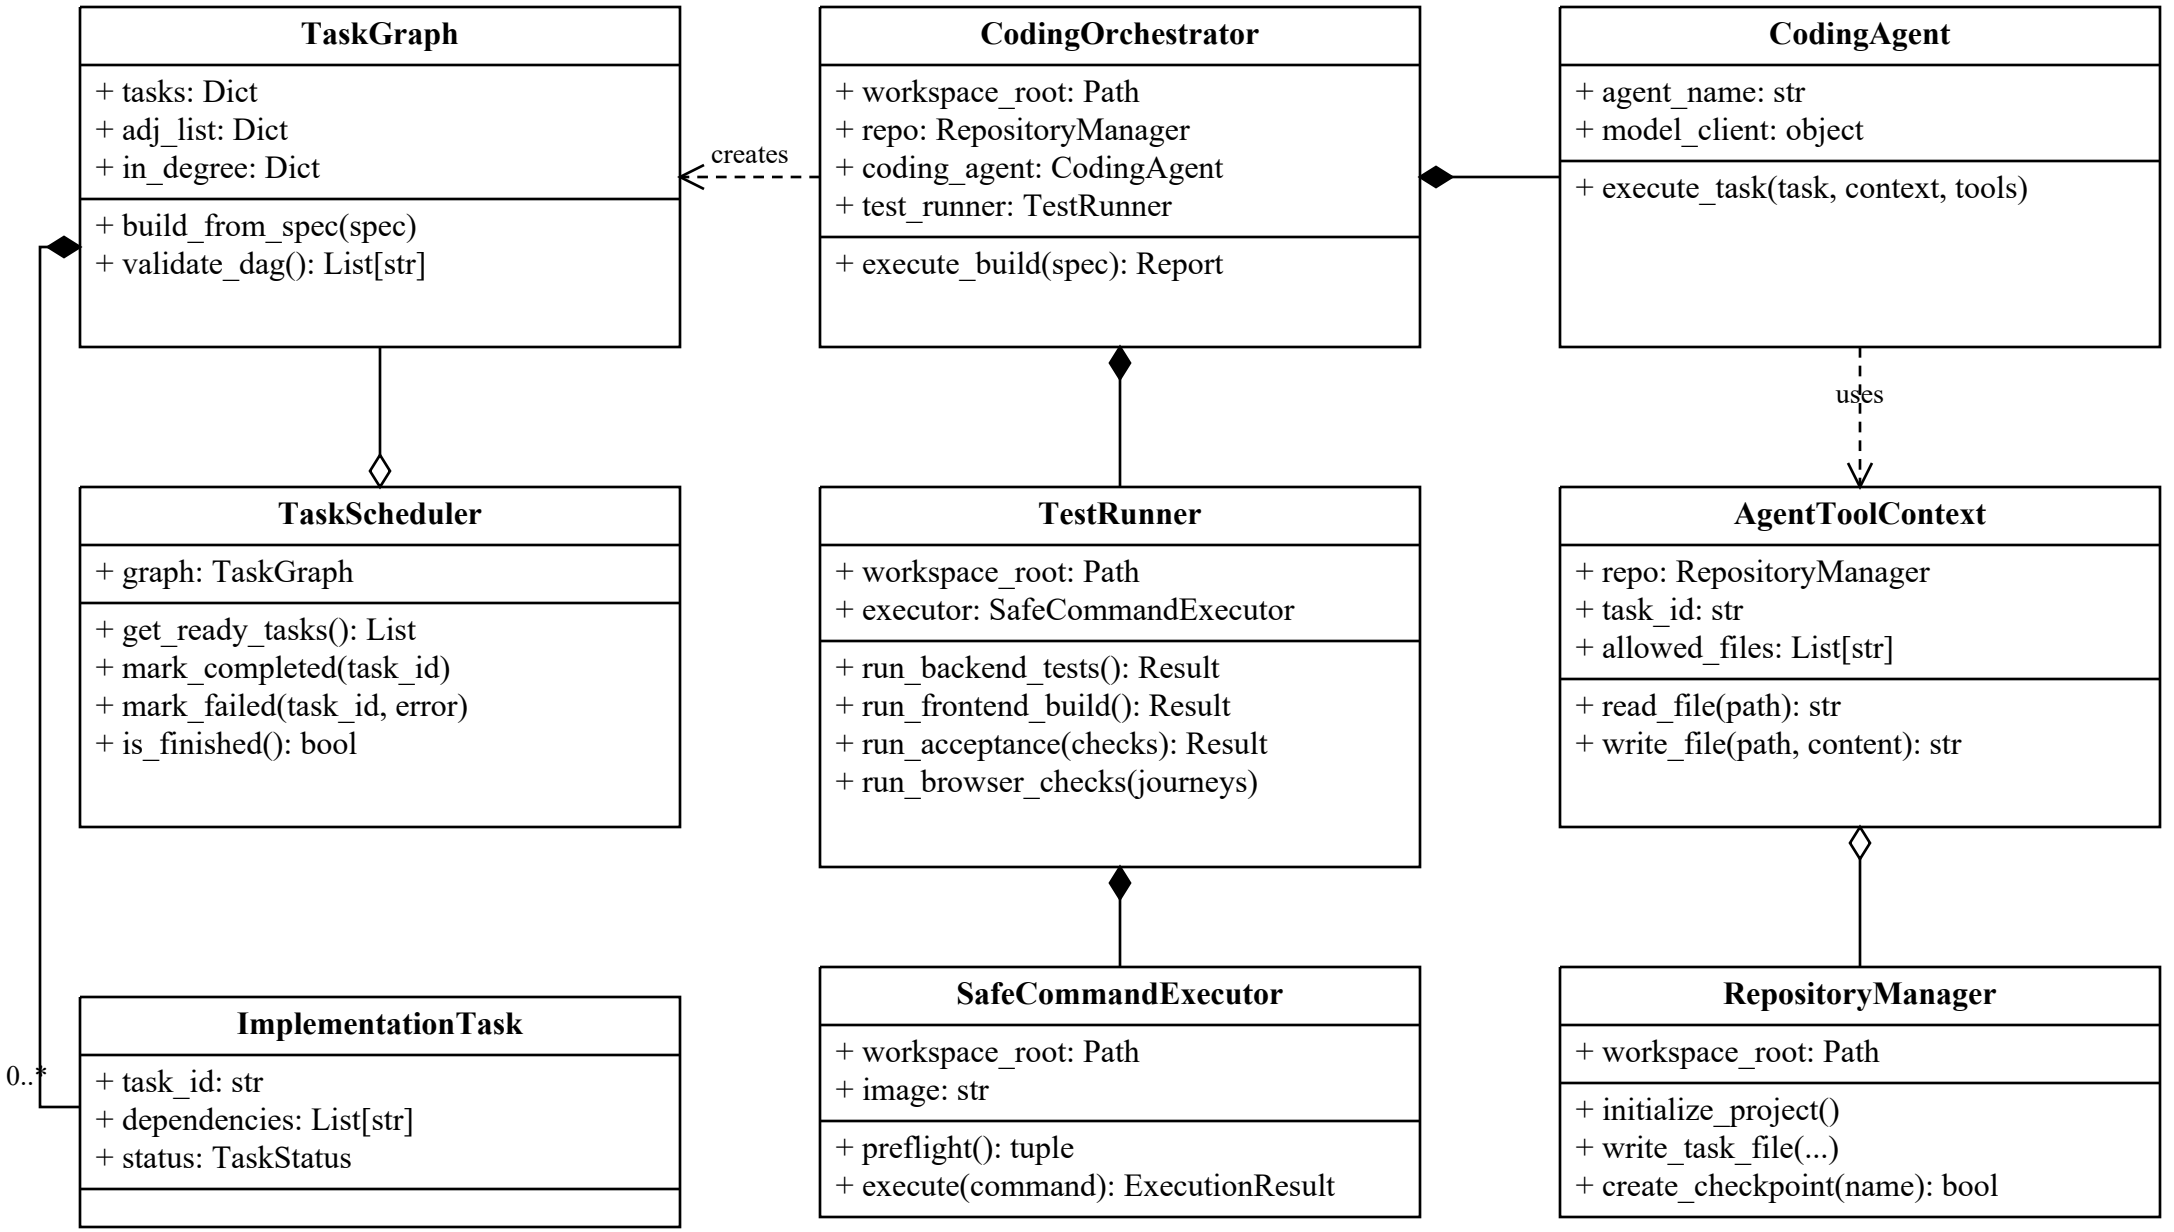

Graph and scheduler are created inside execute_build(); their links are dependencies, not stored fields.

Selected core classes only. Repair, conflict-resolution and blueprint helper details are omitted.

UML: filled diamond = composition; hollow diamond = aggregation; dashed arrow = dependency; hollow triangle = inheritance.