
ProjectForge AI UML Class Diagram

Figure 2.3(a) Project data and specification classes

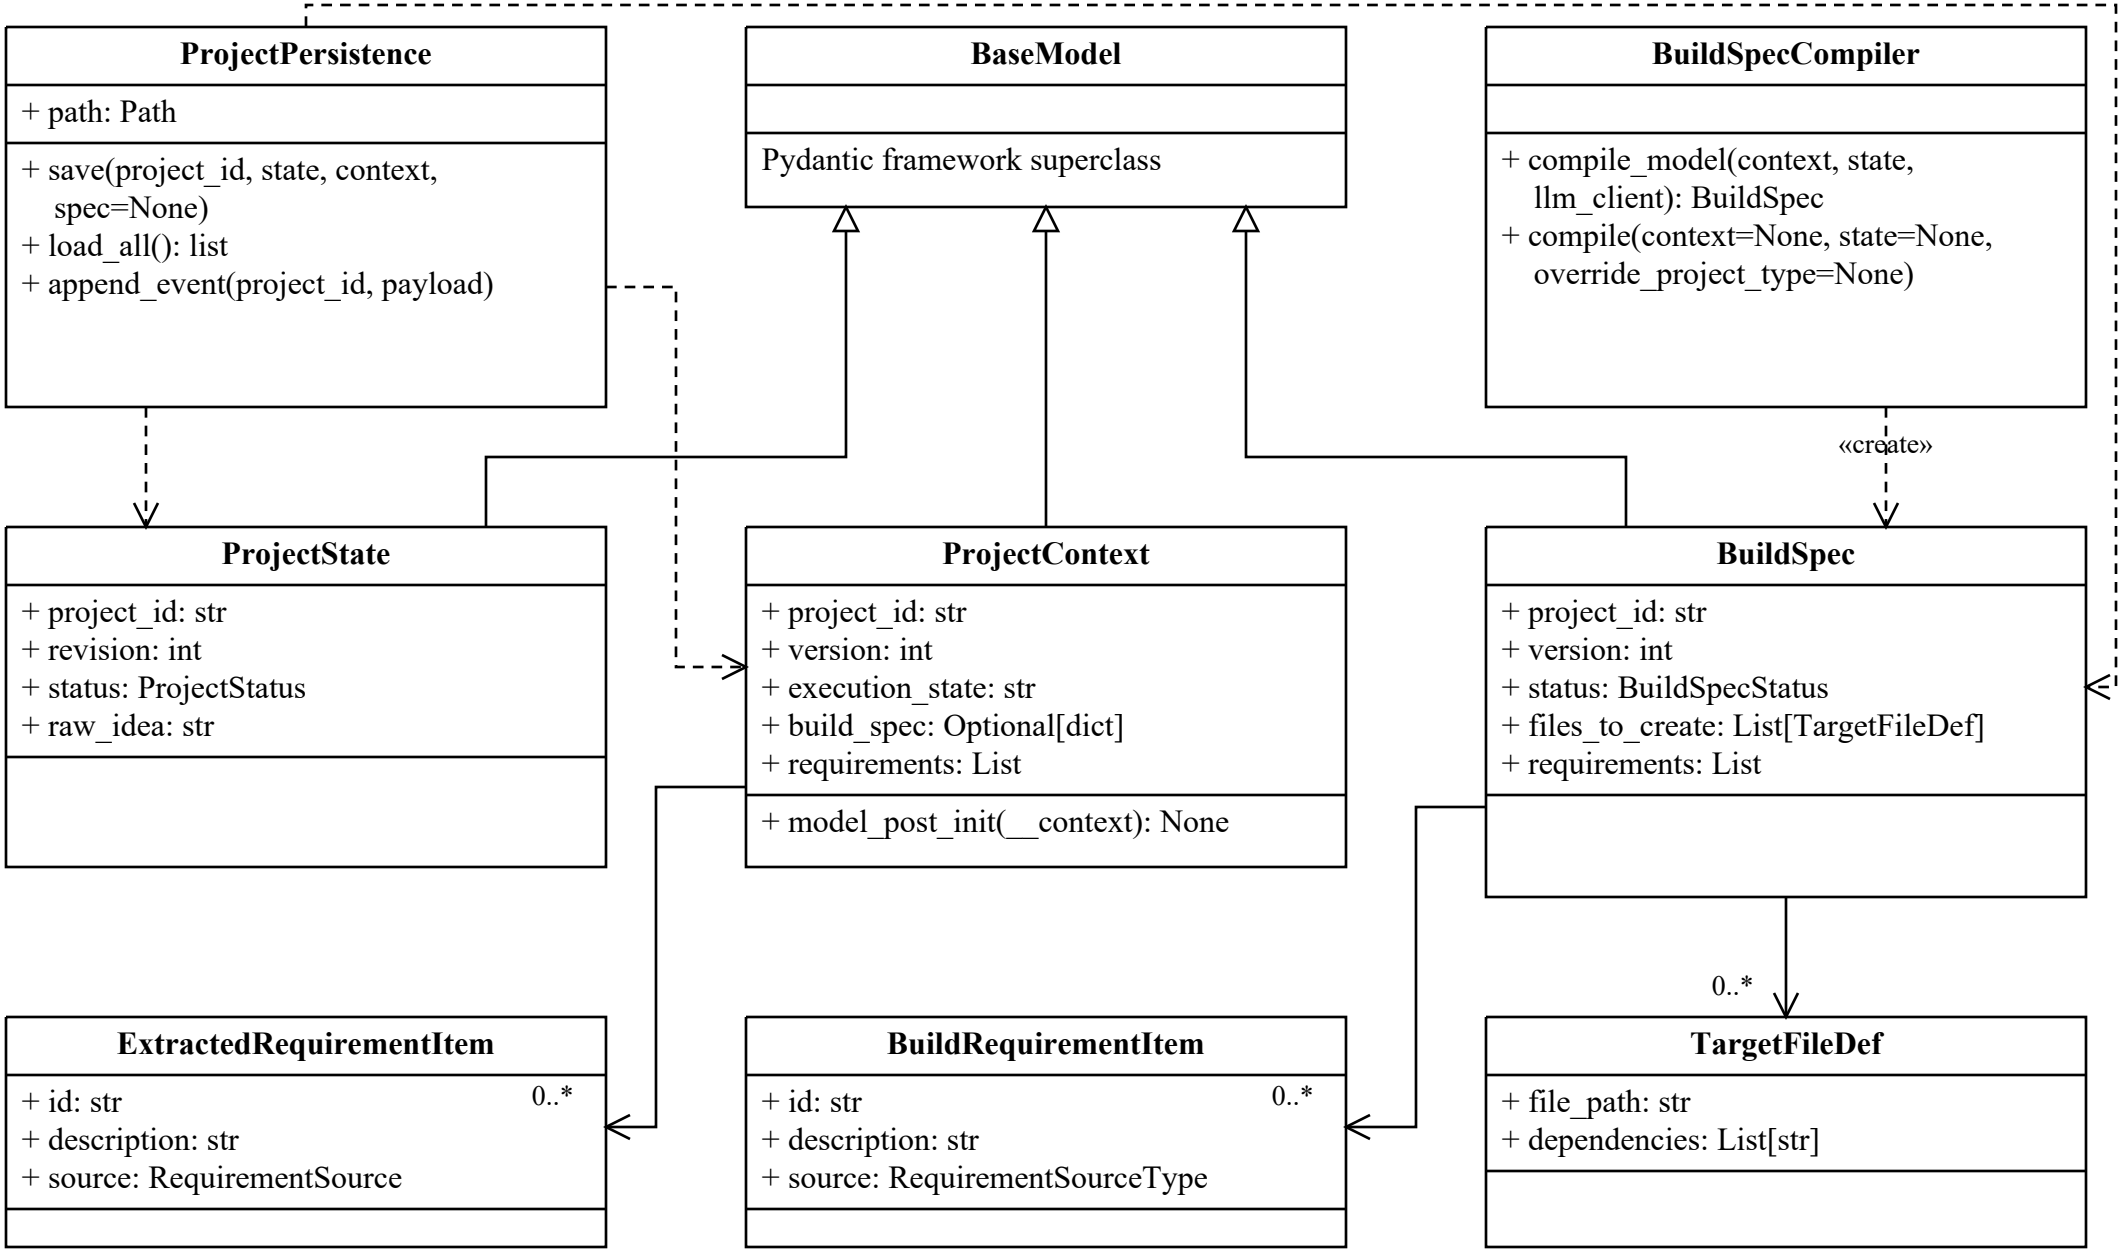


build_spec is an optional serialized dict, not a stored BuildSpec instance. No object association is asserted.

Persistence serializes state/context/spec. Nested lists use associations; exclusive lifecycle ownership is not enforced.

UML: filled diamond = composition; hollow diamond = aggregation; dashed arrow = dependency; hollow triangle = inheritance.

ProjectForge AI UML Class Diagram

Figure 2.3(b) Specialist harnesses and provider selection

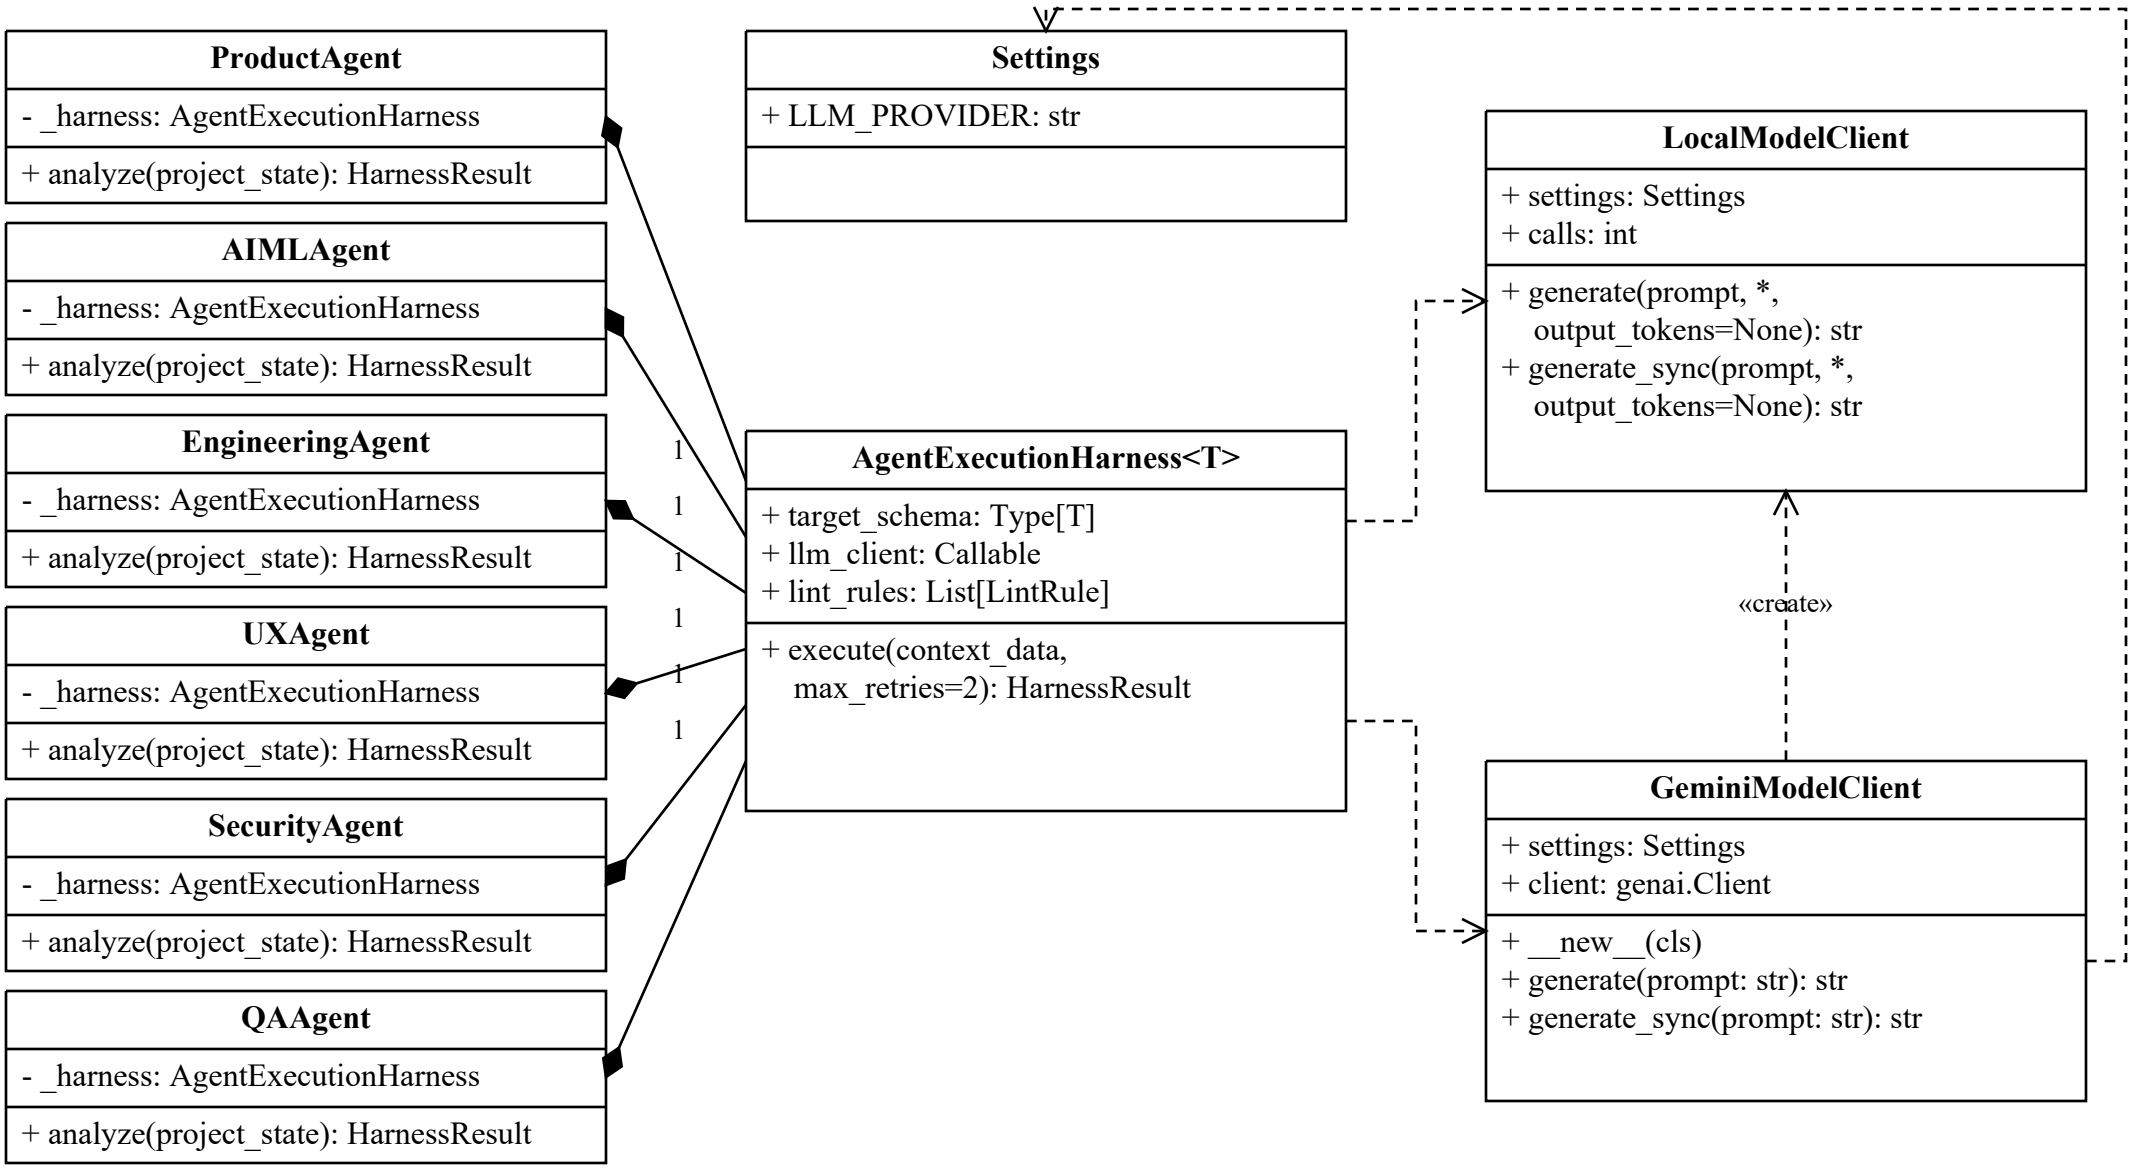


__new__(): lmstudio -> LocalModelClient(); gemini -> Gemini instance; other providers raise ModelUnavailableError.

Each agent creates its own harness. Harness callbacks bind the selected provider generate(); there is no provider inheritance.

UML: filled diamond = composition; hollow diamond = aggregation; dashed arrow = dependency; hollow triangle = inheritance.

ProjectForge AI UML Class Diagram

Figure 2.3(c) Build ownership and execution collaborators

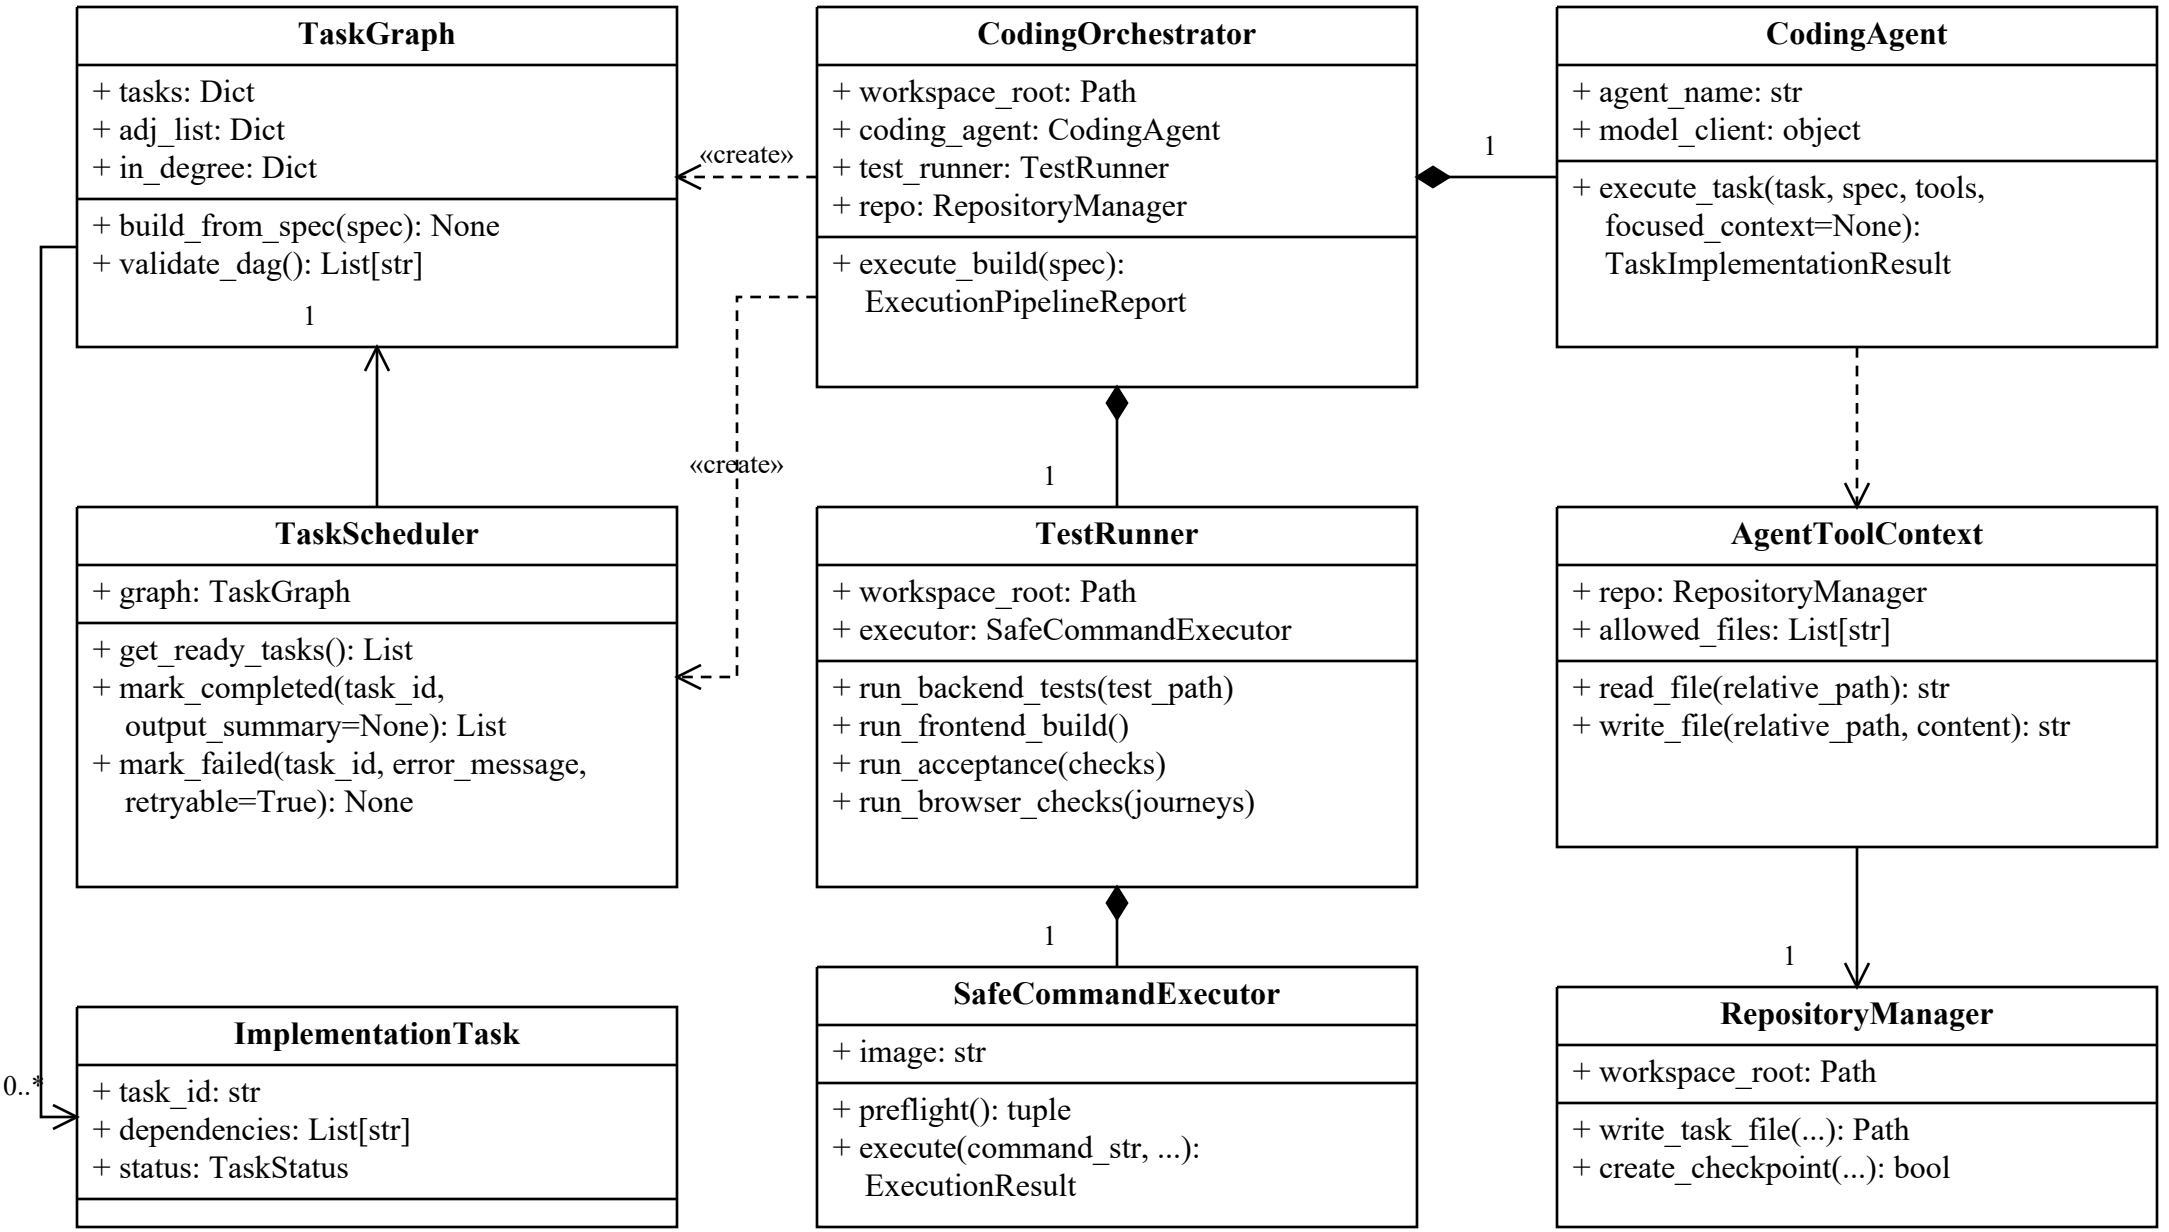

TaskGraph and TaskScheduler are local variables in execute_build(), not permanent CodingOrchestrator attributes.

Associations denote references, not whole-part ownership. Ellipses abbreviate selected method parameters.

UML: filled diamond = composition; hollow diamond = aggregation; dashed arrow = dependency; hollow triangle = inheritance.