

Lab-11 PHP

1. Write a PHP function generateFibonacci(\$terms = 10) that prints the Fibonacci series. The function should accept an optional argument for the number of terms. If no value is provided, it should default to 10 terms.

Code:

```
<?php
function generateFibonacci($terms = 10)
{
    $a = 0;
    $b = 1;


    echo "Fibonacci Series ($terms terms): ";

    for ($i = 0; $i < $terms; $i++) {
        echo $a . " ";
        $next = $a + $b;
        $a = $b;
        $b = $next;
    }

    echo "<br>";
}

// function calls
generateFibonacci();    // default 10 terms
generateFibonacci(15); // 15 terms
?>
```

Output:



Fibonacci Series (10 terms): 0 1 1 2 3 5 8 13 21 34

Fibonacci Series (15 terms): 0 1 1 2 3 5 8 13 21 34 55 89 144 233 377

2. Write a function findMax() that accepts multiple numbers as arguments and returns the maximum number from the given inputs.


Code:

```
<?php
function findMax()
{
    $numbers = func_get_args(); // get all arguments
    $max = $numbers[0];

    for ($i = 1; $i < count($numbers); $i++) {
        if ($numbers[$i] > $max) {
            $max = $numbers[$i];
        }
    }
}
```

```
    }  
}  
  
    return $max;  
}  
  
// function calls  
echo "Max Value: " . findMax(10, 25, 99, 45) . "<br>";  
echo "Max Value: " . findMax(1000, 200, 50) . "<br>";  
echo "Max Value: " . findMax(12, 48, 30) . "<br>";  
?>
```

Output:

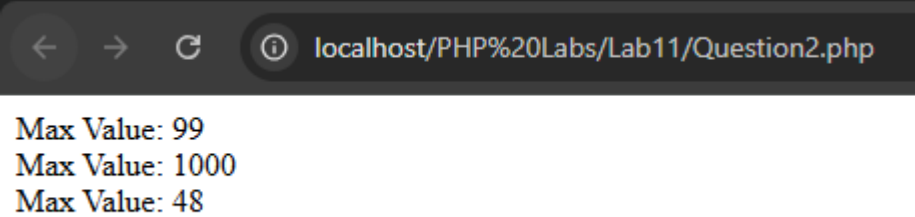

Max Value: 99
Max Value: 1000
Max Value: 48