

Lab-6 PHP

1. Write a function to count the number of vowels and consonants in a given string.

Code:


```
<?php
function countVowelsConsonants($str) {
    $str = strtolower($str);
    $vowels = 0;
    $consonants = 0;

    for ($i = 0; $i < strlen($str); $i++) {
        if (ctype_alpha($str[$i])) {
            if (in_array($str[$i], ['a','e','i','o','u'])) {
                $vowels++;
            } else {
                $consonants++;
            }
        }
    }

    echo "Vowels: $vowels <br>";
    echo "Consonants: $consonants";
}

countVowelsConsonants("Hello World");
?>
```

Output:



Vowels: 3
Consonants: 7


2. Validate if a given string contains only numbers.

Code:

```
<?php
function onlyNumbers($str) {
    if (ctype_digit($str)) {
        echo "String contains only numbers";
    } else {
        echo "String does NOT contain only numbers";
    }
}
```

```
onlyNumbers("12345");
?>
```

Output:

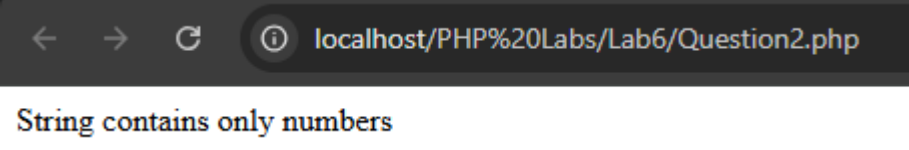

String contains only numbers

3.Filter an array of numbers, returning only even numbers.


Code:

```
<?php
$numbers = [1, 2, 3, 4, 5, 6, 7, 8];

$evenNumbers = array_filter($numbers, function($num) {
    return $num % 2 == 0;
});

print_r($evenNumbers);
?>
```

Output:

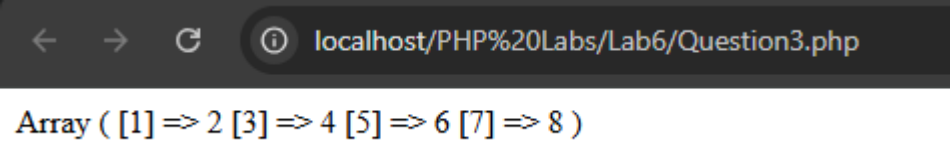

Array ([1] => 2 [3] => 4 [5] => 6 [7] => 8)

4.Sort an array of names by their length instead of alphabetical order.


Code:

```
<?php
$names = ["Ravi", "Amitabh", "Neha", "Raj"];

usort($names, function($a, $b) {
    return strlen($a) - strlen($b);
});

print_r($names);
?>
```

Output:

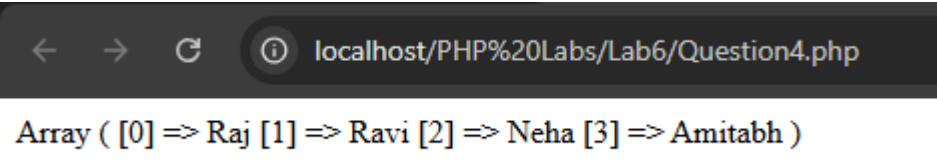

Array ([0] => Raj [1] => Ravi [2] => Neha [3] => Amitabh)

5. Create a function that reverses each word in a sentence while keeping the word order intact. Example: "Hello World" → "olleH dlroW"

Code:

```
<?php
function reverseWords($sentence) {
    $words = explode(" ", $sentence);
    $result = [];

    foreach ($words as $word) {
        $result[] = strrev($word);
    }

    return implode(" ", $result);
}

echo reverseWords("Hello World");
?>
```

Output:

