
 Marwadi University Marwadi Chandarana Group 	Marwadi University Faculty of Engineering & Technology Department of Information and Communication Technology	
Subject: Programming With Python (01CT1309)	Aim: Practical based on Data Visualization with Seaborn	
Experiment No: 27	Date:	Enrollment No: 92400133055

[GITHUB](#)

Aim: Practical based on Data Visualization with Seaborn

IDE:

Installation

pip install seaborn

Histplot: Seaborn Histplot is used to visualize the univariate set of distributions(single variable). It plots a histogram, with some other variations like kdeplot and rugplot.

```
import numpy as np
```

```
import seaborn as sns
```

```
sns.set(style="white")
```

```
# Generate a random univariate dataset
```



```
rs = np.random.RandomState(10)
```

```
d = rs.normal(size=100)
```

```
# Plot a simple histogram and kde
```


```
sns.histplot(d, kde=True, color="m")
```



Output

 Marwadi University Marwadi Chandarana Group 	Marwadi University Faculty of Engineering & Technology Department of Information and Communication Technology	
Subject: Programming With Python (01CT1309)	Aim: Practical based on Data Visualization with Seaborn	
Experiment No: 27	Date:	Enrollment No: 92400133055

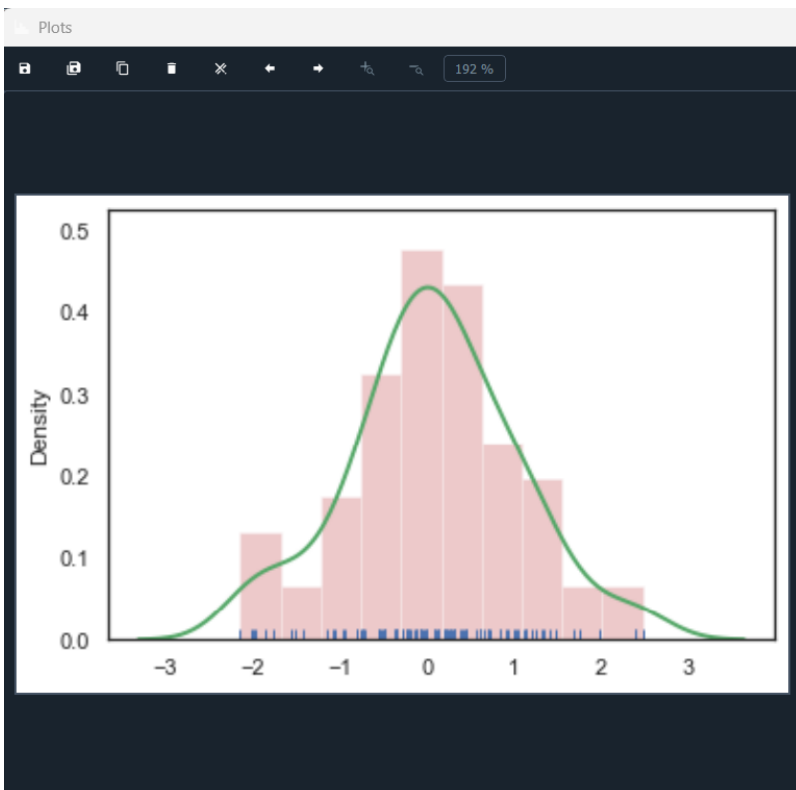

Distplot: Seaborn distplot is used to visualize the univariate set of distributions(Single features) and plot the histogram with some other variations like kdeplot and rugplot.



 Marwadi University Marwadi Chandarana Group 	Marwadi University Faculty of Engineering & Technology Department of Information and Communication Technology	
Subject: Programming With Python (01CT1309)	Aim: Practical based on Data Visualization with Seaborn	
Experiment No: 27	Date:	Enrollment No: 92400133055

Lineplot: The line plot is one of the most basic plots in the seaborn library. This plot is mainly used to visualize the data in the form of some time series, i.e. in a continuous manner.

```
import seaborn as sns



sns.set(style="dark")


fmri = sns.load_dataset("fmri")

# Plot the responses for different\
# events and regions

sns.lineplot(x="timepoint",
             y="signal",
             hue="region",
             style="event",
             data=fmri)

output
```

 Marwadi University Marwadi Chandarana Group 	Marwadi University Faculty of Engineering & Technology Department of Information and Communication Technology	
Subject: Programming With Python (01CT1309)	Aim: Practical based on Data Visualization with Seaborn	
Experiment No: 27	Date:	Enrollment No: 92400133055

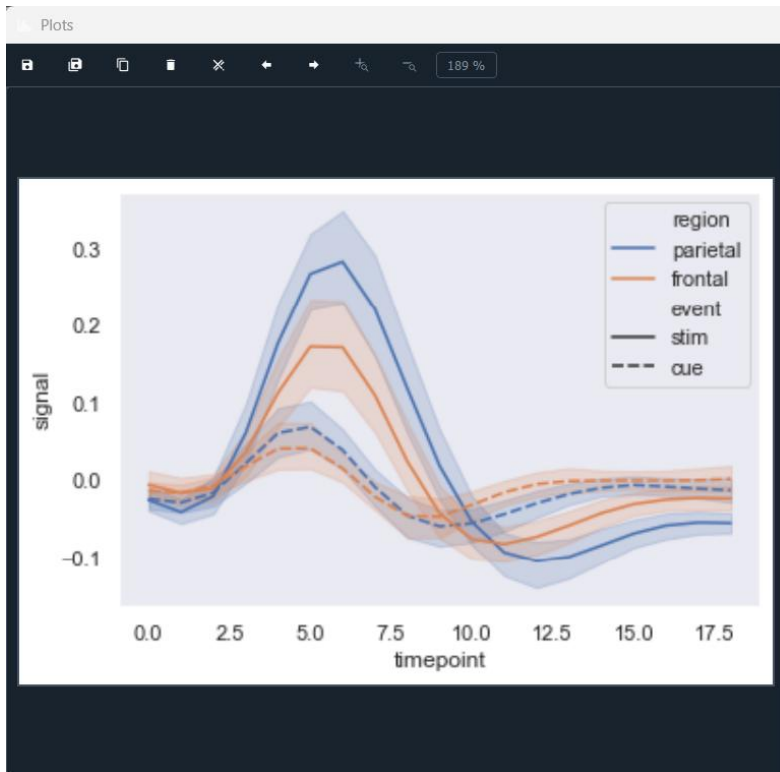

Implot: The Implot is another most basic plot. It shows a line representing a linear regression model along with data points on the 2D space and x and y can be set as the horizontal and vertical labels respectively.

```
import seaborn as sns
```

```
sns.set(style="ticks")
```



```
# Loading the dataset
```


```
df = sns.load_dataset("anscombe")
```

```
# Show the results of a linear regression
```

```
sns.lmplot(x="x", y="y", data=df)
```



Output

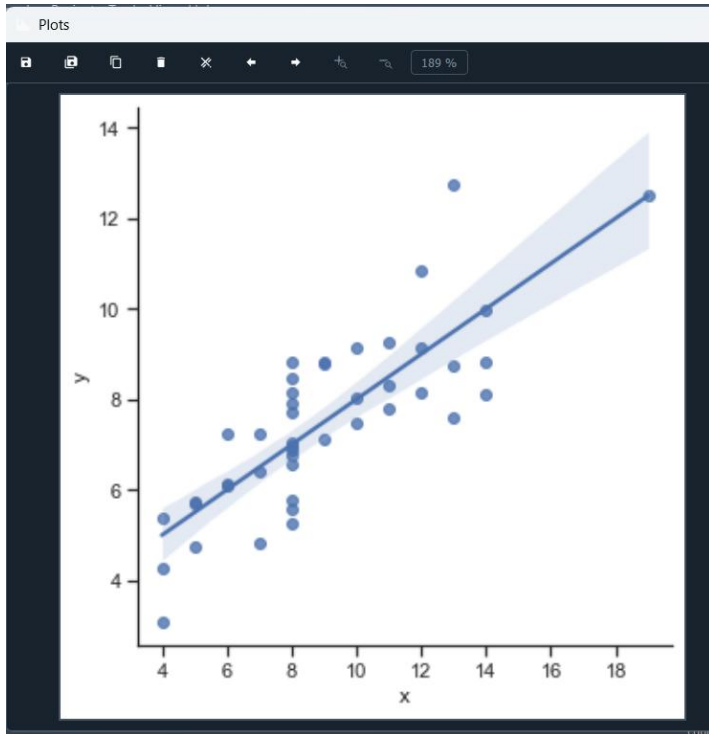 Marwadi University Marwadi Chandarana Group 	Marwadi University Faculty of Engineering & Technology Department of Information and Communication Technology	
Subject: Programming With Python (01CT1309)	Aim: Practical based on Data Visualization with Seaborn	
Experiment No: 27	Date:	Enrollment No: 92400133055



Post Lab

Visualize the data with a box plot and pandas:

 Marwadi University Marwadi Chandarana Group 	Marwadi University Faculty of Engineering & Technology Department of Information and Communication Technology	
Subject: Programming With Python (01CT1309)	Aim: Practical based on Data Visualization with Seaborn	
Experiment No: 27	Date:	Enrollment No: 92400133055

```
import pandas as pd
```

```
import seaborn as sns
```


```
# initialise data of lists
```

```
data = {'Name': [ 'Mohe' , 'Karnal' , 'Yrik' , 'jack' ],
```

```
        'Age': [ 30 , 21 , 29 , 28 ]}
```



```
df = pd.DataFrame( data )
```
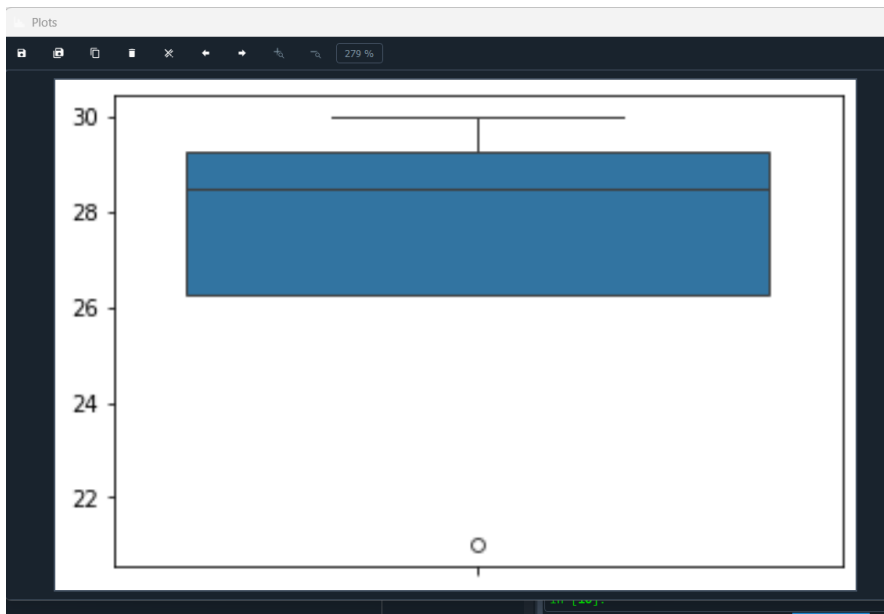
```
sns.boxplot( data['Age'] )
```



Draw the violin plot with Pandas

```
import pandas as pd
```

 Marwadi University Marwadi Chandarana Group 	Marwadi University Faculty of Engineering & Technology Department of Information and Communication Technology	
Subject: Programming With Python (01CT1309)	Aim: Practical based on Data Visualization with Seaborn	
Experiment No: 27	Date:	Enrollment No: 92400133055

```
import seaborn as sns

# initialise data of lists

data = {'Name': [ 'Mohe' , 'Karnal' , 'Yrik' , 'jack' ],
        'Age': [ 30 , 21 , 29 , 28 ]}

df = pd.DataFrame( data )

sns.violinplot(data['Age'])
```

