

GOOGLE ADS API BASIC ACCESS

Axyro Analytics

Private Google Ads Analytics & Control Center

Design, security, workflow, and interface evidence

Operator	Iskhakov Ruslan
Legal status	Individual; no registered company
Product status	Independent software project; not a separate legal entity
Website	https://axyro.tech
Developer-token MCC	558-933-5362
Google Cloud Project Number	1044664056304
Contact	support@axyro.tech
Document date	August 18, 2026

This document contains no Developer Token, OAuth Client Secret, refresh token, access token, password, encryption key, or private key.

1. Executive summary

Axyro Analytics is an independent Google Ads analytics and operations software project operated by Iskhakov Ruslan, an individual. Axyro Analytics is the project name, not a registered company or separate legal entity. The private tool consolidates connected manager and advertising accounts into a single control center.

The platform synchronizes account hierarchy, campaign performance metrics, conversion data, policy and verification statuses, operational issues, and change history. Its sole user can analyze accounts across different geographic markets, apply filters and saved views, compare performance, review alerts, maintain notes, and export reports.

The primary purpose of the tool is centralized reporting, performance analysis, account monitoring, and operational control.

The platform also includes secondary campaign management functions. Authorized users can create validated Demand Gen campaigns, pause or enable selected campaigns, and update budgets. All write operations are explicitly initiated by a user, validated before execution, confirmed in the interface, recorded in an audit log, and protected by production safety controls. Newly created campaigns are created in a paused state by default.

Only Iskhakov Ruslan currently has access. There are no employees, contractors, external clients, or public users, and the platform is not offered as a public self-service advertising product.

Primary use: reporting, analytics and monitoring. Secondary use: explicitly confirmed campaign management operations.

2. Why Basic Access is required

Basic Access is required to analyze and manage production Google Ads accounts that Iskhakov Ruslan is authorized to access through his manager account. Test accounts do not serve ads and therefore cannot provide the real performance metrics, conversion data, policy statuses, verification states, account activity, and operational history required to validate the analytics and monitoring functions of the platform.

The requested access will be used only for accounts that Iskhakov Ruslan is authorized to manage and that are linked to his Google Ads manager account.

3. Ownership, business model, and audience


The applicant and operator is Iskhakov Ruslan, an individual developer and advertiser who does not represent a registered company. Axyro Analytics is a project name used for his privately operated software; it is not a separate legal entity, advertising agency, public SaaS product, or API resale service.

The current deployment is used only by Iskhakov Ruslan through the owner ADMIN account. No employee, contractor, external client, or other person has access. The role types below are technical authorization boundaries and do not imply that a team currently uses the application.

- ADMIN - protected connections, permitted confirmations, settings, and audit review.
- OPERATOR - analytics, planning, and permitted operational workflows.
- VIEWER - read-only reporting and monitoring.

4. Architecture and credential boundary

The production deployment uses seven isolated Docker services. PostgreSQL is the source of truth; Redis transports bounded background work. Google Ads protocol objects and credentials remain inside the backend adapter.

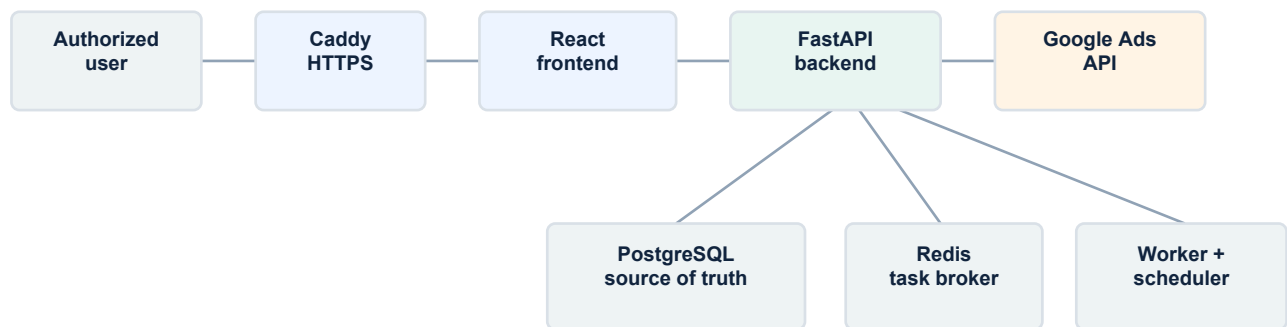

Credentials and Google protocol objects remain behind the backend boundary.

- Caddy terminates HTTPS and proxies only the public frontend and /api routes.
- React frontend never receives the Developer Token, OAuth Client Secret, access token, refresh token, or encryption key.
- FastAPI enforces server-side sessions, CSRF, role authorization, trusted hosts, CORS, and audit recording.
- Celery worker and scheduler execute bounded, persisted jobs; queued does not mean successful.
- A versioned Google Ads adapter isolates GAQL, validate_only, mutate, readback, error codes, and Request IDs.

5. OAuth and MCC discovery

OAuth uses the Google Ads scope, exact HTTPS callback, state, PKCE, short-lived authorization records, and encrypted refresh-token storage.

Public callback: https://axyro.tech/api/google-connections/oauth/callback	
Production developer-token MCC	558-933-5362
Isolated Google Test MCC	383-107-3849
Verified test clients	183-386-9760 and 804-728-0949
Discovery	ListAccessibleCustomers + recursive customer_client GAQL + customer GAQL

6. Google Ads API operations

Primary read operations	Secondary write operations
Accessible customers and MCC hierarchy Account and campaign configuration Cost, impressions, clicks, CTR, CPC Mapped registrations, deposits, and CPA Policy and verification status Change history and supported billing data Post-operation GAQL readback	Validated Demand Gen creation Pause selected campaigns Enable selected campaigns Update selected campaign budgets Every write is user initiated, previewed, validated, explicitly confirmed, audited, and read back.

Current production state: API Center shows Test Account Access. Production mutation is hard-blocked and production mutation count is zero.

7. Validated campaign deployment

- Select an authorized connection, MCC, and child accounts.
- Build an immutable preliminary campaign plan.
- Validate schema, budgets, targeting, assets, URLs, and domain availability or reputation.
- Refresh account and hierarchy state and call Google Ads `validate_only`.
- Present the complete plan and financial preview.
- Require explicit confirmation from the same authenticated user.
- Create each new campaign in `PAUSED`; never enable it automatically.
- Read every resource back and store results and Request IDs in AuditLog.

8. Manual campaign control

`PAUSE`, `ENABLE`, and budget updates use fresh read, preview, confirmation, stale-state rejection, `validate_only`, `mutate`, Request ID persistence, GAQL readback, comparison, and audit. Success is reported only after matching readback.

9. Production safety controls

- Current hard production-mutation block while Basic Access is pending.
- Server-side role authorization and exact connection/target hierarchy checks.
- Exact login_customer_id and fresh confirmation that the target is a client, not an MCC.
- Immutable preview fingerprint and stale-state rejection.
- Local validation, Google validate_only, and explicit confirmation.
- Idempotency keys, duplicate protection, bounded retries, and circuit breaker.
- Campaign-level failure isolation; unrelated package items may continue safely.
- 15,000-operation internal daily planning limit with a 20% manual reserve.
- AuditLog, Google Request IDs, and post-mutation readback.
- Automatic rules remain DRY RUN by default.

10. Security, audit, retention, and deletion

Transport	HTTPS, HSTS, reverse-proxy security headers
Authentication	Server-side sessions, secure cookies, CSRF, roles
OAuth protection	Exact callback, state, PKCE, encrypted refresh tokens
Secrets	Backend only; redacted from responses, logs, exports, and screenshots
Audit	Actor, action, old/requested/actual values, mode, resources, Request IDs
Errors	Google code, category, safe message, Request ID; never masked as success
Disconnect	Stored refresh token for the connection is cleared immediately
Backups	Encrypted production backup rotation: 14 days
Deletion contact	support@axyro.tech


11. Public documentation

- [Product page - https://axyro.tech/](https://axyro.tech/)
- [Privacy Policy - https://axyro.tech/privacy](https://axyro.tech/privacy)
- [Terms of Use - https://axyro.tech/terms](https://axyro.tech/terms)
- [This PDF - public copy](#)

Axyro Analytics is an independent software project operated by Iskhakov Ruslan, an individual. It is not a registered company or separate legal entity and is not affiliated with, endorsed by, or sponsored by Google.

Interface evidence 1: overall analytics dashboard

The Control Center is the primary product surface. It combines account totals, spend, campaign activity, attention states, operation planning, and a portfolio table.

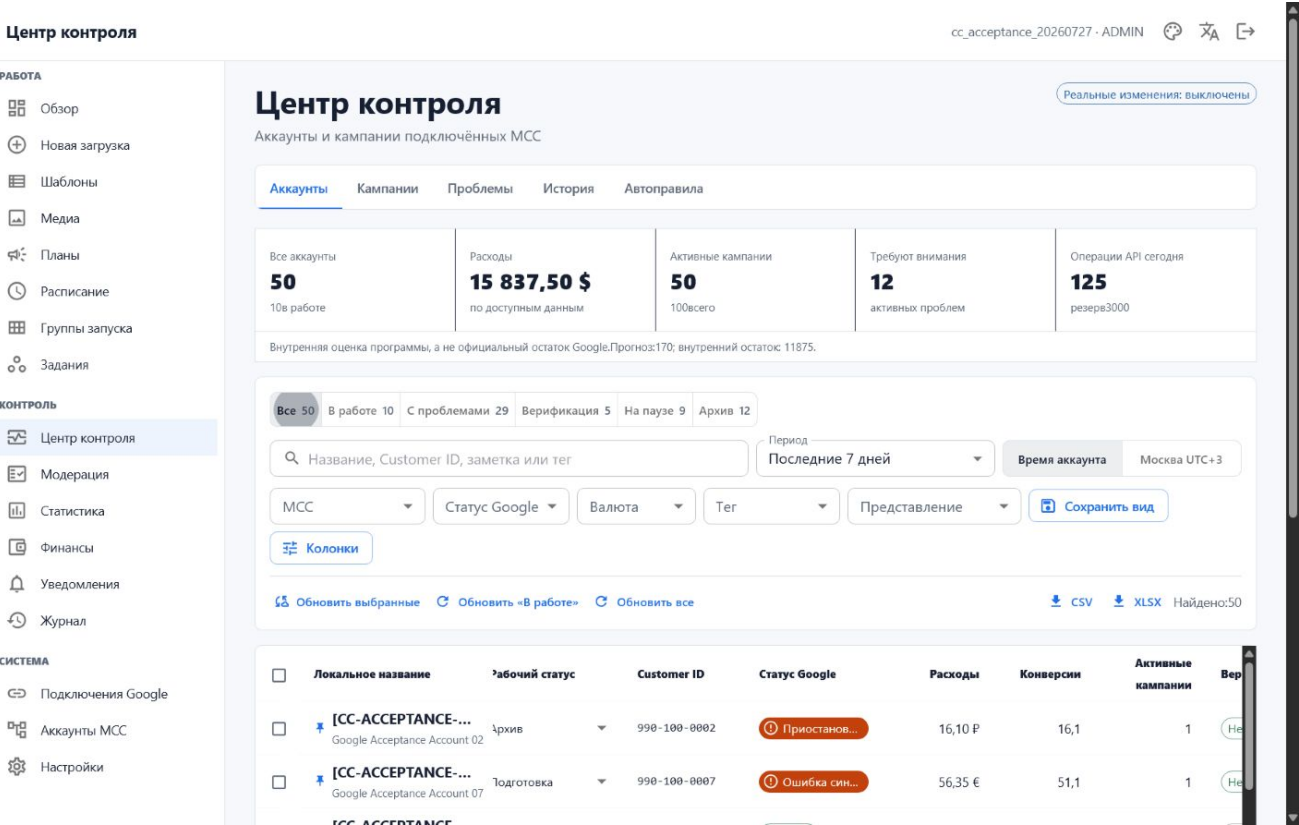

Acceptance-fixture data is used for this screenshot; it is clearly separated from real Google Test and production data.

Interface evidence 2: accounts in work

Local working statuses are independent from Google status. The In work filter keeps operational ownership visible even when Google status requires attention.

Центр контроля

РАБОТА

Обзор

Новая загрузка

Шаблоны

Медиа

Планы

Расписание

Группы запуска

Задания

КОНТРОЛЬ

Центр контроля

Модерация

Статистика

Финансы

Уведомления

Журнал

СИСТЕМА

Подключения Google

Аккаунты MCC

Настройки

cc_acceptance_20260727 - ADMIN

Реальные изменения: выключены

Центр контроля

Аккаунты и кампании подключённых MCC

АккаунтыКампанииПроблемыИсторияАвтоправила

Все аккаунты5010в работе

Расходы15 837,50 \$по доступным данным

Активные кампании50100всего

Требуют внимания12активных проблем

Операции API сегодня125резерв3000

Внутренняя оценка программы, а не официальный остаток Google.Прогноз:170; внутренний остаток: 11875.

Все 50В работе 10С проблемами 29Верификация 5На паузе 9Архив 12

Название, Customer ID, заметка или тер

ПериодПоследние 7 дней

Время аккаунтаМосква UTC+3

MCCСтатус GoogleВалютаTerПредставление

Сохранить вид

Колонки

Обновить выбранныеОбновить «В работе»Обновить все


CSVXLSXНайдено:50

	Локальное название	Рабочий статус	Customer ID	Статус Google	Расходы	Конверсии	Активные кампании	Вер
	[CC-ACCEPTANCE-...] Google Acceptance Account 02	Архив	990-100-0002	Приостанов...	16,10 P	16,1	1	Не
	[CC-ACCEPTANCE-...] Google Acceptance Account 07	Подготовка	990-100-0007	Ошибка син...	56,35 €	51,1	1	Не

Accounts can be moved between Unclassified, Preparation, In work, Paused, and Archive without changing Google Ads state.

Interface evidence 3: GEO and MCC grouping

The account table supports MCC, GEO, currency, tag, Google-status, and saved-view context. Hierarchy and local grouping remain separate from raw Customer IDs.

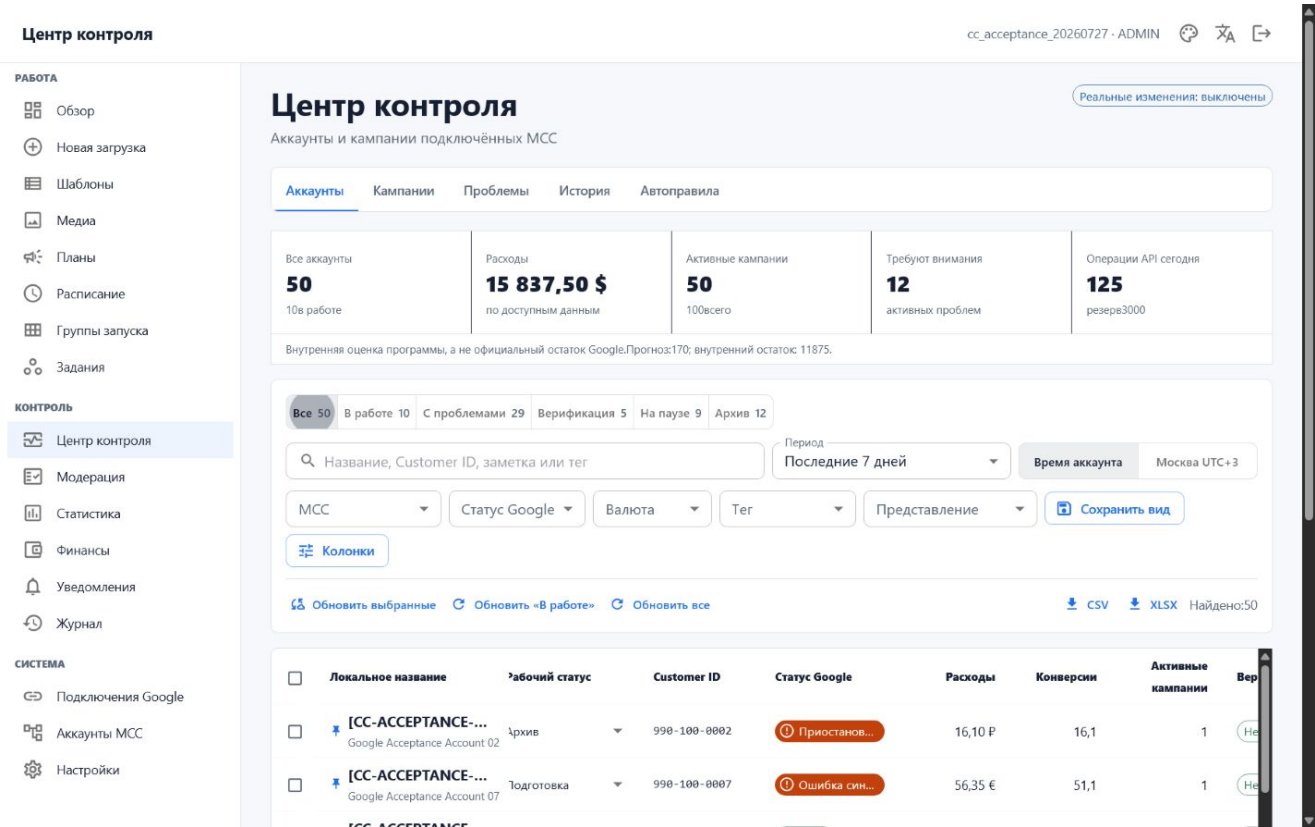

MCC hierarchy comes from Google; GEO and local names are internal organizational metadata.

Interface evidence 4: spend and conversion metrics

Portfolio rows and summaries expose spend and mapped conversions. Registration and deposit mappings are explicit, and missing data is never converted into a false zero.

Центр контроля

cc_acceptance_20260727 · ADMIN

РАБОТА

Обзор

Новая загрузка

Шаблоны

Медиа

Планы

Расписание

Группы запуска

Задания

КОНТРОЛЬ

Центр контроля

Модерация

Статистика

Финансы

Уведомления

Журнал

СИСТЕМА

Подключения Google

Аккаунты MCC

Настройки

Центр контроля

Аккаунты и кампании подключённых MCC

АккаунтыКампанииПроблемыИсторияАвтоправила

Все аккаунты

Расходы

Активные кампании

Требуют внимания

Операции API сегодня

50

15 837,50 \$

50

12

125

10 в работе

по доступным данным

100 всего

активных проблем

резерв 3000

Внутренняя оценка программы, а не официальный остаток Google. Прогноз: 170; внутренний остаток: 11875.

Все 50

В работе 10

С проблемами 29

Верификация 5

На паузе 9

Архив 12

Название, Customer ID, заметка или тег

Период

Последние 7 дней

Время аккаунта

Москва UTC+3

MCC

Статус Google

Валюта

Тег

Представление

Сохранить вид

Колонки

Обновить выбранные

Обновить «В работе»

Обновить все

CSV

XLSX

Найдено: 50

Локальное название

Рабочий статус

Customer ID

Статус Google

Расходы

Конверсии

Активные кампании

Вер

[CC-ACCEPTANCE-...]

Google Acceptance Account 02

Архив

990-100-0002

Приостанов...

16,10 P

16,1

1

Не

[CC-ACCEPTANCE-...]

Google Acceptance Account 07

Подготовка

990-100-0007

Ошибка син...

56,35 €

51,1

1

Не


Supported metrics include cost, impressions, clicks, CTR, CPC, registrations, deposits, and CPA.

Confidential application documentation - no credentials or tokens

Page 9

Interface evidence 5: issues and statuses


Separate views expose synchronization failures, account status, campaign status, policy issues, advertiser verification, and operational alerts.

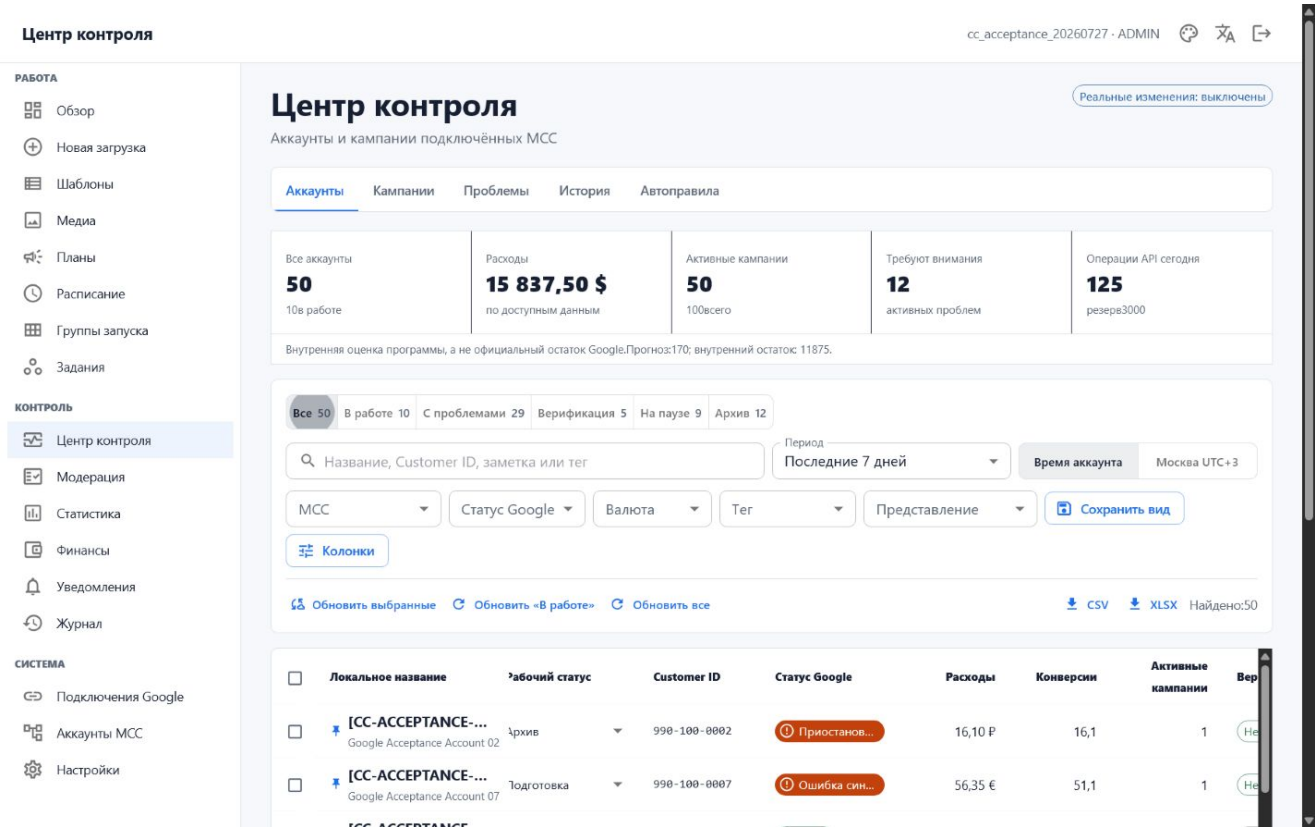

A severe confirmed policy or access problem remains visible regardless of local work status.

Interface evidence 6: filters and saved views

Search, period, account-time-zone mode, MCC, Google status, currency, tags, configurable columns, and saved views support repeatable reporting.

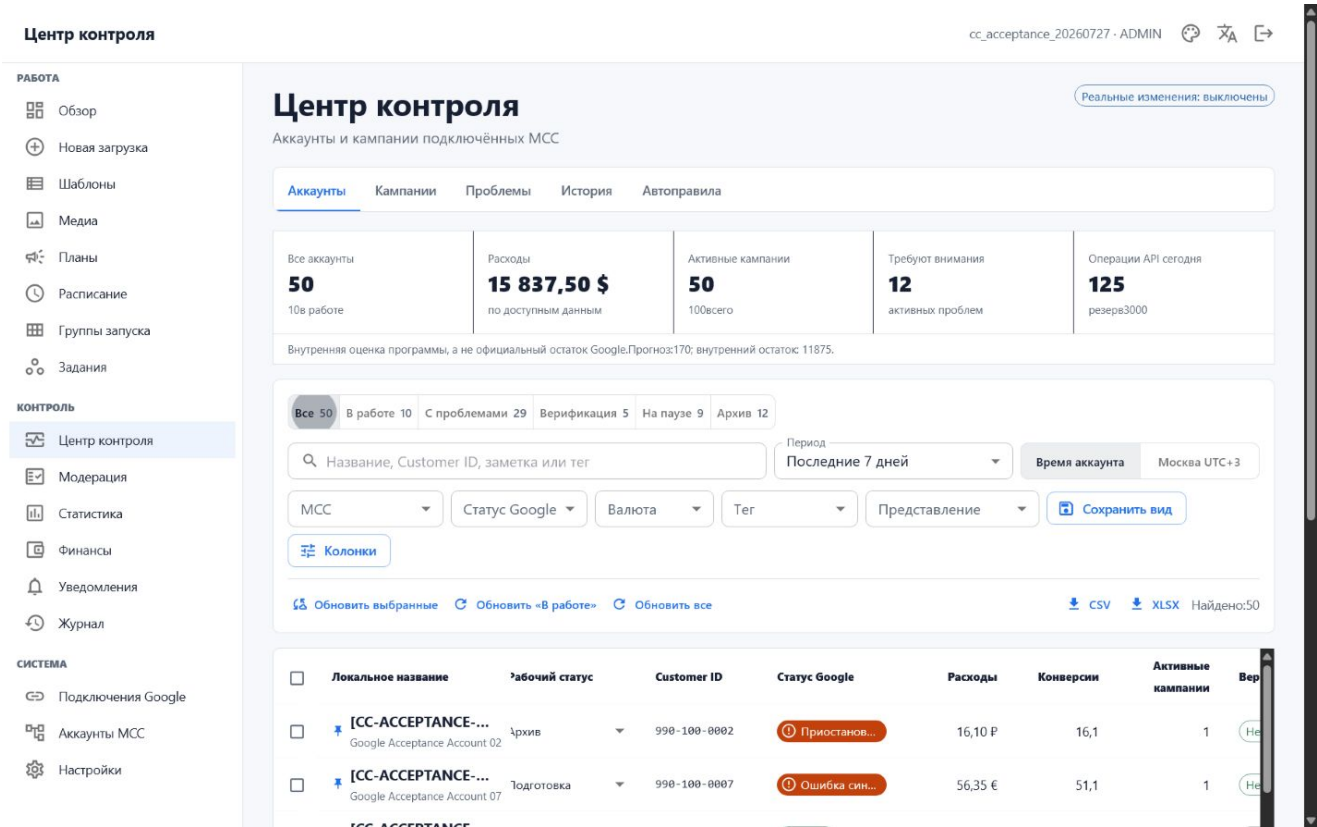

CSV and XLSX exports use the current authorized view and never include protected credentials.

Interface evidence 7: history and AuditLog

Operational history records PAUSE and ENABLE results while the independent AuditLog keeps actor, target, request, result, and timestamp evidence.

Группы запуска

codex_acceptance_20260722 - ADMIN

РАБОТА

Обзор

Новая загрузка

Шаблоны

Медиа

Планы

Группы запуска

Задания

КОНТРОЛЬ

Модерация

Статистика

Финансы

Уведомления

Журнал

СИСТЕМА

Подключения Google

Аккаунты MCC

Назад к группам

CZ-501 · Test account

9000000001 · USD · Europe/Prague

SIMULATION PAUSED Обновить метрики

TEST / MOCK: метрики и статусы локальные; Google Ads API не вызывается.

Кампаний	Расход	Конверсии	Клики	Показы
10	2 090 USD	45	855	26500

Кампании

История действий

PAUSE · 10 кампаний	SUCCEEDED	22.07.2026, 22:35:48
ENABLE · 10 кампаний	SUCCEEDED	22.07.2026, 22:34:02
PAUSE · 2 кампаний	SUCCEEDED	22.07.2026, 22:33:36
ENABLE · 2 кампаний	SUCCEEDED	22.07.2026, 22:33:18


The displayed fixture is SIMULATION and is labelled accordingly; real Google actions additionally persist Request IDs and readback.

Confidential application documentation - no credentials or tokens

Page 12

Interface evidence 8: account notes and tags

Account rows support editable internal notes, local names, tags, work status, and history. These fields never alter the corresponding Google Ads account.

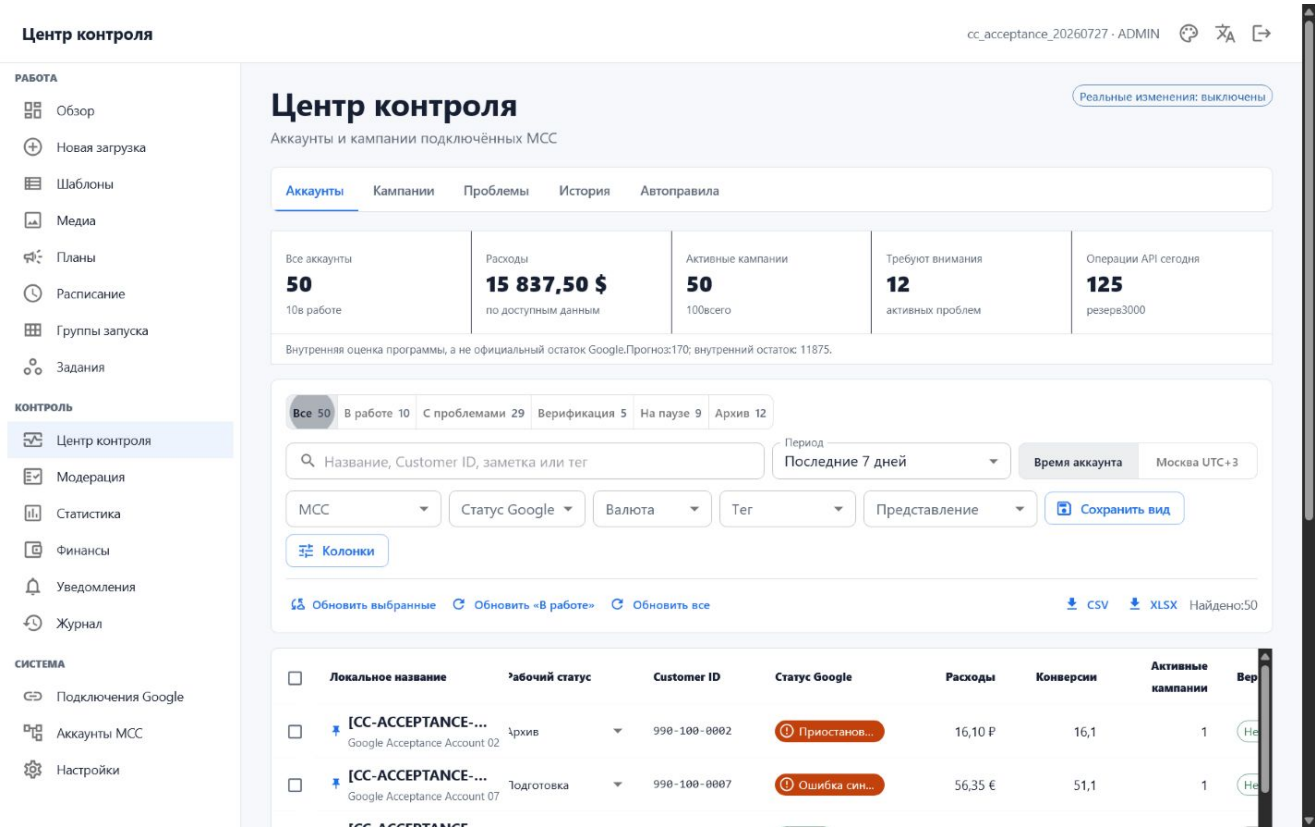

Internal context is stored in PostgreSQL and protected by application roles and AuditLog.

Interface evidence 9: campaigns and statistics

The campaign view combines source, type, status, budget, and available statistics. This screenshot shows the isolated real Google Test fixtures.

Центр контроля

admin · ADMIN

РАБОТА

Обзор

Новая загрузка

Шаблоны

Медиа

Планы

Расписание

Группы запуска

Задания

КОНТРОЛЬ

Центр контроля

Модерация

Статистика

Финансы

Уведомления

Журнал

СИСТЕМА

Подключения Google

Аккаунты MCC

Настройки

Центр контроля

Аккаунты и кампании подключённых MCC

Аккаунты Кампании Проблемы История Автоправила

Google Test — реальные API-запросы, без показа рекламы.

API_TEST_ACCEPTANCE

Статус

Источник

Выбрано:0

Режим действия

Google Test — реальные API

Остановить

Включить

Изменить бюджет

Найдено:2


Нет данных: тестовые аккаунты не показывают рекламу

	Кампания	Аккаунт	Источник	Тип	Статус	Бюджет	Расход	Клики	Конверсии
☐	API_TEST_ACCEPTANCE_20260729_132252 [DGu 4c8633fa834c] 24078084651	1 183-386- 9760	Google Ads / ручное	DEMAND_GEN	PAUSED	10,00 \$	—	—	—
☐	API_TEST_ACCEPTANCE_20260729_134730 [DGu ad88386b4d33] 24078086559	1 804-728- 0949	Google Ads / ручное	DEMAND_GEN	PAUSED	12,00 \$	—	—	—

Google Test accounts do not serve ads; missing delivery metrics are displayed as no data rather than synthetic values.

Interface evidence 10: validated Demand Gen deployment

Only after analytics and operational-control evidence, the secondary wizard demonstrates financial preview, local validation, Google validate_only, confirmation, and creation in PAUSED.

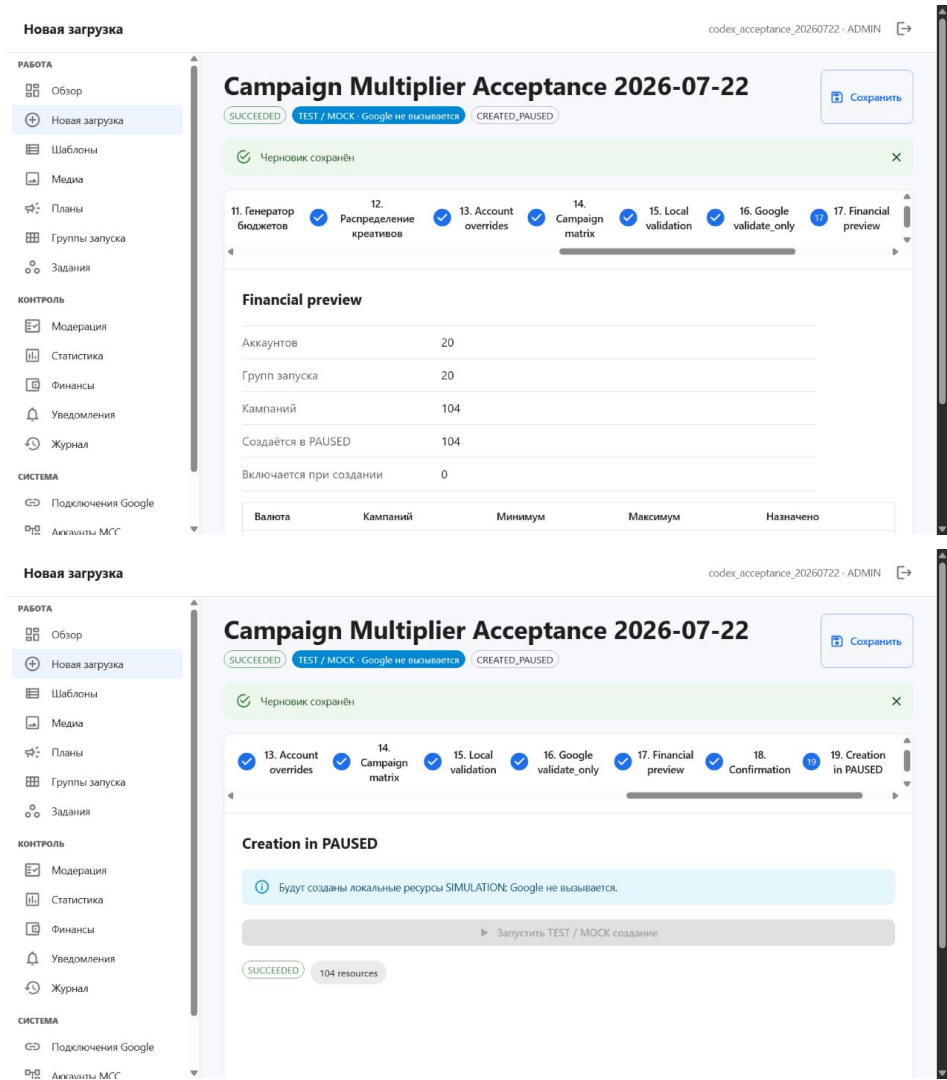

The acceptance fixture is SIMULATION. Separate real Google Test evidence confirmed validate_only, creation, Request IDs, and PAUSED readback; production mutation remains zero.

12. Application readiness checklist

Public identity	Iskhakov Ruslan - individual operator; Axyro Analytics is a project, not a company or legal entity
Website	Publicly accessible without authentication
Privacy and Terms	Public English/Russian pages with Google Ads API use and deletion contact
API Center	Developer-token MCC 558-933-5362; Test Account Access; Basic Access application available
Google Cloud	Project Number 1044664056304; OAuth callback uses https://axyro.tech
Write disclosure	Demand Gen creation, PAUSE, ENABLE, and budget update are explicitly documented
Production state	Mutations blocked; zero production mutations
Form	Answers prepared for sole individual use; confirmation checkboxes and Submit intentionally untouched

Prepared for owner review. This document does not authorize submission of the Basic Access application.