Predicting Crime Rate Within Boston Area

Group 20

5/13/2021

Introduction

Motivation

Public safety has always been one of the most concerns in our daily lives. A safe environment with a low crime rate not only protects us from injury and illness but also helps us improve our overall quality of life. Further, reducing crimes can lead to a decrease in societal costs and, as a result, generate substantial economic benefits. Therefore, in this project, we would like to identify the influential factors that could potentially predict the crime rate and hopefully provide insight for future policy to improve population safety. Specifically, we focus on the per capita crime rate within the Boston area. The overall goal of this project is to predict the crime rate and identify the important predicting variables as well as understand their impact on population safety.

Data

The dataset that we used in this project can be assessed from the StatLib library which is maintained at Carnegie Mellon University. It contains information about various factors that could potentially explain crime rate from 506 observations. This dataset has already been cleaned. The detailed description of each variables is displayed in Table 1. The outcome of interest is the per capita crime rate.

We randomly split our dataset into a training dataset (75%) and a test dataset (25%). We performed model fitting and model selection on the training dataset and evaluated its test performance on the test dataset.

There were no missing or duplicated observations in our data and the distribution of each predictor variable can be seen in Figure 1. After careful consideration, we decided not to perform transformations in order to maintain the interpretability of the predictors.

Exploratory Analysis/Visualization

From the plot of each predictor versus crime rate (Figure 2), we can see that some variables seem to have nonlinear patterns with crime rate whereas others seem to have linear patterns. Therefore, it is reasonable to consider using non-linear models (e.g., GAM and MARS), tree-based methods (e.g., regression tree and conditional inference tree), and ensemble methods (e.g., random forests and boosting) to fit the data in addition to linear models.

We also examined the multi-collinearity among predictors. This is because if two predictors are highly correlated, it may undermine the statistical significance of the variable. From the correlation plot (Figure 3), we can observe that there are a number of predictors highly correlated with each other. For example, the per capita crime rate (CRIM) seems to have a high positive correlation with the index of accessibility to radial highways (RAD) and full-value property-tax rate per \$10,000 (TAX). The weighted distances to five

Boston employment centers (DIS) seem to have a high positive correlation with the proportion of residential land zoned for lots over 25,000 sq.ft. (ZN) and a high negative correlation with the proportion of non-retail business acres per town (INDUS), nitrogen oxideS concentration per 10 million (NOX), and proportion of owner-occupied units built prior to 1940 (AGE). The proportion of non-retail business acres per town (INDUS) and % lower status of the population (LSTAT) seem to be correlated with most predictors except for CHAS.

We will explore more about the predicting abilities of these variables for crime rate in the following Models section.

Models

Model Determination

We used crime rate as our response variable and all the remaining variables as the predictors. Since crime rate is a continuous outcome, we performed the modeling under the regression framework. Our earlier exploratory findings suggested that there seemed to be some non-linear association between the predictors and the outcome. Therefore, we considered both linear and non-linear models during the modeling process. Specifically, we fitted linear models including multiple linear regression, LASSO, ridge, elastic net, principal component regression (PCR), and partial least squares (PLS) model, and non-linear models such as generalized additive model (GAM), multivariate adaptive regression splines (MARS), regression tree, conditional inference tree, random forests, and boosting.

There were one or few tuning parameters for each of the models except the linear regression model. Within these models that require tuning parameters, we specified a grid of numbers and then selected the one that gave the smallest cross-validation error. We then compared each of these models with optimal tuning parameters and decided the final model based on their training performance, i.e., cross-validation RMSE. Both median and mean RMSEs are reasonable evaluation metrics for the selection of the final model. We discussed both metrics and determined the appropriate final model, which would be used to predict the crime rate.

Figure 4 displays the distribution of the training errors (in black) of each of the models that we considered in this project. We can see that both random forest (rf) model and boosting (gmb) model performed well compared to the other models. Both models have similar performance using the training data; the random forest model has a slightly larger mean RMSE but a smaller median RMSE than the boosting model. As there is extreme value in RMSE, median RMSE can be a more appropriate criterion as it is insensitive to extreme values whereas mean is. Hence, we decided to use the random forest model, which has a smaller median RMSE, as our final model.

We also evaluated the test performance of the models in the form of mean RMSE as displayed in Figure 4 (in orange). We can observe that among all the models, regression tree (rpart) model has the smallest test error, followed by boosting model (gbm), MARS model (mars), and random forest model (rf). Our selected final model, the random forest model, has its test error (mean RMSE) close to its training error (mean RMSE). This is desirable and it indicates that random forest model seems to have a consistently reliable predictive ability. Therefore, our decision of choosing random forest model looks reasonable and random forest seems to be flexible enough to make the prediction and able to successfully capture the non-linearity between the predictors and the crime rate.

Model Interpretation

By the nature of random forest model, no specific assumption is made with regard to the functional relationship between the response variable and the predictor variables. As blackbox models, the random forest model does not have an explicit form. However, it can be interpreted, both globally and locally, using visualization tools.

[TO BE MODIFIED Based on the variable importance plot (VIP) in Figure 5 (first plot), RAD, DIS, MEDV, LSTAT, and AGE are the top 5 variables of importance in predicting the crime rate. The partial dependence plots (PDP) (Figure 5) illustrate how these variables impact the prediction of the response variable. For example, PDP of RAD implies that our model found that one knot (at 8) in RAD provides the best fit. Specifically, the per capita crime rate seems to be stable when the index of accessibility to radial highways is below 8 but it starts to increase after the index exceeds 8. Similarly, we can see that the crime rate seems to first decrease with weighted distances to five Boston employment centers (DIS) and remain stable after around 2.20. Overall, the crime rate seems to decrease for the median value of owner-occupied homes, but it decreases fastest when the median value is below 13.8, second fastest when the median value is from 13.8k to 17.4k, and the slowest when the median value exceeds 17.4k. The crime rate seems to decrease with the percentage of the lower status of the population and remaining stable after around 23.24%.

Discussion

We did not perform transformations on the predictors due to the concern of interpretability. Through transformation might compromise the interpretability, it could possibly improve model performance. Future research could consider applying transformation on predictors.

[TO BE MODIFIED Overall, our model suggests that accessibility to radial highways, distances to employment centers, and the median value of owner-occupied homes are the top 3 variables that play an important role in predicting the crime rate. Specifically, the crime rate is predicted to start to increase with the accessibility to radial highways when the index of latter exceeds 8, to decrease if the distance to employment centers is farther, and to decreases with the median home value overall – it decreases faster if the median is below 17.4k compared to after 17.4k. These findings are consistent with our natural understanding and expectation and provide meaningful insight into public safety. Therefore, the policymaker or authority might consider making more effort in these forehead mentioned areas to reduce the crime rate and protect the overall population.]

Tables and Figures

 Table 1. Variable Description

Variable	Description
AGE	proportion of owner-occupied units built prior to 1940
В	$1000(Bk - 0.63)^2$ where Bk is the proportion of blacks by town
CHAS	Charles River dummy variable $(= 1 \text{ if tract bounds river}; 0)$
	otherwise)
CRIM	per capita crime rate by town
DIS	weighted distances to five Boston employment centres
INDUS	proportion of non-retail business acres per town
LSTAT	% lower status of the population
MEDV	Median value of owner-occupied homes in \$1000s
NOX	nitrogen oxides concentration (parts per 10 million)
PTRATIO	pupil-teacher ratio by town
RAD	index of accessibility to radial highways
RM	average number of rooms per dwelling
TAX	full-value property-tax rate per \$10,000
ZN	proportion of residential land zoned for lots over 25,000 sq.ft.

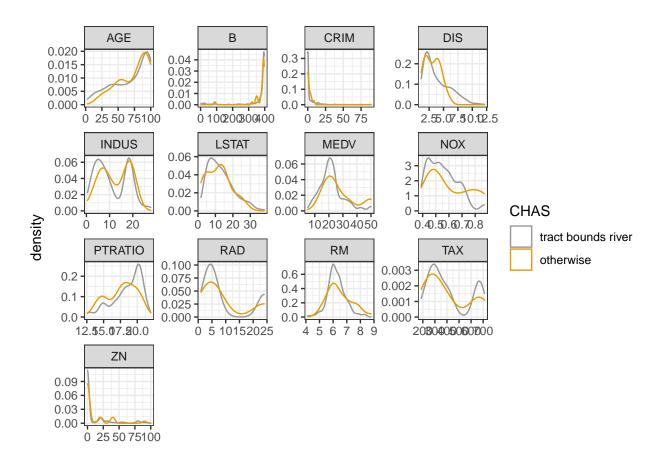


Figure 1 Variable Distribution (Training Dataset)

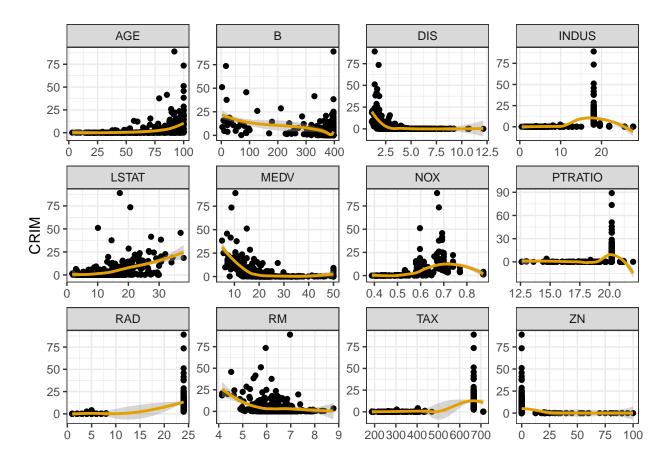


Figure 2A Scatter Plot of Continuous Variable vs. Crime Rate (Training Dataset)

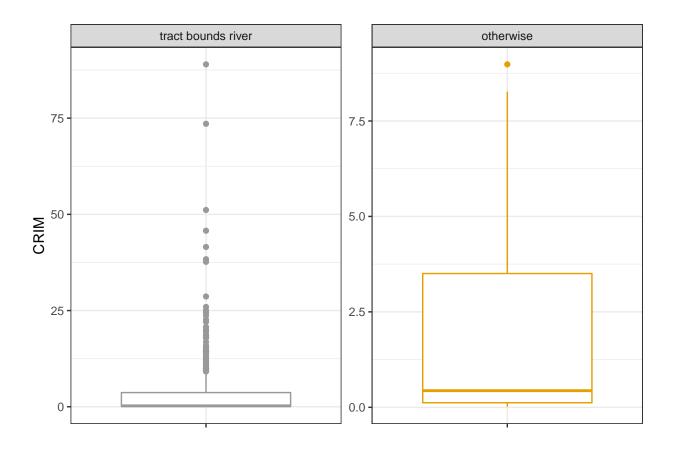


Figure 2B Boxplot of Categorical Variable vs. Crime Rate (Training Dataset)


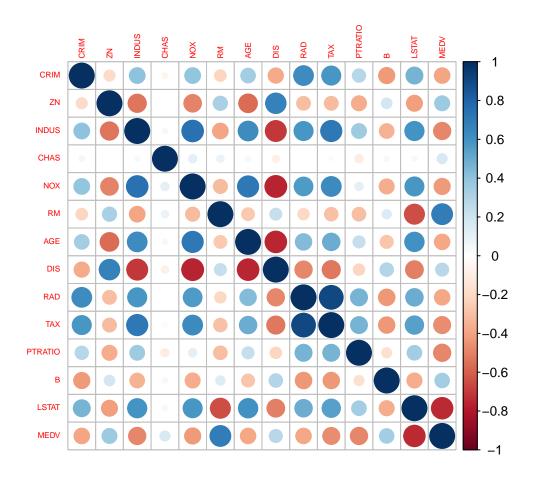


Figure 3 Correlation Plot (Training Dataset)

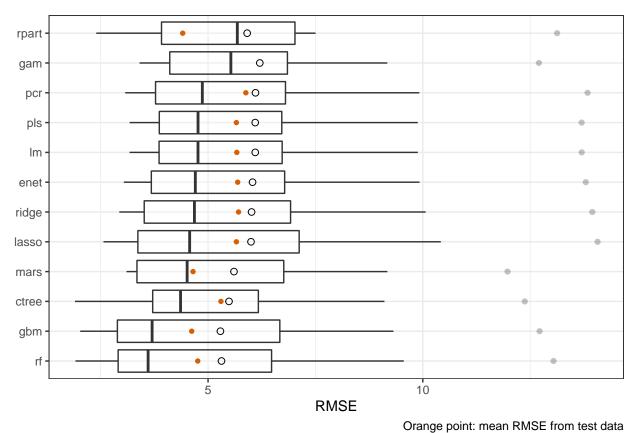

3.1.1

Figure 4 Predictive Performance of All Models

TO BE ADDED

Figure 5 The Variable Importance Plot (VIP), Partial Dependence Plots (PDP), Individual Conditional Expectation (ICE) Curves from Random Forest Model (Final Model)