

A perturbed threefold saddle-point formulation yielding new mixed finite element methods for poroelasticity with reduced symmetry

ALONSO J. BUSTOS* GABRIEL N. GATICA†
RICARDO RUIZ-BAIER‡ BENJAMIN N. VENEGAS§

Abstract

We propose and analyze new mixed finite element methods for the linear poroelasticity problem, which models the coupled phenomena of fluid diffusion and solid deformation. The formulation is based on the introduction of the vorticity and the strain tensor as auxiliary unknowns, which makes it possible to eliminate the fluid content from the system. The latter can then be recovered from the strain tensor and the pressure. Then, by incorporating a multiple of the pressure gradient as an additional unknown, we arrive at an operator equation showing a threefold saddle-point structure, which, in turn, is perturbed by a term depending on the pressure variable. The well-posedness of the continuous formulation is established through a suitable extension of the usual Babuška–Brezzi theory, which yields a new abstract result, along with a recently developed approach to analyze perturbed saddle-point problems. The discrete analysis follows a similar strategy, employing arbitrary finite element spaces satisfying suitable assumptions. In particular, we provide concrete examples based on PEERS elements and derive the corresponding convergence rates. Finally, several numerical experiments are presented, which confirm the theoretical results and illustrate the good performance of the methods.

Keywords: Poroelasticity, fully mixed finite element methods, threefold saddle-point problems, error analysis.

Mathematics subject classifications (2000): 74F10, 65N30, 65N15, 74S05.

1 Introduction

Scope. The equations of Biot poroelasticity describe the mechanical behavior of a fluid-saturated porous medium, where the coupling between fluid diffusion and solid deformation is taken into account. This model finds wide use in various fields that span from geomechanics and petroleum engineering to biomechanics and material science; see, e.g., [40, 41]. Numerical solutions of poroelasticity can be challenging, especially when dealing with heterogeneous materials, complex geometries, and multiphysics, and partly due to the presence of multiple scales and physical parameters (e.g., Lamé coefficients, storativity, permeability) as well as discretization parameters.

While the primary form of the governing equations is based on the solid displacement and the fluid pressure as main unknowns, it is well known that reformulations of the equations in fully mixed form can provide significant advantages in terms of robustness with respect to material parameters and of local mass

*CI²MA and Departamento de Ingeniería Matemática, Universidad de Concepción, Casilla 160-C, Concepción, Chile, email: `albustos2020@udec.cl`.

†CI²MA and Departamento de Ingeniería Matemática, Universidad de Concepción, Casilla 160-C, Concepción, Chile, email: `ggatica@ci2ma.udec.cl`.

‡School of Mathematics, Monash University, 9 Rainforest Walk, 3800, Victoria, Australia, and Universidad Adventista de Chile, Casilla 7-D Chillán, Chile email: `ricardo.ruizbaier@monash.edu`.

§CI²MA and Departamento de Ingeniería Matemática, Universidad de Concepción, Casilla 160-C, Concepción, Chile, email: `bevenegas2020@udec.cl`.

conservation, for example. In this context, several mixed finite element and polytopal methods have been proposed in the literature; see, e.g., [8, 12, 15, 1, 26, 30, 35, 36, 42], which also include multiphysics couplings with diffusion, temperature, or interfacial effects. Depending on the specific structure and choice of the additional unknowns, many different methods can be derived, usually resulting in saddle-point formulations (symmetric, non-symmetric, single, twofold, threefold, etc.). Their analysis – solution existence and uniqueness, energy estimates, and error bounds – typically relies on the classical Babuška–Brezzi theory for mixed problems [13], or on its extensions to more complex saddle-point structures [11, 29].

The present work aims to introduce and analyze new mixed finite element methods for linear poroelasticity with mixed traction-loading boundary conditions, and based on a threefold saddle-point formulation. The proposed approach is inspired by traditional mixed formulations with weakly imposed symmetry for linear elasticity [4, 5, 18, 37]. Apart from solid displacement and fluid pressure, several other variables of mathematical and physical interest form part of the resulting system. Indeed, we introduce the full Biot stress, which, besides allowing the mixed boundary conditions to be incorporated more naturally, ensures that the balance of linear momentum is satisfied exactly. In turn, the balance of angular momentum is imposed weakly through the incorporation of the infinitesimal rotation tensor. In addition, we consider the infinitesimal strain, the discharge flux, and an additional unknown defined on a function space associated with the Neumann part of the boundary, which is related to the imposition of non-homogeneous boundary conditions on the discharge velocity (Darcy flux). While these extra unknowns often lead to larger algebraic systems, they also provide more accurate approximations of the corresponding physical quantities of interest, especially when low-regularity solutions are considered and in the presence of multiphysics couplings.

Closely related to the present contribution is the recent and independent work [10], which analyzes a five-field fully mixed formulation of the Biot equations with weakly imposed stress symmetry, homogeneous mixed boundary conditions, arbitrary-order $H(\text{div})$ -conforming discretizations, and splitting strategies of fixed-stress type. Here, instead, the strain is retained as an independent unknown, so that $\mathcal{C}$ enters the formulation directly rather than through its inverse, which is convenient, for instance, for nonlinear constitutive laws. In addition, non-homogeneous flux data are imposed weakly through an additional unknown on the Neumann boundary. This leads to the perturbed threefold saddle-point structure analyzed below, which allows us to establish decoupled inf-sup conditions rather than a global one, as in [10], where the formulation is cast as a single perturbed saddle-point problem. A further difference concerns the scope of the analysis: the present contribution provides a detailed treatment of convergence rates and, as mentioned above, of non-homogeneous Neumann boundary conditions, whereas these aspects are briefly summarized in [10].

We prove that the resulting threefold saddle-point formulation is well-posed by extending the classical Babuška–Brezzi theory to this more complex setting, and by employing a recently developed framework for the analysis of perturbed saddle-point problems [20]. The developments in this paper can be therefore seen as a non-trivial extension of the abstract theory presented in [20] to the case of threefold saddle-point problems, which can be of use for other general applications in continuum mechanics. The arguments of the proofs involve kernel splittings and their identification/characterization when applied to the Biot equations.

At the discrete level it is possible to follow conforming or non-conforming schemes. In this work, we restrict ourselves to the conforming case and develop the discrete analysis under a set of explicit and verifiable assumptions on the finite element spaces involved. These hypotheses are formulated in a general manner, so that the resulting Galerkin scheme is not tied to a specific discretization. Within this setting, the discrete analysis follows a strategy that closely mirrors the proposed abstract continuous approach. Nevertheless, it departs from the ideas cited above when addressing approximation properties and the verification of suitable discrete inf-sup conditions.

We then particularize the abstract framework to PEERS elements combined with Raviart–Thomas and discontinuous polynomial spaces, showing that they satisfy all the required conditions, and we remark that other well-established mixed finite element families available in the literature also fit within the proposed setting. The discrete analysis requires additional assumptions on the regularity of the discretization of the Neumann sub-boundary, as well as on the compatibility between the finite element spaces for the Darcy flux, their normal traces, and the discrete Lagrange multiplier space. Another technical issue is that the

discrete inf-sup conditions rely on auxiliary Poisson problems with mixed boundary conditions, which in turn impose mild restrictions on the class of admissible domains. The practical impact of these restrictions is investigated through numerical experiments, including a test on a domain that does not satisfy the required regularity assumptions and nevertheless exhibits the expected convergence behavior.

Outline. In the remainder of this section we include notational convention and preliminary definitions of spaces and operators needed for the functional setting. In Section 2 we recall the equations of poroelasticity in steady form, introducing also the auxiliary unknowns. Section 3 is devoted to deriving the weak formulation, stating and proving a new abstract result for threefold saddle-point problems, and using this theory for establishing the well-posedness of the fully mixed Biot equations. In Section 4 we define the Galerkin method, state regularity assumptions, and apply the new abstract theory to show existence and uniqueness of discrete solution for generic finite element spaces that satisfy inf-sup stability, space compatibility, suitable trace inequalities, and existence of adequate interpolation operators. In Section 5 we derive quasi-optimality results, which we combine with specific properties of PEERS and Raviart–Thomas finite elements to establish optimal convergence rates. We conclude in Section 6 with simple numerical tests in 2D and 3D that illustrate the convergence properties of the proposed finite element schemes.

Preliminaries. Let Ω be a bounded domain in $\mathbb{R}^n$ with polyhedral boundary $\partial\Omega$, and let Σ and Γ be two disjoint open subsets of $\partial\Omega$, such that $\partial\Omega = \bar{\Sigma} \cup \bar{\Gamma}$. We denote by $\boldsymbol{\nu}$ the outward unit normal vector on $\partial\Omega$. In what follows, standard notation is adopted for Lebesgue spaces $L^p(\Omega)$ and Sobolev spaces $W^{s,p}(\Omega)$, with $s \in \mathbb{R}$ and $p \geq 1$, whose corresponding norms, either for the scalar, vectorial, or tensorial case, are denoted by $\|\cdot\|_{0,p;\Omega}$ and $\|\cdot\|_{s,p;\Omega}$, respectively. In particular, given a non-negative integer m , $W^{m,2}(\Omega)$ is also denoted by $H^m(\Omega)$, and the notations of its norm and seminorm are simplified to $\|\cdot\|_{m,\Omega}$ and $|\cdot|_{m,\Omega}$, respectively. On the other hand, given any generic scalar functional space S , we let $\mathbf{S}$ and $\mathbb{S}$ be the corresponding vector and tensor counterparts, whereas $\|\cdot\|$, with no subscripts, will be employed for the norm of any element or operator whenever there is no confusion about the space to which they belong. Also, $|\cdot|$ denotes the Euclidean norm in both $\mathbb{R}^n$ and $\mathbb{R}^{n \times n}$, and as usual, $\mathbb{I}$ stands for the identity tensor in $\mathbb{R}^{n \times n}$. In addition, for normed vector spaces X and Y , with norms $\|\cdot\|_X$ and $\|\cdot\|_Y$, respectively, we endow the product space $X \times Y$ with the natural norm

$$\|(x, y)\|_{X \times Y} := \|x\|_X + \|y\|_Y \quad \forall (x, y) \in X \times Y.$$

Unless otherwise stated, the duality pairing between X and its topological dual X' is denoted by $[\cdot, \cdot]$. Furthermore, given a linear operator $A : X \rightarrow Y'$, its transpose is the operator $A^\mathbf{t} : Y \rightarrow X'$ characterized by the relation $[A(x), y] = [A^\mathbf{t}(y), x]$, for every $(x, y) \in X \times Y$. In this context, an operator $A : X \rightarrow X'$ is said to be symmetric if $A = A^\mathbf{t}$ and positive semi-definite if $[A(x), x] \geq 0$, for all $x \in X$. Given a closed subspace S of X , we define the operator $\Pi_S : \mathcal{L}(X, X') \rightarrow \mathcal{L}(S, S')$ through the relation

$$[\Pi_S A(u), v] = [A(u), v] \quad \forall u, v \in S, \quad \forall A \in \mathcal{L}(X, X'). \quad (1.1)$$

Also, given any vector fields $\mathbf{v} = (v_i)_{i=1,n}$ and $\mathbf{w} = (w_i)_{i=1,n}$, we set the gradient and divergence as

$$\nabla \mathbf{v} := \left(\frac{\partial v_i}{\partial x_j} \right)_{i,j=1,n} \quad \text{and} \quad \text{div}(\mathbf{v}) := \sum_{j=1}^n \frac{\partial v_j}{\partial x_j},$$

whereas for any tensor fields $\boldsymbol{\tau} = (\tau_{ij})_{i,j=1,n}$ and $\boldsymbol{\zeta} = (\zeta_{ij})_{i,j=1,n}$, we let $\mathbf{div}(\boldsymbol{\tau})$ be the divergence operator div acting along the rows of $\boldsymbol{\tau}$, and define the transpose, the trace, and the tensor inner product, respectively, as

$$\boldsymbol{\tau}^\mathbf{t} := (\tau_{ji})_{i,j=1,n}, \quad \text{tr}(\boldsymbol{\tau}) := \sum_{i=1}^n \tau_{ii}, \quad \text{and} \quad \boldsymbol{\tau} : \boldsymbol{\zeta} := \sum_{i,j=1}^n \tau_{ij} \zeta_{ij}.$$

In addition, $H^{1/2}(\partial\Omega)$ is the space of traces of functions of $H^1(\Omega)$, $H^{-1/2}(\partial\Omega)$ denotes its dual, and $\langle \cdot, \cdot \rangle_{\partial\Omega}$ stands for the duality pairing between $H^{-1/2}(\partial\Omega)$ (resp $\mathbf{H}^{-1/2}(\partial\Omega)$) and $H^{1/2}(\partial\Omega)$ (resp. $\mathbf{H}^{1/2}(\partial\Omega)$). Furthermore, $H^{1/2}(\Gamma)$ is the space of functions in $H^{1/2}(\partial\Omega)$ when restricted to Γ . In turn, $E_{\Gamma,0} : H^{1/2}(\Gamma) \rightarrow L^2(\partial\Omega)$ denotes the extension by zero on $\partial\Omega \setminus \bar{\Gamma}$, and we define the Hilbert space

$$H_{00}^{1/2}(\Gamma) := \left\{ \psi \in H^{1/2}(\Gamma) : E_{\Gamma,0}(\psi) \in H^{1/2}(\partial\Omega) \right\},$$

which is endowed with the inner product

$$\langle \psi, \varphi \rangle_{1/2,00;\Gamma} := \langle E_{\Gamma,0}(\psi), E_{\Gamma,0}(\varphi) \rangle_{1/2,\partial\Omega} \quad \forall \psi, \varphi \in H_{00}^{1/2}(\Gamma). \quad (1.2)$$

Additionally, we denote by $H_{00}^{-1/2}(\Gamma)$ the dual of $H_{00}^{1/2}(\Gamma)$, and employ $\langle \cdot, \cdot \rangle_{\Gamma}$ to denote the duality pairing between them. Throughout the paper $\| \cdot \|_{1/2,00;\Gamma}$ is the norm induced by (1.2) and $\| \cdot \|_{-1/2,00;\Gamma}$ denotes the norm of $H_{00}^{-1/2}(\Gamma)$. For further details, we refer to [24]. Next, we introduce the standard Hilbert spaces

$$\begin{aligned} \mathbf{H}(\text{div}; \Omega) &:= \left\{ \boldsymbol{\chi} \in \mathbf{L}^2(\Omega) : \text{div}(\boldsymbol{\chi}) \in L^2(\Omega) \right\} \quad \text{and} \\ \mathbb{H}(\mathbf{div}; \Omega) &:= \left\{ \boldsymbol{\tau} \in \mathbf{L}^2(\Omega) : \mathbf{div}(\boldsymbol{\tau}) \in \mathbf{L}^2(\Omega) \right\}, \end{aligned}$$

which are endowed with their usual norms

$$\begin{aligned} \|\boldsymbol{\chi}\|_{\text{div};\Omega} &:= \left(\|\boldsymbol{\chi}\|_{0,\Omega}^2 + \|\text{div}(\boldsymbol{\chi})\|_{0,\Omega}^2 \right)^{1/2} \quad \forall \boldsymbol{\chi} \in \mathbf{H}(\text{div}; \Omega), \quad \text{and} \\ \|\boldsymbol{\tau}\|_{\mathbf{div};\Omega} &:= \left(\|\boldsymbol{\tau}\|_{0,\Omega}^2 + \|\mathbf{div}(\boldsymbol{\tau})\|_{0,\Omega}^2 \right)^{1/2} \quad \forall \boldsymbol{\tau} \in \mathbb{H}(\mathbf{div}; \Omega). \end{aligned}$$

Additionally, we recall the integration by parts formulas (cf. [24, Lemma 1.4])

$$\begin{aligned} \langle \boldsymbol{\chi} \cdot \boldsymbol{\nu}, w \rangle_{\partial\Omega} &= \int_{\Omega} \boldsymbol{\chi} \cdot \nabla w + \int_{\Omega} w \text{div}(\boldsymbol{\chi}) \quad \forall w \in H^1(\Omega), \quad \forall \boldsymbol{\chi} \in \mathbf{H}(\text{div}; \Omega), \quad \text{and} \\ \langle \boldsymbol{\tau} \boldsymbol{\nu}, \mathbf{w} \rangle_{\partial\Omega} &= \int_{\Omega} \boldsymbol{\tau} : \nabla \mathbf{w} + \int_{\Omega} \mathbf{w} \cdot \mathbf{div}(\boldsymbol{\tau}) \quad \forall \mathbf{w} \in \mathbf{H}^1(\Omega), \quad \forall \boldsymbol{\tau} \in \mathbb{H}(\mathbf{div}; \Omega). \end{aligned} \quad (1.3)$$

Finally, in what follows, we denote by 0 or $\mathbf{0}$ the null element of any vector space, and we use C to represent a generic constant independent of the discretization parameters, which may take different values in different contexts.

2 The model problem

Consider a fully-saturated poroelastic medium composed of isotropic and homogeneous fluid and solid phases, represented by Ω . Under suitable physical conditions, the medium is primarily influenced by a body force $\mathbf{f} : \Omega \rightarrow \mathbb{R}^n$, and the linear momentum conservation is expressed as

$$\mathbf{div}(\boldsymbol{\sigma}) = -\mathbf{f} \quad \text{in } \Omega, \quad (2.1)$$

where $\boldsymbol{\sigma}$ is the Cauchy stress tensor, which, in turn, is symmetric due to the angular momentum conservation. Furthermore, the effective stress principle relates $\boldsymbol{\sigma}$ to the fluid pressure $p : \Omega \rightarrow \mathbb{R}$ and the solid displacement $\mathbf{u} : \Omega \rightarrow \mathbb{R}^n$ via

$$\boldsymbol{\sigma} = \mathcal{C}(\mathbf{e}(\mathbf{u})) - \alpha p \mathbb{I} \quad \text{in } \Omega, \quad (2.2)$$

where $\mathcal{C}$ denotes the elasticity operator acting on the strain tensor $\mathbf{e}(\mathbf{u}) = \frac{1}{2}(\nabla \mathbf{u} + (\nabla \mathbf{u})^\top)$, and $\alpha \in [0, 1]$ is the Biot–Willis coefficient. Under the assumption of a linearized regime, the generalized Hooke's law provides

a simplified relationship between stress and strain. In fact, denoting by λ and μ the Lamé coefficients, the elasticity operator is given by

$$\mathcal{C}(\boldsymbol{\tau}) = 2\mu \boldsymbol{\tau} + \lambda \operatorname{tr}(\boldsymbol{\tau}) \mathbb{I} \quad \forall \boldsymbol{\tau} \in \mathbb{L}^2(\Omega).$$

On the other hand, it is known that the fluid content $\vartheta : \Omega \rightarrow \mathbb{R}$, resulting from saturation and local volume dilation, is given by

$$\vartheta = c_0 p + \alpha \operatorname{div} \mathbf{u} = c_0 p + \alpha \operatorname{tr} \mathbf{e}(\mathbf{u}), \quad (2.3)$$

where $c_0 \geq 0$ is the constrained specific storage coefficient (storativity). Under Darcy flow, given the resultant flow $g : \Omega \rightarrow \mathbb{R}$ and the intrinsic permeability relative to fluid viscosity of the flow in the medium κ , there holds $\partial_t \vartheta - \operatorname{div}(\kappa \nabla p) = g$. Here, we note that under an appropriate semi-discrete transformation it is sufficient to consider the stationary form

$$\vartheta - \operatorname{div}(\kappa \nabla p) = g. \quad (2.4)$$

We assume that there exist positive constants κ_0 and κ_1 such that

$$\kappa_0 \leq \kappa^{-1}(\mathbf{x}) \leq \kappa_1 \quad \text{for a.e. } \mathbf{x} \in \Omega.$$

In order to reformulate the system given by (2.1), (2.2), (2.3), (2.4) and the symmetry of $\boldsymbol{\sigma}$ in a mixed form, we begin by denoting the vorticity tensor and the strain tensor by

$$\boldsymbol{\gamma} = \frac{1}{2}(\nabla \mathbf{u} - (\nabla \mathbf{u})^\mathbf{t}) \quad \text{and} \quad \boldsymbol{\xi} = \mathbf{e}(\mathbf{u}) \quad \text{in } \Omega, \quad (2.5)$$

respectively. It is worth noting that (2.5), together with (2.2), are equivalent to requiring that $\boldsymbol{\gamma}$ is skew-symmetric and

$$\boldsymbol{\sigma} = \mathcal{C}(\boldsymbol{\xi}) - \alpha p \mathbb{I} \quad \text{and} \quad \nabla \mathbf{u} = \boldsymbol{\gamma} + \boldsymbol{\xi} \quad \text{in } \Omega,$$

provided that the symmetry of $\boldsymbol{\sigma}$ is already enforced. In addition, from (2.3), we realize that the fluid content ϑ is completely determined by the pressure p and the strain $\boldsymbol{\xi}$. So, by replacing this relation into the flow equation (2.4), we get

$$c_0 p + \alpha \operatorname{tr}(\boldsymbol{\xi}) - \operatorname{div}(\boldsymbol{\eta}) = g,$$

where we introduced $\boldsymbol{\eta} := \kappa \nabla p$ as a further unknown. This enables us to eliminate ϑ from the system and recover it afterwards from $\boldsymbol{\xi}$ and p , using (2.3). Therefore, as a result of the previous discussion, we are able to rewrite the initial system as: find $\mathbf{u}$, $\boldsymbol{\sigma}$, $\boldsymbol{\eta}$, p , $\boldsymbol{\xi}$, $\boldsymbol{\gamma}$ in suitable spaces to be specified below such that $\boldsymbol{\gamma}$ is skew-symmetric, $\boldsymbol{\xi}$ is symmetric, and

$$\begin{aligned} \boldsymbol{\sigma} &= \mathcal{C}(\boldsymbol{\xi}) - \alpha p \mathbb{I}, \quad \nabla \mathbf{u} = \boldsymbol{\gamma} + \boldsymbol{\xi} \quad \text{in } \Omega \\ -\operatorname{div}(\boldsymbol{\sigma}) &= \mathbf{f}, \quad \boldsymbol{\sigma} = \boldsymbol{\sigma}^\mathbf{t}, \quad \boldsymbol{\eta} = \kappa \nabla p \quad \text{in } \Omega \\ c_0 p + \alpha \operatorname{tr}(\boldsymbol{\xi}) - \operatorname{div}(\boldsymbol{\eta}) &= g \quad \text{in } \Omega. \end{aligned} \quad (2.6)$$

Furthermore, the system is complemented by mixed boundary conditions, incorporating the given boundary data $\mathbf{u}_D$ and g_N ,

$$\begin{aligned} \mathbf{u} &= \mathbf{u}_D \quad \text{on } \Gamma, \quad \boldsymbol{\sigma} \boldsymbol{\nu} = 0 \quad \text{on } \Sigma, \\ p &= 0 \quad \text{on } \Sigma, \quad \boldsymbol{\eta} \cdot \boldsymbol{\nu} = g_N \quad \text{on } \Gamma. \end{aligned} \quad (2.7)$$

3 Weak formulation and its solvability analysis

3.1 Variational formulation

In this section, we derive the weak formulation of problem (2.6), together with the boundary conditions (2.7). To this end, we first assume that $\mathbf{u} \in \mathbf{H}^1(\Omega)$, and test the second equation in (2.6) against a tensor field $\boldsymbol{\tau} \in \mathbb{H}(\mathbf{div}; \Omega)$, thus obtaining

$$\int_{\Omega} \nabla \mathbf{u} : \boldsymbol{\tau} = \int_{\Omega} \boldsymbol{\gamma} : \boldsymbol{\tau} + \int_{\Omega} \boldsymbol{\xi} : \boldsymbol{\tau} \quad \forall \boldsymbol{\tau} \in \mathbb{H}(\mathbf{div}; \Omega), \quad (3.1)$$

from which we deduce that all terms are well defined, provided that $\boldsymbol{\gamma}$ and $\boldsymbol{\xi}$ are sought in $\mathbb{L}^2(\Omega)$. Moreover, motivated by the boundary conditions (2.7), we introduce the space

$$\mathbb{H}_{\Sigma}(\mathbf{div}; \Omega) := \left\{ \boldsymbol{\tau} \in \mathbb{H}(\mathbf{div}; \Omega) : \boldsymbol{\tau} \boldsymbol{\nu} = 0 \text{ on } \Sigma \right\},$$

and we require that $\mathbf{u}_D \in \mathbf{H}^{1/2}(\Gamma)$, so that the following relation holds:

$$\langle \boldsymbol{\tau} \boldsymbol{\nu}, \mathbf{u} \rangle_{\partial\Omega} = \langle (\boldsymbol{\tau} \boldsymbol{\nu})|_{\Gamma}, \mathbf{u}|_{\Gamma} \rangle_{\partial\Omega} = \langle \boldsymbol{\tau} \boldsymbol{\nu}, \mathbf{u}_D \rangle_{\Gamma} \quad \forall \boldsymbol{\tau} \in \mathbb{H}_{\Sigma}(\mathbf{div}; \Omega), \quad (3.2)$$

where the last term $\boldsymbol{\tau} \boldsymbol{\nu}$ is understood as a functional acting on $\mathbf{H}^{1/2}(\Gamma)$. In fact, while usually $\boldsymbol{\tau} \boldsymbol{\nu}|_{\Gamma}$ belongs to $\mathbf{H}_{00}^{-1/2}(\Gamma)$, the fact that it vanishes on Σ guarantees that actually $\boldsymbol{\tau} \boldsymbol{\nu}|_{\Gamma} \in \mathbf{H}^{-1/2}(\Gamma)$, and hence here we also use $\langle \cdot, \cdot \rangle_{\Gamma}$ to denote the duality pairing between $\mathbf{H}^{-1/2}(\Gamma)$ and $\mathbf{H}^{1/2}(\Gamma)$. Then, by applying integration by parts (cf. (1.3)) in (3.1) and then using (3.2), we arrive at

$$\int_{\Omega} \boldsymbol{\xi} : \boldsymbol{\tau} + \int_{\Omega} \mathbf{u} \cdot \mathbf{div}(\boldsymbol{\tau}) + \int_{\Omega} \boldsymbol{\gamma} : \boldsymbol{\tau} = \langle \boldsymbol{\tau} \boldsymbol{\nu}, \mathbf{u}_D \rangle_{\Gamma} \quad \forall \boldsymbol{\tau} \in \mathbb{H}_{\Sigma}(\mathbf{div}; \Omega). \quad (3.3)$$

Notice that this equation makes sense even if $\mathbf{u} \in \mathbf{L}^2(\Omega)$ instead of $\mathbf{H}^1(\Omega)$. Moreover, we claim that seeking $\mathbf{u}$ in $\mathbf{L}^2(\Omega)$ is equivalent to doing so in $\mathbf{H}^1(\Omega)$. Indeed, if (3.3) holds for $\mathbf{u} \in \mathbf{L}^2(\Omega)$, then, by restricting the test functions to compactly supported smooth tensor fields, we recover that $\nabla \mathbf{u} = \boldsymbol{\xi} + \boldsymbol{\gamma}$ in $\mathbf{L}^2(\Omega)$, so $\mathbf{u} \in \mathbf{H}^1(\Omega)$. In addition, testing the latter with $\boldsymbol{\tau} \in \mathbb{H}(\mathbf{div}; \Omega)$, integrating by parts, and invoking (3.3), we obtain $\mathbf{u}|_{\Gamma} = \mathbf{u}_D$ and (3.1). According to this equivalence, from now on we shall seek $\mathbf{u} \in \mathbf{L}^2(\Omega)$. Arguing similarly for the fifth equation in (2.6), this time using that $p = 0$ on Σ (cf. (2.7)), we obtain

$$\int_{\Omega} \kappa^{-1} \boldsymbol{\eta} \cdot \boldsymbol{\chi} + \int_{\Omega} p \operatorname{div}(\boldsymbol{\chi}) = \langle \boldsymbol{\chi} \cdot \boldsymbol{\nu}, p \rangle_{\Gamma} \quad \forall \boldsymbol{\chi} \in \mathbf{H}(\mathbf{div}; \Omega),$$

which, after introducing the further unknown $\varphi := p|_{\Gamma} \in \mathbf{H}_{00}^{1/2}(\Gamma)$, reads

$$\int_{\Omega} \kappa^{-1} \boldsymbol{\eta} \cdot \boldsymbol{\chi} + \int_{\Omega} p \operatorname{div}(\boldsymbol{\chi}) - \langle \boldsymbol{\chi} \cdot \boldsymbol{\nu}, \varphi \rangle_{\Gamma} = 0 \quad \forall \boldsymbol{\chi} \in \mathbf{H}(\mathbf{div}; \Omega). \quad (3.4)$$

Here, we notice that, by a reasoning similar to the one made for (3.3), we may require that $p \in \mathbf{L}^2(\Omega)$ and $\boldsymbol{\eta} \in \mathbf{L}^2(\Omega)$. In turn, the boundary condition for $\boldsymbol{\eta}$ (cf. (2.7)) is enforced as a weak constraint via

$$\langle \boldsymbol{\eta} \cdot \boldsymbol{\nu}, \psi \rangle_{\Gamma} = \langle g_N, \psi \rangle_{\Gamma} \quad \forall \psi \in \mathbf{H}_{00}^{1/2}(\Gamma). \quad (3.5)$$

Next, we test the first equation in (2.6) against a tensor field $\boldsymbol{\rho} \in \mathbf{L}^2(\Omega)$, thereby obtaining

$$-\int_{\Omega} \boldsymbol{\sigma} : \boldsymbol{\rho} + \int_{\Omega} \mathcal{C}(\boldsymbol{\xi}) : \boldsymbol{\rho} - \alpha \int_{\Omega} p \operatorname{tr}(\boldsymbol{\rho}) = 0 \quad \forall \boldsymbol{\rho} \in \mathbf{L}^2(\Omega), \quad (3.6)$$

from which it follows that $\boldsymbol{\sigma}$ must be sought in $\mathbf{L}^2(\Omega)$. Certainly, the symmetry of the Cauchy stress tensor (cf. (2.6)) could be enforced by restricting the trial space to symmetric tensors. Nevertheless, this choice is

not optimal from an implementation standpoint, so we instead enforce the symmetry as a weak constraint, which is accomplished by imposing

$$\int_{\Omega} \boldsymbol{\sigma} : \boldsymbol{\delta} = 0 \quad \forall \boldsymbol{\delta} \in \mathbb{L}_{\text{skew}}^2(\Omega), \quad (3.7)$$

where

$$\mathbb{L}_{\text{skew}}^2(\Omega) := \left\{ \boldsymbol{\delta} \in \mathbb{L}^2(\Omega) : \boldsymbol{\delta} = -\boldsymbol{\delta}^t \right\}.$$

Now, observe that if $\boldsymbol{\sigma}$ satisfies (3.7), then, by testing with $\mathbb{L}_{\text{skew}}^2(\Omega)$ in (3.6), we deduce that $\boldsymbol{\xi}$ is symmetric. In turn, the skew-symmetry of $\boldsymbol{\gamma}$ is enforced by simply requiring that $\boldsymbol{\gamma} \in \mathbb{L}_{\text{skew}}^2(\Omega)$. Next, we test the momentum balance (cf. third equation of (2.6)) against a vector field $\mathbf{v} \in \mathbf{L}^2(\Omega)$, formally obtaining

$$-\int_{\Omega} \mathbf{v} \cdot \text{div}(\boldsymbol{\sigma}) = \int_{\Omega} \mathbf{f} \cdot \mathbf{v} \quad \forall \mathbf{v} \in \mathbf{L}^2(\Omega). \quad (3.8)$$

We observe that the previous equation is well defined when $\mathbf{f}$ and $\text{div}(\boldsymbol{\sigma})$ belong to $\mathbf{L}^2(\Omega)$, the latter implying that $\boldsymbol{\sigma} \in \mathbb{H}(\text{div}; \Omega)$. Furthermore, we note that integration by parts is not necessary, since the symmetry required for a saddle-point formulation is already satisfied (cf. (3.3)). Finally, we test the last equation of (2.6) with a scalar field $q \in L^2(\Omega)$, obtaining

$$c_0 \int_{\Omega} p q + \alpha \int_{\Omega} q \text{tr}(\boldsymbol{\xi}) - \int_{\Omega} q \text{div}(\boldsymbol{\eta}) = \int_{\Omega} g q \quad \forall q \in L^2(\Omega),$$

from which we observe that each term is well defined provided $g \in L^2(\Omega)$ and $\text{div}(\boldsymbol{\eta}) \in L^2(\Omega)$, which in turn implies that $\boldsymbol{\eta} \in \mathbf{H}(\text{div}; \Omega)$. In this way, adding (3.4) with (3.6), and suitably combining (3.3) with (3.5) and (3.7) with (3.8), the system describing our problem is: find $(\boldsymbol{\eta}, \boldsymbol{\xi}) \in \mathbf{H}(\text{div}; \Omega) \times \mathbb{L}^2(\Omega)$, $p \in L^2(\Omega)$, $(\varphi, \boldsymbol{\sigma}) \in H_{00}^{1/2}(\Gamma) \times \mathbb{H}_{\Sigma}(\text{div}; \Omega)$, and $(\mathbf{u}, \boldsymbol{\gamma}) \in \mathbf{L}^2(\Omega) \times \mathbb{L}_{\text{skew}}^2(\Omega)$, all of them such that

$$\begin{aligned} & \int_{\Omega} \kappa^{-1} \boldsymbol{\eta} \cdot \boldsymbol{\chi} + \int_{\Omega} p \text{div}(\boldsymbol{\chi}) - \langle \boldsymbol{\chi} \cdot \boldsymbol{\nu}, \varphi \rangle_{\Gamma} - \int_{\Omega} \boldsymbol{\sigma} : \boldsymbol{\rho} + \int_{\Omega} \mathcal{C}(\boldsymbol{\xi}) : \boldsymbol{\rho} - \alpha \int_{\Omega} p \text{tr}(\boldsymbol{\rho}) = 0 \\ & -\alpha \int_{\Omega} q \text{tr}(\boldsymbol{\xi}) + \int_{\Omega} q \text{div}(\boldsymbol{\eta}) - c_0 \int_{\Omega} p q = - \int_{\Omega} g q \\ & - \int_{\Omega} \boldsymbol{\xi} : \boldsymbol{\tau} - \int_{\Omega} \mathbf{u} \cdot \text{div}(\boldsymbol{\tau}) - \int_{\Omega} \boldsymbol{\gamma} : \boldsymbol{\tau} - \langle \boldsymbol{\eta} \cdot \boldsymbol{\nu}, \psi \rangle_{\Gamma} = - \langle \boldsymbol{\tau} \boldsymbol{\nu}, \mathbf{u}_D \rangle_{\Gamma} - \langle g_N, \psi \rangle_{\Gamma} \\ & - \int_{\Omega} \mathbf{v} \cdot \text{div}(\boldsymbol{\sigma}) - \int_{\Omega} \boldsymbol{\sigma} : \boldsymbol{\delta} = \int_{\Omega} \mathbf{f} \cdot \mathbf{v} \end{aligned}$$

for all $(\boldsymbol{\chi}, \boldsymbol{\rho}) \in \mathbf{H}(\text{div}; \Omega) \times \mathbb{L}^2(\Omega)$, $q \in L^2(\Omega)$, $(\psi, \boldsymbol{\tau}) \in H_{00}^{1/2}(\Gamma) \times \mathbb{H}_{\Sigma}(\text{div}; \Omega)$, and $(\mathbf{v}, \boldsymbol{\delta}) \in \mathbf{L}^2(\Omega) \times \mathbb{L}_{\text{skew}}^2(\Omega)$. This system can be rewritten in terms of linear operators, yielding the previously announced threefold saddle-point structure. To this end, we define the spaces

$$\mathbf{H} := \mathbf{H}_1 \times \mathbf{H}_2, \quad \mathbf{Q} := L^2(\Omega), \quad \mathbf{X} := \mathbf{X}_1 \times \mathbf{X}_2, \quad \text{and} \quad \mathbf{Y} := \mathbf{Y}_1 \times \mathbf{Y}_2,$$

where

$$\begin{aligned} \mathbf{H}_1 &:= \mathbf{H}(\text{div}; \Omega), \quad \mathbf{H}_2 := L^2(\Omega), \quad \mathbf{X}_1 := H_{00}^{1/2}(\Gamma), \\ \mathbf{X}_2 &:= \mathbb{H}_{\Sigma}(\text{div}; \Omega), \quad \mathbf{Y}_1 := L^2(\Omega), \quad \mathbf{Y}_2 := \mathbb{L}_{\text{skew}}^2(\Omega), \end{aligned}$$

and set the following notation for trial and test functions, respectively

$$\begin{aligned} \vec{\boldsymbol{\eta}} &:= (\boldsymbol{\eta}, \boldsymbol{\xi}) \in \mathbf{H}, & \vec{\varphi} &:= (\varphi, \boldsymbol{\sigma}) \in \mathbf{X}, & \vec{\mathbf{u}} &:= (\mathbf{u}, \boldsymbol{\gamma}) \in \mathbf{Y}, \\ \vec{\boldsymbol{\chi}} &:= (\boldsymbol{\chi}, \boldsymbol{\rho}) \in \mathbf{H}, & \vec{\psi} &:= (\psi, \boldsymbol{\tau}) \in \mathbf{X}, & \vec{\mathbf{v}} &:= (\mathbf{v}, \boldsymbol{\delta}) \in \mathbf{Y}, \end{aligned}$$

which allows us to rewrite our system as: find $(\vec{\eta}, p, \vec{\varphi}, \vec{\mathbf{u}}) \in \mathbf{H} \times \mathbf{Q} \times \mathbf{X} \times \mathbf{Y}$ such that

$$\begin{pmatrix} \mathcal{A}_1 & \mathcal{B}_1^\dagger & \mathcal{B}_2^\dagger \\ \mathcal{B}_1 & -\mathcal{D}_1 & \\ \mathcal{B}_2 & & \mathcal{B}_3^\dagger \\ & & \mathcal{B}_3 \end{pmatrix} \begin{pmatrix} \vec{\eta} \\ p \\ \vec{\varphi} \\ \vec{\mathbf{u}} \end{pmatrix} = \begin{pmatrix} \mathcal{F} \\ \mathcal{G} \\ \mathcal{H} \\ \mathcal{I} \end{pmatrix}, \quad (3.9)$$

where the linear operators $\mathcal{A}_1 : \mathbf{H} \rightarrow \mathbf{H}'$, $\mathcal{B}_1 : \mathbf{H} \rightarrow \mathbf{Q}'$, $\mathcal{B}_2 : \mathbf{H} \rightarrow \mathbf{X}'$, $\mathcal{B}_3 : \mathbf{X} \rightarrow \mathbf{Y}'$ and $\mathcal{D}_1 : \mathbf{Q} \rightarrow \mathbf{Q}'$ are given by

$$\begin{aligned} [\mathcal{A}_1(\vec{\eta}), \vec{\chi}] &:= \int_{\Omega} \kappa^{-1} \vec{\eta} \cdot \vec{\chi} + \int_{\Omega} \mathcal{C}(\xi) : \rho, & [\mathcal{B}_1(\vec{\chi}), q] &:= \int_{\Omega} q \operatorname{div}(\vec{\chi}) - \alpha \int_{\Omega} q \operatorname{tr}(\rho), \\ [\mathcal{B}_2(\vec{\chi}), \vec{\psi}] &:= - \int_{\Omega} \rho : \tau - \langle \vec{\chi} \cdot \nu, \psi \rangle_{\Gamma}, & [\mathcal{B}_3(\vec{\psi}), \vec{\mathbf{v}}] &:= - \int_{\Omega} \mathbf{v} \cdot \operatorname{div}(\tau) - \int_{\Omega} \tau : \delta, \\ [\mathcal{D}_1(r), q] &:= c_0 \int_{\Omega} r q, \end{aligned}$$

whereas the linear functionals $\mathcal{F} \in \mathbf{H}'$, $\mathcal{G} \in \mathbf{Q}'$, $\mathcal{H} \in \mathbf{X}'$ and $\mathcal{I} \in \mathbf{Y}'$ are given by

$$[\mathcal{F}, \vec{\chi}] := 0, \quad [\mathcal{G}, q] := - \int_{\Omega} g q, \quad [\mathcal{H}, \vec{\psi}] := - \langle \tau \nu, \mathbf{u}_D \rangle_{\Gamma} - \langle g_N, \psi \rangle_{\Gamma}, \quad \text{and} \quad [\mathcal{I}, \vec{\mathbf{v}}] := \int_{\Omega} \mathbf{f} \cdot \mathbf{v},$$

respectively, for arbitrary inputs in their respective spaces. Furthermore, by applying the Cauchy–Schwarz inequality and bearing in mind the continuity of the normal trace operators $\gamma_{\nu} : \mathbf{H}(\operatorname{div}; \Omega) \rightarrow \mathbf{H}^{-1/2}(\partial\Omega)$ and $\gamma_{\nu} : \mathbb{H}(\operatorname{div}; \Omega) \rightarrow \mathbf{H}^{-1/2}(\partial\Omega)$, we note that the foregoing operators and functionals satisfy the following stability properties:

$$\begin{aligned} \|\mathcal{A}_1\| &\leq \kappa + 2\mu + n\lambda, \quad \|\mathcal{B}_1\| \leq 1 + \sqrt{n}\alpha, \quad \|\mathcal{B}_2\| \leq 1 + \|\gamma_{\nu}\|, \quad \|\mathcal{B}_3\| \leq \sqrt{2}, \quad \|\mathcal{D}_1\| \leq c_0, \\ \|\mathcal{F}\| &= 0, \quad \|\mathcal{G}\| \leq \|g\|_{0,\Omega}, \quad \|\mathcal{H}\| \leq \|g_N\|_{-1/2,0;\Gamma} + \|\gamma_{\nu}\| \|\mathbf{u}_D\|_{1/2,\Gamma} \quad \text{and} \quad \|\mathcal{I}\| \leq \|\mathbf{f}\|_{0,\Omega}. \end{aligned} \quad (3.10)$$

3.2 A new abstract result

In this section, we establish an abstract result on the well-posedness of threefold saddle-point problems, which slightly extends the structure of (3.9). We emphasize that, although our problem is posed in Hilbert spaces, it is possible—without introducing unnecessary complications—to state the result in the broader setting of reflexive Banach spaces, which ensures greater generality and reusability. Our approach to proving well-posedness relies heavily on Babuška–Brezzi theory in combination with a recent result concerning perturbed saddle-point problems in reflexive Banach spaces (cf. [20]). This strategy has also been frequently applied in related contexts, namely, simple and twofold saddle-point problems, with or without perturbations (see, for instance, [16, 9, 34, 26, 17]).

We let H , Q , X and Y be reflexive real Banach spaces, and let $\mathbf{a} : H \rightarrow H'$, $\mathbf{b} : H \rightarrow Q'$, $\mathbf{c} : Q \rightarrow Q'$, $\mathbf{B} : H \times Q \rightarrow X'$, and $\mathbf{D} : H \times Q \times X \rightarrow Y'$ be linear and bounded operators. We aim to establish sufficient conditions to the well-posedness of the following problem: Given $(F, G, I, J) \in H' \times Q' \times X' \times Y'$, find $(u, \sigma, p, \psi) \in H \times Q \times X \times Y$ such that

$$\left(\begin{array}{c|c|c|c} \mathbf{a} & \mathbf{b}^\dagger & & \\ \hline \mathbf{b} & -\mathbf{c} & & \\ \hline \mathbf{B} & & & \\ \hline \mathbf{D} & & & \end{array} \right) \begin{pmatrix} u \\ \sigma \\ p \\ \psi \end{pmatrix} = \begin{pmatrix} F \\ G \\ I \\ J \end{pmatrix}. \quad (3.11)$$

To that end, we begin by defining the linear and bounded operators $\mathbf{A}_1 : H \times Q \rightarrow H' \times Q'$, $\mathbf{A}_2 : H \times Q \times X \rightarrow H' \times Q' \times X'$, and $\mathbf{A}_3 : H \times Q \times X \times Y \rightarrow H' \times Q' \times X' \times Y'$, as

$$\mathbf{A}_1 := \left(\begin{array}{c|c} \mathbf{a} & \mathbf{b}^\dagger \\ \hline \mathbf{b} & -\mathbf{c} \end{array} \right), \quad \mathbf{A}_2 := \left(\begin{array}{c|c} \mathbf{A}_1 & \mathbf{B}^\dagger \\ \hline \mathbf{B} & \end{array} \right), \quad \text{and} \quad \mathbf{A}_3 := \left(\begin{array}{c|c} \mathbf{A}_2 & \mathbf{D}^\dagger \\ \hline \mathbf{D} & \end{array} \right).$$

We then observe that studying the well-posedness of (3.11) reduces to analyzing the bijectivity of the operator $\mathbf{A}_3$. In this context, we recall from Babuška–Brezzi theory (cf. [23, Theorem 49.12]) that $\mathbf{A}_3$ is an isomorphism if and only if $\mathbf{D}$ is surjective and $\mathbf{A}_2$ defines an isomorphism from the kernel of $\mathbf{D}$ to its dual. More precisely, defining

$$\mathcal{K} := \left\{ (v, \tau, q) \in H \times Q \times X : \quad \mathbf{D}(v, \tau, q) = 0 \right\}, \quad (3.12)$$

we have that $\mathbf{A}_3$ is an isomorphism if and only if (cf. (1.1)) $\Pi_{\mathcal{K}} \mathbf{A}_2 : \mathcal{K} \rightarrow \mathcal{K}'$ is an isomorphism and $\mathbf{D}$ satisfies the inf-sup condition

$$\sup_{0 \neq (v, \tau, q) \in H \times Q \times X} \frac{[\mathbf{D}(v, \tau, q), \varphi]}{\|(v, \tau, q)\|} \geq \beta_3 \|\varphi\| \quad \forall \varphi \in Y, \quad (3.13)$$

for some positive constant β_3 . Frequent use of the definition given by (1.1) is made in this section. Now, looking at the definition of $\mathbf{A}_2$, one would like to apply the same result to establish equivalent conditions to the bijectivity of the operator. This is possible only if we have that $\mathcal{K}$ has a product structure. In fact, assuming that $\mathcal{K} = \mathcal{K}_1 \times \mathcal{K}_2 \times \mathcal{K}_3$, where $\mathcal{K}_1$, $\mathcal{K}_2$ and $\mathcal{K}_3$ are subspaces of H , Q and X , respectively, we have that $\Pi_{\mathcal{K}} \mathbf{A}_2$ is an isomorphism if and only if $\Pi_{\mathcal{V}} \mathbf{A}_1 : \mathcal{V} \rightarrow \mathcal{V}'$ is an isomorphism, where

$$\mathcal{V} := \left\{ (v, \tau) \in \mathcal{K}_1 \times \mathcal{K}_2 : \quad [\mathbf{B}(v, \tau), q] = 0 \quad \forall q \in \mathcal{K}_3 \right\}, \quad (3.14)$$

and there exists a positive constant β_2 such that

$$\sup_{0 \neq (v, \tau) \in \mathcal{K}_1 \times \mathcal{K}_2} \frac{[\mathbf{B}(v, \tau), q]}{\|(v, \tau)\|} \geq \beta_2 \|q\| \quad \forall q \in \mathcal{K}_3. \quad (3.15)$$

It only remains to translate the bijectivity condition of $\Pi_{\mathcal{V}} \mathbf{A}_1$. Noting that the structure of $\mathbf{A}_1$ differs from that of $\mathbf{A}_2$ and $\mathbf{A}_3$, due to the presence of a perturbation term, we cannot directly apply the previous result. Instead, we rely on [20, Theorem 3.4], which provides sufficient conditions for the bijectivity of an operator with this structure. In particular, we first observe that $\Pi_{\mathcal{V}} \mathbf{A}_1 : \mathcal{V} \rightarrow \mathcal{V}'$ is an isomorphism if and only if, for each $(\mathcal{F}, \mathcal{G}) \in \mathcal{V}'$, there exists a unique solution to the following problem: find $(u, \sigma) \in \mathcal{V}$ such that

$$\begin{aligned} \mathbf{a}(u) + \mathbf{b}^\dagger(\sigma) &= \mathcal{F}, \\ \mathbf{b}(u) - \mathbf{c}(\sigma) &= \mathcal{G}. \end{aligned}$$

Now, notice that, in order to apply [20, Theorem 3.4], $\mathcal{V}$ must possess a product structure. We then suppose that $\mathcal{V} = \mathcal{V}_1 \times \mathcal{V}_2$, where $\mathcal{V}_1$ and $\mathcal{V}_2$ are subspaces of $\mathcal{K}_1$ and $\mathcal{K}_2$, respectively, and define

$$\mathcal{W} := \left\{ v \in \mathcal{V}_1 : \quad [\mathbf{b}(v), \tau] = 0 \quad \forall \tau \in \mathcal{V}_2 \right\}. \quad (3.16)$$

Thus, by collecting the conditions mentioned earlier (cf. (3.13) and (3.15)), and by employing [20, Theorem 3.4], we arrive at the following result.

Theorem 3.1. *Let H , Q , X and Y be reflexive real Banach spaces, and let $\mathbf{a} : H \rightarrow H'$, $\mathbf{b} : H \rightarrow Q'$, $\mathbf{c} : Q \rightarrow Q'$, $\mathbf{B} : H \times Q \rightarrow X'$, and $\mathbf{D} : H \times Q \times X \rightarrow Y'$ be given linear and bounded operators. In addition, let us suppose that the kernel $\mathcal{K}$ of $\mathbf{D}$ (cf. (3.12)) can be written as a product space $\mathcal{K} = \mathcal{K}_1 \times \mathcal{K}_2 \times \mathcal{K}_3$, where $\mathcal{K}_1$, $\mathcal{K}_2$ and $\mathcal{K}_3$ are subspaces of H , Q and X , respectively. Define $\mathcal{V}$ as in (3.14) and suppose that $\mathcal{V} = \mathcal{V}_1 \times \mathcal{V}_2$, where $\mathcal{V}_1$ and $\mathcal{V}_2$ are subspaces of $\mathcal{K}_1$ and $\mathcal{K}_2$, respectively. Furthermore, define $\mathcal{W}$ as in (3.16), and assume that the following conditions hold:*

(i) *There exists a positive constant β_3 such that*

$$\sup_{0 \neq (v, \tau, q) \in H \times Q \times X} \frac{[\mathbf{D}(v, \tau, q), \varphi]}{\|(v, \tau, q)\|} \geq \beta_3 \|\varphi\| \quad \forall \varphi \in Y.$$

(ii) There exists a positive constant β_2 such that

$$\sup_{0 \neq (v, \tau) \in \mathcal{K}_1 \times \mathcal{K}_2} \frac{[\mathbf{B}(v, \tau), q]}{\|(v, \tau)\|} \geq \beta_2 \|q\| \quad \forall q \in \mathcal{K}_3.$$

(iii) There exists a positive constant β_1 such that

$$\sup_{0 \neq v \in \mathcal{V}_1} \frac{[\mathbf{b}(v), q]}{\|v\|} \geq \beta_1 \|q\| \quad \forall q \in \mathcal{V}_2.$$

(iv) There exists a positive constant α such that

$$\sup_{0 \neq \tau \in \mathcal{W}} \frac{[\mathbf{a}(v), \tau]}{\|\tau\|} \geq \alpha \|v\| \quad \forall v \in \mathcal{W}.$$

(v) $\mathbf{a}$ and $\mathbf{c}$ are symmetric and positive semi-definite in $\mathcal{V}_1$ and $\mathcal{V}_2$, respectively.

Then, for each $(F, G, I, J) \in H' \times Q' \times X' \times Y'$, there exists a unique $(u, \sigma, p, \psi) \in H \times Q \times X \times Y$ solution to (3.11). Moreover, there exists a positive constant C , depending only on $\alpha, \beta_1, \beta_2, \beta_3, \|\mathbf{a}\|, \|\mathbf{b}\|, \|\mathbf{c}\|, \|\mathbf{B}\|$, and $\|\mathbf{D}\|$, such that

$$\|(u, \sigma, p, \psi)\|_{H \times Q \times X \times Y} \leq C \|(F, G, I, J)\|_{H' \times Q' \times X' \times Y'}. \quad (3.17)$$

Proof. The existence and uniqueness of solution follows from the previous discussion. In turn, (3.17) can be derived by using the *a priori* estimates given by [20, Theorem 3.4]. Alternatively, one can use the inf-sup conditions and perform standard techniques to arrive at the same estimate. $\square$

We remark that in the previous discussion we could instead have considered [20, Theorem 3.1], which covers a different spectrum of problems, namely, when the transpose map $\mathbf{b}^\mathbf{t}$ has nontrivial kernel inside $\mathcal{V}_2$. This is not under the scope of this work, as our problem does not fall in this category.

3.3 Well-posedness of the continuous problem

In this section, we prove that (3.9) is well-posed by employing Theorem 3.1. For this purpose, we first define $\mathcal{K}_3$ as the kernel space of $\mathcal{B}_3$, which is characterized by

$$\mathcal{K}_3 = H_{00}^{1/2}(\Gamma) \times \left\{ \tau \in \mathbb{H}_\Sigma(\mathbf{div}; \Omega) : \tau \in \mathbb{L}_{\text{sym}}^2(\Omega) \quad \text{and} \quad \mathbf{div}(\tau) = 0 \right\}, \quad (3.18)$$

where

$$\mathbb{L}_{\text{sym}}^2(\Omega) := \left\{ \tau \in \mathbb{L}^2(\Omega) : \tau^\mathbf{t} = \tau \right\}.$$

In addition, we define the spaces

$$\mathcal{V} := \left\{ \vec{\chi} \in \mathbf{H} : [\mathcal{B}_2(\vec{\chi}), \vec{\psi}] = 0 \quad \forall \vec{\psi} \in \mathcal{K}_3 \right\} \quad \text{and} \quad \mathcal{W} := \left\{ \vec{\chi} \in \mathcal{V} : [\mathcal{B}_1(\vec{\chi}), q] = 0 \quad \forall q \in \mathcal{Q} \right\},$$

which, denoting by $\mathcal{K}_3^{(2)}$ the second-component space of $\mathcal{K}_3$ (cf. (3.18)), can be characterized by

$$\begin{aligned} \mathcal{V} &= \left\{ \vec{\chi} := (\chi, \rho) \in \mathbf{H} : \chi \cdot \nu = 0 \quad \text{on} \quad \Gamma \quad \text{and} \quad \int_\Omega \rho : \tau = 0 \quad \forall \tau \in \mathcal{K}_3^{(2)} \right\}, \\ \text{and} \quad \mathcal{W} &= \left\{ \vec{\chi} := (\chi, \rho) \in \mathcal{V} : \mathbf{div}(\chi) = \alpha \mathbf{tr}(\rho) \right\}. \end{aligned} \quad (3.19)$$

With these definitions in place, we begin our analysis by verifying the hypotheses of Theorem 3.1. First, observe that the splitting condition on $\mathcal{K}$ established in the previous section is trivially satisfied, as $\mathcal{B}_3$ acts only in $\mathbf{X}$. The following results establish the inf-sup conditions for $\mathcal{B}_3, \mathcal{B}_2$, and $\mathcal{B}_1$, respectively.

Lemma 3.2. *There exists a positive constant β_3 , depending only on Ω , such that*

$$\sup_{0 \neq \vec{\psi} \in \mathbf{X}} \frac{[\mathcal{B}_3(\vec{\psi}), \vec{\mathbf{v}}]}{\|\vec{\psi}\|_{\mathbf{X}}} \geq \beta_3 \|\vec{\mathbf{v}}\|_{\mathbf{Y}} \quad \forall \vec{\mathbf{v}} \in \mathbf{Y}.$$

Proof. It follows from a slightly modification of [24, Section 2.4.3.1]. $\square$

Lemma 3.3. *There exists a positive constant β_2 , depending only on Ω , such that*

$$\sup_{0 \neq \vec{\chi} \in \mathbf{H}} \frac{[\mathcal{B}_2(\vec{\chi}), \vec{\psi}]}{\|\vec{\chi}\|_{\mathbf{H}}} \geq \beta_2 \|\vec{\psi}\|_{\mathbf{X}} \quad \forall \vec{\psi} \in \mathcal{K}_3.$$

Proof. Given $\vec{\psi} := (\psi, \boldsymbol{\tau}) \in \mathcal{K}_3$, by the characterization given in (3.18), we have that $\|\boldsymbol{\tau}\|_{0,\Omega} = \|\boldsymbol{\tau}\|_{\text{div};\Omega}$. Then, by choosing $\vec{\chi} = (0, \boldsymbol{\tau}) \in \mathbf{H}(\text{div};\Omega) \times \mathbb{L}^2(\Omega)$ in the supremum, we obtain

$$\sup_{0 \neq \vec{\chi} \in \mathbf{H}} \frac{[\mathcal{B}_2(\vec{\chi}), \vec{\psi}]}{\|\vec{\chi}\|_{\mathbf{H}}} \geq \frac{\|\boldsymbol{\tau}\|_{0,\Omega}^2}{\|\boldsymbol{\tau}\|_{\text{div};\Omega}} = \|\boldsymbol{\tau}\|_{\text{div};\Omega}. \quad (3.20)$$

Similarly, taking $\vec{\chi} = (\boldsymbol{\chi}, 0)$ in the supremum, with arbitrary $\boldsymbol{\chi} \in \mathbf{H}(\text{div};\Omega)$, leads to

$$\sup_{0 \neq \vec{\chi} \in \mathbf{H}} \frac{[\mathcal{B}_2(\vec{\chi}), \vec{\psi}]}{\|\vec{\chi}\|_{\mathbf{H}}} \geq \sup_{0 \neq \boldsymbol{\chi} \in \mathbf{H}(\text{div};\Omega)} \frac{\langle \boldsymbol{\chi} \cdot \boldsymbol{\nu}, \psi \rangle_{\Gamma}}{\|\boldsymbol{\chi}\|_{\text{div};\Omega}}. \quad (3.21)$$

We focus on bounding the right-hand side. To do so, we consider the following variational problem: Find $z \in H_{\Sigma}^1(\Omega) := \{w \in H^1(\Omega) : w = 0 \text{ on } \Sigma\}$ such that

$$\int_{\Omega} \nabla z \cdot \nabla w = \langle \mathcal{R}_{00}^{-1}(\psi), w \rangle_{\Gamma} \quad \forall w \in H_{\Sigma}^1(\Omega), \quad (3.22)$$

where $\mathcal{R}_{00} : H_{00}^{-1/2}(\Gamma) \rightarrow H_{00}^{1/2}(\Gamma)$ is the corresponding Riesz isomorphism. Since $H_{\Sigma}^1(\Omega)$ is a Hilbert space, and owing to the well-known Poincaré inequality and the Lax–Milgram lemma, there exist a unique $z \in H_{\Sigma}^1(\Omega)$ solution to (3.22), and a positive constant C_2 depending only on Ω , such that

$$|z|_{1,\Omega} \leq C_2 \|\psi\|_{1/2,00;\Gamma}.$$

We then define $\hat{\boldsymbol{\chi}} := \nabla z \in \mathbf{L}^2(\Omega)$, and observe from (3.22) that $\text{div}(\hat{\boldsymbol{\chi}}) = 0$, which yields $\hat{\boldsymbol{\chi}} \in \mathbf{H}(\text{div};\Omega)$, and

$$\|\hat{\boldsymbol{\chi}}\|_{\text{div};\Omega} = \|\hat{\boldsymbol{\chi}}\|_{0,\Omega} = |z|_{1,\Omega} \leq C_2 \|\psi\|_{1/2,00;\Gamma}. \quad (3.23)$$

Moreover, it is also clear from (3.22) that $\hat{\boldsymbol{\chi}} \cdot \boldsymbol{\nu} = \mathcal{R}_{00}^{-1}(\psi)$ on Γ , and hence, using (3.23) we can assert that

$$\sup_{0 \neq \boldsymbol{\chi} \in \mathbf{H}(\text{div};\Omega)} \frac{\langle \boldsymbol{\chi} \cdot \boldsymbol{\nu}, \psi \rangle_{\Gamma}}{\|\boldsymbol{\chi}\|_{\text{div};\Omega}} \geq \frac{\langle \hat{\boldsymbol{\chi}} \cdot \boldsymbol{\nu}, \psi \rangle_{\Gamma}}{\|\hat{\boldsymbol{\chi}}\|_{\text{div};\Omega}} = \frac{\langle \mathcal{R}_{00}^{-1}(\psi), \psi \rangle_{\Gamma}}{\|\hat{\boldsymbol{\chi}}\|_{\text{div};\Omega}} = \frac{\|\psi\|_{1/2,00;\Gamma}^2}{\|\hat{\boldsymbol{\chi}}\|_{\text{div};\Omega}} \geq C_2^{-1} \|\psi\|_{1/2,00;\Gamma}, \quad (3.24)$$

so that, replacing (3.24) in (3.21), and then adding it to (3.20), we arrive at the desired inf-sup condition with $\beta_2 = \frac{1}{2} \min\{1, C_2^{-1}\}$. $\square$

Lemma 3.4. *There exists a positive constant β_1 , depending only on Ω , such that*

$$\sup_{0 \neq \vec{\chi} \in \mathcal{V}} \frac{[\mathcal{B}_1(\vec{\chi}), q]}{\|\vec{\chi}\|_{\mathbf{H}}} \geq \beta_1 \|q\|_{\mathbf{Q}} \quad \forall q \in \mathbf{Q}.$$

Proof. Given $q \in \mathbf{Q}$, we consider the following boundary value problem:

$$\Delta z = q \quad \text{in } \Omega, \quad z = 0 \quad \text{on } \Sigma, \quad \nabla z \cdot \boldsymbol{\nu} = 0 \quad \text{on } \Gamma,$$

whose unique weak solution $z \in H^1(\Omega)$ satisfies the estimate $\|z\|_{1,\Omega} \leq C_1 \|q\|_{0,\Omega}$ (cf. [24, Chapter 2.4.2]), for some positive constant C_1 depending only on the domain Ω . Then, define $\tilde{\boldsymbol{\chi}} := \nabla z$, and note that $\operatorname{div}(\tilde{\boldsymbol{\chi}}) = q \in L^2(\Omega)$, which implies $\tilde{\boldsymbol{\chi}} \in \mathbf{H}(\operatorname{div}; \Omega)$. Moreover, since $\tilde{\boldsymbol{\chi}} \cdot \boldsymbol{\nu} = 0$ on Γ , we deduce that $(\tilde{\boldsymbol{\chi}}, 0) \in \mathcal{V}$ (cf. (3.19)), and from the *a priori* estimate of our auxiliary problem, there holds

$$\|\tilde{\boldsymbol{\chi}}\|_{\operatorname{div};\Omega}^2 = |z|_{1,\Omega}^2 + \|q\|_{0,\Omega}^2 \leq (C_1^2 + 1) \|q\|_{0,\Omega}^2.$$

Hence, by taking $\vec{\boldsymbol{\chi}} = (\tilde{\boldsymbol{\chi}}, 0) \in \mathcal{V}$ in the supremum, we obtain that

$$\sup_{0 \neq \vec{\boldsymbol{\chi}} \in \mathcal{V}} \frac{[\mathcal{B}_1(\vec{\boldsymbol{\chi}}), q]}{\|\vec{\boldsymbol{\chi}}\|_{\mathbf{H}}} \geq \frac{\int_{\Omega} q \operatorname{div}(\tilde{\boldsymbol{\chi}})}{\|\tilde{\boldsymbol{\chi}}\|_{\operatorname{div};\Omega}} = \frac{\|q\|_{0,\Omega}^2}{\|\tilde{\boldsymbol{\chi}}\|_{\operatorname{div};\Omega}} \geq \frac{1}{(C_1^2 + 1)^{1/2}} \|q\|_{0,\Omega},$$

which completes the proof with $\beta_1 = (1 + C_1^2)^{-1/2}$. $\square$

Lemma 3.5. $\mathcal{A}_1$ and $\mathcal{D}_1$ are symmetric and positive semi-definite. Moreover, there exists a positive constant α_1 , depending only on κ_0 , λ , and μ , such that

$$[\mathcal{A}_1(\vec{\boldsymbol{\chi}}), \vec{\boldsymbol{\chi}}] \geq \alpha_1 \|\vec{\boldsymbol{\chi}}\|_{\mathbf{H}}^2 \quad \forall \vec{\boldsymbol{\chi}} \in \mathcal{W}.$$

Proof. We first observe that $\mathcal{A}_1$ and $\mathcal{D}_1$ are symmetric, with the latter being positive semi-definite. In particular, note that the second statement regarding $\mathcal{D}_1$ includes the case $c_0 = 0$. Thereby, we focus on proving that $\mathcal{A}_1$ is coercive in $\mathcal{W}$. In fact, given $\vec{\boldsymbol{\chi}} \in \mathbf{H}$, we have

$$[\mathcal{A}_1(\vec{\boldsymbol{\chi}}), \vec{\boldsymbol{\chi}}] = \int_{\Omega} \kappa^{-1} |\boldsymbol{\chi}|^2 + \int_{\Omega} (2\mu \boldsymbol{\rho} + \lambda \operatorname{tr}(\boldsymbol{\rho}) \mathbb{I}) : \boldsymbol{\rho} \geq \kappa_0 \|\boldsymbol{\chi}\|_{0,\Omega}^2 + 2\mu \|\boldsymbol{\rho}\|_{0,\Omega}^2 + \lambda \|\operatorname{tr}(\boldsymbol{\rho})\|_{0,\Omega}^2, \quad (3.25)$$

which shows that $\mathcal{A}_1$ is also positive semi-definite. Moreover, if $\vec{\boldsymbol{\chi}} \in \mathcal{W}$, we have, in particular, that $\operatorname{div}(\boldsymbol{\chi}) = \alpha \operatorname{tr}(\boldsymbol{\rho})$, and hence, since $\alpha \in [0, 1]$, $\|\operatorname{div}(\boldsymbol{\chi})\|_{0,\Omega} \leq \|\operatorname{tr}(\boldsymbol{\rho})\|_{0,\Omega}$. Substituting this estimate into (3.25) yields

$$[\mathcal{A}_1(\vec{\boldsymbol{\chi}}), \vec{\boldsymbol{\chi}}] \geq \kappa_0 \|\boldsymbol{\chi}\|_{0,\Omega}^2 + 2\mu \|\boldsymbol{\rho}\|_{0,\Omega}^2 + \lambda \|\operatorname{div}(\boldsymbol{\chi})\|_{0,\Omega}^2 \geq \min\{\kappa_0, \lambda, 2\mu\} \|\vec{\boldsymbol{\chi}}\|_{\mathbf{H}}^2,$$

thereby proving the coercivity of $\mathcal{A}_1$ in $\mathcal{W}$ with $\alpha_1 = \frac{1}{2} \min\{\kappa_0, \lambda, 2\mu\}$. Note that this argument, and hence the whole analysis, also covers the case $\alpha = 0$, in which the flow and elasticity subproblems decouple. For $\alpha \in (0, 1]$ one can also take the slightly sharper constant $\min\{\kappa_0, \lambda \alpha^{-2}, 2\mu\}$. $\square$

Theorem 3.6. The problem (3.9) has a unique solution $(\vec{\boldsymbol{\eta}}, p, \vec{\boldsymbol{\varphi}}, \vec{\boldsymbol{u}}) \in \mathbf{H} \times \mathbf{Q} \times \mathbf{X} \times \mathbf{Y}$. Moreover, there exists a positive constant C depending only on κ_0 , κ_1 , μ , λ , α , c_0 and Ω , such that

$$\|(\vec{\boldsymbol{\eta}}, p, \vec{\boldsymbol{\varphi}}, \vec{\boldsymbol{u}})\| \leq C \left\{ \|g\|_{0,\Omega} + \|g_N\|_{-1/2,00;\Gamma} + \|\mathbf{u}_D\|_{1/2,\Gamma} + \|\mathbf{f}\|_{0,\Omega} \right\}.$$

Proof. Owing to Lemmas 3.2, 3.3, 3.4, and 3.5, the assumptions of Theorem 3.1 are satisfied. Therefore, the desired result follows, with the *a priori* estimate also stemming from the operators' stability (cf. (3.10)). $\square$

We end this section by remarking that the constant C in Theorem 3.6 depends on the model parameters only through $\alpha_1 = \frac{1}{2} \min\{\kappa_0, \lambda, 2\mu\}$ (cf. Lemma 3.5) and the upper bounds in (3.10). In particular, since $\mathcal{D}_1$ is only required to be positive semi-definite and $\|\mathcal{D}_1\| \leq c_0$, the estimate holds uniformly for $c_0 \in [0, \bar{c}_0]$, for any $\bar{c}_0 > 0$, including the case of vanishing storage $c_0 = 0$. Similarly, it is uniform with respect to $\alpha \in [0, 1]$. In contrast, C deteriorates in the nearly incompressible limit $\lambda \rightarrow \infty$ (through $\|\mathcal{A}_1\|$), as well as for very low or very high permeabilities (through κ_1 and κ_0 , respectively). The same observations apply to the discrete constants in Theorems 4.6 and 5.1, since the inf-sup constants $\beta_{1,d}$, $\beta_{2,d}$, and $\beta_{3,d}$ are independent of the model parameters. Fully parameter-robust estimates would require the use of parameter-dependent norms and are beyond the scope of this work. Nevertheless, as a first step in this direction, the behaviour of the method in such norms is explored numerically in Example 4 of Section 6.

4 The Galerkin scheme

We first let $\{\mathcal{T}_h\}_{h>0}$ be a regular family of triangulations of $\bar{\Omega}$ made up of triangles K (when $n = 2$) or tetrahedra K (when $n = 3$) of diameter h_K , and set $h := \max\{h_K : K \in \mathcal{T}_h\}$. Given an integer $k \geq 0$ and a subset S of $\mathbb{R}^n$, we denote by $\mathbf{P}_k(S)$ the space of polynomials of total degree at most k defined on S , and $\mathbf{P}_k(S)$ its vector counterpart. We also let $\mathbf{H}_h^\eta$, $\mathbb{H}_h^\xi$, $\mathbf{Q}_h$, $\mathbf{X}_h^\varphi$, $\mathbb{X}_h^\sigma$, $\mathbf{Y}_h^u$ and $\mathbb{Y}_h^\gamma$ be arbitrary finite element subspaces of $\mathbf{H}(\text{div}; \Omega)$, $\mathbb{L}^2(\Omega)$, $\mathbf{L}^2(\Omega)$, $\mathbf{H}_{00}^{1/2}(\Gamma)$, $\mathbb{H}_\Sigma(\text{div}, \Omega)$, $\mathbf{L}^2(\Omega)$ and $\mathbb{L}_{\text{skew}}^2(\Omega)$, respectively, all of them endowed with the corresponding subspace topology. Similarly to the continuous case, we define

$$\mathbf{H}_h := \mathbf{H}_h^\eta \times \mathbb{H}_h^\xi, \quad \mathbf{X}_h := \mathbf{X}_h^\varphi \times \mathbb{X}_h^\sigma, \quad \text{and} \quad \mathbf{Y}_h := \mathbf{Y}_h^u \times \mathbb{Y}_h^\gamma,$$

and introduce the notation

$$\begin{aligned} \vec{\eta}_h &:= (\eta_h, \xi_h) \in \mathbf{H}_h, & \vec{\varphi}_h &:= (\varphi_h, \sigma_h) \in \mathbf{X}_h, & \vec{u}_h &:= (u_h, \gamma_h) \in \mathbf{Y}_h, \\ \vec{\chi}_h &:= (\chi_h, \rho_h) \in \mathbf{H}_h, & \vec{\psi}_h &:= (\psi_h, \tau_h) \in \mathbf{X}_h, & \vec{v}_h &:= (v_h, \delta_h) \in \mathbf{Y}_h, \end{aligned}$$

which enables us to state the Galerkin scheme associated with the continuous problem (3.9). It consists in finding $(\vec{\eta}_h, p_h, \vec{\varphi}_h, \vec{u}_h) \in \mathbf{H}_h \times \mathbf{Q}_h \times \mathbf{X}_h \times \mathbf{Y}_h$ such that

$$\begin{pmatrix} \mathcal{A}_{1,h} & \mathcal{B}_{1,h}^\dagger & \mathcal{B}_{2,h}^\dagger & \\ \mathcal{B}_{1,h} & -\mathcal{D}_{1,h} & & \\ \mathcal{B}_{2,h} & & \mathcal{B}_{3,h}^\dagger & \\ & & \mathcal{B}_{3,h} & \end{pmatrix} \begin{pmatrix} \vec{\eta}_h \\ p_h \\ \vec{\varphi}_h \\ \vec{u}_h \end{pmatrix} = \begin{pmatrix} \mathcal{F}_h \\ \mathcal{G}_h \\ \mathcal{H}_h \\ \mathcal{I}_h \end{pmatrix}, \quad (4.1)$$

where all the operators and functionals appearing above are understood as the restrictions of their continuous counterparts (see (3.9)) to the corresponding finite element subspaces. The discrete kernels associated with $\mathcal{B}_1$ and $\mathcal{B}_3$ are defined, respectively, as

$$\begin{aligned} \mathcal{K}_{1,h} &:= \ker(\mathcal{B}_{1,h}) = \left\{ \vec{\chi}_h \in \mathbf{H}_h : \int_{\Omega} q_h (\text{div}(\chi_h) - \alpha \text{tr}(\rho_h)) = 0 \quad \forall q_h \in \mathbf{Q}_h \right\} \\ &\text{and} \quad \mathcal{K}_{3,h} := \ker(\mathcal{B}_{3,h}) = \mathbf{X}_h^\varphi \times \mathcal{K}_{3,h}^{(2)}, \end{aligned} \quad (4.2)$$

where

$$\mathcal{K}_{3,h}^{(2)} := \left\{ \tau_h \in \mathbb{X}_h^\sigma : \int_{\Omega} \mathbf{v}_h \cdot \text{div}(\tau_h) + \int_{\Omega} \delta_h : \tau_h = 0 \quad \forall (\mathbf{v}_h, \delta_h) \in \mathbf{Y}_h \right\}.$$

In addition, similarly to the continuous case (cf. (3.19)), we introduce the spaces

$$\mathcal{V}_h := \left\{ \vec{\chi}_h \in \mathbf{H}_h : [\mathcal{B}_{2,h}(\vec{\chi}_h), \vec{\psi}_h] = 0 \quad \forall \vec{\psi}_h \in \mathcal{K}_{3,h} \right\} \quad \text{and} \quad \mathcal{W}_h := \mathcal{K}_{1,h} \cap \mathcal{V}_h. \quad (4.3)$$

4.1 Discrete well-posedness

We begin this section by formulating suitable assumptions on the finite element spaces and on the discretization of the domain, providing sufficient conditions to ensure the well-posedness of the Galerkin scheme (4.1). To that end, we briefly review the conditions stated in Theorem 3.1, thereby motivating the need to impose specific assumptions on the finite element spaces. The first of these is the inf-sup condition associated with the operator $\mathcal{B}_{3,h}$, which, not involving the variable $\psi_h \in \mathbf{X}_h^\varphi$ in its definition, coincides with the bilinear form arising from the saddle-point formulation of the linear elasticity problem (see, for instance, [37]). Accordingly, the discrete spaces involved in this inf-sup condition—namely, $\mathbf{X}_h$ and $\mathbf{Y}_h$ —must form a stable pair for the linear elasticity problem, as we shall see in Section 5. This motivates the following assumption:

ASSUMPTION 4.1. *There exists a positive constant $\beta_{3,d}$, independent of h , such that*

$$\sup_{0 \neq \vec{\psi}_h \in \mathbf{X}_h} \frac{[\mathcal{B}_{3,h}(\vec{\psi}_h), \vec{\mathbf{v}}_h]}{\|\vec{\psi}_h\|_{\mathbf{X}_h}} \geq \beta_{3,d} \|\vec{\mathbf{v}}_h\|_{\mathbf{Y}_h} \quad \forall \vec{\mathbf{v}}_h \in \mathbf{Y}_h. \quad (4.4)$$

Now we aim to prove an inf-sup condition for the operator $\mathcal{B}_{2,h}$, which serves as the discrete counterpart of Lemma 3.3. Namely, we seek to establish the existence of $\beta_{2,d} > 0$ such that

$$\sup_{0 \neq \vec{\chi}_h \in \mathbf{H}_h} \frac{[\mathcal{B}_{2,h}(\vec{\chi}_h), \vec{\psi}_h]}{\|\vec{\chi}_h\|_{\mathbf{H}_h}} \geq \beta_{2,d} \|\vec{\psi}_h\|_{\mathbf{X}_h} \quad \forall \vec{\psi}_h \in \mathcal{K}_{3,h}. \quad (4.5)$$

To this end, we follow closely the approach of [7, Lemmas 3.2 and 3.3]. In order to retain the generality of the framework, we introduce a set of natural assumptions on the finite element subspaces, together with some auxiliary constructions. As a first step, we define an auxiliary space that will serve as a discretization of $H_{00}^{-1/2}(\Gamma)$:

$$H_h^{-1/2} := \left\{ \mu_h \in L^2(\Gamma) : \mu_h|_{K \cap \Gamma} \in P_0(K \cap \Gamma) \quad \forall K \in \mathcal{T}_h, K \cap \Gamma \neq \emptyset \right\}. \quad (4.6)$$

Certainly, it can be proved that $H_h^{-1/2}$ is a subspace of $H_{00}^s(\Gamma)$ for all $-1/2 \leq s < 1/2$, and this fact will be used in the subsequent analysis. In addition, we consider an independent simplicial discretization $\{\tilde{\Gamma}_1, \dots, \tilde{\Gamma}_m\}$ of Γ , parametrized by $\tilde{h} := \max_{1 \leq j \leq m} |\tilde{\Gamma}_j|$, which enables us to approximate the space $H_{00}^{1/2}(\Gamma)$ in terms of $\tilde{h}$ rather than h . Accordingly, we now denote by X_h^φ the approximation space for φ , and denote by $\mathbf{X}_{\underline{h}} := X_h^\varphi \times \mathbb{X}_h^\sigma$ the associated product space, where $\underline{h} := (h, \tilde{h})$ is used to indicate dependence on both discretization parameters.

ASSUMPTION 4.2 (Regularity of the discretizations of Γ).

1. *The family of triangulations $\{\mathcal{T}_h\}_{h>0}$ is uniformly regular near Γ . That is, there exists a positive constant C , independent of h , such that $|K \cap \Gamma| \geq C h^{n-1}$, for all $K \in \mathcal{T}_h$ that intersect Γ .*
2. *$\tilde{\Gamma}$ is uniformly regular. Namely, there exists $C > 0$, independent of $\tilde{h}$, such that $|\tilde{\Gamma}_j| \geq C \tilde{h}^{n-1}$, for all $j \in \{1, \dots, m\}$.*

Under this assumption, the auxiliary space $H_h^{-1/2}$ satisfies an approximation property (see, for instance, [6]): there exists a positive constant C , independent of h , such that for all $s \in (-1/2, 1/2]$ and for all $\mu \in H_{00}^s(\Gamma)$, there exists $\hat{\mu}_h \in H_h^{-1/2}$ such that

$$\|\mu - \hat{\mu}_h\|_{-1/2,0;\Gamma} \leq C h^{s+1/2} \|\mu\|_{s,0,\Gamma}. \quad (4.7)$$

In turn, inverse inequalities for both X_h^φ and $H_h^{-1/2}$ will play a key role in the forthcoming analysis. The one for $H_h^{-1/2}$ is valid under Assumption 4.2. Indeed, as mentioned in [39, Remark 4.4.4, (b)], whose corresponding proof actually follows from the more general results provided in [21, Theorems 4.2 and 4.6], there exists a positive constant $\tilde{C}$, independent of h , such that for all the indexes $(t, s) \in \{0\} \times [0, 1/2) \cup [-1, 0] \times \{0\}$ there holds

$$\|\mu_h\|_{s,0;\Gamma} \leq \tilde{C} h^{t-s} \|\mu_h\|_{t,0;\Gamma} \quad \forall \mu_h \in H_h^{-1/2}.$$

In particular, taking $s \in [0, 1/2)$ and $t = 0$, we obtain

$$\|\mu_h\|_{s,0,\Gamma} \leq \tilde{C} h^{-s} \|\mu_h\|_{0,\Gamma} \quad \forall \mu_h \in H_h^{-1/2},$$

whereas $s = 0$ and $t \in [-1, 0]$ yield

$$\|\mu_h\|_{0,\Gamma} \leq \tilde{C} h^t \|\mu_h\|_{t,0;\Gamma} \quad \forall \mu_h \in H_h^{-1/2},$$

so that, combining the foregoing inequalities, we deduce the existence of a positive constant C , independent of h , such that for all the indexes (t, s) such that $-1 \leq t \leq 0 \leq s < 1/2$, there holds

$$\|\mu_h\|_{s,00;\Gamma} \leq C h^{t-s} \|\mu_h\|_{t,00;\Gamma} \quad \forall \mu_h \in H_h^{-1/2}. \quad (4.8)$$

We shall assume an inverse inequality for the subspace X_h^φ . Nevertheless, it is worth mentioning that, in practice, this inequality can be derived from the choice of X_h^φ , together with the regularity of the triangulation (cf. Assumption 4.2). We will refer again to this point in Section 5 for a specific choice of spaces.

ASSUMPTION 4.3 (Inverse inequality for X_h^φ). *There exists a positive constant C , independent of $\tilde{h}$, such that for all $0 \leq s \leq t \leq 1$, there holds*

$$\|\psi_{\tilde{h}}\|_{t,00;\Gamma} \leq C \tilde{h}^{s-t} \|\psi_{\tilde{h}}\|_{s,00;\Gamma} \quad \forall \psi_{\tilde{h}} \in X_h^\varphi. \quad (4.9)$$

We now impose an additional regularity assumption on the boundary discretization, specifically on the space X_h^φ .

ASSUMPTION 4.4. $X_h^\varphi \subset H_{00}^1(\Gamma)$.

Next, we introduce two additional assumptions, which guarantee the existence of a mixed finite element interpolation operator, also referred to as the equilibrium interpolation operator. In what follows, $\mathcal{P}_h$ and Ξ_h denote the standard L^2 -orthogonal projections onto Q_h and onto the normal trace of functions in $\mathbf{H}_h^\eta$, respectively.

ASSUMPTION 4.5. $\text{div}(\mathbf{H}_h^\eta) \subset Q_h$.

ASSUMPTION 4.6 (Existence of an equilibrium interpolation operator). *For all $\delta > 1/2$, $\mathbf{H}_h^\eta$ admits an operator $\mathcal{E}_h : \mathbf{H}^\delta(\Omega) \cap \mathbf{H}(\text{div}; \Omega) \rightarrow \mathbf{H}_h^\eta$ such that*

$$\text{div}(\mathcal{E}_h(\zeta)) = \mathcal{P}_h(\text{div}(\zeta)) \quad \text{in } \Omega, \quad \text{and} \quad \mathcal{E}_h(\zeta) \cdot \boldsymbol{\nu} = \Xi_h(\zeta \cdot \boldsymbol{\nu}) \quad \text{on } \partial\Omega,$$

for all $\zeta \in \mathbf{H}^\delta(\Omega) \cap \mathbf{H}(\text{div}; \Omega)$. Moreover, assume that there exists a positive constant C_{eq} , independent of h , such that

$$\|\zeta - \mathcal{E}_h(\zeta)\|_{0,\Omega} \leq C_{\text{eq}} h^\delta \|\zeta\|_{\delta,\Omega} \quad \forall \zeta \in \mathbf{H}^\delta(\Omega) \cap \mathbf{H}(\text{div}; \Omega).$$

We now introduce an additional assumption concerning the interaction between the finite element spaces and the auxiliary space $H_h^{-1/2}$.

ASSUMPTION 4.7. $H_h^{-1/2}$ is contained in the restriction to Γ of the normal traces of functions in $\mathbf{H}_h^\eta$.

This assumption, in particular, implies that $\Xi_h(\mu_h) = \mu_h$ on Γ for all $\mu_h \in H_h^{-1/2}$. We are now ready to establish the first of three steps in the proof of (4.5).

Lemma 4.1. *Assume that Ω is convex. Then, there exists a positive constant C_1 , independent of h and $\tilde{h}$, such that*

$$\sup_{0 \neq \chi_h \in \mathbf{H}_h^\eta} \frac{\langle \chi_h \cdot \boldsymbol{\nu}, \psi_{\tilde{h}} \rangle_\Gamma}{\|\chi_h\|_{\text{div}; \Omega}} \geq C_1 \sup_{0 \neq \mu_h \in H_h^{-1/2}} \frac{\langle \mu_h, \psi_{\tilde{h}} \rangle_\Gamma}{\|\mu_h\|_{-1/2,00;\Gamma}} \quad \forall \psi_{\tilde{h}} \in X_h^\varphi. \quad (4.10)$$

Proof. Given $\mu_h \in H_h^{-1/2}$, $\mu_h \neq 0$, we consider the mixed boundary value problem of finding z such that

$$-\Delta z = 0 \quad \text{in } \Omega, \quad z = 0 \quad \text{on } \Sigma, \quad \nabla z \cdot \boldsymbol{\nu} = \mu_h \quad \text{on } \Gamma.$$

Recalling that, for every $-1/2 \leq s < 1/2$, $H_h^{-1/2} \subset H_{00}^s(\Gamma)$ (cf. (4.6)), it follows that $\mu_h \in H_{00}^s(\Gamma)$. Then, by standard elliptic regularity theory (see, for instance, [27, 28]), the weak solution z to this problem belongs to $H^{1+\delta}(\Omega)$ and satisfies, for some positive constant C , independent of h and μ_h ,

$$\|z\|_{1+\delta,\Omega} \leq C \|\mu_h\|_{-1/2+\delta,00,\Gamma}, \quad (4.11)$$

for every $\delta \in [0, \bar{\delta}]$, where $\bar{\delta} := \min\{1, \pi/(2\omega)\}$ with ω the largest interior angle of Ω . Observe that, since Ω is convex, there holds $\bar{\delta} > 1/2$. Thus, by taking a fixed $\delta \in (1/2, \bar{\delta})$, and putting $\tilde{\chi} := \nabla z \in \mathbf{H}^\delta(\Omega) \cap \mathbf{H}(\text{div}; \Omega)$, we obtain $\text{div}(\tilde{\chi}) = 0$ in Ω , $\tilde{\chi} \cdot \boldsymbol{\nu} = \mu_h$ on Γ , and $\|\tilde{\chi}\|_{\delta, \Omega} \leq C \|\mu_h\|_{-1/2+\delta, 0, \Gamma}$. In turn, using (4.11) with $\delta = 0$,

$$\|\tilde{\chi}\|_{\text{div}; \Omega} = \|\tilde{\chi}\|_{0, \Omega} \leq \|z\|_{1, \Omega} \leq C \|\mu_h\|_{-1/2, 0, \Gamma}. \quad (4.12)$$

Moreover, by Assumption 4.6 along with Assumption 4.7, we find that

$$\text{div}(\mathcal{E}_h(\tilde{\chi})) = 0 \quad \text{in } \Omega, \quad \mathcal{E}_h(\tilde{\chi}) \cdot \boldsymbol{\nu} = \mu_h \quad \text{on } \Gamma \quad \text{and} \quad \|\tilde{\chi} - \mathcal{E}_h(\tilde{\chi})\|_{0, \Omega} \leq C_{\text{eq}} h^\delta \|\tilde{\chi}\|_{\delta, \Omega},$$

which, together with (4.11) and (4.12), yields

$$\|\mathcal{E}_h(\tilde{\chi})\|_{\text{div}; \Omega} \leq \|\tilde{\chi} - \mathcal{E}_h(\tilde{\chi})\|_{0, \Omega} + \|\tilde{\chi}\|_{0, \Omega} \leq C C_{\text{eq}} h^\delta \|\mu_h\|_{-1/2+\delta, 0, \Gamma} + C \|\mu_h\|_{-1/2, 0, \Gamma}.$$

Owing to the inverse inequality (4.8) with $t = -1/2$ and $s = \delta - 1/2$ into this estimate, we find that

$$\|\mathcal{E}_h(\tilde{\chi})\|_{\text{div}; \Omega} \leq \frac{1}{C_1} \|\mu_h\|_{-1/2, 0, \Gamma},$$

where $C_1 := (C \max\{C_{\text{eq}} C_{\text{inv}}, 1\})^{-1}$. Finally, bearing in mind that $\mathcal{E}_h(\tilde{\chi}) \cdot \boldsymbol{\nu} = \mu_h$ on Γ , we take $\mathcal{E}_h(\tilde{\chi}) \in \mathbf{H}_h^\eta$ in the supremum on the left-hand side of (4.10), leading to

$$\sup_{0 \neq \chi_h \in \mathbf{H}_h^\eta} \frac{\langle \chi_h \cdot \boldsymbol{\nu}, \psi_h^\varphi \rangle_\Gamma}{\|\chi_h\|_{\text{div}; \Omega}} \geq \frac{\langle \mu_h, \psi_h^\varphi \rangle_\Gamma}{\|\mathcal{E}_h(\tilde{\chi})\|_{\text{div}; \Omega}} \geq C_1 \frac{\langle \mu_h, \psi_h^\varphi \rangle_\Gamma}{\|\mu_h\|_{-1/2, 0, \Gamma}} \quad \forall \mu_h \in H_h^{-1/2} \setminus \{0\},$$

and for all $\psi_h^\varphi \in X_h^\varphi$. Hence, taking the supremum over $H_h^{-1/2}$, we conclude (4.10). $\square$

Having established this result, we are now in a position to present the next one, which constitutes the main part of the effort in proving the desired inf-sup condition.

Lemma 4.2. *There exist $C_0, C_2 > 0$, independent of h and $\tilde{h}$, such that if $h \leq C_0 \tilde{h}$, then*

$$\sup_{0 \neq \mu_h \in H_h^{-1/2}} \frac{\langle \mu_h, \psi_h^\varphi \rangle_\Gamma}{\|\mu_h\|_{-1/2, 0, \Gamma}} \geq C_2 \|\psi_h^\varphi\|_{1/2, 0, \Gamma} \quad \forall \psi_h^\varphi \in X_h^\varphi. \quad (4.13)$$

Proof. Given $\psi_h^\varphi \in X_h^\varphi$, denote by z the unique solution of the problem

$$-\Delta z + z = 0 \quad \text{in } \Omega, \quad z = 0 \quad \text{on } \Sigma, \quad \text{and} \quad z = \psi_h^\varphi \quad \text{on } \Gamma. \quad (4.14)$$

Then, bearing in mind that $E_{\Gamma, 0}(\psi_h^\varphi) \in H^1(\partial\Omega)$ by Assumption 4.4, a classical result on elliptic regularity (see, for instance, [27, 28]) guarantees that z belongs to $H^{1+\delta}(\Omega)$ and satisfies

$$\|z\|_{1+\delta, \Omega} \leq C \|\psi_h^\varphi\|_{1/2+\delta, 0, \Gamma}, \quad (4.15)$$

for some $C > 0$ and for all $\delta \in [0, 1/2]$. In turn, since z solves (4.14), partial integration yields

$$\|z\|_{1, \Omega}^2 = \int_\Omega \{z \Delta z + |\nabla z|^2\} = \langle \nabla z \cdot \boldsymbol{\nu}, E_{\Gamma, 0}(\psi_h^\varphi) \rangle_{\partial\Omega} = \langle \nabla z \cdot \boldsymbol{\nu}, \psi_h^\varphi \rangle_\Gamma,$$

where we used that $z = E_{\Gamma, 0}(\psi_h^\varphi)$ on $\partial\Omega$, by construction. Now, according to the continuity of the canonical trace operator and the definition of the norm in $H_{00}^{1/2}(\Gamma)$, there holds

$$\|\psi_h^\varphi\|_{1/2, 0, \Gamma} = \|E_{\Gamma, 0}(\psi_h^\varphi)\|_{1/2, \partial\Omega} \leq \|z\|_{1, \Omega}.$$

We have thus proved that

$$\langle \nabla z \cdot \boldsymbol{\nu}, \psi_h^\varphi \rangle_\Gamma \geq \|\psi_h^\varphi\|_{1/2, 0, \Gamma}^2. \quad (4.16)$$

Fix $\delta \in (0, 1/2)$. Since $z \in H^{1+\delta}(\Omega)$ and the canonical trace operator is continuous from $H^{1-\delta}(\Omega)$ to $H^{1/2-\delta}(\partial\Omega)$ (see, for instance, [38, Theorem 3.37]), one can verify that $(\nabla z \cdot \boldsymbol{\nu})|_{\Gamma} \in H_{00}^{-1/2+\delta}(\Gamma)$ and

$$\|\nabla z \cdot \boldsymbol{\nu}\|_{-1/2+\delta,00,\Gamma} \leq C_{\boldsymbol{\nu}} \|z\|_{1+\delta,\Omega}, \quad (4.17)$$

for some positive constant $C_{\boldsymbol{\nu}}$, depending only on Ω and δ . In turn, by the approximation property of our auxiliary space (cf. (4.7)), there exists $\hat{\mu}_h \in H_h^{-1/2}$ such that

$$\|\nabla z \cdot \boldsymbol{\nu} - \hat{\mu}_h\|_{-1/2,00,\Gamma} \leq C h^{\delta} \|\nabla z \cdot \boldsymbol{\nu}\|_{-1/2+\delta,00,\Gamma} \leq C C_{\boldsymbol{\nu}} h^{\delta} \|z\|_{1+\delta,\Omega} \leq C^2 C_{\boldsymbol{\nu}} h^{\delta} \|\psi_{\tilde{h}}\|_{1/2+\delta,00,\Gamma},$$

where the last two inequalities come from (4.17) and (4.15), respectively. Furthermore, using the inverse inequality (4.9) with $t = 1/2 + \delta$ and $s = 1/2$, we get

$$\|\nabla z \cdot \boldsymbol{\nu} - \hat{\mu}_h\|_{-1/2,00,\Gamma} \leq \bar{C} (h/\tilde{h})^{\delta} \|\psi_{\tilde{h}}\|_{1/2,00,\Gamma}. \quad (4.18)$$

In particular, by applying the triangle inequality together with (4.17) and (4.15) with $\delta = 0$, we obtain

$$\|\hat{\mu}_h\|_{-1/2,00,\Gamma} \leq \bar{C} (h/\tilde{h})^{\delta} \|\psi_{\tilde{h}}\|_{1/2,00,\Gamma} + C_{\boldsymbol{\nu}} C \|\psi_{\tilde{h}}\|_{1/2,00,\Gamma} \leq \hat{C} \|\psi_{\tilde{h}}\|_{1/2,00,\Gamma},$$

for $h \leq \tilde{h}$ and $\hat{C} = \max\{\bar{C}, C_{\boldsymbol{\nu}} C\}$. We now use this to bound the supremum in (4.13) with the particular choice $\mu_h = \hat{\mu}_h$, arriving at

$$\begin{aligned} \sup_{0 \neq \mu_h \in H_h^{-1/2}} \frac{\langle \mu_h, \psi_{\tilde{h}} \rangle_{\Gamma}}{\|\mu_h\|_{-1/2,00,\Gamma}} &\geq \frac{\langle \hat{\mu}_h, \psi_{\tilde{h}} \rangle_{\Gamma}}{\|\hat{\mu}_h\|_{-1/2,00,\Gamma}} \geq \frac{\hat{C}^{-1}}{\|\psi_{\tilde{h}}\|_{1/2,00,\Gamma}} \left(\langle \nabla z \cdot \boldsymbol{\nu}, \psi_{\tilde{h}} \rangle_{\Gamma} - \langle \nabla z \cdot \boldsymbol{\nu} - \hat{\mu}_h, \psi_{\tilde{h}} \rangle_{\Gamma} \right) \\ &\geq \hat{C}^{-1} (1 - \bar{C} (h/\tilde{h})^{\delta}) \|\psi_{\tilde{h}}\|_{1/2,00,\Gamma}, \end{aligned}$$

where the last inequality follows from (4.16) and (4.18). In this way, recalling that $h \leq \tilde{h}$, it suffices to require $h \leq C_0 \tilde{h}$, with $C_0 := \min\{1, (2\bar{C})^{-1/\delta}\}$, in order to ensure a positive constant on the right-hand side. This concludes the proof with $C_2 = \hat{C}^{-1}/2$. $\square$

To finally prove the inf-sup condition for $\mathcal{B}_{2,h}$, we require one last assumption.

ASSUMPTION 4.8. $\mathbf{div}(\mathbb{X}_h^{\sigma}) \subset \mathbf{Y}_h^{\mathbf{u}}$ and $\mathcal{K}_{3,h}^{(2)} \subset \mathbb{H}_h^{\xi}$.

Lemma 4.3. *Assume that Ω is convex. Then, there exists a positive constant $\beta_{2,\mathbf{d}}$, independent of h and $\tilde{h}$, such that for all $h \leq C_0 \tilde{h}$ there holds*

$$\sup_{0 \neq \vec{\chi}_h \in \mathbf{H}_h} \frac{[\mathcal{B}_{2,h}(\vec{\chi}_h), \vec{\psi}_h]}{\|\vec{\chi}_h\|_{\mathbf{H}_h}} \geq \beta_{2,\mathbf{d}} \|\vec{\psi}_h\|_{\mathbf{X}_h} \quad \forall \vec{\psi}_h \in \mathcal{K}_{3,h}. \quad (4.19)$$

Proof. Given $\vec{\psi}_h = (\psi_{\tilde{h}}, \boldsymbol{\tau}_h) \in \mathcal{K}_{3,h}$, by the definition of this kernel (cf. (4.2)), we have that

$$\int_{\Omega} \mathbf{v}_h \cdot \mathbf{div}(\boldsymbol{\tau}_h) = 0 \quad \forall \mathbf{v}_h \in \mathbf{Y}_h^{\mathbf{u}},$$

which, by the first inclusion in Assumption 4.8, implies that $\mathbf{div}(\boldsymbol{\tau}_h) = 0$. Furthermore, by the second inclusion in the same assumption we have that $\boldsymbol{\tau}_h \in \mathbb{H}_h^{\xi}$, and hence we are able to take $\vec{\chi}_h = (0, \boldsymbol{\tau}_h) \in \mathbf{H}_h$ in the supremum on the left-hand side of (4.19), thus arriving at

$$\sup_{0 \neq \vec{\chi}_h \in \mathbf{H}_h} \frac{[\mathcal{B}_{2,h}(\vec{\chi}_h), \vec{\psi}_h]}{\|\vec{\chi}_h\|_{\mathbf{H}_h}} \geq \|\boldsymbol{\tau}_h\|_{\mathbf{div};\Omega}. \quad (4.20)$$

In turn, we bound the same supremum by choosing $\vec{\chi}_h = (\chi_h, 0)$, with arbitrary $\chi_h \in \mathbf{H}_h^\eta$, and apply Lemmas 4.1 and 4.2 to obtain

$$\sup_{0 \neq \vec{\chi}_h \in \mathbf{H}_h} \frac{[\mathcal{B}_{2,h}(\vec{\chi}_h), \vec{\psi}_h]}{\|\vec{\chi}_h\|_{\mathbf{H}_h}} \geq \sup_{0 \neq \chi_h \in \mathbf{H}_h^\eta} \frac{\langle \chi_h \cdot \boldsymbol{\nu}, \psi_h \rangle_\Gamma}{\|\chi_h\|_{\mathbf{H}_h^\eta}} \geq C_1 C_2 \|\psi_h\|_{1/2,0;\Gamma}. \quad (4.21)$$

Thus, by summing both (4.20) and (4.21), we obtain the discrete inf-sup condition (4.19), with constant $\beta_{2,d} := \frac{1}{2} \min\{1, C_1 C_2\}$. $\square$

Next, we establish the inf-sup condition for $\mathcal{B}_{1,h}$, which corresponds to the discrete counterpart of Lemma 3.4. Notice that no additional assumptions beyond those already established are required.

Lemma 4.4. *Suppose that Ω is convex. Then, there exists a positive constant $\beta_{1,d}$ such that*

$$\sup_{0 \neq \vec{\chi}_h \in \mathcal{V}_h} \frac{[\mathcal{B}_{1,h}(\vec{\chi}_h), q_h]}{\|\vec{\chi}_h\|_{\mathbf{H}_h}} \geq \beta_{1,d} \|q_h\|_{Q_h} \quad \forall q_h \in Q_h. \quad (4.22)$$

Proof. Let $q_h \in Q_h \subset L^2(\Omega)$, and consider $q_h \neq 0$, as otherwise the inequality holds trivially. Then, we consider the following boundary value problem: Find z such that

$$-\Delta z = q_h \quad \text{in } \Omega, \quad z = 0 \quad \text{on } \Sigma, \quad \text{and} \quad \nabla z \cdot \boldsymbol{\nu} = 0 \quad \text{on } \Gamma,$$

whose weak solution, by standard elliptic regularity theory (see, for instance, [27, 28]), belongs to $H^{1+\delta}(\Omega)$ and satisfies $\|z\|_{1+\delta,\Omega} \leq C \|q_h\|_{0,\Omega}$ for every $\delta \in [0, \bar{\delta}]$, where $\bar{\delta} := \pi/(2\omega)$ with ω the largest interior angle of Ω . Notice that $\bar{\delta} > 1/2$ as Ω is convex. Then, fixing $\delta \in (1/2, \bar{\delta})$, and noting that $\operatorname{div}(\nabla z) = -q_h$ in $L^2(\Omega)$, we deduce that $\nabla z \in \mathbf{H}^\delta(\Omega) \cap \mathbf{H}(\operatorname{div}; \Omega)$. Thus, we may define $\tilde{\chi}_h := \mathcal{E}_h(\nabla z) \in \mathbf{H}_h^\eta$ (cf. Assumption 4.6). Furthermore, $\tilde{\chi}_h \cdot \boldsymbol{\nu} = \Xi_h(\nabla z \cdot \boldsymbol{\nu}) = 0$ on Γ , which implies that $\langle \tilde{\chi}_h \cdot \boldsymbol{\nu}, \psi_h \rangle_\Gamma = 0$ for all $\psi_h \in X_h^\varphi$, so that $(\tilde{\chi}_h, 0) \in \mathcal{V}_h$. In turn,

$$\|\tilde{\chi}_h\|_{\operatorname{div};\Omega}^2 = \|\tilde{\chi}_h\|_{0,\Omega}^2 + \|\operatorname{div}(\tilde{\chi}_h)\|_{0,\Omega}^2 = \|\tilde{\chi}_h\|_{0,\Omega}^2 + \|q_h\|_{0,\Omega}^2. \quad (4.23)$$

Now, employing Assumption 4.6, the *a priori* estimate of the auxiliary problem, and assuming that $h \leq 1$ without loss of generality, we write

$$\begin{aligned} \|\tilde{\chi}_h\|_{0,\Omega} &= \|\mathcal{E}_h(\nabla z)\|_{0,\Omega} \leq \|\mathcal{E}_h(\nabla z) - \nabla z\|_{0,\Omega} + \|\nabla z\|_{0,\Omega} \leq C_{\text{eq}} h^\delta \|\nabla z\|_{\delta,\Omega} + \|\nabla z\|_{0,\Omega} \\ &\leq C_{\text{eq}} h^\delta \|z\|_{1+\delta,\Omega} + \|z\|_{1,\Omega} \leq (C_{\text{eq}} + 1) C \|q_h\|_{0,\Omega}. \end{aligned}$$

Using this into (4.23), we find that $\|\tilde{\chi}_h\|_{\operatorname{div};\Omega} \leq \hat{C} \|q_h\|_{0,\Omega}$, where $\hat{C} := ((C_{\text{eq}} + 1)^2 C^2 + 1)^{1/2}$. Finally, bounding the supremum in (4.22) with $\vec{\chi}_h = (\tilde{\chi}_h, 0) \in \mathcal{V}_h$, we obtain

$$\sup_{0 \neq \vec{\chi}_h \in \mathcal{V}_h} \frac{[\mathcal{B}_{1,h}(\vec{\chi}_h), q_h]}{\|\vec{\chi}_h\|_{\mathbf{H}_h}} \geq \frac{\left| \int_\Omega q_h \operatorname{div}(\tilde{\chi}_h) \right|}{\|\tilde{\chi}_h\|_{\operatorname{div};\Omega}} \geq \frac{\|q_h\|_{0,\Omega}^2}{\hat{C} \|q_h\|_{0,\Omega}} = \hat{C}^{-1} \|q_h\|_{0,\Omega},$$

which proves (4.22) with $\beta_{1,d} = \hat{C}^{-1}$, as desired. $\square$

In order to establish the discrete counterpart of Lemma 3.5, we first note that the symmetry and positive semi-definiteness of $\mathcal{A}_{1,h}$ and $\mathcal{D}_{1,h}$ are inherited from those of $\mathcal{A}_1$ and $\mathcal{D}_1$, respectively. However, the coercivity of $\mathcal{A}_{1,h}$ does not follow directly from the continuous case, as $\mathcal{W}_h$ is not necessarily contained in $\mathcal{W}$ (cf. (3.19) and (4.3)). Nevertheless, under Assumption 4.5, we are still able to establish it.

Lemma 4.5. *There exists a positive constant $\alpha_{1,d}$ such that*

$$[\mathcal{A}_{1,h}(\vec{\chi}_h), \vec{\chi}_h] \geq \alpha_{1,d} \|\vec{\chi}_h\|_{\mathbf{H}}^2 \quad \forall \vec{\chi}_h \in \mathcal{W}_h.$$

Proof. Let $\vec{\chi}_h \in \mathcal{W}_h$. As in the continuous case, algebraic manipulations yield (cf. (3.25))

$$[\mathcal{A}_{1,h}(\vec{\chi}_h), \vec{\chi}_h] \geq \kappa_0 \|\chi_h\|_{0,\Omega}^2 + 2\mu \|\rho_h\|_{0,\Omega}^2 + \lambda \|\text{tr}(\rho_h)\|_{0,\Omega}^2. \quad (4.24)$$

Since $\vec{\chi}_h \in \mathcal{W}_h \subset \mathcal{K}_{1,h}$ (cf. (4.2)) and noting that $\text{div}(\chi_h) \in Q_h$ by Assumption 4.5, there holds

$$\|\text{div}(\chi_h)\|_{0,\Omega}^2 = \alpha \int_{\Omega} \text{div}(\chi_h) \text{tr}(\rho_h).$$

Hence, by the Cauchy–Schwarz inequality, we obtain that $\|\text{div}(\chi_h)\|_{0,\Omega} \leq \alpha \|\text{tr}(\rho_h)\|_{0,\Omega} \leq \|\text{tr}(\rho_h)\|_{0,\Omega}$, since $\alpha \in [0, 1]$. Therefore, (4.24) becomes

$$\begin{aligned} [\mathcal{A}_{1,h}(\vec{\chi}_h), \vec{\chi}_h] &\geq \kappa_0 \|\chi_h\|_{0,\Omega}^2 + 2\mu \|\rho_h\|_{0,\Omega}^2 + \lambda \|\text{div}(\chi_h)\|_{0,\Omega}^2 \\ &\geq \min\{\kappa_0, \lambda, 2\mu\} (\|\chi_h\|_{\text{div};\Omega}^2 + \|\rho_h\|_{0,\Omega}^2), \end{aligned}$$

which allows us to conclude the desired result, with $\alpha_{1,d} = \frac{1}{2} \min\{\kappa_0, \lambda, 2\mu\}$, which is valid for all $\alpha \in [0, 1]$. $\square$

Theorem 4.6. *Suppose that Assumptions 4.1 through 4.8 hold, and that Ω is convex. Then, the problem (4.1) has a unique solution $(\vec{\eta}_h, p_h, \vec{\varphi}_h, \vec{\mathbf{u}}_h) \in \mathbf{H}_h \times Q_h \times \mathbf{X}_h \times \mathbf{Y}_h$ and there exists a positive constant C_d , depending only on $\beta_{1,d}, \beta_{2,d}, \beta_{3,d}, \kappa_0, \kappa_1, \mu, \lambda, \alpha, c_0$, and Ω , such that for all $h \leq C_0 \tilde{h}$ there holds*

$$\|(\vec{\eta}_h, p_h, \vec{\varphi}_h, \vec{\mathbf{u}}_h)\| \leq C_d \left\{ \|g\|_{0,\Omega} + \|g_N\|_{-1/2,0;\Gamma} + \|\mathbf{u}_D\|_{1/2,\Gamma} + \|\mathbf{f}\|_{0,\Omega} \right\}.$$

Proof. Under Assumption 4.1, and using Lemmas 4.3, 4.4, and 4.5, together with the observation that $\mathcal{A}_{1,h}$ and $\mathcal{D}_{1,h}$ are symmetric and positive semi-definite, we conclude that the hypotheses of Theorem 3.1 are satisfied. Therefore, applying this result in the discrete setting completes the proof. $\square$

4.2 A priori error analysis

Now we aim to derive a Céa-type estimate associated with the Galerkin scheme (4.1). As usual, given a subspace U of an arbitrary Banach space $(V, \|\cdot\|_V)$, we set

$$\text{dist}(v, U) := \inf_{u \in U} \|v - u\|_V \quad \forall v \in V.$$

In addition, let us denote the solutions of (3.9) and (4.1) (cf. Theorems 3.6 and 4.6) as

$$\Theta := (\vec{\eta}, p, \vec{\varphi}, \vec{\mathbf{u}}) \in \mathbf{H} \times Q \times \mathbf{X} \times \mathbf{Y} \quad \text{and} \quad \Theta_h := (\vec{\eta}_h, p_h, \vec{\varphi}_h, \vec{\mathbf{u}}_h) \in \mathbf{H}_h \times Q_h \times \mathbf{X}_h \times \mathbf{Y}_h, \quad (4.25)$$

respectively. The following result establishes the desired Céa estimate associated with (4.1).

Theorem 4.7. *Suppose that the assumptions of Theorem 4.6 hold. Then, there exists a positive constant C_{Cea} , depending only on $\kappa_0, \kappa_1, \mu, \lambda, \alpha, c_0, \beta_{1,d}, \beta_{2,d}, \beta_{3,d}$, and Ω , such that*

$$\|\Theta - \Theta_h\| \leq C_{\text{Cea}} \text{dist}(\Theta, \mathbf{H}_h \times Q_h \times \mathbf{X}_h \times \mathbf{Y}_h). \quad (4.26)$$

Proof. It follows from standard arguments concerning Céa estimates in the context of Galerkin schemes. Specifically, we subtract the discrete system (4.1) from the continuous one (3.9), and apply the inf-sup conditions (4.4), (4.19), and (4.22), together with the coercivity property of $\mathcal{A}_{1,h}$ (cf. Lemma 4.5). Further details are omitted and can be found, for instance, in [23, Lemma 26.14] or [24, Section 2.5]. $\square$

5 Specific finite element spaces

In this section, we provide specific examples for the choice of the spaces $\mathbf{H}_h^\eta$, $\mathbb{H}_h^\xi$, $\mathbf{Q}_h$, $\mathbf{X}_h^\varphi$, $\mathbb{X}_h^\sigma$, $\mathbf{Y}_h^u$, and $\mathbb{Y}_h^\gamma$ which satisfy Assumptions 4.1 through 4.8, and we establish the corresponding rates of convergence. Certainly, Assumption 4.2 must be assumed since it concerns the mesh discretization rather than the finite element spaces. In this way, we first introduce preliminary notations. For a nonnegative integer k and $K \in \mathcal{T}_h$, we let $\mathbf{P}_k(K)$ be the space of polynomials of total degree at most k defined on K . Its vector and tensorial counterparts are denoted by $\mathbf{P}_k(K) := [\mathbf{P}_k(K)]^n$ and $\mathbb{P}_k(K) := [\mathbf{P}_k(K)]^{n \times n}$, respectively. In addition, we let $\mathbf{RT}_k(K) := \mathbf{P}_k(K) + \mathbf{P}_k(K) \mathbf{x}$ be the local Raviart–Thomas space of order k defined on K , where $\mathbf{x}$ stands for a generic vector in $\mathbb{R}^n$. We denote by $\mathbb{RT}_k(K)$ the space of tensor-valued functions whose rows lie in $\mathbf{RT}_k(K)$. Furthermore, we let b_K be the bubble function on K , which is given by the product of its $n + 1$ barycentric coordinates. The local bubble space of order k is then given by

$$\mathbf{B}_k(K) := \begin{cases} \mathbf{curl}(b_K \mathbf{P}_k(K)) & \text{if } n = 2, \\ \mathbf{curl}(b_K \mathbf{P}_k(K)) & \text{if } n = 3, \end{cases}$$

where the curl operators are defined as $\mathbf{curl}(v) := (\frac{\partial v}{\partial x_2}, -\frac{\partial v}{\partial x_1})$ for $v : K \rightarrow \mathbb{R}$ (if $n = 2$), and $\mathbf{curl}(\mathbf{v}) := \nabla \times \mathbf{v}$ for $\mathbf{v} : K \rightarrow \mathbb{R}^3$ (if $n = 3$). Finally, $\mathbb{B}_k(K)$ denotes the space of tensor-valued functions whose rows belong to $\mathbf{B}_k(K)$.

As mentioned earlier in Section 4, Assumption 4.1 corresponds to the inf-sup condition associated with the classical bilinear form arising in the saddle-point formulation of the linear elasticity problem with weakly imposed symmetry. Accordingly, it is natural to consider stable finite element spaces for linear elasticity as a choice for the spaces involved in this inf-sup. More precisely, we define

$$\begin{aligned} \mathbb{X}_h^\sigma &:= \left\{ \boldsymbol{\tau}_h \in \mathbb{H}_\Sigma(\mathbf{div}, \Omega) : \boldsymbol{\tau}_h|_K \in \mathbb{RT}_k(K) \oplus \mathbb{B}_k(K) \quad \forall K \in \mathcal{T}_h \right\}, \\ \mathbf{Y}_h^u &:= \left\{ \mathbf{v}_h \in \mathbf{L}^2(\Omega) : \mathbf{v}_h|_K \in \mathbf{P}_k(K) \quad \forall K \in \mathcal{T}_h \right\}, \\ \mathbb{Y}_h^\gamma &:= \left\{ \boldsymbol{\delta}_h \in [C(\overline{\Omega})]^{n \times n} \cap \mathbb{L}_{\text{skew}}^2(\Omega) : \boldsymbol{\delta}_h|_K \in \mathbb{P}_{k+1}(K) \quad \forall K \in \mathcal{T}_h \right\}. \end{aligned} \quad (5.1)$$

Observe that $(\mathbb{X}_h^\sigma, \mathbf{Y}_h^u, \mathbb{Y}_h^\gamma)$ corresponds to the PEERS $_{k+1}$ element. Under this choice, Assumption 4.1 is satisfied. Indeed, in [37, Theorem 4.5], the authors establish this inf-sup condition for the triple associated with the BDMS $_{k+1}$ element, and further remark in Section 5 of the same article that the corresponding analysis remains valid for PEERS $_{k+1}$. We also emphasize that other combinations of stable finite element spaces for linear elasticity with reduced symmetry could be employed to fulfill Assumption 4.1. Examples include the Amara–Thomas element [3], Arnold–Falk–Winther [5], and Cockburn–Gopalakrishnan–Guzmán [18] families. However, to keep the exposition focused, in the remaining of this work, we restrict ourselves to the PEERS $_{k+1}$ element.

Next, let us define the remaining finite element subspaces:

$$\begin{aligned} \mathbf{H}_h^\eta &:= \left\{ \boldsymbol{\chi}_h \in \mathbf{H}(\mathbf{div}; \Omega) : \boldsymbol{\chi}_h|_K \in \mathbf{RT}_k(K) \quad \forall K \in \mathcal{T}_h \right\}, \\ \mathbb{H}_h^\xi &:= \left\{ \boldsymbol{\rho}_h \in \mathbb{L}^2(\Omega) : \boldsymbol{\rho}_h|_K \in \mathbb{P}_k(K) \oplus \mathbb{B}_k(K) \quad \forall K \in \mathcal{T}_h \right\}, \\ \mathbf{Q}_h &:= \left\{ q_h \in L^2(\Omega) : q_h|_K \in \mathbf{P}_k(K) \quad \forall K \in \mathcal{T}_h \right\}, \\ \mathbf{X}_h^\varphi &:= \left\{ \psi_h \in H_{00}^{1/2}(\Gamma) : \psi_h|_{\tilde{\Gamma}_j} \in \mathbf{P}_{k+1}(\tilde{\Gamma}_j) \quad \forall j \in \{1, \dots, m\} \right\}. \end{aligned} \quad (5.2)$$

We recall from [7, eq. 3.12] that, in the special case $k = 0$, $\mathbf{X}_h^\varphi \subset H_{00}^1(\Gamma)$, and the inverse inequality (4.9) holds. This result can be extended to the case $k \geq 1$, so that Assumptions 4.3 and 4.4 are satisfied. The corresponding proof for $s, t \in \{0, 1\}$ is provided in [39, Theorem 4.4.3], whereas the extension to the

whole range $0 \leq s \leq t \leq 1$ follows from the more general result given by [21, Theorem 4.1]. In turn, since $\text{div}(\mathbf{RT}_k(K)) \subseteq \mathbf{P}_k(K)$ for each $K \in \mathcal{T}_h$, Assumption 4.5 holds as well.

Now, we consider $\mathcal{E}_h$ as the usual Raviart–Thomas interpolation operator (see, for instance, [24, Chapter 3.4]), which can be defined from the space $\mathbf{H}^\delta(\Omega) \cap \mathbf{H}(\text{div}; \Omega)$ with $\delta > 1/2$, since the moments of the Raviart–Thomas space are well-defined as linear and bounded functionals in $\mathbf{H}^\delta(\hat{K}) \cap \mathbf{H}(\text{div}; \hat{K})$, where $\hat{K}$ is the reference element associated to the mesh. This can be viewed from a slight modification of the analysis made in [25, Lemma C.1]. In this way, Assumption 4.6 is also satisfied.

On the other hand, since the normal traces of functions in $\mathbf{H}_h^\eta$ are contained in the space of piecewise polynomials of order k defined on $\partial\Omega$, it follows that Assumption 4.7 holds.

Next, by noticing that $\mathbf{div}(\mathbb{B}_k(K)) = 0$, it follows that $\mathbf{div}(\mathbb{X}_h^\sigma) \subset \mathbf{Y}_h^u$, which means that the first inclusion of Assumption 4.8 is fulfilled. In order to establish the second inclusion of this assumption, we notice that, for $\boldsymbol{\tau}_h \in \mathcal{K}_{3,h}^{(2)} \subset \mathbb{X}_h^\sigma$, there holds

$$\int_{\Omega} \mathbf{v}_h \cdot \mathbf{div}(\boldsymbol{\tau}_h) = 0 \quad \forall \mathbf{v}_h \in \mathbf{Y}_h^u.$$

Then, by exploiting again that the bubble functions are divergence-free, this identity means that the Raviart–Thomas component of $\boldsymbol{\tau}_h$ is divergence-free as well. In this way, from the proof of [24, Theorem 3.3], we obtain that the Raviart–Thomas component belongs to $\mathbf{P}_k(K)$ in each element $K \in \mathcal{T}_h$. In addition, since the bubble component of $\boldsymbol{\tau}_h$ remains unaltered, we need to incorporate it in the definition of $\mathbb{H}_h^\xi$ in order to guarantee that $\boldsymbol{\tau}_h$ belongs to this subspace, thus proving that the second inclusion in Assumption 4.8 does hold. The above explains the rather unusual definition of $\mathbb{H}_h^\xi$ (cf. (5.2)).

As a result of the previous discussion, we conclude that this choice of finite element spaces yields a stable Galerkin scheme.

Now we aim to obtain the rates of convergence of our Galerkin scheme (4.1) with the specific finite element subspaces defined previously. To this end, approximation properties of the finite element subspaces $\mathbf{H}_h^\eta$, $\mathbb{H}_h^\xi$, $\mathbf{Q}_h$, $\mathbf{X}_h^\varphi$, $\mathbb{X}_h^\sigma$, $\mathbf{Y}_h^u$, and $\mathbb{Y}_h^\gamma$ are presented below, which follow from interpolation estimates for Sobolev spaces and the approximation properties of the relevant orthogonal projectors and the interpolation operators (see, for instance, [13], [14], [19], [24]).

($\mathbf{AP}_h^\eta$) There exists a positive constant C , independent of h , such that for each $\ell \in (0, k+1]$ and for each $\boldsymbol{\chi} \in \mathbf{H}^\ell(\Omega)$, with $\text{div}(\boldsymbol{\chi}) \in \mathbf{H}^\ell(\Omega)$, there holds

$$\text{dist}(\boldsymbol{\chi}, \mathbf{H}_h^\eta) \leq C h^\ell \left\{ \|\boldsymbol{\chi}\|_{\ell, \Omega} + \|\text{div}(\boldsymbol{\chi})\|_{\ell, \Omega} \right\}.$$

($\mathbf{AP}_h^\xi$) There exists a positive constant C , independent of h , such that for each $\ell \in [0, k+1]$ and for each $\boldsymbol{\rho} \in \mathbb{H}^\ell(\Omega)$, there holds

$$\text{dist}(\boldsymbol{\rho}, \mathbb{H}_h^\xi) \leq C h^\ell \|\boldsymbol{\rho}\|_{\ell, \Omega}.$$

($\mathbf{AP}_h^p$) There exists a positive constant C , independent of h , such that for each $\ell \in [0, k+1]$ and for each $q \in \mathbf{H}^\ell(\Omega)$, there holds

$$\text{dist}(q, \mathbf{Q}_h) \leq C h^\ell \|q\|_{\ell, \Omega}.$$

($\mathbf{AP}_h^\varphi$) There exists a positive constant C , independent of $\tilde{h}$, such that for each $\ell \in (0, k+1]$ and for each $\psi \in \mathbf{H}_{00}^{1/2+\ell}(\Gamma)$, there holds

$$\text{dist}(\psi, \mathbf{X}_h^\varphi) \leq C \tilde{h}^\ell \|\psi\|_{1/2+\ell, 00, \Gamma}.$$

($\mathbf{AP}_h^\sigma$) There exists a positive constant C , independent of h , such that for each $\ell \in (0, k+1]$ and for each $\boldsymbol{\tau} \in \mathbb{H}^\ell(\Omega) \cap \mathbb{H}_\Sigma(\mathbf{div}; \Omega)$, with $\mathbf{div}(\boldsymbol{\tau}) \in \mathbf{H}^\ell(\Omega)$, there holds

$$\text{dist}(\boldsymbol{\tau}, \mathbb{X}_h^\sigma) \leq C h^\ell \left\{ \|\boldsymbol{\tau}\|_{\ell, \Omega} + \|\mathbf{div}(\boldsymbol{\tau})\|_{\ell, \Omega} \right\}.$$

($\mathbf{AP}_h^{\mathbf{u}}$) There exists a positive constant C , independent of h , such that for each $\ell \in [0, k+1]$ and for each $\mathbf{v} \in \mathbf{H}^\ell(\Omega)$, there holds

$$\text{dist}(\mathbf{v}, \mathbf{Y}_h^{\mathbf{u}}) \leq C h^\ell \|\mathbf{v}\|_{\ell, \Omega}.$$

($\mathbf{AP}_h^\gamma$) There exists a positive constant C , independent of h , such that for each $\ell \in [0, k+1]$ and for each $\boldsymbol{\eta} \in \mathbb{H}^\ell(\Omega) \cap \mathbb{L}_{\text{skew}}^2(\Omega)$, there holds

$$\text{dist}(\boldsymbol{\eta}, \mathbb{Y}_h^\gamma) \leq C h^\ell \|\boldsymbol{\eta}\|_{\ell, \Omega}.$$

Theorem 5.1. *In addition to the hypotheses of Theorem 4.6, assume that there exists $\ell \in (0, k+1]$ such that $\boldsymbol{\eta} \in \mathbf{H}^\ell(\Omega)$, $\text{div}(\boldsymbol{\eta}) \in \mathbf{H}^\ell(\Omega)$, $\boldsymbol{\xi} \in \mathbb{H}^\ell(\Omega)$, $p \in \mathbf{H}^\ell(\Omega)$, $\varphi \in H_{00}^{1/2+\ell}(\Gamma)$, $\boldsymbol{\sigma} \in \mathbb{H}^\ell(\Omega)$, $\text{div}(\boldsymbol{\sigma}) \in \mathbf{H}^\ell(\Omega)$, $\mathbf{u} \in \mathbf{H}^\ell(\Omega)$, and $\gamma \in \mathbb{H}^\ell(\Omega)$. Furthermore, let Θ and Θ_h be the continuous and discrete solutions, respectively, as in (4.25). Then, there exists $C > 0$, independent of h and $\tilde{h}$, such that for all $h \leq C_0 \tilde{h}$, there holds*

$$\|\Theta - \Theta_h\| \leq C \Psi_\ell(\Theta) (h^\ell + \tilde{h}^\ell),$$

where

$$\Psi_\ell(\Theta) := \|\boldsymbol{\eta}\|_{\ell, \Omega} + \|\text{div}(\boldsymbol{\eta})\|_{\ell, \Omega} + \|\boldsymbol{\xi}\|_{\ell, \Omega} + \|p\|_{\ell, \Omega} + \|\boldsymbol{\sigma}\|_{\ell, \Omega} + \|\text{div}(\boldsymbol{\sigma})\|_{\ell, \Omega} + \|\mathbf{u}\|_{\ell, \Omega} + \|\gamma\|_{\ell, \Omega} + \|\varphi\|_{1/2+\ell, 00, \Gamma}.$$

Proof. The result follows from a straightforward application of the Céa estimate (4.26) along with the foregoing approximation properties. We omit further details. $\square$

We end this section by stressing that the convexity of Ω guaranteeing the stability and convergence of our mixed finite element method is forced by the corresponding elliptic regularity result for the Poisson equation with mixed boundary conditions (cf. [27], [28]), as required in the proofs of Lemmas 4.1, 4.3, and 4.4, and Theorem 4.6. Nevertheless, in the following section we illustrate that even for nonconvex domains we obtain the theoretical rates of convergence predicted by Theorem 5.1, which, on one hand, confirms that numerical essays are usually more generous than the abstract theory, and, on the other hand, suggests that perhaps only technical difficulties stop us of proving the well-posedness of the Galerkin scheme in an arbitrary region. In turn, needless to say, the convexity assumption is certainly not needed when either Dirichlet or Neumann boundary conditions are considered since in this case a regularity $\delta > 1/2$ is ensured for any Lipschitz-continuous domain with largest interior angle $\omega < 2\pi$ (cf. [28]).

6 Numerical results

In this section, we illustrate the performance of the mixed finite element method (4.1) using the specific choices of discrete spaces introduced in (5.1) and (5.2). The implementation was carried out with the open-source finite element library FEniCS [2] and, in particular, with the specialized module FEniCS_{ii} [31], which is required to handle mixed-dimensional, non-conforming meshes and is also instrumental in the numerical realization of the $H_{00}^{1/2}(\Gamma)$ norm. The first two examples are devoted to corroborating the convergence rates predicted by Theorem 5.1, both on the unit square and on a nonconvex domain. The third example examines the method's performance in a three-dimensional setting. In the fourth example we study the behaviour of the errors when the model parameters λ , α , c_0 , and κ take values across several orders of magnitude. In all cases, the linear systems are solved with the direct solver MUMPS. Regarding the size of the resulting linear systems, we note that the strain $\boldsymbol{\xi}_h$ is the unknown with the largest number of degrees of freedom (about 37% of the total for the spaces (5.1)–(5.2) with $k = 0$ in 2D), whereas the multiplier φ_h only adds $\mathcal{O}(\tilde{h}^{1-n})$ unknowns (less than 0.1% of the total in Example 1). However, since $\mathbb{H}_h^\xi$ consists of element-wise discontinuous functions and the diagonal block associated with $\boldsymbol{\xi}_h$ is given by $\mathcal{C}$, which is symmetric and positive definite, $\boldsymbol{\xi}_h$ can be eliminated element by element via static condensation. The condensed system involves only $(\boldsymbol{\eta}_h, p_h, \varphi_h, \boldsymbol{\sigma}_h, \mathbf{u}_h, \gamma_h)$, and its size is therefore comparable to that of five-field stress-based mixed formulations of Biot's equations (see, e.g., [8, 10, 35]). For realistic, large-scale configurations, iterative

solvers with block preconditioners, robust with respect to the model parameters, as well as splitting schemes (cf. [8, 10]), would be required; their design for the present formulation is left for future work.

As usual, we introduce the following notation to denote the associated errors to each unknown in (4.1):

$$\begin{aligned} e(\boldsymbol{\eta}) &:= \|\boldsymbol{\eta} - \boldsymbol{\eta}_h\|_{\text{div};\Omega}, & e(\boldsymbol{\xi}) &:= \|\boldsymbol{\xi} - \boldsymbol{\xi}_h\|_{0,\Omega}, & e(p) &:= \|p - p_h\|_{0,\Omega}, & e(\varphi) &:= \|\varphi - \varphi_{\tilde{h}}\|_{1/2,00,\Gamma}, \\ e(\boldsymbol{\sigma}) &:= \|\boldsymbol{\sigma} - \boldsymbol{\sigma}_h\|_{\text{div};\Omega}, & e(\mathbf{u}) &:= \|\mathbf{u} - \mathbf{u}_h\|_{0,\Omega}, & \text{and} & & e(\boldsymbol{\gamma}) &:= \|\boldsymbol{\gamma} - \boldsymbol{\gamma}_h\|_{0,\Omega}. \end{aligned}$$

Furthermore, we recall that the experimental rates of convergence are computed as

$$r(\diamond) := \frac{\log(e(\diamond)/e'(\diamond))}{\log(h/h')} \quad \text{for } \diamond \in \{\boldsymbol{\eta}, \boldsymbol{\xi}, p, \boldsymbol{\sigma}, \mathbf{u}, \boldsymbol{\gamma}\}, \quad \text{and} \quad r(\varphi) := \frac{\log(e(\varphi)/e'(\varphi))}{\log(\tilde{h}/\tilde{h}')},$$

where h and h' (resp. $\tilde{h}$ and $\tilde{h}'$) are consecutive mesh sizes with respective errors e and e' . In order to compute $e(\varphi)$, we employ the characterization of $H_{00}^{1/2}(\Gamma)$ in terms of the spectral decomposition of the Laplacian operator (see, for instance, [32]). More precisely, let $S : H_0^1(\Gamma) \rightarrow H_0^1(\Gamma)$ be the linear and bounded operator uniquely determined by the relation

$$(S(u), v)_{1,\Gamma} = (u, v)_{0,\Gamma} \quad \forall u, v \in H_0^1(\Gamma),$$

where $(\cdot, \cdot)_{1,\Gamma}$ and $(\cdot, \cdot)_{0,\Gamma}$ denote the inner products of $H_0^1(\Gamma)$ and $L^2(\Gamma)$, respectively. Then, one can define a basis $\{z_i\}_{i=1}^\infty$ of eigenfunctions of S with a non-increasing sequence of positive eigenvalues λ_i , and for any $u = \sum_{i=1}^\infty c_i z_i$ there holds

$$\|u\|_{1/2,00,\Gamma}^2 = \sum_{i=1}^\infty c_i^2 \lambda_i^{1/2},$$

so that $H_{00}^{1/2}(\Gamma)$ becomes the closure of the span of the basis $\{z_i\}_{i=1}^\infty$ with respect to this norm. Naturally, for the practical computation of $\|u\|_{1/2,00,\Gamma}^2$ one employs a discrete approximation of the aforementioned spectral decomposition.

Example 1: Convergence against smooth exact solutions in a 2D domain

In this test, we analyze the convergence with respect to the spatial discretization using a manufactured solution. The computational domain is the square $\Omega := (0, 1)^2$, which is meshed by successively refined regular triangles. In addition, the boundary $\partial\Omega$ is partitioned into two parts, Γ and Σ , where Γ corresponds to the left and bottom sides of the square, whereas Σ denotes the union of the top and right sides. We take the [dimensionless physical parameters](#) as

$$\mu = \lambda = 1, \quad c_0 = \alpha = 0.1, \quad \text{and} \quad \kappa(x, y) := \exp(xy), \quad (6.1)$$

and adjust the source terms $\mathbf{f}$ and g so that the exact solution of (2.6) is given by

$$\mathbf{u} = 0.05 \begin{pmatrix} \cos(1.5\pi(x+y)) \\ \sin(1.5\pi(x-y)) \end{pmatrix} \quad \text{and} \quad p = \cos\left(\frac{\pi}{2}x\right) \cos\left(\frac{\pi}{2}y\right).$$

Note that p vanishes on Σ but not on Γ , so that the Lagrange multiplier $\varphi = p|_\Gamma$ is nontrivial. The system is complemented with suitable non-homogeneous boundary conditions, which generalize (2.7). The analysis made in the previous sections can be adapted to handle this framework by employing a lifting technique and adding some terms to the right-hand side of the weak formulation (3.9). As requested by the constraint $h \leq C_0 \tilde{h}$ introduced in Lemma 4.2, the boundary mesh for the Lagrange multiplier associated with the pressure is coarser than the partition of Γ induced by the bulk mesh. More precisely, at refinement level j the bulk mesh has $2^{j+1} + 2$ segments per side of Ω , whereas the boundary mesh has $2^j + 1$ segments per side of Γ , giving $\tilde{h} \approx 2h$. Since the partition of Γ for φ is then nested in the one induced by $\mathcal{T}_h$, the coupling

terms $\langle \chi_h \cdot \nu, \psi_h \rangle_\Gamma$ are computed exactly on the latter. Tables 6.1 and 6.2 show the convergence history of the method, with $k \in \{0, 1\}$, and confirm the optimal rates of convergence predicted by Theorem 5.1. For $k = 0$, the experimental rate of convergence of φ increases monotonically towards the predicted value, the asymptotic regime being reached more slowly than for the remaining unknowns. We also monitor the discrete conservation of mass and momentum through the defects

$$\text{mass} := \|\mathcal{P}_h^Q(c_0 p_h + \alpha \operatorname{tr}(\xi_h) - \operatorname{div}(\eta_h) - g)\|_{\ell^\infty} \quad \text{and} \quad \text{mom} := \|\mathcal{P}_h^u(\operatorname{div}(\sigma_h) + \mathbf{f})\|_{\ell^\infty},$$

where $\mathcal{P}_h^Q$ and $\mathcal{P}_h^u$ denote the L^2 -orthogonal projections onto Q_h and $\mathbf{Y}_h^u$, respectively, and $\|\cdot\|_{\ell^\infty}$ is the maximum absolute value of the degrees of freedom. Since the second and fourth rows of (4.1) are precisely the mass and momentum balance equations tested against all of Q_h and $\mathbf{Y}_h^u$, respectively, both defects vanish in exact arithmetic, that is, the scheme is locally (element-wise) conservative. Moreover, since $\operatorname{div}(\mathbb{X}_h^\sigma) \subseteq \mathbf{Y}_h^u$ (cf. Assumption 4.8), the discrete momentum balance $\operatorname{div}(\sigma_h) = -\mathcal{P}_h^u(\mathbf{f})$ holds pointwise. Accordingly, the last columns of Tables 6.1 and 6.2 show that both defects are at the level of round-off errors for all meshes and for $k \in \{0, 1\}$ (at most $2.2 \cdot 10^{-10}$ for **mass** and $1.2 \cdot 10^{-9}$ for **mom**), several orders of magnitude below the discretisation errors; their overall growth under refinement reflects the increasing condition number of the linear systems. In addition, Figure 6.1 shows the solutions obtained by the mixed scheme with $k = 1$ and mesh sizes $h = 0.021$ and $\tilde{h} = 0.043$, thus using 436,790 DOF.

Discretization with $k = 0$ for η, ξ, p and φ											
DOF	h	$\tilde{h}$	e(η)	r(η)	e(ξ)	r(ξ)	e(p)	r(p)	e(φ)	r(φ)	mass
550	0.354	0.707	6.50e-01	–	1.50e-01	–	1.12e-01	–	1.71e-01	–	6.97e-14
1208	0.236	0.471	4.39e-01	0.97	1.04e-01	0.90	7.60e-02	0.96	1.24e-01	0.78	3.06e-13
3292	0.141	0.283	2.65e-01	0.99	6.44e-02	0.95	4.60e-02	0.98	8.47e-02	0.75	1.29e-12
10532	0.079	0.157	1.47e-01	1.00	3.63e-02	0.98	2.56e-02	1.00	5.31e-02	0.79	2.36e-12
37300	0.042	0.083	7.79e-02	1.00	1.93e-02	0.99	1.36e-02	1.00	3.13e-02	0.83	1.17e-11
139988	0.021	0.043	4.01e-02	1.00	1.00e-02	0.99	6.98e-03	1.00	1.76e-02	0.86	4.59e-11

Discretization with $k = 0$ for $\sigma, \mathbf{u}$, and γ									
DOF	h	e(σ)	r(σ)	e($\mathbf{u}$)	r($\mathbf{u}$)	e(γ)	r(γ)	mom	
550	0.354	2.27e+00	–	2.96e-02	–	1.04e-01	–	7.93e-13	
1208	0.236	1.54e+00	0.95	1.95e-02	1.03	6.17e-02	1.28	2.11e-11	
3292	0.141	9.36e-01	0.98	1.16e-02	1.02	3.25e-02	1.25	9.77e-14	
10532	0.079	5.22e-01	0.99	6.40e-03	1.01	1.63e-02	1.18	4.26e-13	
37300	0.042	2.77e-01	1.00	3.38e-03	1.00	8.11e-03	1.10	1.59e-12	
139988	0.021	1.43e-01	1.00	1.74e-03	1.00	4.07e-03	1.04	7.02e-12	

Table 6.1: [Example 1, $k = 0$] Number of degrees of freedom, meshsizes, errors, rates of convergence, and mass and momentum defects.

Example 2: Convergence against smooth exact solutions in a nonconvex domain

We now consider the two-dimensional nonconvex domain Ω depicted in the first part of Figure 6.2. We use the same parameters as in the previous example (cf. (6.1)), while the manufactured solutions are given by

$$\mathbf{u} = 0.05 \begin{pmatrix} \cos(1.5\pi(x+y)) \\ \sin(1.5\pi(x-y)) \end{pmatrix} \quad \text{and} \quad p = (y-2x)^2 y \cos(\pi xy).$$

The boundary mesh is constructed in a similar manner as before. Furthermore, to obtain better convergence rates for φ , we introduce the additional term $-\varepsilon(\varphi_h, \psi_h)_\Gamma$ in the third row of the left-hand side of (4.1). This term acts as a perturbation and helps the algebraic system become more stable. In our case, we set

Discretization with $k = 1$ for $\boldsymbol{\eta}$, $\boldsymbol{\xi}$, p and φ											
DOF	h	$\tilde{h}$	$e(\boldsymbol{\eta})$	$r(\boldsymbol{\eta})$	$e(\boldsymbol{\xi})$	$r(\boldsymbol{\xi})$	$e(p)$	$r(p)$	$e(\varphi)$	$r(\varphi)$	mass
1674	0.354	0.707	5.20e-02	–	3.13e-02	–	4.05e-03	–	2.15e-03	–	3.84e-13
3710	0.236	0.471	2.31e-02	2.00	1.45e-02	1.89	1.81e-03	1.99	6.79e-04	2.84	1.06e-12
10182	0.141	0.283	8.28e-03	2.01	5.38e-03	1.94	6.54e-04	1.99	1.78e-04	2.62	3.75e-12
32726	0.079	0.157	2.55e-03	2.01	1.69e-03	1.97	2.02e-04	2.00	4.90e-05	2.19	1.48e-11
116214	0.042	0.083	7.12e-04	2.00	4.78e-04	1.99	5.67e-05	2.00	1.40e-05	1.98	5.75e-11
436790	0.021	0.043	1.89e-04	2.00	1.27e-04	2.00	1.51e-05	2.00	3.83e-06	1.95	2.17e-10

Discretization with $k = 1$ for $\boldsymbol{\sigma}$, $\mathbf{u}$, and $\boldsymbol{\gamma}$									
DOF	h	$e(\boldsymbol{\sigma})$	$r(\boldsymbol{\sigma})$	$e(\mathbf{u})$	$r(\mathbf{u})$	$e(\boldsymbol{\gamma})$	$r(\boldsymbol{\gamma})$	mom	
1674	0.354	4.78e-01	–	6.36e-03	–	3.27e-02	–	1.29e-12	
3710	0.236	2.20e-01	1.92	3.31e-03	1.61	1.60e-02	1.77	6.32e-12	
10182	0.141	8.07e-02	1.96	1.29e-03	1.85	6.07e-03	1.89	1.67e-11	
32726	0.079	2.51e-02	1.99	4.08e-04	1.95	1.95e-03	1.93	5.00e-11	
116214	0.042	7.06e-03	2.00	1.15e-04	1.99	5.61e-04	1.96	2.78e-10	
436790	0.021	1.88e-03	2.00	3.06e-05	2.00	1.50e-04	1.99	1.24e-09	

Table 6.2: [Example 1, $k = 1$] Number of degrees of freedom, meshsizes, errors, rates of convergence, and mass and momentum defects.

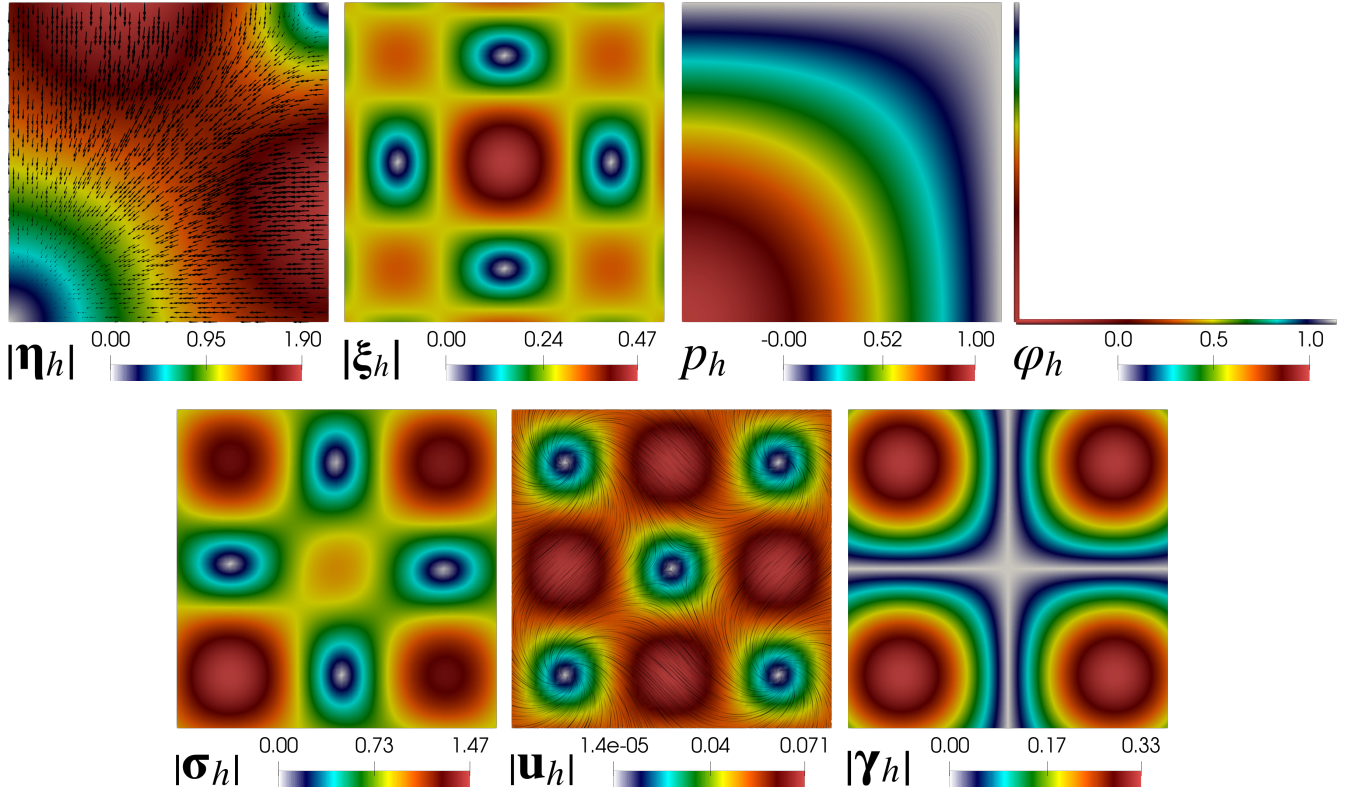


Figure 6.1: [Example 1] Computed solutions of the mixed scheme. The displacement field (center bottom) is displayed using line integral convolution (LIC).

$\varepsilon = 10^{-12}$. In this context, and as anticipated at the end of Section 5, Tables 6.3 and 6.4 show that optimal convergence rates are achieved in most of the experiments. This observation suggests that Theorem 5.1 may be extended to a broader class of domains. Nevertheless, for the finest meshes we observe a deterioration in

the convergence order, which is likely attributable to the non-convexity of the domain. Figure 6.2 depicts the numerical solutions obtained with the mixed scheme for $k = 1$, $h = 0.005$ and $\tilde{h} = 0.012$, using 785,594 DOF.

Discretization with $k = 0$ for $\boldsymbol{\eta}$, $\boldsymbol{\xi}$, p and φ										
DOF	h	$\tilde{h}$	$e(\boldsymbol{\eta})$	$r(\boldsymbol{\eta})$	$e(\boldsymbol{\xi})$	$r(\boldsymbol{\xi})$	$e(p)$	$r(p)$	$e(\varphi)$	$r(\varphi)$
1002	0.147	0.280	6.16e-01	–	4.85e-02	–	1.57e-02	–	2.42e-02	–
4050	0.079	0.149	3.12e-01	1.10	2.53e-02	1.05	8.03e-03	1.08	8.66e-03	1.63
15682	0.041	0.079	1.51e-01	1.09	1.32e-02	0.97	3.70e-03	1.16	4.18e-03	1.14
62562	0.020	0.042	7.85e-02	0.94	6.84e-03	0.95	1.86e-03	0.99	2.04e-03	1.15
251714	0.010	0.024	4.07e-02	0.95	3.67e-03	0.91	9.32e-04	1.01	1.03e-03	1.20
999426	0.005	0.012	2.15e-02	0.92	2.06e-03	0.83	4.68e-04	1.00	5.14e-04	1.02

Discretization with $k = 0$ for $\boldsymbol{\sigma}$, $\mathbf{u}$, and $\boldsymbol{\gamma}$							
DOF	h	$\mathbf{e}(\boldsymbol{\sigma})$	$\mathbf{r}(\boldsymbol{\sigma})$	$\mathbf{e}(\mathbf{u})$	$\mathbf{r}(\mathbf{u})$	$\mathbf{e}(\boldsymbol{\gamma})$	$\mathbf{r}(\boldsymbol{\gamma})$
1002	0.147	5.49e-01	–	6.95e-03	–	5.74e-02	–
4050	0.079	2.84e-01	1.07	3.45e-03	1.13	2.43e-02	1.38
15682	0.041	1.43e-01	1.02	1.77e-03	0.99	1.20e-02	1.06
62562	0.020	7.12e-02	1.01	8.49e-04	1.06	6.16e-03	0.96
251714	0.010	3.61e-02	0.99	4.18e-04	1.03	3.21e-03	0.95
999426	0.005	1.86e-02	0.95	2.05e-04	1.03	1.80e-03	0.83

Table 6.3: [Example 2, $k = 0$] Number of degrees of freedom, meshsizes, errors, and rates of convergence.

Discretization with $k = 1$ for $\boldsymbol{\eta}$, $\boldsymbol{\xi}$, p and φ										
DOF	h	$\tilde{h}$	$e(\boldsymbol{\eta})$	$r(\boldsymbol{\eta})$	$e(\boldsymbol{\xi})$	$r(\boldsymbol{\xi})$	$e(p)$	$r(p)$	$e(\varphi)$	$r(\varphi)$
3064	0.147	0.280	6.55e-02	–	3.60e-03	–	2.31e-03	–	5.73e-03	–
12526	0.079	0.149	1.75e-02	2.13	9.31e-04	2.18	5.73e-04	2.25	1.74e-03	1.89
48750	0.041	0.079	4.54e-03	2.02	2.30e-04	2.09	1.41e-04	2.09	5.13e-04	1.92
194998	0.020	0.042	1.20e-03	1.92	5.64e-05	2.03	3.48e-05	2.02	1.25e-04	2.27
785594	0.010	0.024	3.12e-04	1.96	1.42e-05	2.00	8.62e-06	2.03	3.24e-05	2.36
3121186	0.005	0.012	8.17e-05	1.93	3.60e-06	1.98	2.16e-06	2.00	1.16e-05	1.51

Discretization with $k = 1$ for $\boldsymbol{\sigma}$, $\mathbf{u}$, and $\boldsymbol{\gamma}$							
DOF	h	$\mathbf{e}(\boldsymbol{\sigma})$ $\mathbf{r}(\boldsymbol{\sigma})$		$\mathbf{e}(\mathbf{u})$ $\mathbf{r}(\mathbf{u})$		$\mathbf{e}(\boldsymbol{\gamma})$ $\mathbf{r}(\boldsymbol{\gamma})$	
3064	0.147	4.44e-02	–	6.97e-04	–	4.19e-03	–
12526	0.079	1.09e-02	2.26	1.74e-04	2.24	1.07e-03	2.21
48750	0.041	2.74e-03	2.06	4.31e-05	2.08	2.62e-04	2.10
194998	0.020	6.85e-04	2.00	1.08e-05	2.00	6.73e-05	1.96
785594	0.010	1.69e-04	2.04	2.67e-06	2.03	1.67e-05	2.03
3121186	0.005	4.25e-05	1.99	6.71e-07	1.99	4.28e-06	1.96

Table 6.4: [Example 2, $k = 1$] Number of degrees of freedom, meshsizes, errors, and rates of convergence.

Example 3: Convergence against smooth exact solutions in a 3D domain

In this example, we consider the unit cube $\Omega = (0, 1)^3$. The parameters μ , λ , c_0 , and α are chosen as in (6.1), while the permeability κ is defined by

$$\kappa(x, y, z) := \exp(-xyz).$$

In addition, the source terms $\mathbf{f}$ and g are defined in such a way that the manufactured solutions presented below coincide with the prescribed analytical solutions (cf. (2.6)). The corresponding [displacement](#) and

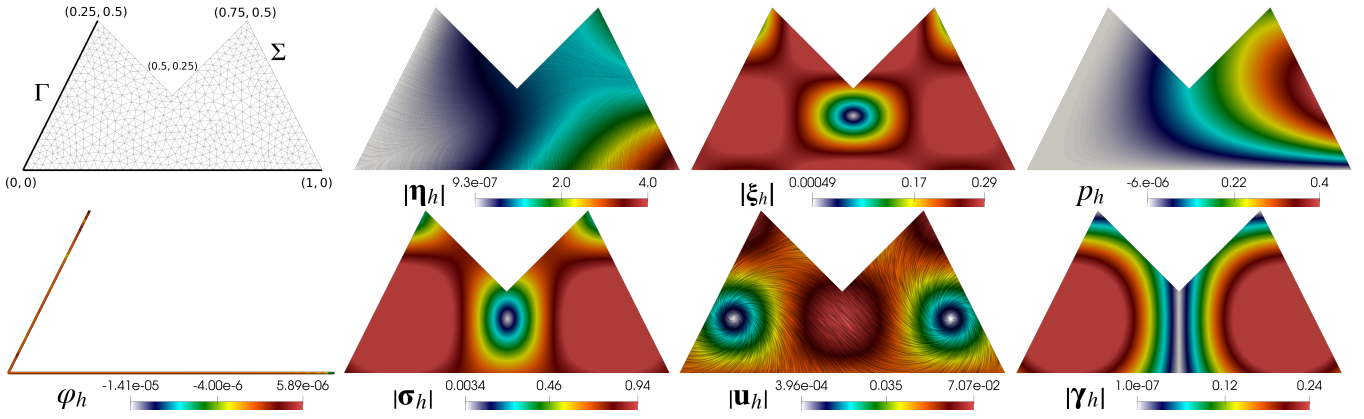


Figure 6.2: [Example 2] Nonconvex domain under consideration (top left). The black portion of the boundary represents Γ , while the remaining part corresponds to Σ . The mesh shown has size $h = 0.041$. Computed solutions of the mixed scheme (remaining panels). The pressure flux and the displacement fields are displayed using line integral convolution (LIC), colored by their respective magnitudes.

pressure fields are defined by

$$\mathbf{u} = 0.1 \begin{pmatrix} \sin(x) \cos(y) \cos(z) + 0.5 x^2 \\ -2 \cos(x) \sin(y) \cos(z) + 0.5 y^2 \\ \cos(x) \cos(y) \sin(z) + 0.5 z^2 \end{pmatrix} \quad \text{and} \quad p = \sin(\pi x) \sin(\pi y) \sin(\pi z).$$

The independent boundary mesh is constructed as in the first example, now in the three-dimensional setting. The convergence history is reported in Table 6.5, where optimal convergence rates are observed for most variables, in agreement with the predictions of Theorem 5.1 for $k = 0$. For one of the variables, however, the optimal rate is not fully attained on the meshes considered. This behavior is likely due to a pre-asymptotic effect, since the mesh refinements required to enter the asymptotic regime would be computationally prohibitive. In addition, the numerical solutions are depicted in Figure 6.3 for mesh sizes $h = 0.108$ and $\tilde{h} = 0.192$, using 979,618 degrees of freedom.

Discretization with $k = 0$ for $\boldsymbol{\eta}$, $\boldsymbol{\xi}$, p and φ										
DOF	h	$\tilde{h}$	$e(\boldsymbol{\eta})$	$r(\boldsymbol{\eta})$	$e(\boldsymbol{\xi})$	$r(\boldsymbol{\xi})$	$e(p)$	$r(p)$	$e(\varphi)$	$r(\varphi)$
2068	0.866	0.866	5.63e+00	—	4.83e-02	—	2.28e-01	—	3.09e+01	—
15772	0.433	0.577	3.09e+00	0.86	2.83e-02	0.77	1.14e-01	0.99	2.33e-02	17.73
123622	0.217	0.346	1.59e+00	0.96	1.59e-02	0.83	5.85e-02	0.97	4.04e-03	3.43
979618	0.108	0.192	7.98e-01	0.99	8.98e-03	0.82	2.95e-02	0.99	1.23e-03	2.02

Discretization with $k = 0$ for $\boldsymbol{\sigma}$, $\mathbf{u}$, and $\boldsymbol{\gamma}$							
DOF	h	$e(\boldsymbol{\sigma})$	$r(\boldsymbol{\sigma})$	$e(\mathbf{u})$	$r(\mathbf{u})$	$e(\boldsymbol{\gamma})$	$r(\boldsymbol{\gamma})$
2068	0.866	2.28e-01	—	2.38e-02	—	6.14e-02	—
15772	0.433	1.26e-01	0.86	1.16e-02	1.04	2.48e-02	1.31
123622	0.217	6.67e-02	0.92	5.77e-03	1.01	1.08e-02	1.20
979618	0.108	3.54e-02	0.91	2.88e-03	1.00	5.09e-03	1.09

Table 6.5: [Example 3, $k = 0$] Number of degrees of freedom, meshsizes, errors, and rates of convergence.

Example 4: Sensitivity with respect to the model parameters

We now assess how the accuracy of the lowest-order scheme ($k = 0$) is affected by extreme values of the physical parameters. We use the domain, the partition of $\partial\Omega$ into Γ and Σ , and the sequence of bulk

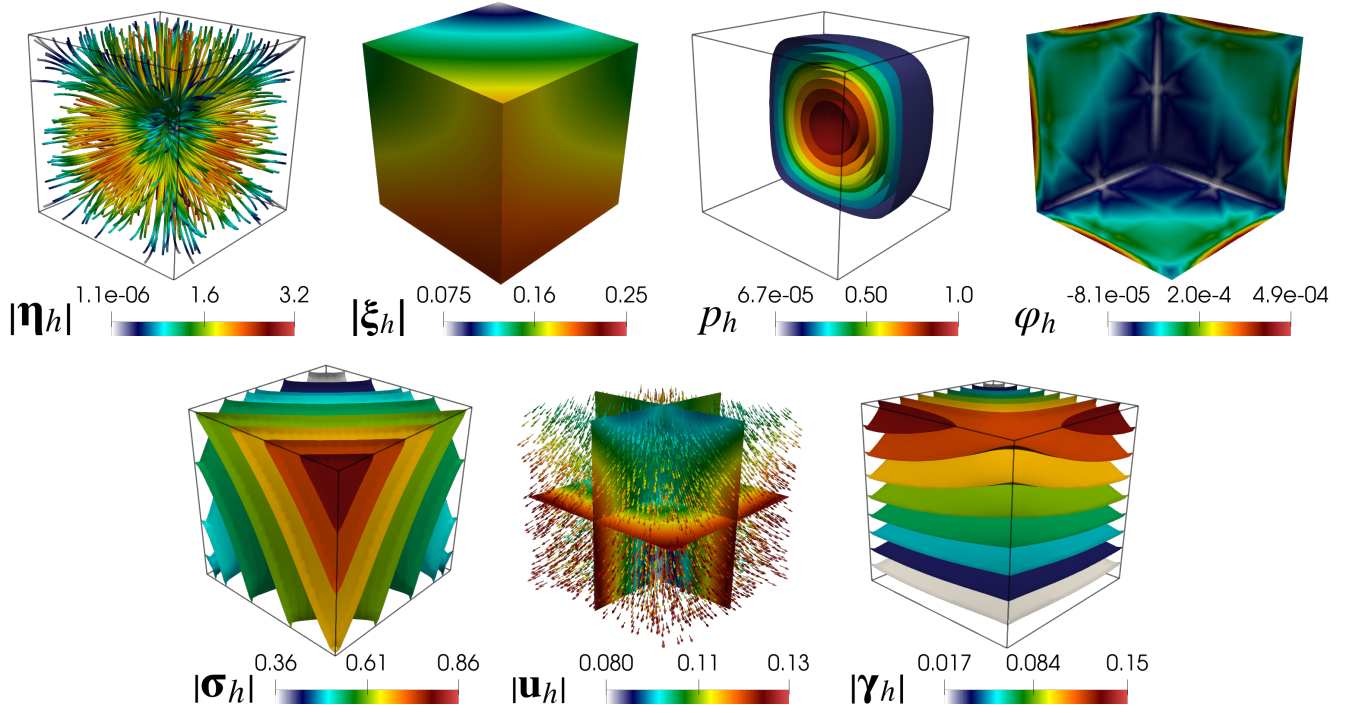


Figure 6.3: [Example 3] Computed solutions of the mixed scheme in the unit cube.

and boundary meshes of Example 1, with five refinement levels. We keep $\mu = 1$, take the permeability as $\kappa(x, y) := \kappa_0 \exp(xy)$, and consider all the 320 combinations of

$$\lambda \in \{1, 10^3, 10^6, 10^9\}, \quad \kappa_0, c_0 \in \{1, 10^{-3}, 10^{-6}, 10^{-9}\}, \quad \alpha \in \{0, 10^{-9}, 10^{-6}, 10^{-3}, 1\}.$$

We include the case $\alpha = 0$, in which the flow and elasticity subproblems decouple, and which is also covered by the analysis (cf. Lemmas 3.5 and 4.5). The source terms and boundary data are constructed from the manufactured solutions

$$\mathbf{u} = \mathbf{curl} \left(0.1 \sin(\pi x) \sin(\pi y) \right) + \frac{0.05}{\lambda} \begin{pmatrix} \cos \left(1.5 \pi (x + y) \right) \\ \sin \left(1.5 \pi (x - y) \right) \end{pmatrix} \quad \text{and} \quad p = \cos \left(\frac{\pi}{2} x \right) \cos \left(\frac{\pi}{2} y \right).$$

In this way $\operatorname{div} \mathbf{u} = \mathcal{O}(\lambda^{-1})$, so that $\boldsymbol{\sigma}$ remains bounded in the nearly incompressible limit $\lambda \rightarrow \infty$, and φ is nontrivial.

The constants in the stability and Céa estimates of Sections 3 and 4 depend on the model parameters, and so do the errors measured in the norms used in Examples 1–3. For instance, when κ_0 is small compared with α or c_0 , the flux $\boldsymbol{\eta} = \kappa \nabla p$ is much smaller than the remaining terms of the mass balance, and the relative error $e(\boldsymbol{\eta}) / \|\boldsymbol{\eta}\|_{\operatorname{div}; \Omega}$ on the finest mesh reaches $2.2 \cdot 10^3$; if in addition $c_0 \ll \alpha$, the relative errors of p and φ reach 62 and 111, respectively (see Table 6.6). We therefore measure the errors in parameter-weighted norms. Let

$$c_\star := c_0 + \frac{n \alpha^2}{2\mu + n\lambda} \quad \text{and} \quad \varpi := c_\star + \kappa_0,$$

where $c_\star$ is the effective storage coefficient obtained by eliminating $\operatorname{tr}(\boldsymbol{\xi})$ from the constitutive relation, and define

$$\begin{aligned} \|\boldsymbol{\chi}\|_{\boldsymbol{\eta}}^2 &:= \|\kappa^{-1/2} \boldsymbol{\chi}\|_{0, \Omega}^2 + \varpi^{-1} \|\operatorname{div}(\boldsymbol{\chi})\|_{0, \Omega}^2, \quad \|\boldsymbol{\rho}\|_{\boldsymbol{\xi}}^2 := \int_{\Omega} \mathcal{C}(\boldsymbol{\rho}) : \boldsymbol{\rho}, \quad \|q\|_p^2 := \varpi \|q\|_{0, \Omega}^2, \quad \|\psi\|_{\varphi}^2 := \varpi \|\psi\|_{1/2, 0, \Gamma}^2, \\ \|\boldsymbol{\tau}\|_{\boldsymbol{\sigma}}^2 &:= \int_{\Omega} \mathcal{C}^{-1}(\boldsymbol{\tau}) : \boldsymbol{\tau} + (2\mu)^{-1} \|\operatorname{div}(\boldsymbol{\tau})\|_{0, \Omega}^2, \quad \|\mathbf{v}\|_{\mathbf{u}}^2 := 2\mu \|\mathbf{v}\|_{0, \Omega}^2, \quad \text{and} \quad \|\boldsymbol{\delta}\|_{\boldsymbol{\gamma}}^2 := 2\mu \|\boldsymbol{\delta}\|_{0, \Omega}^2. \end{aligned}$$

For $\kappa_0 \rightarrow 0$ these reduce to the norms of a storage-dominated flow problem, whereas for $c_\star \rightarrow 0$ they reduce to the κ -scaled norms of the mixed Darcy problem. Denoting by $\vec{x} := (\boldsymbol{\eta}, \boldsymbol{\xi}, p, \varphi, \boldsymbol{\sigma}, \mathbf{u}, \boldsymbol{\gamma})$ the exact solution and by $\vec{x}_h$ its approximation, we report the total weighted error

$$\text{ew} := \frac{(\sum_{\diamond} \|\diamond - \diamond_h\|_{\diamond}^2)^{1/2}}{(\sum_{\diamond} \|\diamond\|_{\diamond}^2)^{1/2}}, \quad \diamond \in \{\boldsymbol{\eta}, \boldsymbol{\xi}, p, \varphi, \boldsymbol{\sigma}, \mathbf{u}, \boldsymbol{\gamma}\}.$$

Note that the error of the whole solution is normalised by the norm of the whole solution: some components can be arbitrarily small with respect to the others (e.g., $\boldsymbol{\eta}$ scales with κ_0), so that their individual relative errors are not meaningful in the limiting regimes.

Figure 6.4 (top) displays ew against the number of degrees of freedom. The rows of the figure correspond to the values of λ and the columns to the values of κ_0 . Within each panel, the colour of each curve indicates the value of α (the case $\alpha = 0$ being drawn with open markers), the marker indicates the value of c_0 , and the dashed line indicates the rate $\mathcal{O}(h)$. For $\lambda = 1$, all 80 combinations of (κ_0, α, c_0) produce essentially the same errors: on the finest mesh ew lies between 0.035 and 0.049, and the experimental rates of convergence lie between 0.83 and 1.00. Moreover, for all values of λ , κ_0 , and c_0 , the errors obtained with $\alpha = 0$ coincide with those obtained with $\alpha = 10^{-9}$ up to a relative difference of order 10^{-8} , so that the method behaves continuously in the limit $\alpha \rightarrow 0$ and also covers the decoupled case $\alpha = 0$. That is, in the weighted norms the method is robust with respect to κ_0 , α , and c_0 , including the regimes in which the relative errors in the original norms are of order 10^2 – 10^3 (cf. Table 6.6). In contrast, the method is not robust with respect to λ : for $\lambda = 10^3$ the rate of convergence drops to 0.56, and for $\lambda \geq 10^6$ the error grows under refinement (with rate ≈ -1). This increase stems from the deviatoric part of $\boldsymbol{\sigma}$ (the trace part being weighted by λ^{-1} in $\|\cdot\|_{\boldsymbol{\sigma}}$), and it is a locking phenomenon of the discrete strain space. Indeed, as $\lambda \rightarrow \infty$, the term $\lambda \int_{\Omega} \text{tr}(\boldsymbol{\xi}_h) \text{tr}(\boldsymbol{\rho}_h)$ forces $\text{tr}(\boldsymbol{\xi}_h) \rightarrow 0$, and for $k = 0$ one can check that the only element of $\mathbb{B}_0(K)$ with vanishing trace is zero, so that in the limit $\boldsymbol{\xi}_h$ reduces to a piecewise constant, trace-free tensor, which is too poor to represent $\mathcal{C}^{-1}(\boldsymbol{\sigma}_h)$ for $\boldsymbol{\sigma}_h \in \mathbb{X}_h^{\boldsymbol{\sigma}}$.

This suggests enlarging $\mathbb{H}_h^{\boldsymbol{\xi}}$. In each $K \in \mathcal{T}_h$, the elements of $\mathbb{X}_h^{\boldsymbol{\sigma}}$ are polynomials of degree at most $k + 2$ (those of $\mathbb{RT}_k(K)$ being of degree $k + 1$ and those of $\mathbb{B}_k(K)$ of degree $k + 2$), and $\mathcal{C}^{-1}$ preserves this property. Therefore, if we replace $\mathbb{H}_h^{\boldsymbol{\xi}}$ by

$$\tilde{\mathbb{H}}_h^{\boldsymbol{\xi}} := \left\{ \boldsymbol{\rho}_h \in \mathbb{L}^2(\Omega) : \quad \boldsymbol{\rho}_h|_K \in \mathbb{P}_{k+2}(K) \quad \forall K \in \mathcal{T}_h \right\},$$

then $(\chi_h, \boldsymbol{\rho}_h) = (\mathbf{0}, \mathcal{C}(\boldsymbol{\xi}_h) - \boldsymbol{\sigma}_h - \alpha p_h \mathbb{I})$ is an admissible test function in the first equation of (4.1), which yields $\boldsymbol{\xi}_h = \mathcal{C}^{-1}(\boldsymbol{\sigma}_h + \alpha p_h \mathbb{I})$ exactly (we have verified this identity numerically up to round-off). Hence $\boldsymbol{\xi}_h$ can be eliminated, and the resulting scheme is a mixed discretisation of the stress-based formulation of Biot's equations with weakly imposed symmetry, in which $\mathcal{C}$ enters only through its inverse; for this class of methods, error estimates and preconditioners that are robust with respect to λ are available (see, e.g., [35, 8]). This is the discrete counterpart of the equivalence between Hu–Washizu and Hellinger–Reissner type formulations, which is known to govern the behaviour of Hu–Washizu discretisations in the incompressible limit [22, 33]. Moreover, since $\tilde{\mathbb{H}}_h^{\boldsymbol{\xi}}$ contains $\mathbb{P}_k(K) \oplus \mathbb{B}_k(K)$ in each element, Assumption 4.8 and property (AP $_{\boldsymbol{\xi}_h}^{\boldsymbol{\xi}}$) still hold, and hence Theorem 5.1 remains valid. The corresponding results are shown in Figure 6.4 (bottom): the curves collapse in all panels, and on the finest mesh (83,540 instead of 37,300 degrees of freedom) ew lies between 0.028 and 0.049 for all 320 combinations of the parameters (including $\alpha = 0$), with rates of convergence between 0.83 and 1.00. The last column of Table 6.6 confirms that the modified scheme is also robust with respect to λ . A rigorous analysis of the method in these weighted norms is beyond the scope of this work.

References

- [1] E. AHMED, F.A. RADU, AND J.M. NORDBOTTEN, *Adaptive poromechanics computations based on a posteriori*

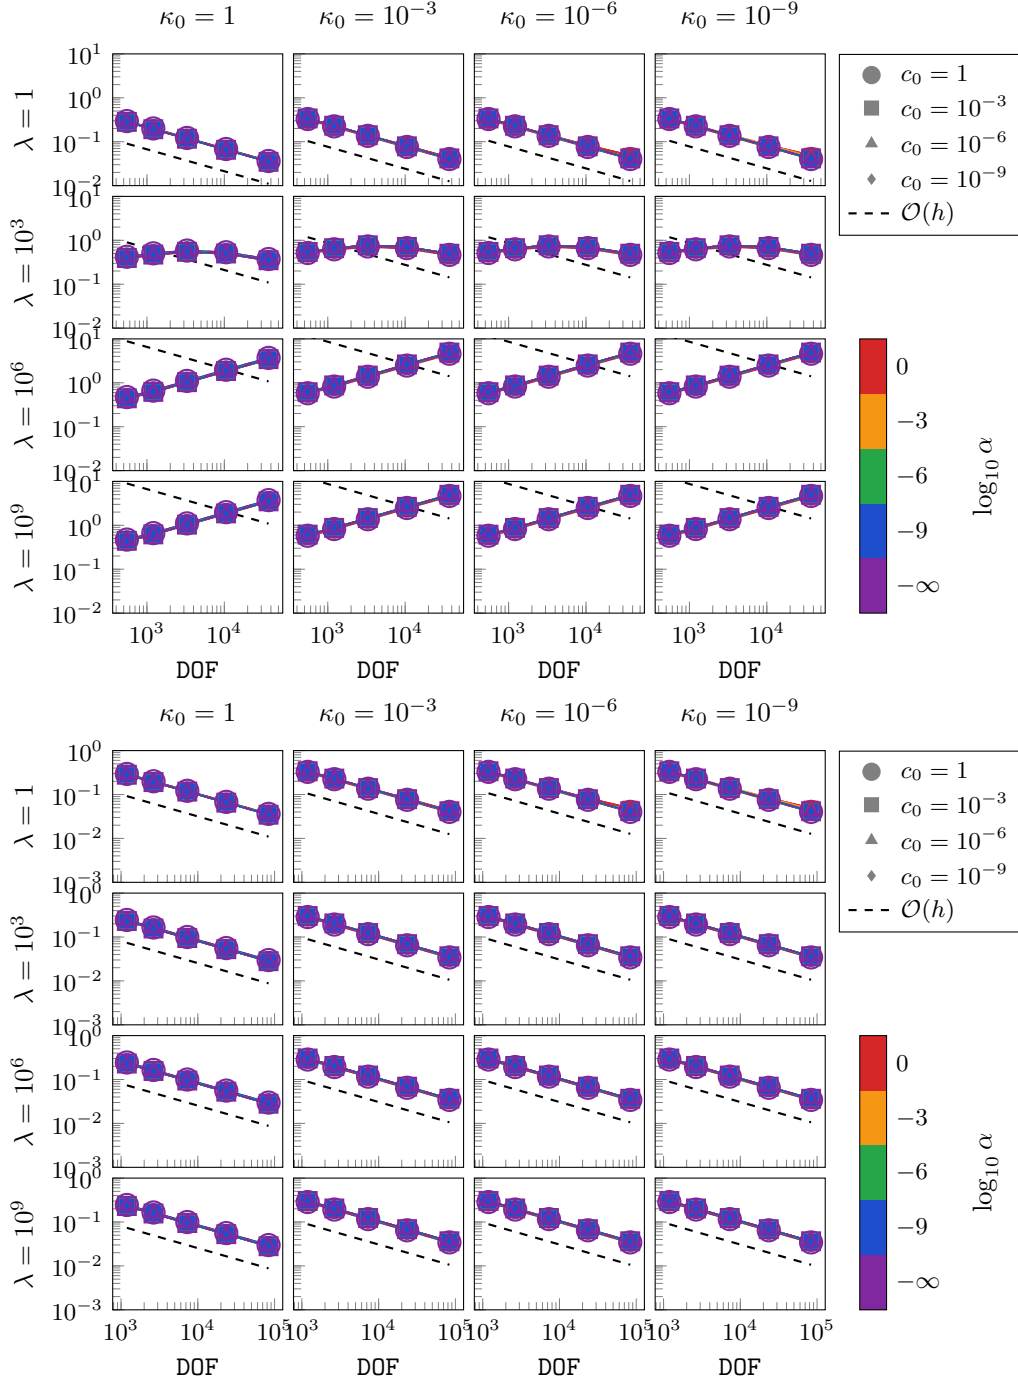


Figure 6.4: [Example 4, $k = 0$] Total weighted error ew versus number of degrees of freedom for $\lambda \in \{1, 10^3, 10^6, 10^9\}$ (rows) and $\kappa_0 \in \{1, 10^{-3}, 10^{-6}, 10^{-9}\}$ (columns), using the spaces (5.1)–(5.2) (top) and replacing $\mathbb{H}_h^\xi$ by $\tilde{\mathbb{H}}_h^\xi$ (bottom). In each panel, the colour indicates the value of $\alpha \in \{0, 10^{-9}, 10^{-6}, 10^{-3}, 1\}$ (open markers and dashed lines for $\alpha = 0$, which coincide with the curves for $\alpha = 10^{-9}$) and the marker the value of $c_0 \in \{1, 10^{-3}, 10^{-6}, 10^{-9}\}$, and the black dashed line indicates the rate $\mathcal{O}(h)$.

error estimates for fully mixed formulations of Biot's consolidation model, Computer Meth. Appl. Mech. Engrg. 347 (2019), 264–294.

- [2] M. S. ALNAES, J. BLECHTA, J. HAKE, A. JOHANSSON, B. KEHLET, A. LOGG, C. RICHARDSON, J. RING, M. E. ROGNES AND G. N. WELLS, *The FEniCS project version 1.5*. Arch. Numer. Softw. 3, 9–23 (2015).

				relative errors, spaces (5.2)			ew	
λ	κ_0	α	c_0	$e(\boldsymbol{\eta})/\ \boldsymbol{\eta}\ _{\text{div};\Omega}$	$e(p)/\ p\ _{0,\Omega}$	$e(\varphi)/\ \varphi\ _{1/2,00,\Gamma}$	spaces (5.2)	with $\tilde{\mathbb{H}}_h^\xi$
1	1	1	1	1.68e-02	2.55e-02	2.07e-02	3.59e-02	3.58e-02
1	1	10^{-9}	10^{-9}	1.57e-02	2.73e-02	2.26e-02	3.48e-02	3.47e-02
1	10^{-9}	10^{-9}	10^{-9}	1.68e-02	2.57e-02	2.09e-02	4.17e-02	4.16e-02
1	10^{-9}	1	1	6.93e+01	3.08e-02	4.63e-02	4.04e-02	4.03e-02
1	10^{-9}	10^{-3}	10^{-9}	2.18e+03	6.21e+01	1.11e+02	4.57e-02	4.56e-02
1	10^{-9}	0	1	6.02e+00	1.69e-02	1.81e-03	4.03e-02	4.02e-02
10^3	1	1	1	1.60e-02	2.58e-02	2.09e-02	3.67e-01	2.95e-02
10^6	1	1	1	1.60e-02	2.58e-02	2.10e-02	3.62e+00	2.95e-02
10^9	1	1	1	1.60e-02	2.58e-02	2.10e-02	3.67e+00	2.95e-02
10^9	10^{-9}	10^{-3}	10^{-9}	1.60e-02	2.58e-02	2.10e-02	4.96e+00	3.64e-02

Table 6.6: [Example 4, $k = 0$] Errors on the finest mesh ($h = 0.042$, $\tilde{h} = 0.083$) for representative combinations of the model parameters: relative errors in the norms of Examples 1–3 and total weighted error ew , for the spaces (5.1)–(5.2) and when $\mathbb{H}_h^\xi$ is replaced by $\tilde{\mathbb{H}}_h^\xi$.

- [3] M. AMARA AND J.M. THOMAS, *Equilibrium finite elements for the linear elastic problem*. Numer. Math. 33(4), 367–383 (1979).
- [4] D. N. ARNOLD, F. BREZZI, AND J. DOUGLAS, *PEERS: A new mixed finite element method for plane elasticity*, Japan J. Appl. Math., 1 (1984), pp. 347–367.
- [5] D.N. ARNOLD, R. FALK AND R. WINTHER, *Mixed finite element methods for linear elasticity with weakly imposed symmetry*. Math. Comp. 76 (2007), 1699–1723.
- [6] I. BABUŠKA AND A.K. AZIZ, *Survey lectures on the mathematical foundations of the finite element method*, in *The mathematical foundations of the finite element method with applications to partial differential equations* (Proc. Sympos., Univ. Maryland, Baltimore, Md., 1972), pp. 1–359, Academic Press, New York-London.
- [7] I. BABUŠKA AND G.N. GATICA, *On the mixed finite element method with Lagrange multipliers*. Numer. Methods Partial Differential Equations 19 (2) (2003) 192–210.
- [8] T. BÆRLAND, J. J. LEE, K.-A. MARDAL, AND R. WINTHER, *Weakly imposed symmetry and robust preconditioners for Biot’s consolidation model*, Comput. Methods Appl. Math., 17 (2017), pp. 377–396.
- [9] I. BERMÚDEZ, C. CORREA, G.N. GATICA AND J.P. SILVA, *A perturbed twofold saddle point-based mixed finite element method for the Navier-Stokes equations with variable viscosity*. Appl. Numer. Math. 201 (2024), 465–487.
- [10] F. BERTRAND, J.W. BOTH, AND T. DAĞLI, *Splitting-strategies for arbitrary-order fully mixed finite element discretizations of the Biot equations*, arXiv preprint, 2603.18241 (2026). Available at <https://arxiv.org/abs/2603.18241>.
- [11] D. BOFFI, F. BREZZI, AND M. FORTIN, *Mixed Finite Element Methods and Applications*, vol. 44 of Springer Series in Computational Mathematics, Springer, 2013.
- [12] M. BOTTI, D. PRADA, A. SCOTTI, AND M. VISINONI, *Fully-mixed virtual element method for the Biot problem*, arXiv preprint, 2504.17729 (2025). Available at <https://arxiv.org/abs/2504.17729>.
- [13] F. BREZZI AND M. FORTIN, *Mixed and Hybrid Finite Element Methods*. Springer Series in Computational Mathematics, 15. Springer-Verlag, New York, 1991.
- [14] J. CAMAÑO, C. MUÑOZ AND R. OYARZÚA, *Numerical analysis of a dual-mixed problem in non-standard Banach spaces*. Electron. Trans. Numer. Anal. 48 (2018), 114–130.
- [15] J. CAREAGA, G. N. GATICA, C. INZUNZA, AND R. RUIZ-BAIER, *New Banach spaces-based mixed finite element methods for the coupled poroelasticity and heat equations*, IMA J. Numer. Anal. 45 (2025), 1936–1984.

- [16] S. CAUCAO, G.N. GATICA, S. MEDRADO AND Y. SOBRAL, *Nonlinear twofold saddle point-based mixed finite element methods for a regularized $\mu(I)$ -rheology model of granular materials*. J. Comput. Phys. 520 (2025), no. 113462, 26.
- [17] S. CAUCAO, G.N. GATICA AND F. SANDOVAL, *A fully-mixed finite element method for the coupling of the Navier-Stokes and Darcy-Forchheimer equations*. Numer. Methods Partial Differential Equations 37 (2021), no. 3, 2550–2587.
- [18] B. COCKBURN, J. GOPALAKRISHNAN AND J. GUZMÁN, *A new elasticity element made for enforcing weak stress symmetry*. Math. Comp. 79(271), 1331–1349 (2010).
- [19] E. COLMENARES, G.N. GATICA AND S. MORAGA, *A Banach spaces-based analysis of a new fully-mixed finite element method for the Boussinesq problem*. ESAIM Math. Model. Numer. Anal. 54 (2020), no. 5, 1525–1568.
- [20] C.I. CORREA AND G.N. GATICA, *On the continuous and discrete well-posedness of perturbed saddle-point formulations in Banach spaces*. Computers & Mathematics with Applications, 117 (2022), 14–23.
- [21] W. DAHMEN, B. FAERMANN, I.G. GRAHAM, W. HACKBUSCH, AND S.A. SAUTER, *Inverse inequalities on non-quasi-uniform meshes and application to the mortar element method*. Math. Comp. 73 (2004), no. 247, 1107–1138.
- [22] J. K. DJOKO, B. P. LAMICHHANE, B. D. REDDY, AND B. I. WOHLMUTH, *Conditions for equivalence between the Hu–Washizu and related formulations, and computational behavior in the incompressible limit*, Comput. Methods Appl. Mech. Engrg., 195 (2006), pp. 4161–4178.
- [23] A. ERN AND J.-L. GUERMOND, *Finite Elements II. Galerkin Approximation, Elliptic and Mixed PDEs*. Texts in Applied Mathematics, Vol. 73, Springer, Cham, 2021.
- [24] G.N. GATICA, *A Simple Introduction to the Mixed Finite Element Method. Theory and Applications*. Springer-Briefs in Mathematics. Springer, Cham, 2014.
- [25] G.N. GATICA, S. MEDDAHI, AND R. RUIZ-BAIER, *An L^p -spaces-based formulation yielding a new fully mixed finite element method for the coupled Darcy and heat equations*. IMA J. Numer. Anal. 42 (2022), no. 4, 3154–3206.
- [26] B. GÓMEZ-VARGAS, K. MARDAL, R. RUIZ-BAIER AND V. VINJE, *Twofold saddle-point formulation of Biot poroelasticity with stress-dependent diffusion*. SIAM J. Numer. Anal. 61 (2023), no. 3, 1449–1481.
- [27] P. GRISVARD, *Elliptic Problems in Nonsmooth Domains*. Classics in Applied Mathematics. Society for Industrial and Applied Mathematics (SIAM), Philadelphia, 2011.
- [28] P. GRISVARD, *Problèmes aux limites dans les polygones, Mode d’emploi*. EDF Bulletin de la Direction des Etudes et Recherches (Serie C), 1 (1986), 21–59.
- [29] J. S. HOWELL AND N. J. WALKINGTON, *Inf-sup conditions for twofold saddle point problems*, Numer. Math., 118 (2011), 663–693.
- [30] A. KHAN, B. P. LAMICHHANE, R. RUIZ-BAIER, AND S. VILLA-FUENTES, *A priori and a posteriori error bounds for the fully mixed FEM formulation of poroelasticity with stress-dependent permeability*, IMA J. Numer. Anal., in press (2026).
- [31] M. KUČHTA, *Assembly of multiscale linear PDE operators*. In: F. J. Vermolen, C. Vuik (eds.) Numerical Mathematics and Advanced Applications ENUMATH 2019, (2021) pp. 641–650.
- [32] M. KUČHTA, M. NORDAAS, J. C. VERSCHAEVE, M. MORTENSEN AND K.-A. MARDAL, *Preconditioners for saddle point systems with trace constraints coupling 2d and 1d domains*. SIAM J. Sci. Comput. 38 (2016), B962–B987.
- [33] B. P. LAMICHHANE, B. D. REDDY, AND B. I. WOHLMUTH, *Convergence in the incompressible limit of finite element approximations based on the Hu–Washizu formulation*, Numer. Math., 104 (2006), pp. 151–175.
- [34] B.P. LAMICHHANE, R. RUIZ-BAIER AND S. VILLA-FUENTES, *New twofold saddle-point formulations for Biot poroelasticity with porosity-dependent permeability*. Results in Applied Mathematics, Volume 21, 2024.

- [35] J. J. LEE, *Robust error analysis of coupled mixed methods for Biot's consolidation model*, J. Sci. Comput., 69 (2016), 610–632.
- [36] T. LI AND I. YOTOV, *A mixed elasticity formulation for fluid-poroelastic structure interaction*, ESAIM: Math. Model. Numer. Anal., 56 (2022), 1–40.
- [37] M. LONSING AND R. VERFÜRTH, *On the stability of BDMS and PEERS elements*. Numer. Math. 99 (2004), 131–140.
- [38] W. MCLEAN, *Strongly elliptic systems and boundary integral equations*. Cambridge Univ. Press, Cambridge, 2000.
- [39] S.A. SAUTER AND C. SCHWAB, *Boundary Element Methods*. Translated and expanded from the 2004 German original Springer Ser. Comput. Math., 39. Springer-Verlag, Berlin, 2011.
- [40] R. E. SHOWALTER, *Diffusion in poro-elastic media*, J. Math. Anal. Appl. 251 (2000), 310–340.
- [41] R. E. SHOWALTER AND N. SU, *Partially saturated flow in a poroelastic medium*, Discr. Cont. Dyn. Syst. . B, 1 (2001), 403–420.
- [42] S.-Y. YI, *Convergence analysis of a new mixed finite element method for Biot's consolidation model*, Numer. Methods Partial Differential Equations, 30 (2014), 1189–1210.