

Basic HTML Tags and Text Formatting



ASSOC. PROF. ELİF KARTAL

Istanbul University, Faculty of Economics, MIS
elifk@istanbul.edu.tr

```
</script>
```

```
<form id="form1" name="login" method="POST" action="login.php">
```

```
<div style="background-color:#336699;border-radius:5px; height:22px;">
```

```
<div style="float:left;" ><strong><font color="white" size="14">
```


```
<div style="float:right; margin-right:20px; background-color:#336699; height:12px;">
```

```
<a href="admin.php" title="Close">
```

```
</div><br>
```

```
<?php
```

```
if(isset($_POST['save']))
```

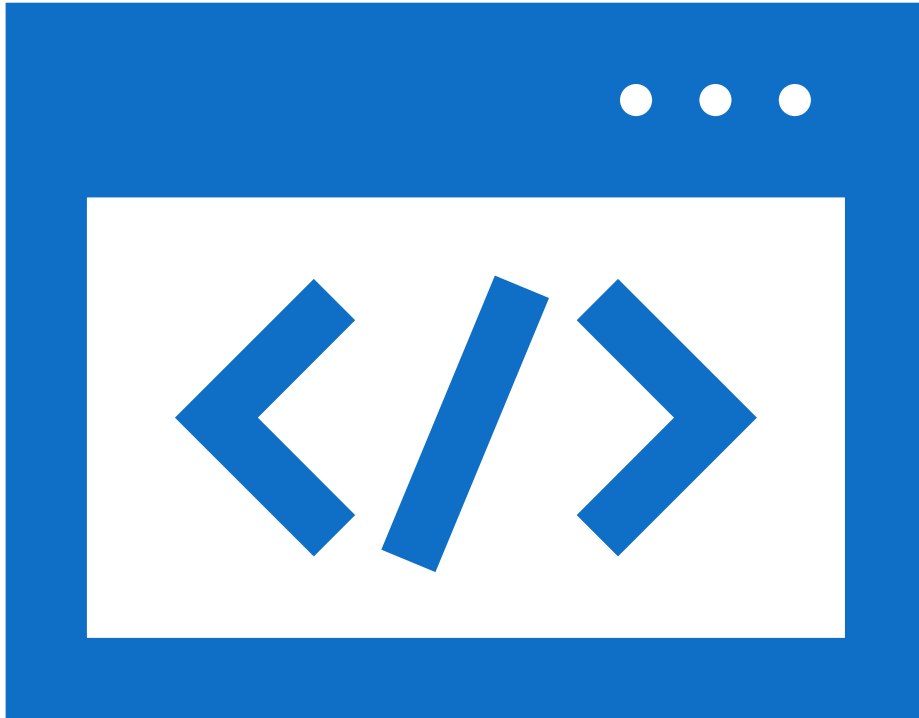

What is HTML?

HTML is the set of markup symbols or codes placed in a file intended for display on a Web browser page.

The World Wide Web Consortium (<http://w3c.org>) sets the standards for HTML and its related languages.



What is HTML5 ?

Newest version of HTML/XHTML

Supported by modern browsers

Intended to be backwards compatible

Adds new elements

Adds new functionality

- Edit form data
- Native video and audio
- ...

Source: W3C <http://www.w3.org/html/logo/>

Naming Conventions (1/2)

Use proper suffixes for your files.

- HTML and XHTML files must end with .html. Web graphics must be labeled according to their file format: .gif, .png, or .jpg (.jpeg is also acceptable).

Never use character spaces within filenames.

- It is common to use an underline character or hyphen to visually separate words within filenames, such as elif_bio.html or elif-bio.html.

Avoid special characters.

- Avoid special characters such as ?, %, #, /, :, ;, •, etc. Limit filenames to letters, numbers, underscores, hyphens, and periods.

Naming Conventions (1/2)

Filename may be case-sensitive.

- Filenames may be case-sensitive, depending on your server configuration.
- Consistently using all lowercase letters in filenames, although not necessary, is one way to make your filenames easier to manage.

Keep filenames short.

- Short names keep the character count and file size of your HTML file in check.
- If you really must give the file a long, multiword name, you can separate words with hyphens, such as a-long-document-title.html, to improve readability.

Self-imposed conventions.

- Self-imposed conventions. It is helpful to develop a consistent naming scheme for huge sites.
- For instance, always using lowercase with hyphens between words. This takes some of the guesswork out of remembering what you named a file when you go to link to it later.

Class Practice (1)

- **Entering the Content of an HTML Page**

1. Choose any text you like (your own writing, a short news paragraph, a blog excerpt, a poem snippet, etc.).
2. Copy the text and paste it into a new text file.
3. Wrap it in a basic HTML structure (html / head / body).
4. Save the file as **index.html**.
5. Open **index.html** in a web browser to view the result.

What Browsers Ignore


Multiple (white) spaces. When a browser encounters multiple consecutive empty character spaces, it displays a single space. So, for example, if **Elif Kartal** is typed, it will be displayed in the browser as **Elif Kartal**.

Line breaks (carriage returns). Just as scanners convert carriage returns to white spaces, line breaks have no effect on the formatting of the page. Text and elements are continuously scrolled until a new block element is encountered in the flow of the document text, such as a heading (**h1**) or paragraph (**p**) or line break (**br**) element.

Tabs. Tabs are also converted to character spaces.

Unrecognized markup. Scanners are instructed to ignore any tags that they do not understand or are incorrectly specified. Depending on the element and the browser, this can have various consequences. The browser may show nothing, or it may display the contents of the tag as if it were normal text.

Comment lines. Browsers will not display text between the special **<!-- and -->** tags used to indicate a comment.

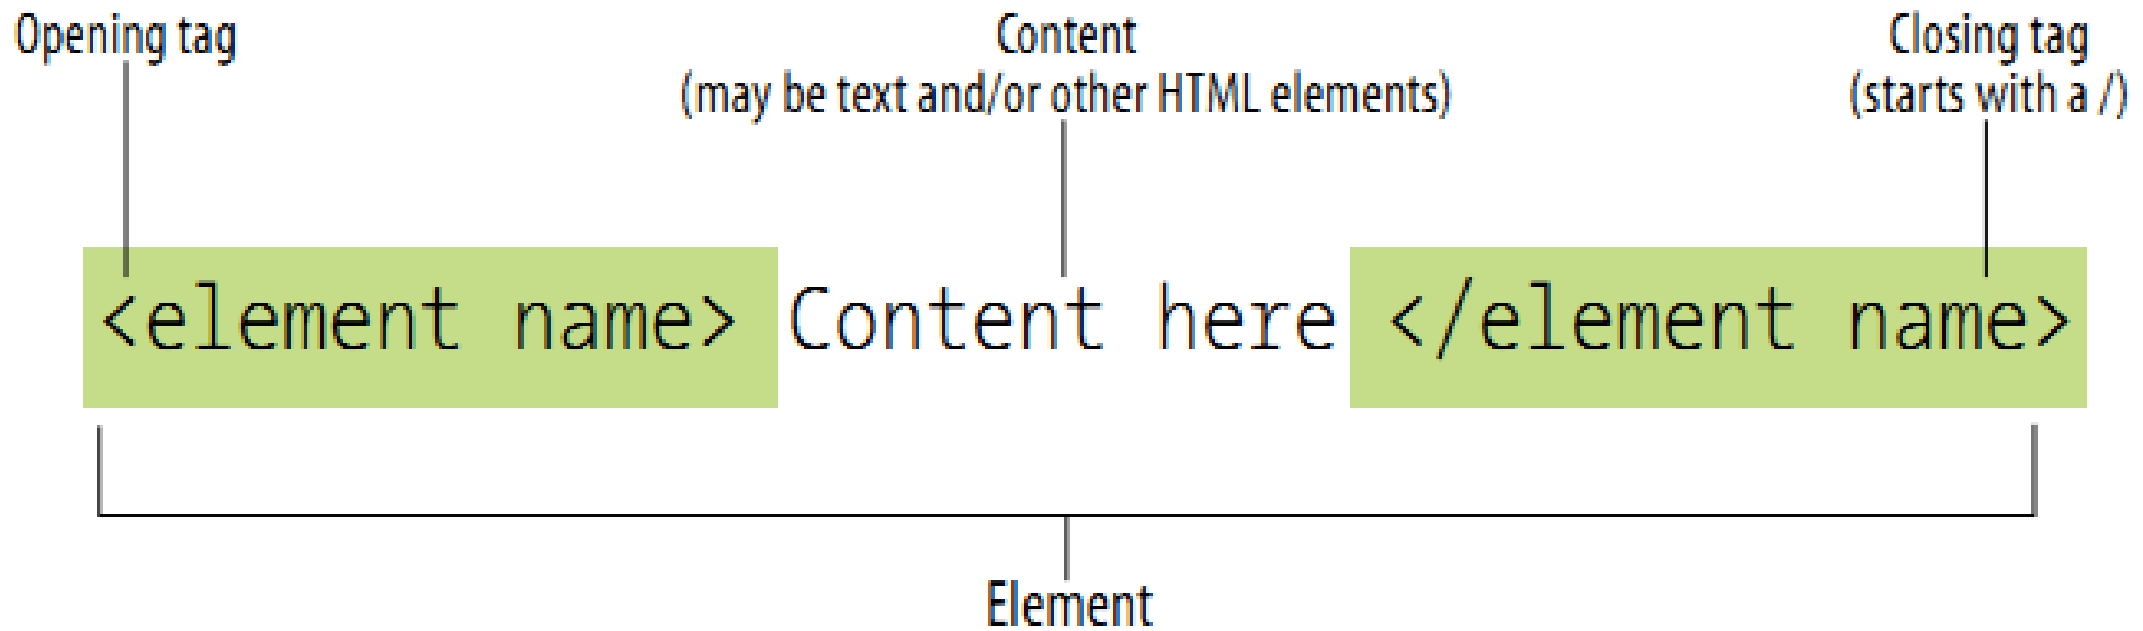

HTML Basic Syntax and HTML Elements

HTML Basic Syntax and HTML Elements

Elements are identified by **tags** in the text source. A tag consists of the element name (usually an abbreviation for a longer descriptive name) enclosed in angle brackets (< >). The browser knows that any text in these brackets is hidden and not displayed in the browser window.

The element name appears in the **opening tag** (also called the start tag) and in the **closing** (or **end**) **tag**, which also begins with a forward slash (/). The closing tag works like a «off» switch for the element. Care should be taken to avoid using similar backslash characters in end tags.

Tags added around the content are called **markup**. It is important to note that an **element** consists of both content and markup (the start and end tags); but not all items have content. Some are empty by definition, such as the **img** element used to add an image to the page.

In HTML, it doesn't matter if element names are capitalized. So , and are the same as far as the browser is concerned; however, to be valid in XHTML, the stricter version of HTML, all element names must be all lowercase. Throughout the course, all lowercase letters will be adhered to.

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Page Title</title>
</head>
<body>
  Your content goes here.
</body>
</html>
```

A Basic HTML Page Structure

A Basic HTML Page Structure (2/3)

1. The **DOCTYPE** declaration represents the document type and helps browsers display web pages correctly. It should appear only once at the top of the page (before any HTML tags). Before HTML5, the syntax used to specify the character set by the meta element was a bit more elaborate.
2. The entire document is contained within an **html** element. The html element is called **the root element** because it contains all the elements in the document and may not be contained within another element. It is used for both HTML and XHTML documents.
3. Within the html element, the document is divided into a **head** and a **body** element. The head element contains descriptive information about the document itself, such as its title, the style sheets it uses, scripts, and other types of «**meta**» information.

A Basic HTML Page Structure

4. **Meta elements** within the head element provide information about the document itself. A meta element can be used to provide any type of information; for example, it may specify the character encoding (a standardized collection of letters, numbers, and symbols) used in the document, **set the viewport for mobile responsiveness, provide a short page description for search engines, define keywords, declare the author, or control caching and indexing behavior.**
5. Also in the head is the mandatory **title** element. According to the HTML specification, every document must contain a descriptive title.
6. Finally, the **body** element contains everything we want to appear in the browser window.

Summary

<!DOCTYPE html> — declares HTML5 (standards mode).

<html>...</html> — wraps the whole document.

<head>...</head> — metadata container.

<meta charset="UTF-8"> — character encoding (important for special characters).

<meta name="viewport" content="width=device-width, initial-scale=1.0"> — mobile-friendly scaling.

<title>...</title> — text shown in the browser tab.

<body>...</body> — all visible page content.

```
1 <!-- HTML5 Meta Example -->
2 <!DOCTYPE html>
3 <html lang="en">
4 <head>
5     <meta charset="UTF-8">
6     <meta name="viewport" content="width=device-width, initial-scale=1.0">
7     <meta name="description" content="An example HTML5 document with meta tags.">
8     <meta name="keywords" content="HTML5, meta, example">
9     <meta name="author" content="Elif Kartal">
10    <title>HTML5 Meta Example</title>
11 </head>
12 <body>
13     <!-- Your content here -->
14 </body>
15 </html>
```

```
19 <!-- HTML 4.01 or XHTML 1.0 Meta Example -->
20 <!DOCTYPE html PUBLIC "-//W3C//DTD HTML 4.01//EN" "http://www.w3.org/TR/html4/strict.dtd">
21 <html>
22 <head>
23     <meta http-equiv="Content-Type" content="text/html; charset=UTF-8">
24     <meta http-equiv="Content-Language" content="en">
25     <title>HTML 4.01 Meta Example</title>
26 </head>
27 <body>
28     <!-- Your content here -->
29 </body>
30 </html>
```

The Importance of the Title on the Page


The **title** element is necessary and very useful.


The **title** is what is displayed in a user's list of bookmarks or favorites and tabs in desktop browsers.

Descriptive titles are also an important tool for improving accessibility, as they are the first thing a person hears when using a screen reader.

Search engines also rely heavily on document titles. For these reasons, it is important to provide thoughtful and descriptive titles for all your documents and **avoid vague titles like «Welcome» or «My Page»**.

You may also want to keep the length of your titles under control so that they can be displayed in the browser's title area. Additionally, it may be more appropriate to put the part of the title that contains more specific information (for example, the page description in front of the company name) so that the page title is visible when there are multiple tabs in the browser window.

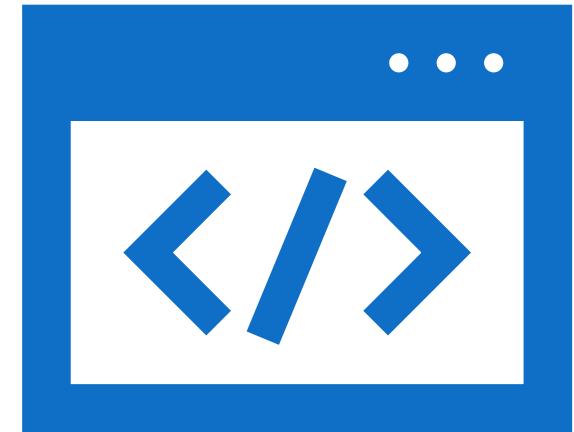

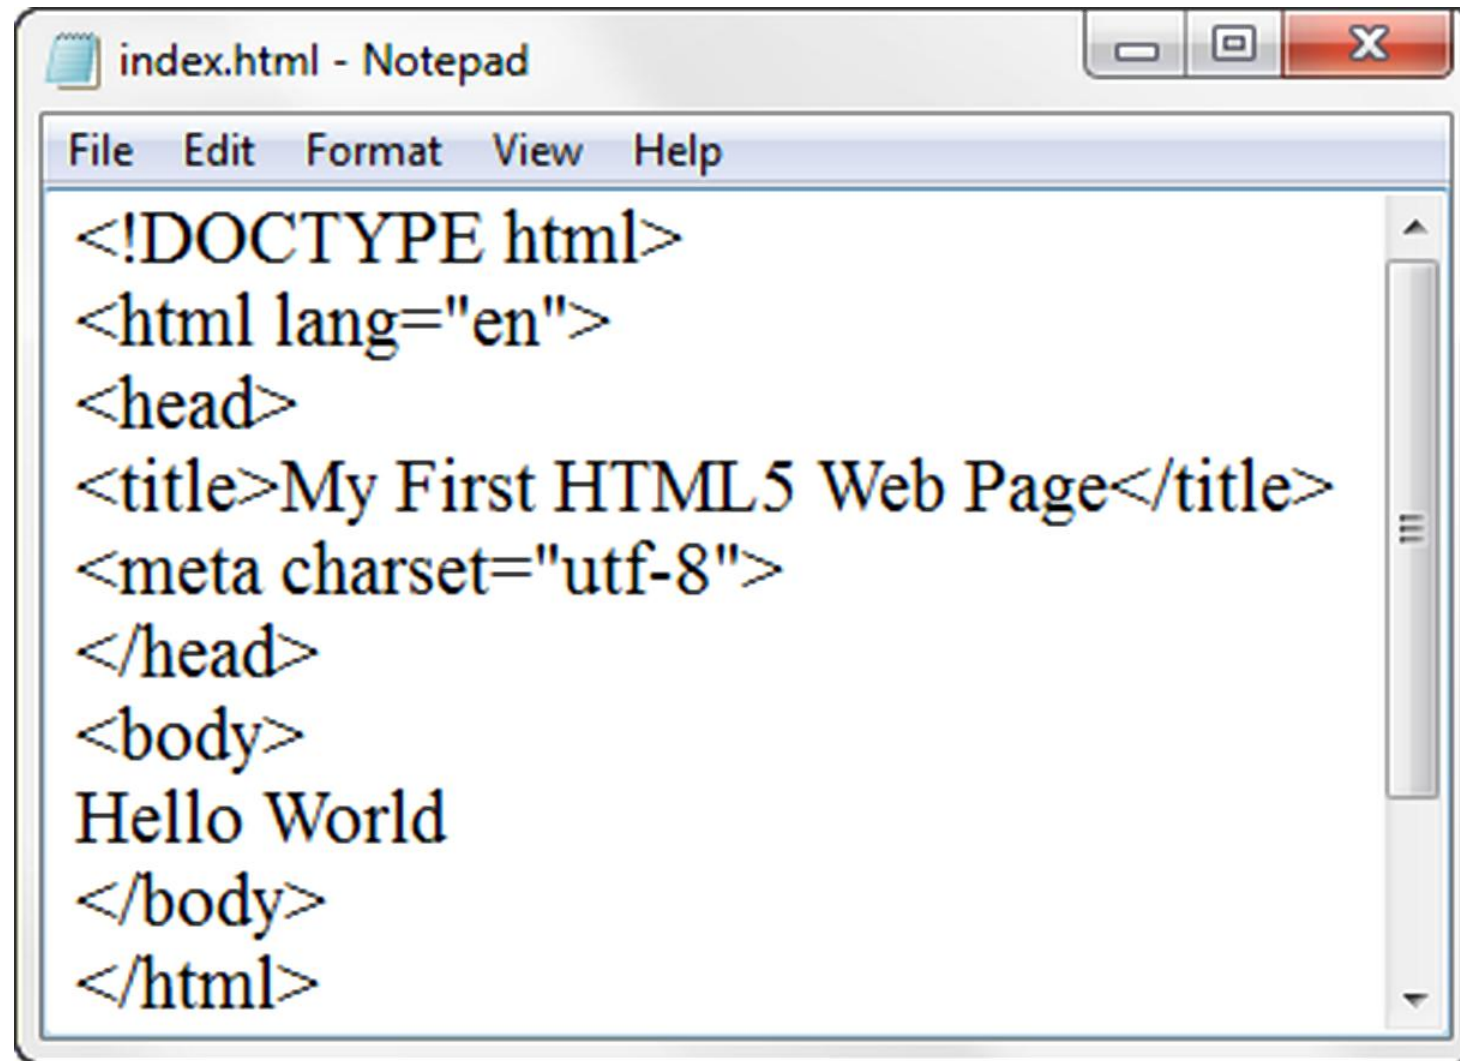

```
<!DOCTYPE html>
<html lang="en">
<head>
<title>My First HTML5 Web Page</title>
<meta charset="utf-8">
</head>
<body>
Hello World
</body>
</html>
```

Class Practice (2)

Rebuild your HTML file using only the Basic HTML Page Structure.

1. Start the file with `<!DOCTYPE html>`.
2. Add the basic structure: `<html>`, `<head>`, and `<body>`.
3. Inside `<head>`, add:
 - `<meta charset="UTF-8">`
 - `<title>` → write a title based on **your own topic** (e.g., “My Hobby Page”, “My Favorite Games”, “My Dream Trip”).
4. Inside `<body>`, place **all your content** and format it with only these tags:
5. Save the file as `topic.html` and open it in your browser.

Identifying Text Elements

The purpose of HTML is to add meaning and structure to content.

When marking up content, your job is to choose the HTML element that provides the most meaningful description of the content at hand. In our country, this is called semantic markup.

- For example, the most important heading at the beginning of the document should be marked as h1 because it is the most important heading on the page.

In addition to adding meaning to content, formatting also gives the structure of the document.

The way elements follow or intertwine creates relationships between elements. You can think of it as a blueprint (the technical name is **Document Object Model-DOM**). The basic document hierarchy is important; because it gives browsers clues on how to handle content. It is also the basis for adding presentation instructions with style sheets and behaviors with Javascript.

Heading Level 1

Heading Level 2

Heading Level 3

Heading Level 4

Heading Level 5

Heading Level 6

Headings

HTML headings are defined by `<h1>` `<h2>` ... `<h6>` tags.

`<h1>` defines **the most important** heading. `<h6>` identifies **the least important** heading.

Browsers automatically add some space (margin) before and after a title.

Search engines use titles to index the structure and content of your web pages.

Users often browse a page by its titles. It is important to use headings to show the document structure.

Paragraphs

The HTML `<p>` element defines **a paragraph**. A paragraph always starts on a new line, and browsers automatically add some space (margin) before and after the paragraph.

The `<hr>` tag defines a thematic break on an HTML page and is often displayed as a horizontal rule. The `<hr>` element is used to separate content (or define a change) on an HTML page.

The `<br>` element defines a line break. If you want a line break (a new line) without starting a new paragraph, use `<br>`. No extra space (margin) is added.

The `<hr>` and `<br>` tags are empty tags, meaning they have no ending tags.

The `<pre>` element defines preformatted text. The text inside the `<pre>` element is displayed in a fixed-width font (usually Courier) and preserves both spaces and line breaks.

```
<html>
```

```
<head>
```

```
<title>Page title</title>
```

```
</head>
```

```
<body>
```

```
<h1>This is a heading</h1>
```

```
<p>This is a paragraph.</p>
```

```
<p>This is another paragraph.</p>
```

```
</body>
```

```
</html>
```

Text Formatting

**** - Text that has no extra importance but is styled in bold font by usage and convention

**** - Strong importance; causes text to stand out from surrounding text; usually displayed in bold

<i> - Text that has no extra importance but is styled in italics by usage and convention

**** - Causes text to be emphasized in relation to other text; usually displayed in italics

<mark> - Text that is highlighted in order to be easily referenced (HTML5 only)

<small> - Legal disclaimers and notices (“fine print”) displayed in small font-size

**** - Deleted text

<ins> - Inserted text

<sub> - Displays a subscript as small text below the baseline

<sup> - Displays a superscript as small text above the baseline

Example (1)

`<p>This is <i><u>bold, italic, and underlined</u></i>
text.</p>`

`<p><mark>This</mark> is strongly emphasized
text.</p>`

`<p><small>This line of text is <ins>changed</ins> and
_{subscripted} with ^{superscript}.</small></p>`

Example (2)

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <title>HTML Tag Examples</title>
</head>
<body>
  <p>
    Web development is a <b>versatile</b> and <strong>exciting</strong> field.
    Frontend and backend development is the foundation of creating <i>modern</i> web applications.
    At the same time, <em>flexibility</em> and <mark>speed</mark> are important factors.
    In this process, paying attention to <small>details</small> and fixing <del>errors</del> is critical.
    When adding new features, documenting <ins>changes</ins> and adding <sub>subtext</sub> can be
    beneficial.
    However, it is important to distinguish <sup>superscript</sup> usage from <sub>subscript</sub>.
  </p>
</body>
</html>
```

Example (3)

`<pre>` (preformatted text)

- Preserves spaces, tabs, and line breaks exactly as you type them.
- Uses a **monospace** font by default (code-like).
- Best for: **code blocks, pseudo-code, aligned lists, ASCII tables**, formatted steps.

```
<pre>
Step 1: Collect data
Step 2: Clean    data
Step 3: Analyze data
</pre>
```

Multiple `<br>` lines

- Only forces **new lines**, but **does NOT preserve multiple spaces** (HTML collapses spaces).
- Font stays normal (unless styled).
- Best for: **simple line breaks** inside regular text (addresses, short poems).

```
<p>
Step 1: Collect data<br>
Step 2: Clean    data<br>
Step 3: Analyze data
</p>
```



HTML Editors

- Sublime Text
 - <https://www.sublimetext.com/>
- Notepad ++
 - <https://notepad-plus-plus.org/>
- Visual Studio Code
 - <https://code.visualstudio.com/>

Class Practice (3)

1. Create a new file named **text-formatting.html** and complete the steps below using **only basic HTML tags**.
2. Start the page with `<!DOCTYPE html>` and include `<html>`, `<head>`, and `<body>`.
3. In the `<head>`, set a `<title>` based on **your own topic** (e.g., “My Hobby Page”, “My Favorite Music”, “My Travel List”).
4. In the `<body>`, add **all heading levels** in order to show the size difference:
5. Add **at least 3 paragraphs** using `<p>` about your chosen topic.
6. Insert **one horizontal rule** `<hr>` to separate two parts of the page (e.g., “About” and “My List”).
7. Use **a line break** `<br>` inside one paragraph to create a new line **without starting a new paragraph**.
8. Add a **preformatted text block** using `<pre>` that preserves spacing and line breaks.
Examples you can put inside `<pre>`:
 - a short poem snippet (your own), a small to-do list with aligned spacing, a tiny code-like block (just text), e.g. steps or pseudo-code.
9. Save the file and open **text-formatting.html** in your browser and check it!

Blockquote Element

Blockquote element

- Indents a block of text for special emphasis

`<blockquote>`

...text goes here...

`</blockquote>`

- Block Display – Configures empty space above and below

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <title>Blockquote Example</title>
</head>
<body>

  <h1>Quotation Example</h1>

  <p>The text below is shown as a quotation:</p>

  <blockquote>
    "Hayatta en hakiki mürşit ilimdir."
  </blockquote>

  <p>— Mustafa Kemal Atatürk</p>

</body>
</html>
```

Example

Proper Nesting

HTML CODE:

✗ `<p><i>Feel free to send your questions: <strong>elifk@istanbul.edu.tr</i></strong></p>`

✓ `<p><i>Feel free to send your questions: <strong>elifk@istanbul.edu.tr </strong></i></p>`

BROWSER DISPLAY:

*Feel free to send your questions: **elifk@istanbul.edu.tr***

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <title>My Page</title>
</head>
<body>
  <h1>About Me</h1>
  <p>I study MIS at university.
</body>
</html>
```

Buggy Snippet 1

Buggy Snippet 2

```
<p><i>Feel free to ask: <strong>student@uni.edu</i></strong></p>
```

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <title>Topic</title>
</head>

<h1>My Topic</h1>
<p>This paragraph is outside the body.</p>

<body>
  <p>Another paragraph.</p>
</body>
</html>
```

Buggy Snippet 3

```
<!DOCTYPE html>
<html lang="en">
<head>
  <title>Encoding Test</title>
</head>
<body>
  <meta charset="UTF-8">
  <p>Türkçe karakterler: ğ ü ş i ö ç</p>
</body>
</html>
```

Buggy Snippet 4

```
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<title>Formatting</title>
<body>
<h1>Checklist</h1>
<pre>
1. Collect data
2. Clean data
3. Analyze data
</pre>
</head>
</html>
```

Buggy Snippet 5

References

Robbins, J. N. (2012). *Learning web design: A beginner's guide to HTML, CSS, JavaScript, and web graphics*. O'Reilly Media, Inc. ISBN: 978-1-449-31927-4.

Felke-Morris, T. (2017). *Web development and design foundations with HTML5* (8th Edition). Pearson, USA. ISBN 978-0-13-432275-9

w3schools.com (2024). HTML Tutorial, 27 Şubat 2024 tarihinde https://www.w3schools.com/html/html_comments.asp adresinden erişildi.



THANKS

QUESTIONS: elifk@istanbul.edu.tr