



Python Tips for Data Scientist

Wenqiang Feng and Jing Yang

December 05, 2021

CONTENTS

1	Preface	3
1.1	About	3
1.1.1	About this note	3
1.1.2	About the authors	4
1.2	Motivation for this note	4
1.3	Feedback and suggestions	5
2	Python Installation	7
3	Notebooks	9
3.1	Nteract	9
3.2	Jupyter Notebook Viewer	9
3.3	Apache Zeppelin	12
3.4	Jupyter Notebook	12
4	Confidential Information	15
5	Primer Functions	17
5.1	*	17
5.2	range	17
5.3	random	18
5.3.1	random.random	18
5.3.2	np.random	18
5.4	round	19
5.5	TODO..	19
6	Data Structures	21
6.1	List	21
6.1.1	Create list	21
6.1.2	Unpack list	22
6.1.3	Methods of list objects	22
6.1.4	list.append(x) vs. list.extend(iterable)	23
6.2	Tuple	23

6.3	Dictionary	23
6.3.1	Create dict from lists	24
6.3.2	dict.get()	24
6.3.3	Looping Techniques	25
6.3.4	Update Values in Dict	25
6.3.5	Update Keys in Dict	26
6.4	One line if-else statement	26
6.4.1	With filter	26
6.4.2	Without filter	26
7	Data Read and Ingestion with DataBase	29
7.1	Data Ingestion from Local to DataBase	29
7.2	Data Read from DataBase to Local	30
7.3	Hive and Impala Tabel Ingestion	31
8	Working with AWS S3	33
8.1	Credentials	33
8.2	File Upload to S3	33
8.2.1	s3_file_upload Function	34
8.2.2	s3_content_type Function	34
8.2.3	Examples	46
8.3	File Download from S3	47
8.3.1	s3_file_download Function	47
8.3.2	Examples	48
8.4	File Management in S3	48
8.4.1	s3_fs Function	48
8.4.2	Examples	48
9	pd.DataFrame manipulation	49
9.1	TODO..	49
10	rdd.DataFrame manipulation	51
10.1	TODO..	51
11	pd.DataFrame vs PySpark DataFrame	53
11.1	Create DataFrame	53
11.1.1	From List	53
11.1.2	From Dict	54
11.2	Convert between pandas and pyspark DataFrame	54
11.2.1	From pandas to pyspark DataFrame	54
11.2.2	From pyspark to pandas DataFrame	55
11.3	Load DataFrame	55
11.3.1	From DataBase	55
11.3.2	From .csv	56
11.3.3	From .json	56

11.4	First n Rows	57
11.5	Column Names	58
11.6	Data types	58
11.7	Replace Data types	58
11.8	Fill Null	59
11.9	Replace Values	60
11.10	Rename Columns	61
	11.10.1 Rename all columns	61
	11.10.2 Rename one or more columns	61
11.11	Drop Columns	62
11.12	Filter	63
11.13	With New Column	64
11.14	Join	67
	11.14.1 Left Join	67
	11.14.2 Right Join	68
	11.14.3 Inner Join	68
	11.14.4 Full Join	69
11.15	Concat Columns	70
11.16	GroupBy	71
11.17	Pivot	71
11.18	Unixtime to Date	72
12	Kaggle Competitions	73
12.1	TODO..	73
13	Package Wrapper	75
13.1	Hierarchical Structure	75
13.2	Set Up	76
13.3	Requirements	77
13.4	ReadMe	77
14	Publish Package to PyPI	79
14.1	Register PyPI account	79
14.2	Install twine	79
14.3	Build Your Package	79
14.4	Upload Your Package	80
14.5	Package at PyPI	80
15	Model Deployment with Flask	81
15.1	Install flask	81
15.2	Train and Save your model	81
15.3	Deployement with Flask	84
15.4	Lunch your app on server	86
	15.4.1 1. Lunch the APP	86
	15.4.2 2. Run the APP	86

16 API Book	87
16.1 Basics Module	87
16.1.1 rnorm	87
16.1.2 dnorm	88
16.1.3 runif	88
16.2 Tests Module	88
16.2.1 T-test	88
17 Main Reference	91
Bibliography	93
Python Module Index	95
Index	97



Welcome to my **Python Tips for Data Scientist** notes! In those notes, you will learn some useful tips for Data Scientist daily work. The PDF version can be downloaded from [HERE](#).

PREFACE

Chinese proverb

The palest ink is better than the best memory. – old Chinese proverb

1.1 About

1.1.1 About this note

This document is a summary of our valuable experiences in using Python for Data Scientist daily work. The PDF version can be downloaded from [HERE](#).

You may download and distribute it. Please be aware, however, that the note contains typos as well as inaccurate or incorrect description.

In this repository, we try to use the detailed Data Scientist related demo code and examples to share some useful python tips for Data Scientist work. If you find your work wasn't cited in this note, please feel free to let me know.

Although we are by no means a python programming and Data Scientist expert, We decided that it would be useful for us to share what we learned about Python in the form of easy note with detailed example. We hope those notes will be a valuable tool for your studies.

The notes assume that the reader has a preliminary knowledge of python programing, LaTeX and Linux. And this document is generated automatically by using [sphinx](#). More details can be found at [[Georg2018](#)].

1.1.2 About the authors

- **Wenqiang Feng**
 - Director of Data Science and PhD in Mathematics
 - University of Tennessee, Knoxville
 - Webpage: <http://web.utk.edu/~wfeng1>
 - Email: von198@gmail.com
- **Jing Yang**
 - Senior Data Scientist and PhD in Physics
 - Harvard University
 - Webpage: <https://scholar.harvard.edu/jingyang/home>
 - Email: jingyangharvard@gmail.com

- **Declaration**

The work of Wenqiang Feng was supported by the IMA, while working at IMA. However, any opinion, finding, and conclusions or recommendations expressed in this material are those of the authors and do not necessarily reflect the views of the IMA, UTK, DST and Harvard.

1.2 Motivation for this note

No matter you like it or not, Python has been one of the most popular programming languages. I have been using Python for almost 4 years. Frankly speaking, I wasn't impressed and attracted by Python at the first using. After starting working in industry, I have to use Python. Gradually I recognize the elegance of Python and use it as one of my main programming language. But I found that:

- Most of the Python books or tutorials which emphasize on programming will overwhelm the green hand.
- While most of the Python books or tutorials for Data Scientist or Data Analysis didn't cover some essential skills from the engineer side.

So I want to keep some of my valuable tips which are heavily applied in my daily work.

1.3 Feedback and suggestions


Your comments and suggestions are highly appreciated. I am more than happy to receive corrections, suggestions or feedbacks through email (Wenqiang Feng: von198@gmail.com, Jing Yang: jingyangharvard@gmail.com) for improvements.

PYTHON INSTALLATION

Note: This Chapter *Python Installation* is for beginner. If you have some Python programming experience, you may skip this chapter.

No matter what operator system is, I will strongly recommend you to install Anaconda which contains Python, Jupyter, spyder, Numpy, Scipy, Numba, pandas, DASK, Bokeh, HoloViews, Datashader, matplotlib, scikit-learn, H2O.ai, TensorFlow, CONDA and more.

Download link: <https://www.anaconda.com/distribution/>

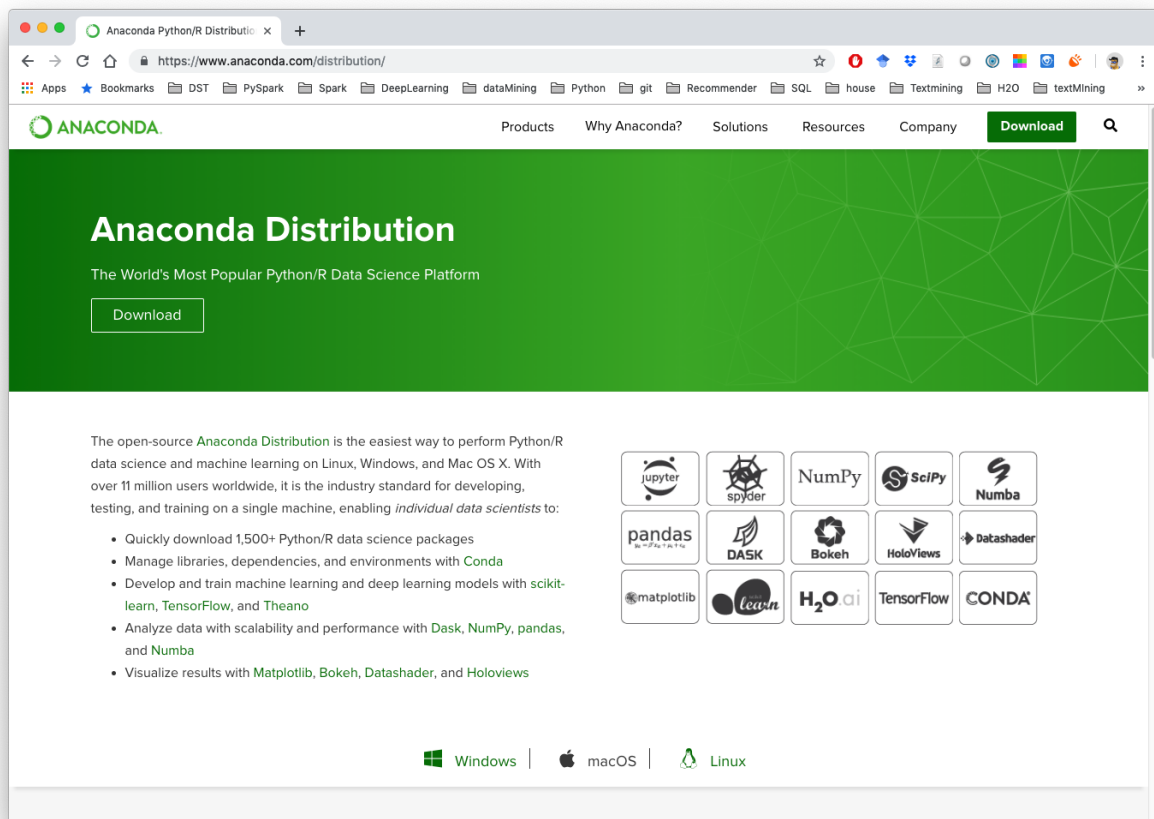

NOTEBOOKS

Note: This Chapter *Notebooks* is for beginner. If you have already know Nteract, Zeppelin and Python, you may skip this chapter.

If you are a Data Scientist, it's not enough to just know Jupyter Notebook. You should also take a look at nbviewer, Nteract and Zeppelin notebooks.

3.1 Nteract


Nteract is an amazing .ipynb reader. You can open and run the .ipynb by just double clicking the .ipynb file.

Download from: <https://nteract.io/>

3.2 Jupyter Notebook Viewer

If you are a MAC user, you can also install the Jupyter Notebook Viewer `nbviewer-app` which is much faster than Nteract.

Download from: <https://github.com/tuxu/nbviewer-app>

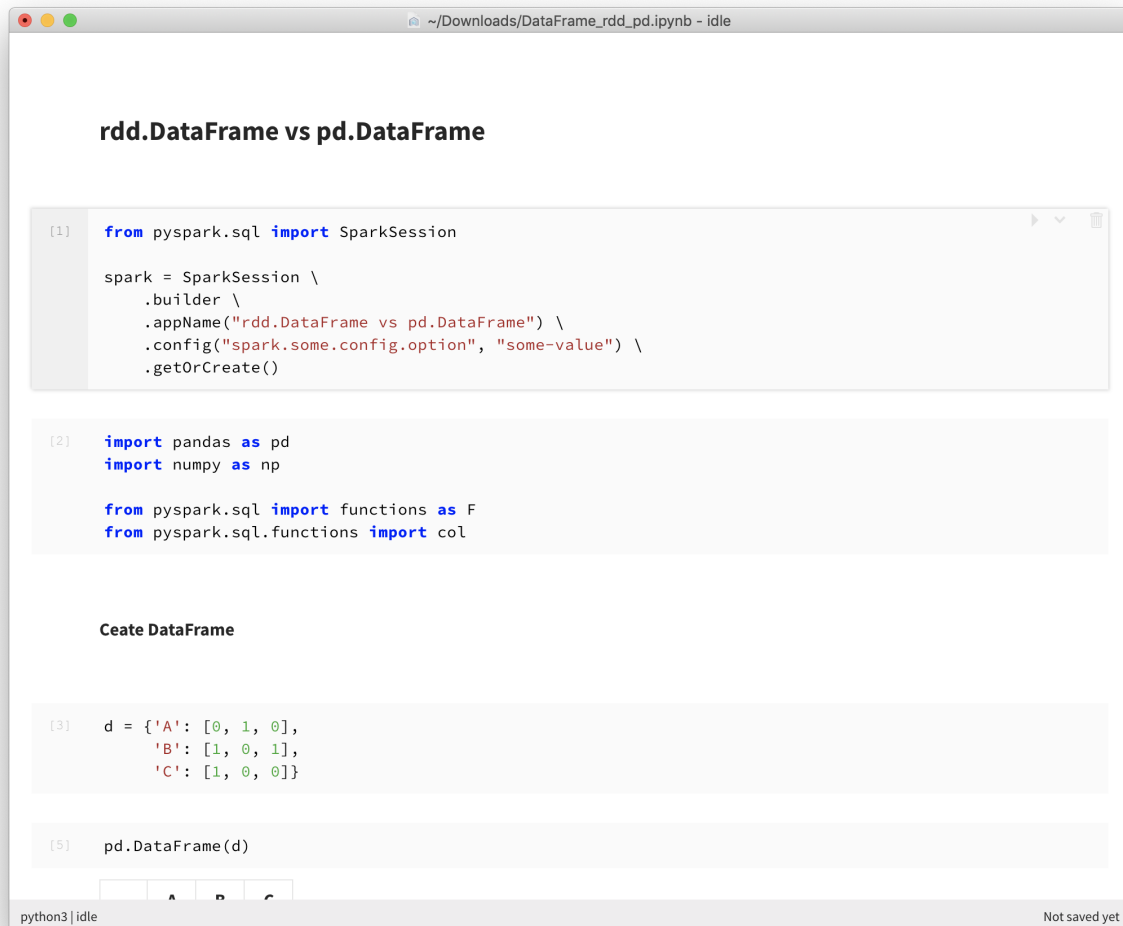

The screenshot shows a Jupyter Notebook window with the title bar indicating the file path is `~/Downloads/DataFrame_rdd_pd.ipynb` and it is in 'idle' state. The notebook content is as follows:

rdd.DataFrame vs pd.DataFrame

```
[1] from pyspark.sql import SparkSession

spark = SparkSession \
    .builder \
    .appName("rdd.DataFrame vs pd.DataFrame") \
    .config("spark.some.config.option", "some-value") \
    .getOrCreate()
```

```
[2] import pandas as pd
import numpy as np


from pyspark.sql import functions as F
from pyspark.sql.functions import col
```

Crete DataFrame

```
[3] d = {'A': [0, 1, 0],
      'B': [1, 0, 1],
      'C': [1, 0, 0]}
```

```
[5] pd.DataFrame(d)
```

At the bottom of the notebook, there is a table with three columns labeled A, B, and C. The status bar at the very bottom shows 'python3 | idle' on the left and 'Not saved yet' on the right.

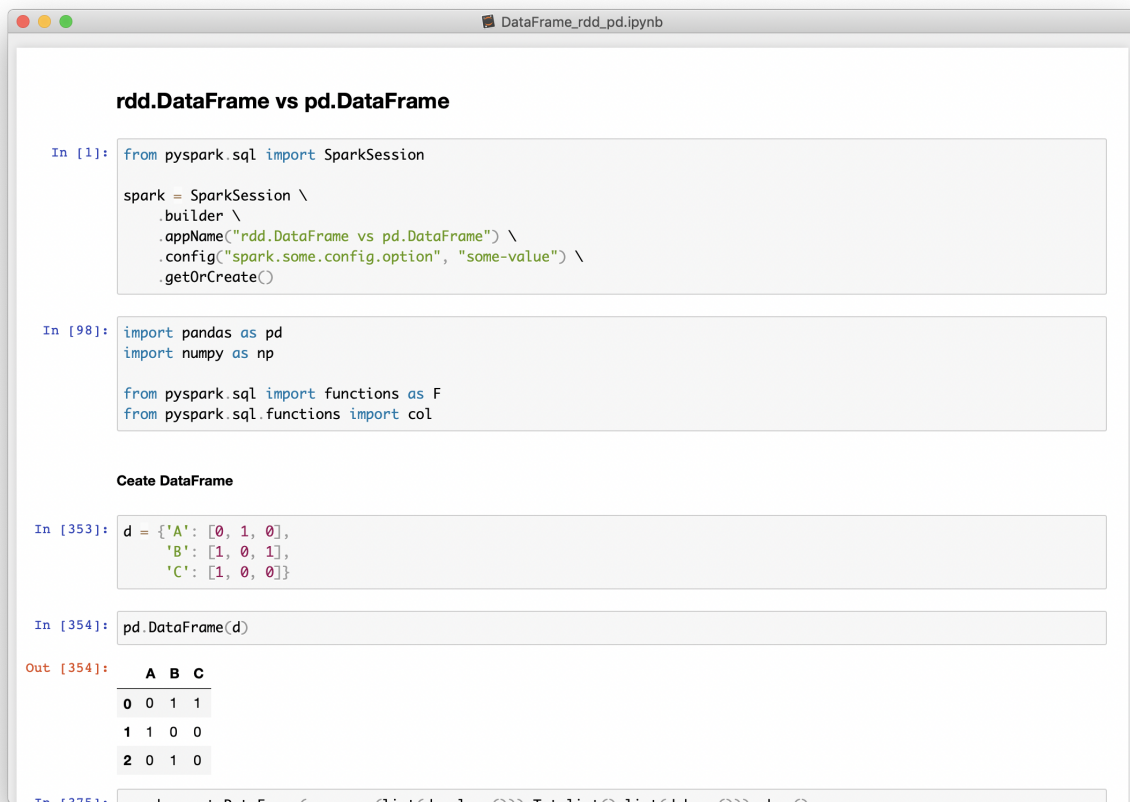

rdd.DataFrame vs pd.DataFrame

```
In [1]: from pyspark.sql import SparkSession

spark = SparkSession \
    .builder \
    .appName("rdd.DataFrame vs pd.DataFrame") \
    .config("spark.some.config.option", "some-value") \
    .getOrCreate()
```

```
In [98]: import pandas as pd
import numpy as np

from pyspark.sql import functions as F
from pyspark.sql.functions import col
```

Create DataFrame

```
In [353]: d = {'A': [0, 1, 0],
              'B': [1, 0, 1],
              'C': [1, 0, 0]}
```

```
In [354]: pd.DataFrame(d)
```

```
Out [354]:
```


	A	B	C
0	0	1	1
1	1	0	0
2	0	1	0

```
In [375]: spark.createDataFrame(sc.parallelize(list(d.values())), F.toStructType(F.fromFields(d.keys(), list(d.values().shape[0])))).show()
```

3.3 Apache Zeppelin


The Zeppelin (Apache Zeppelin) is an open-source Web-based notebook that enables data-driven, interactive data analytics and collaborative documents with Python, PySpark, SQL, Scala and more.

Download from: <https://zeppelin.apache.org/>

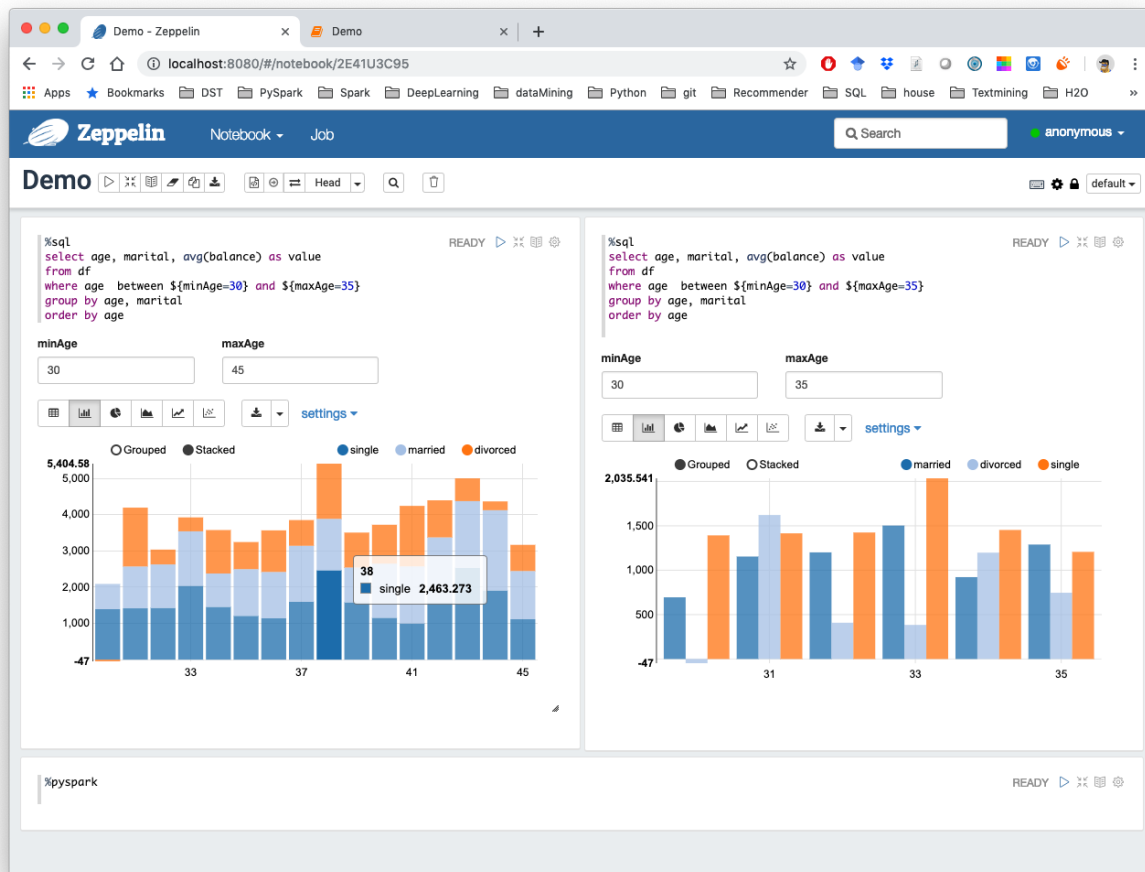

3.4 Jupyter Notebook

The Jupyter Notebook (Ipython Notebook) is an open-source web application that allows you to create and share documents that contain live code, equations, visualizations and narrative text. Uses include: data cleaning and transformation, numerical simulation, statistical modeling, data visualization, machine learning, and much more.

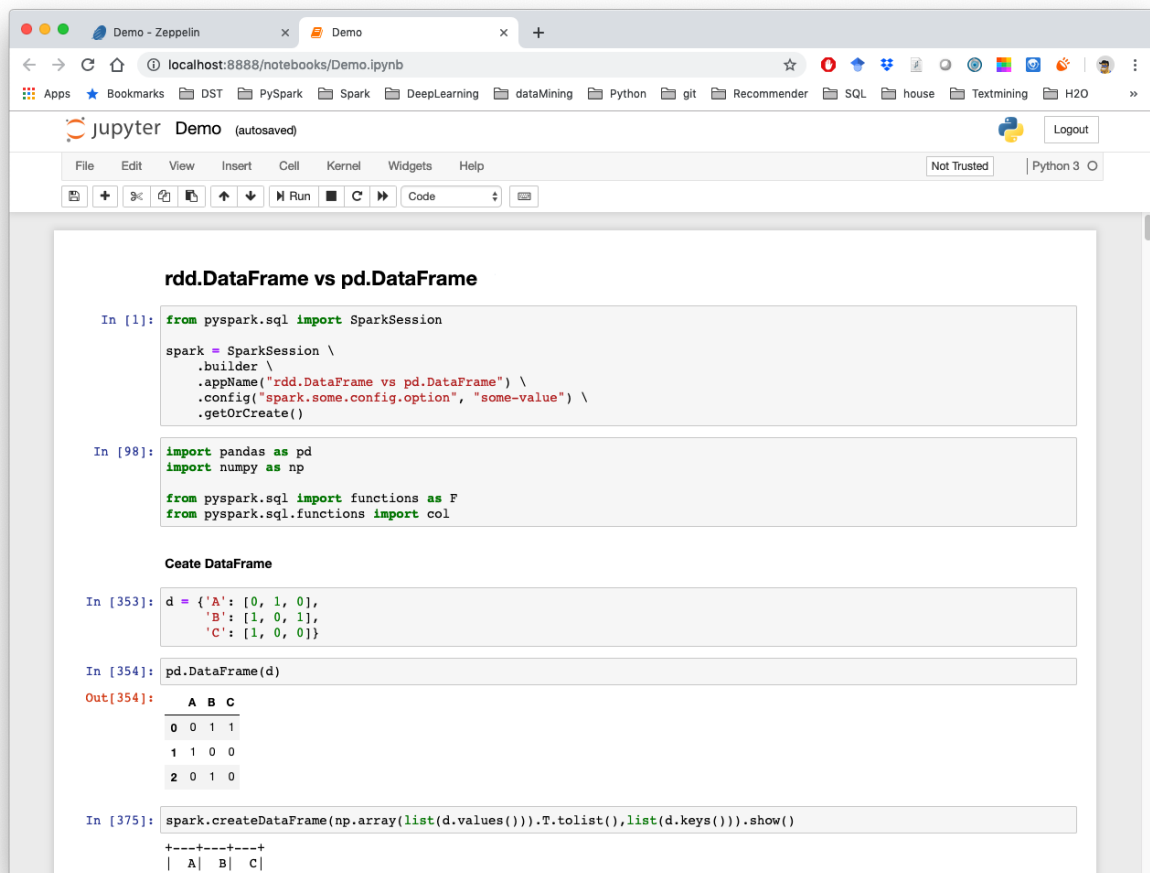

The screenshot shows a Jupyter Notebook titled "Demo" running on a local host. The notebook contains several code cells for creating and comparing DataFrames in Spark and Pandas.

rdd.DataFrame vs pd.DataFrame

```
In [1]: from pyspark.sql import SparkSession

spark = SparkSession \
    .builder \
    .appName("rdd.DataFrame vs pd.DataFrame") \
    .config("spark.some.config.option", "some-value") \
    .getOrCreate()
```

```
In [98]: import pandas as pd
import numpy as np

from pyspark.sql import functions as F
from pyspark.sql.functions import col
```

Create DataFrame

```
In [353]: d = {'A': [0, 1, 0],
              'B': [1, 0, 1],
              'C': [1, 0, 0]}
```

```
In [354]: pd.DataFrame(d)
```

```
Out[354]:
```

	A	B	C
0	0	1	1
1	1	0	0
2	0	1	0

```
In [375]: spark.createDataFrame(np.array(list(d.values())).T.tolist(), list(d.keys())).show()
```

A	B	C
0	1	1
1	0	0
0	1	0

CONFIDENTIAL INFORMATION

Chinese proverb

Be mindful of guarding against harm from others, and stay away from placing harming upon others.

If you are a real Data Scientist, you have to share your code with your colleagues or release your code for Code Review or Quality assurance(QA). You will definitely do not want to have your User Information in the code. So you can save them in login.txt in a safe folder:

```
runawayhorse001  
PythonTips
```

and use the following code to import your User Information:

```
#User Information  
try:  
    login = pd.read_csv(r'login.txt', header=None)  
    user = login[0][0]  
    pw = login[0][1]  
    print('User information is ready!')  
except:  
    print('Login information is not available!!!')
```

You may also want to get the User Information by using `os.environ` in Python:

```
try:  
    user = os.environ['LOGNAME']  
except OSError:  
    user = os.environ['USER']  
except OSError:  
    user = os.environ['USERNAME']  
    print(err)  
except OSError as err:  
    print('The user information is not available!!!')
```


PRIMER FUNCTIONS

Note: This Chapter *Primer Functions* is for beginner. If you have some Python programming experience, you may skip this chapter.

The following functions have been heavily used in my daily Data Scientist work.

5.1 *

Single asterisk as used in function declaration allows variable number of arguments passed from calling environment. Inside the function it behaves as a tuple.

:: Python Code:

```
my_list = [1,2,3]
print(my_list)
print(*my_list)
```

:: Output:

```
[1, 2, 3]
1 2 3
```

5.2 range

:: Python Code:

```
print(range(5))
print(*range(5))
print(*range(3,8))
```

:: Ouput:

```
range(0, 5)
0 1 2 3 4
3 4 5 6 7
```

5.3 random

More details can be found at:

- random: <https://docs.python.org/3/library/random.html#random.randint>
- np.random: <https://docs.scipy.org/doc/numpy/reference/routines.random.html>

5.3.1 random.random

:: Python Code:

```
import random
random.random()

# (b - a) * random() + a
random.uniform(3, 8)
```

:: Ouput:

```
0.33844051243073625
7.772024014335885
```

5.3.2 np.random

:: Python Code:

```
np.random.random_sample()
np.random.random_sample(4)
np.random.random_sample([2, 4])

# (b - a) * random_sample() + a
a = 3; b = 8
(b-a)*np.random.random_sample([2, 4])+a
```

:: Ouput:


```
0.11919402208670005
array([0.07384755, 0.9005251 , 0.30030561, 0.38221819])
array([[0.76851156, 0.56973309, 0.47074505, 0.7814957 ],
       [0.5778028 , 0.94653057, 0.51193493, 0.48693931]])

array([[4.65799262, 6.32702018, 6.55545234, 5.45877784],
       [7.69941994, 4.68709357, 5.49790728, 4.60913966]])
```

5.4 round

Sometimes, we really do not need the scientific decimals for output results. So you can use this function to round an array to the given number of decimals.

:: Python Code:

```
np.round(np.random.random_sample([2,4]),2)
```

:: Ouput:

```
array([[0.76, 0.06, 0.41, 0.4 ],
       [0.07, 0.51, 0.84, 0.76]])
```

5.5 TODO..

:: Python Code:

:: Ouput:

:: Python Code:

:: Ouput:

:: Python Code:

:: Output:

:: Python Code:

:: Output:

DATA STRUCTURES

Note: This Chapter *Data Structures* is for beginner. If you have some Python programming experience, you may skip this chapter.

6.1 List

`list` is one of data structures which is heavily using in my daily work.

6.1.1 Create list

1. Create empty list

The empty list is used to initialize a list.

:: Python Code:

```
my_list = []  
type(my_list)
```

:: Output:

```
list
```

I applied the empty list to initialize my `silhouette_score` list when I try to find the optimal number of the clusters.

:: Example:

```
min_cluster = 3  
max_cluster = 8
```

(continues on next page)

(continued from previous page)

```
# silhouette_score
scores = []

for i in range(min_cluster, max_cluster):
    score = np.round(np.random.random_sample(), 2)
    scores.append(score)

print(scores)
```

:: Output:

```
[0.16, 0.2, 0.3, 0.87, 0.59]
```

6.1.2 Unpack list

:: Example:

```
num = [1, 2, 3, 4, 5, 6, 7, 8, 9, 10]
print(*num)
```

:: Output:

```
1 2 3 4 5 6 7 8 9 10
```

6.1.3 Methods of list objects

Methods of list objects:

Name	Description
<code>list.append(x)</code>	Add an item to the end of the list
<code>list.extend(iterable)</code>	Extend the list by appending all
<code>list.insert(i, x)</code>	Insert an item at a given position
<code>list.remove(x)</code>	Remove the first item
<code>list.pop([i])</code>	Remove the item at given position
<code>list.clear()</code>	Remove all items from the list
<code>list.index(x[, s[, e]])</code>	Return zero-based index in the list
<code>list.count(x)</code>	Return the number of times x
<code>list.sort(key, reverse)</code>	Sort the items of the list
<code>list.reverse()</code>	Reverse the elements of the list
<code>list.copy()</code>	Return a shallow copy ¹ of list

¹ Shallow Copy vs Deep Copy Reference: <https://stackoverflow.com/posts/184780/revisions>

6.1.4 list.append(x) vs. list.extend(iterable)

The difference of `list.append(x)` vs. `list.extend(iterable)` is easy to understand from the example below:

:: Example:

```
list1 = ['A', 'B', 'C']
list2 = ['D', 'E', 'F']
list1.append(list2)
print(list1)
```

:: Output:

```
['A', 'B', 'C', ['D', 'E', 'F']]
```

:: Example:

```
list1 = ['A', 'B', 'C']
list2 = ['D', 'E', 'F']
list1.extend(list2)
print(list1)
```

:: Output:

```
['A', 'B', 'C', 'D', 'E', 'F']
```


6.2 Tuple

A tuple is an assortment of data, separated by commas, which makes it similar to the Python list, but a tuple is fundamentally different in that a tuple is “immutable.” This means that it cannot be changed, modified, or manipulated.

6.3 Dictionary

`dict` is one of another data structures which is heavily using in my daily work. I heavily applied the `dict` in my `PyAudit` package, more details can be found at [PyAudit](#).

Shallow copy:

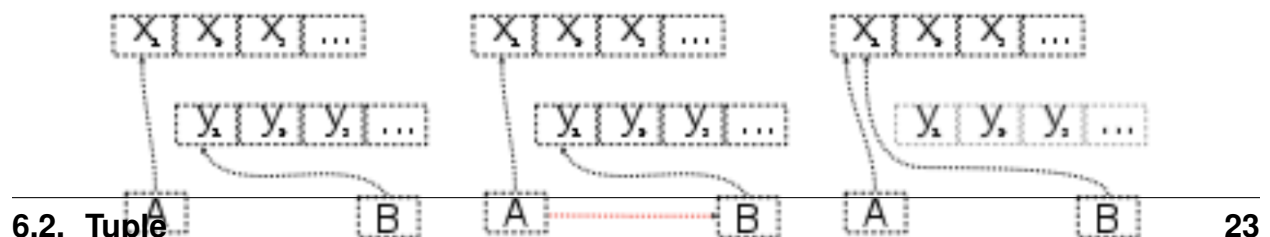

6.3.1 Create dict from lists

:: Example:

```
col_names = ['name', 'Age', 'Sex', 'Car']
col_values = ['Michael', '30', 'Male', ['Honda', 'Tesla']]
#
d = {key: value for key, value in zip(col_names, col_values)}
print(d)
#
import pandas as pd

df = pd.DataFrame(d)
print(df)
```

:: Output:

```
{'name': 'Michael', 'Age': '30', 'Sex': 'Male', 'Car': ['Honda
→', 'Tesla']}
```

	name	Age	Sex	Car
0	Michael	30	Male	Honda
1	Michael	30	Male	Tesla

6.3.2 dict.get()

When `get()` is called, Python checks if the specified key exists in the dict. If it does, then `get()` returns the value of that key. If the key does not exist, then `get()` returns the value specified in the second argument to `get()`. A good application of `get()` can be found at [Update Keys in Dict](#).

:: Example:

```
data1 = d.get("name", "best")
data2 = d.get("names", "George")
print(data1)    # Michael
print(data2)    # George
```

:: Output:

```
Michael
George
```

6.3.3 Looping Techniques

:: Example:

```
print([(key, val) for key, val in d.items()])
```

:: Output:

```
[('name', 'Michael'), ('Age', '30'), ('Sex', 'Male'), ('Car', 'Honda'), ('Car', 'Tesla')]
```

6.3.4 Update Values in Dict

1. Replace values in dict

:: Example:

```
replace = {'Car': ['Tesla S', 'Tesla X']}
print(d)
d.update(replace)
print(d)
```

:: Output:

```
{'name': 'Michael', 'Age': '30', 'Sex': 'Male', 'Car': ['Honda', 'Tesla']}
{'name': 'Michael', 'Age': '30', 'Sex': 'Male', 'Car': ['Tesla S', 'Tesla X']}
```

2. Add key and values in dict

:: Example:

```
# add key and values in dict
added = {'Kid': ['Tom', 'Jim']}
print(d)
d.update(added)
print(d)
```

:: Output:

```
{'name': 'Michael', 'Age': '30', 'Sex': 'Male', 'Car': ['Tesla S', 'Tesla X']}
{'name': 'Michael', 'Age': '30', 'Sex': 'Male', 'Car': ['Tesla S', 'Tesla X'], 'Kid': ['Tom', 'Jim']}
```

6.3.5 Update Keys in Dict

:: Example:

```
# update keys in dict
mapping = {'Car': 'Cars', 'Kid': 'Kids'}
#
print({mapping.get(key, key): val for key, val in d.items()})
```

:: Output:

```
{'name': 'Michael', 'Age': '30', 'Sex': 'Male', 'Car': [
→ 'Tesla S', 'Tesla X'], 'Kid': ['Tom', 'Jim']}
{'name': 'Michael', 'Age': '30', 'Sex': 'Male', 'Cars': [
→ 'Tesla S', 'Tesla X'], 'Kids': ['Tom', 'Jim']}
```

6.4 One line if-else statement

6.4.1 With filter

::syntax:

```
[ RESULT for x in seq if COND ]
```

:: Python Code:

```
num = [1,2,3,4,5,6,7,8,9,10]
[x for x in num if x%2 ==0]
```

:: Output:

```
[2, 4, 6, 8, 10]
```

6.4.2 Without filter

::syntax:

```
[ RESULT1 if COND1 else RESULT2 if COND2 else RESULT3 for x_
→ in seq]
```

:: Python Code:


```
num = [1,2,3,4,5,6,7,8,9,10]

['Low' if 1<= x <=3 else 'Median' if 3<x<8 else 'High' for x_
↪in num]
```

:: Output:

```
['Low',
 'Low',
 'Low',
 'Median',
 'Median',
 'Median',
 'Median',
 'High',
 'High',
 'High']
```

[VanderPlas2016] [McKinney2013]

DATA READ AND INGESTION WITH DATABASE

7.1 Data Ingestion from Local to DataBase

```
# User Information
try:
    login = pd.read_csv(r'login.txt', header=None)
    user = login[0][0]
    pw = login[0][1]
    print('User information is ready!')
except:
    print('Login information is not available!!!')

# Database information
host = '##.###.###.##'
db_name = 'db_name'
table_name = 'table_name'

# Setup connection
conn = psycopg2.connect(host=host, database=db_name, user=user,
    ↪password=pw)
cur = conn.cursor()

# Creat table in DataBase
conn.commit()
query = """
    DROP TABLE IF EXISTS {table_name};
    CREATE TABLE {table_name}
    (
        id character varying(20)
        , val1 double precision
        , val2 double precision
        , val3 double precision
        , val4 text
    )
    DISTRIBUTED BY (id);
```

(continues on next page)

(continued from previous page)

```
GRANT SELECT ON TABLE {table_name} TO xxxx;
""".format(table_name=table_name)
cur.execute(query)
conn.commit()

# load the data
df = pd.read_csv('xx.csv')

# Write dataframe to memory as csv
csv_io = io.StringIO()
df.to_csv(csv_io, sep='\t', header=True, index=False)
csv_io.seek(0)

# Copy the dataframe in memory to GP
conn.commit()
copy_sql = """
    COPY {table_name} FROM stdin WITH CSV HEADER
    DELIMITER as '\t'
    """.format(table_name=table_name)
cur.copy_expert(sql=copy_sql, file=csv_io)
conn.commit()
```

Note: You can also use `copy_to` to copy the dataframe from local memory to GP

```
cur.copy_to(df, table_name)
```

7.2 Data Read from DataBase to Local

```
# User information
try:
    login = pd.read_csv(r'login.txt', header=None)
    user = login[0][0]
    pw = login[0][1]
    print('User information is ready!')
except:
    print('Login information is not available!!!')

# Database information
host = '##.###.###.##'
db_name = 'db_name'
```

(continues on next page)

(continued from previous page)

```

table_name = 'table_name'

# Setup connection
conn = psycopg2.connect(host=host, database=db_name, user=user,
    ↪password=pw)
cur = conn.cursor()

# Read table
sql = """
    select *
    from {table_name}
    """.format(table_name=table_name)
dp = pd.read_sql(sql, conn)

```

7.3 Hive and Impala Tabel Ingestion

The screenshot displays the Data Lake Analytics (DLA) console interface. The left sidebar contains navigation options: Overview, Account, Schema (New), Execute (New), and Endpoint. The main area shows a search for schema names and a list of schemas including 'dataworks_demo (current)', 'dla_orders_db', 'dla_oss_db', and 'dla_oss_demo'. The 'dla_oss_demo' schema is expanded, showing tables like 'prod_name', 'cnt', 'y', and 'm'. The 'Execute' tab is active, displaying a SQL query: 'SELECT * from select * from 'dla_oss_demo'.dla limit 20'. Below the query editor, there are buttons for 'History', 'Result set', and 'Hide'. A table at the bottom shows the execution history with columns for Start time, SQL, and Status.

Start time	SQL	Status
15:08:28	select infinity();	COMPLETE
2019-04-16 15:08:24	select infinity();	COMPLETE
2019-04-16 15:08:24	select tanh(8);	COMPLETE

WORKING WITH AWS S3

Many companies chose to save sensitive data in AWS S3. So you may have to deal with data with python in Databricks, while python will have many issues to operate in Databricks(PySpark will not have problems if the environment was set up correctly in Databricks): such as the `os.system` command-like function can not use any more; no unified way to upload or download different type files, etc. Here, I will provide my way to work in AWS S3 with python in Databricks:

8.1 Credentials

I use Security Token Service (STS) to create the credentials to access AWS S3. STS enables you to request temporary, limited-privilege credentials for Identity and Access Management (IAM) users or for users that you authenticate (federated users). More details can be found at: <https://boto3.amazonaws.com/v1/documentation/api/latest/reference/services/sts.html>

```
import boto3

response = boto3.client('sts')\
    .assume_role(RoleArn='arn:aws:iam::123456789012:role/\
↪demo',
                RoleSessionName='your_role_session_name')
credentials = response['Credentials']
```

8.2 File Upload to S3

The main idea at here is to save the file in memory or a temporary file, then use `put_object` to put the file in S3. It's a little bit tricky to save the corresponding formatted file in memory, I will list several common types in the examples.

8.2.1 s3_file_upload Function

```
def s3_file_upload(data, path):

    file_type = path.split('/')[ -1 ].split('.')[ -1 ].lower()
    try:
        content_type = s3_content_type(file_type)
    except:
        print('Do not support the current input type!!!')

    s3_path = path.replace('s3://', '').replace('s3a://', '')
    bucket = s3_path.split('/')[0]
    key = s3_path.split('/', 1)[1]

    try:
        s3_resource.Bucket(bucket) \
            .put_object(Key=key,
                        Body=data,
                        ContentType=content_type,
                        ACL='public-read')
        print(f"{key.split('/')[ -1 ]} has been successfully saved in s3!
→")
    except Exception as err:
        print(err)
```

8.2.2 s3_content_type Function

```
def s3_content_type(file_type):
    mapping = {png:image/png}

    return mapping[file_type]
```

The full mapping list can be found as follows:

```
3dm:x-world/x-3dmf
3dmf:x-world/x-3dmf
a:application/octet-stream
aab:application/x-authorware-bin
aam:application/x-authorware-map
aas:application/x-authorware-seg
abc:text/vnd.abc
acgi:text/html
afl:video/animaflex
ai:application/postscript
```

(continues on next page)

(continued from previous page)

```
aif:audio/aiff
#aif:audio/x-aiff
aifc:audio/aiff
#aifc:audio/x-aiff
aiff:audio/aiff
#aiff:audio/x-aiff
aim:application/x-aim
aip:text/x-audio-software-intra
ani:application/x-navi-animation
aos:application/x-nokia-9000-communicator-add-on-software
aps:application/mime
arc:application/octet-stream
arj:application/arj
art:image/x-jg
asf:video/x-ms-asf
asm:text/x-asm
asp:text/asp
asx:application/x-mplayer2
#asx:video/x-ms-asf
#asx:video/x-ms-asf-plugin
au:audio/basic
#au:audio/x-au
#avi:video/avi
#avi:video/msvideo
avi:video/x-msvideo
avs:video/avs-video
bcpio:application/x-bcpio
#bin:application/mac-binary
#bin:application/macbinary
#bin:application/octet-stream
bin:application/x-binary
#bin:application/x-macbinary
bm:image/bmp
bmp:image/bmp
boo:application/book
book:application/book
boz:application/x-bzip2
bsh:application/x-bsh
bz:application/x-bzip
bz2:application/x-bzip2
c:text/plain
c++:text/plain
cat:application/vnd.ms-pki.seccat
cc:text/plain
ccad:application/clariscad
```

(continues on next page)

(continued from previous page)

```
cco:application/x-cocoa
cdf:application/cdf
cer:application/pkix-cert
cha:application/x-chat
chat:application/x-chat
class:application/java
com:application/octet-stream
conf:text/plain
cpio:application/x-cpio
cpp:text/x-c
cpt:application/mac-compactpro
crl:application/pkcs-crl
crt:application/pkix-cert
csh:application/x-csh
css:text/css
cxx:text/plain
dcr:application/x-director
deepv:application/x-deepv
def:text/plain
der:application/x-x509-ca-cert
dif:video/x-dv
dir:application/x-director
dl:video/dl
doc:application/msword
dot:application/msword
dp:application/commonground
drw:application/drafting
dump:application/octet-stream
dv:video/x-dv
dvi:application/x-dvi
dwf:model/vnd.dwf
dwg:application/acad
dxf:application/dxf
dxr:application/x-director
el:text/x-script.elisp
elc:application/x-bytecode.elisp
env:application/x-envoy
eps:application/postscript
es:application/x-esrehber
etx:text/x-setext
evy:application/envoy
exe:application/octet-stream
f:text/plain
f77:text/x-fortran
f90:text/plain
```

(continues on next page)

(continued from previous page)

```
fdf:application/vnd.fdf
fif:application/fractals
fli:video/fli
flo:image/florian
flx:text/vnd.fmi.flexstor
fmf:video/x-atomic3d-feature
for:text/plain
fpx:image/vnd.fpx
frl:application/freelader
funk:audio/make
g:text/plain
g3:image/g3fax
gif:image/gif
gl:video/gl
gsd:audio/x-gsm
gsm:audio/x-gsm
gsp:application/x-gsp
gss:application/x-gss
gtar:application/x-gtar
gz:application/x-gzip
gzip:application/x-gzip
h:text/plain
hdf:application/x-hdf
help:application/x-helpfile
hgl:application/vnd.hp-hpgl
hh:text/plain
hlp:application/hlp
hpg:application/vnd.hp-hpgl
hpgl:application/vnd.hp-hpgl
hqx:application/binhex
hta:application/hta
htc:text/x-component
htm:text/html
html:text/html
htmls:text/html
htt:text/webviewhtml
htx:text/html
ice:x-conference/x-cooltalk
ico:image/x-icon
idc:text/plain
ief:image/ief
iefs:image/ief
iges:application/iges
igs:application/iges
ima:application/x-ima
```

(continues on next page)

(continued from previous page)

```
imap:application/x-httpd-imap
inf:application/inf
ins:application/x-internett-signup
ip:application/x-ip2
isu:video/x-isvideo
it:audio/it
iv:application/x-inventor
ivr:i-world/i-vrml
ivy:application/x-livescreen
jam:audio/x-jam
java:text/plain
jcm:application/x-java-commerce
jfif:image/jpeg
jpeg:image/jpeg
jpg:image/jpeg
jps:image/x-jps
js:application/x-javascript
jut:image/jutvision
kar:audio/midi
ksh:text/x-script.ksh
la:audio/nsaudio
lam:audio/x-liveaudio
latex:application/x-latex
lha:application/octet-stream
lhx:application/octet-stream
list:text/plain
lma:audio/nsaudio
log:text/plain
lst:text/plain
lsx:text/x-la-asf
ltx:application/x-latex
lzh:application/octet-stream
lzx:application/octet-stream
m:text/plain
m1v:video/mpeg
m2a:audio/mpeg
m2v:video/mpeg
m3u:audio/x-mpequrl
m4v:video/x-m4v
man:application/x-troff-man
mht:message/rfc822
mhtml:message/rfc822
midi:audio/midi
mif:application/x-frame
mjf:audio/x-vnd.audioexplosion.mjuicemediafile
```

(continues on next page)

(continued from previous page)

```
mjpg:video/x-motion-jpeg
mod:audio/mod
mov:video/quicktime
movie:video/x-sgi-movie
mp2:audio/mpeg
mp3:audio/mpeg
#mpa:audio/mpeg
mpa:video/mpeg
mpc:application/x-project
mpeg:video/mpeg
mpg:video/mpeg
mpga:audio/mpeg
ogg:video/ogg
ogv:video/ogg
p:text/x-pascal
p10:application/pkcs10
#p12:application/pkcs-12
p12:application/x-pkcs12
p7a:application/x-pkcs7-signature
p7c:application/x-pkcs7-mime
p7m:application/pkcs7-mime
p7r:application/x-pkcs7-certreqresp
p7s:application/pkcs7-signature
part:application/pro_eng
pas:text/pascal
pbm:image/x-portable-bitmap
pcl:application/x-pcl
pct:image/x-pict
pcx:image/x-pcx
pdb:chemical/x-pdb
pdf:application/pdf
pfunk:audio/make
pgm:image/x-portable-graymap
pic:image/pict
pict:image/pict
pkg:application/x-newton-compatible-pkg
pko:application/vnd.ms-pki.pko
pl:text/plain
plx:application/x-pixclscript
pm:image/x-xpixmap
pm4:application/x-pagemaker
pm5:application/x-pagemaker
png:image/png
pnm:image/x-portable-anymap
pot:application/mspowerpoint
```

(continues on next page)

(continued from previous page)

```
ppa:application/vnd.ms-powerpoint
ppm:image/x-portable-pixmap
pps:application/mspowerpoint
ppt:application/mspowerpoint
#ppt:application/powerpoint
#ppt:application/vnd.ms-powerpoint
#ppt:application/x-mspowerpoint
ppz:application/mspowerpoint
pre:application/x-freelance
prt:application/pro_eng
ps:application/postscript
psd:application/octet-stream
pvu:paleovu/x-pv
pwz:application/vnd.ms-powerpoint
py:text/x-script.python
pyc:applicaiton/x-bytecode.python
qcp:audio/vnd.qcelp
qd3:x-world/x-3dmf
#qd3d:x-world/x-3dmf
qif:image/x-quicktime
qt:video/quicktime
qtc:video/x-qtc
qti:image/x-quicktime
qtif:image/x-quicktime
ra:audio/x-pn-realaudio
#ra:audio/x-pn-realaudio-plugin
#ra:audio/x-realaudio
ram:audio/x-pn-realaudio
ras:application/x-cmu-raster
#ras:image/cmu-raster
#ras:image/x-cmu-raster
#rast:image/cmu-raster
#rexx:text/x-script.rexx
#rf:image/vnd.rn-realflash
rgb:image/x-rgb
rm:application/vnd.rn-realmedia
#rm:audio/x-pn-realaudio
rmi:audio/mid
rmm:audio/x-pn-realaudio
rmp:audio/x-pn-realaudio
#rmp:audio/x-pn-realaudio-plugin
rng:application/ringing-tones
#rng:application/vnd.nokia.ringing-tone
rnx:application/vnd.rn-realplayer
roff:application/x-troff
```

(continues on next page)

(continued from previous page)

```
rp:image/vnd.rn-realpix
rpm:audio/x-pn-realaudio-plugin
rt:text/richtext
#rt:text/vnd.rn-realtex
rtf:application/rtf
#rtf:application/x-rtf
#rtf:text/richtext
#rtx:application/rtf
#rtx:text/richtext
rv:video/vnd.rn-realvideo
s:text/x-asm
s3m:audio/s3m
#saveme:application/octet-stream
sbk:application/x-tbook
scm:application/x-lotusscreencam
#scm:text/x-script.guile
#scm:text/x-script.scheme
#scm:video/x-scm
sdml:text/plain
sdp:application/sdp
#sdp:application/x-sdp
sdr:application/sounder
sea:application/sea
#sea:application/x-sea
set:application/set
sgm:text/sgml
#sgm:text/x-sgml
sgml:text/sgml
#sgml:text/x-sgml
sh:application/x-bsh
#sh:application/x-sh
#sh:application/x-shar
#sh:text/x-script.sh
shar:application/x-bsh
#shar:application/x-shar
shtml:text/html
#shtml:text/x-server-parsed-html
sid:audio/x-psid
#sit:application/x-sit
sit:application/x-stuffit
skd:application/x-koan
skm:application/x-koan
skp:application/x-koan
skt:application/x-koan
sl:application/x-seelogo
```

(continues on next page)

(continued from previous page)

```
smi:application/smil
smil:application/smil
#snd:audio/basic
snd:audio/x-adpcm
sol:application/solids
#spc:application/x-pkcs7-certificates
spc:text/x-speech
spl:application/futuresplash
spr:application/x-sprite
sprite:application/x-sprite
src:application/x-wais-source
ssi:text/x-server-parsed-html
ssm:application/streamingmedia
sst:application/vnd.ms-pki.certstore
step:application/step
stl:application/sla
#stl:application/vnd.ms-pki.stl
#stl:application/x-navistyle
stp:application/step
sv4cpio:application/x-sv4cpio
sv4crc:application/x-sv4crc
svf:image/vnd.dwg
#svf:image/x-dwg
svr:application/x-world
#svr:x-world/x-svr
swf:application/x-shockwave-flash
t:application/x-troff
talk:text/x-speech
tar:application/x-tar
tbk:application/toolbook
#tbk:application/x-tbook
tcl:application/x-tcl
#tcl:text/x-script.tcl
tcsh:text/x-script.tcsh
tex:application/x-tex
texi:application/x-texinfo
texinfo:application/x-texinfo
#text:application/plain
text:text/plain
#tgz:application/gnutar
tgz:application/x-compressed
tif:image/tiff
#tif:image/x-tiff
tiff:image/tiff
#tiff:image/x-tiff
```

(continues on next page)

(continued from previous page)

```
tr:application/x-troff
tsi:audio/tsp-audio
tsp:application/dsptype
#tsp:audio/tsplayer
tsv:text/tab-separated-values
turbot:image/florian
txt:text/plain
uil:text/x-uil
uni:text/uri-list
unis:text/uri-list
unv:application/i-deas
uri:text/uri-list
uris:text/uri-list
ustar:application/x-ustar
#ustar:multipart/x-ustar
uu:application/octet-stream
#uu:text/x-uuencode
uue:text/x-uuencode
vcd:application/x-cdlink
vcs:text/x-vcalendar
vda:application/vda
vdo:video/vdo
vew:application/groupwise
viv:video/vivo
#viv:video/vnd.vivo
vivo:video/vivo
#vivo:video/vnd.vivo
vmd:application/vocaltec-media-desc
vmf:application/vocaltec-media-file
voc:audio/voc
#voc:audio/x-voc
vos:video/vosaic
vox:audio/voxware
vqe:audio/x-twinvq-plugin
vqf:audio/x-twinvq
vql:audio/x-twinvq-plugin
vrml:application/x-vrml
#vrml:model/vrml
#vrml:x-world/x-vrml
vrt:x-world/x-vrt
vsd:application/x-visio
vst:application/x-visio
vsw:application/x-visio
w60:application/wordperfect6.0
w61:application/wordperfect6.1
```

(continues on next page)

(continued from previous page)

```
w6w:application/msword
wav:audio/wav
#wav:audio/x-wav
wbl:application/x-qpro
wbmp:image/vnd.wap.wbmp
web:application/vnd.xara
wiz:application/msword
wk1:application/x-123
wmf:windows/metafile
wml:text/vnd.wap.wml
wmlc:application/vnd.wap.wmlc
wmls:text/vnd.wap.wmlscript
wmlsc:application/vnd.wap.wmlscriptc
word:application/msword
wp:application/wordperfect
wp5:application/wordperfect
#wp5:application/wordperfect6.0
wp6:application/wordperfect
wpd:application/wordperfect
#wpd:application/x-wpwin
wq1:application/x-lotus
wri:application/mswrite
#wri:application/x-wri
#wrl:application/x-world
wrl:model/vrml
#wrl:x-world/x-vrml
#wrz:model/vrml
#wrz:x-world/x-vrml
#wsc:text/scrlet
wsr:application/x-wais-source
wtk:application/x-wintalk
#xbm:image/x-xbitmap
#xbm:image/x-xbm
xbm:image/xbm
xdr:video/x-amt-demorun
xgz:xgl/drawing
xif:image/vnd.xiff
xl:application/excel
xla:application/excel
#xla:application/x-excel
#xla:application/x-msexcel
#xlb:application/excel
#xlb:application/vnd.ms-excel
xlb:application/x-excel
#xlc:application/excel
```

(continues on next page)

(continued from previous page)

```
#xlc:application/vnd.ms-excel
#xlc:application/x-excel
xld:application/excel
#xld:application/x-excel
#xlk:application/excel
xlk:application/x-excel
#xll:application/excel
#xll:application/vnd.ms-excel
xll:application/x-excel
#xlm:application/excel
#xlm:application/vnd.ms-excel
xlm:application/x-excel
#xls:application/excel
#xls:application/vnd.ms-excel
#xls:application/x-excel
xls:application/x-msexcel
#xlt:application/excel
xlt:application/x-excel
#xlv:application/excel
xlv:application/x-excel
#xlw:application/excel
#xlw:application/vnd.ms-excel
#xlw:application/x-excel
xlw:application/x-msexcel
xm:audio/xm
#xml:application/xml
xml:text/xml
xmz:xgl/movie
xpix:application/x-vnd.ls-xpix
#xpm:image/x-xpixmap
xpm:image/xpm
x-png:image/png
xsr:video/x-amt-showrun
#xwd:image/x-xwd
xwd:image/x-xwindowdump
xyz:chemical/x-pdb
#z:application/x-compress
z:application/x-compressed
#zip:application/x-compressed
#zip:application/x-zip-compressed
zip:application/zip
#zip:multipart/x-zip
zoo:application/octet-stream
zsh:text/x-script.zsh
```

8.2.3 Examples

1. .csv file

save csv file in memory:

```
csv_io = io.StringIO()
df.to_csv(csv_io, sep='\t', header=True, index=False)
csv_io.seek(0)
# the csv data need encode
csv_data = io.BytesIO(csv_io.getvalue().encode())
```

Note:

The alternative way by using tempfile:

```
with tempfile.TemporaryFile(mode='r+') as fp:
    df.to_csv(fp, sep='\t', header=True, index=False)
    fp.seek(0)
#
s3_file_upload(csv_data, file_path)
```

Upload file

```
>>> file_path = 'my_bucket/~/~/test/test.csv'
>>> s3_file_upload(csv_data, file_path)
test.csv has been successfully saved in S3!
```

2. .json file

```
>>> json_object = """ your json content """
>>> json_data = json.dumps(json_object)
>>> file_path = 'my_bucket/~/~/test/test.json'
>>> s3_file_upload(json_data, file_path)
test.json has been successfully saved in S3!
```

Note:

The alternative way by using tempfile:

```
with tempfile.TemporaryFile() as fp:
    joblib.dump(json_data, fp)
    fp.seek(0)
#
s3_file_upload(json_data, file_path)
```

3. .png, .jpeg or .pdf

Save the image in memory:

```
flights = sns.load_dataset("flights")
may_flights = flights.query("month == 'May'")
fig = plt.figure(figsize=(20,8))
sns.lineplot(data=may_flights, x="year", y="passengers")

img_data = io.BytesIO()
plt.savefig(img_data, format='png')
img_data.seek(0)
```

Save the in-memory image data in S3:

```
path = 'my_bucket/my_key'
s3_file_save(img_data, path)
```

Note: The above method also works for .jpeg and .pdf format.

8.3 File Download from S3

The main idea is using the s3 resource function to download the file and save it at /temp as a temporary file, then use the corresponding formatted functions to read it.

8.3.1 s3_file_download Function

```
def s3_file_download(path):

    # extract bucket and key from the given path
    s3_path = path.replace('s3://', '').replace('s3a://', '')
    bucket = s3_path.split('/')[0]
    key = s3_path.split('/', 1)[1]

    # download file and save it as a temp file
    file_name = os.path.join('/tmp', path.split('/')[-1])
    s3_resource.Bucket(bucket).download_file(key, file_name)

    # return saved file path
    return file_name
```

8.3.2 Examples

```
>>> file_path = 'my_bucket/***/***/test/test.json'
>>> file_name = s3_file_download(file_path)
'/temp/test.json'
>>> joblib.load(filename)
```

8.4 File Management in S3

I mainly use my `s3_fs` to help me do the file management in S3.

8.4.1 `s3_fs` Function

The `s3_fs` is mainly based on `s3fs` package. The top-level class `s3fs` holds connection information and allows typical file-system style operations like `cp`, `mv`, `ls`, `walk`, `du`, `glob`, etc. More details can be found at: <https://s3fs.readthedocs.io/en/latest/index.html>

```
import s3fs

s3_fs = s3fs.S3FileSystem(anon=False,
                          key=credentials['AccessKeyId'],
                          secret=credentials['SecretAccessKey'],
                          token=credentials['SessionToken'])
```

8.4.2 Examples

Simple locate and read a file:

```
>>> s3_fs.ls('my-bucket')
['demo-file.csv']
>>> with fs.open('my-bucket/demo-file.csv', 'rb') as f:
...     print(f.read())
b'UserId\tdate\nuser_id1\t2019-05-02\nuser_id2\t2019-12-02\n'
```

PD . DATAFRAME MANIPULATION

Note: This Chapter *Notebooks* is for beginner. If you have some Python programming experience, you may skip this chapter.

9.1 TODO..

RDD . DATAFRAME MANIPULATION

Note: This Chapter *Notebooks* is for beginner. If you have some Python programming experience, you may skip this chapter.

10.1 TODO..

PD.DATFRAME VS PYSPARK DATFRAME

11.1 Create DataFrame

11.1.1 From List

```
my_list = [['a', 1, 2], ['b', 2, 3], ['c', 3, 4]]
col_name = ['A', 'B', 'C']
```

:: Python Code:

```
# caution for the columns=
pd.DataFrame(my_list, columns= col_name)
#
spark.createDataFrame(my_list, col_name).show()
```

:: Comparison:

	A	B	C
0	a	1	2
1	b	2	3
2	c	3	4

	A	B	C
0	a	1	2
1	b	2	3
2	c	3	4

Attention: Pay attention to the parameter `columns=` in `pd.DataFrame`. Since the default value will make the list as rows.

:: Python Code:

```
# caution for the columns=
pd.DataFrame(my_list, columns= col_name)
#
pd.DataFrame(my_list, col_name)
```

:: Comparison:

	A	B	C			0	1	2
0	a	1	2	A	a	1	2	
1	b	2	3	B	b	2	3	
2	c	3	4	C	c	3	4	

11.1.2 From Dict

```
data = {'A': [0, 1, 0],  
        'B': [1, 0, 1],  
        'C': [1, 0, 0]}
```

:: Python Code:

```
pd.DataFrame(data)  
# Tedious for PySpark  
spark.createDataFrame(np.array(list(d.values())).T.tolist(), list(d.  
→keys())).show()
```

:: Comparison:

	A	B	C
0	0	1	1
1	1	0	0
2	0	1	0

	A	B	C
0	0	1	1
1	1	0	0
2	0	1	0

11.2 Convert between pandas and pyspark DataFrame

11.2.1 From pandas to pyspark DataFrame

:: Example:

```
# pd.DataFrame pandas_df: DataFrame pandas  
# rdd.DataFrame. spark_df: DataFrame spark  
pandas_df = pd.read_csv('Advertising.csv')  
spark_df = spark.createDataFrame(pandas_df)  
spark_df.printSchema()
```

11.2.2 From pyspark to pandas DataFrame

:: Example:

```
pandas_df = spark_df.toPandas()
pandas_df.info()
```

11.3 Load DataFrame

11.3.1 From DataBase

Most of time, you need to share your code with your colleagues or release your code for Code Review or Quality assurance(QA). You will definitely do not want to have your User Information in the code. So you can save them in login.txt:

```
runawayhorse001
PythonTips
```

and use the following code to import your User Information:

```
#User Information
try:
    login = pd.read_csv(r'login.txt', header=None)
    user = login[0][0]
    pw = login[0][1]
    print('User information is ready!')
except:
    print('Login information is not available!!!')

#Database information
host = '##.###.###.##'
db_name = 'db_name'
table_name = 'table_name'
```

:: Comparison:

```
conn = psycopg2.connect(host=host, database=db_name, user=user,
    ↪password=pw)
cur = conn.cursor()

sql = """
    select *
    from {table_name}
```

(continues on next page)

(continued from previous page)

```
"".format(table_name=table_name)
pandas_df = pd.read_sql(sql, conn)
```

```
# connect to database
url = 'jdbc:postgresql://'+host+':5432/'+db_name+'?user='+user+'&
    ↳password='+pw
properties = {'driver': 'org.postgresql.Driver', 'password': pw, 'user':
    ↳user}
spark_df = spark.read.jdbc(url=url, table=table_name,
    ↳properties=properties)
```

Attention: Reading tables from Database with PySpark neespark_df the proper drive for the corresponding Database. For example, the above demo neespark_df org.postgresql.Driver and you need to download it and put it in jars folder of your spark installation path. I download postgresql-42.1.1.jar from the official website and put it in jars folder.

11.3.2 From .csv

:: Comparison:

```
# pd.DataFrame pandas_df: DataFrame pandas
pandas_df = pd.read_csv('Advertising.csv')
#rdd.DataFrame. spark_df: DataFrame spark
spark_df = spark.read.csv(path='Advertising.csv',
#                               sep=', ',
#                               encoding='UTF-8',
#                               comment=None,
                               header=True,
                               inferSchema=True)
```

11.3.3 From .json

Data from: <http://api.luftdaten.info/static/v1/data.json>

```
pandas_df = pd.read_json("data/data.json")
spark_df = spark.read.json('data/data.json')
```

:: Python Code:

```
pandas_df[['id', 'timestamp']].head(4)
#
spark_df[['id', 'timestamp']].show(4)
```

:: Comparison:

	id	timestamp
0	2994551481	2019-02-28 17:23:52
1	2994551482	2019-02-28 17:23:52
2	2994551483	2019-02-28 17:23:52
3	2994551484	2019-02-28 17:23:52

only showing top 4 rows

11.4 First n Rows

:: Python Code:

```
pandas_df.head(4)
#
spark_df.show(4)
```

:: Comparison:

	TV	Radio	Newspaper	Sales
0	230.1	37.8	69.2	22.1
1	44.5	39.3	45.1	10.4
2	17.2	45.9	69.3	9.3
3	151.5	41.3	58.5	18.5

only showing top 4 rows

11.5 Column Names

:: Python Code:

```
pandas_df.columns
#
spark_df.columns
```

:: Comparison:

```
Index(['TV', 'Radio', 'Newspaper', 'Sales'], dtype='object')
['TV', 'Radio', 'Newspaper', 'Sales']
```

11.6 Data types

:: Python Code:

```
pandas_df.dtypes
#
spark_df.dtypes
```

:: Comparison:

TV	float64	(('TV', 'double'),
Radio	float64	('Radio', 'double'),
Newspaper	float64	('Newspaper', 'double'),
Sales	float64	('Sales', 'double')]
dtype:	object	

11.7 Replace Data types

```
my_list = [('a', 2, 3),
            ('b', 5, 6),
            ('c', 8, 9),
            ('a', 2, 3),
            ('b', 5, 6),
            ('c', 8, 9)]
col_name = ['col1', 'col2', 'col3']

pandas_df = pd.DataFrame(my_list, columns=col_name)
```

(continues on next page)

(continued from previous page)

```
spark_df = spark.createDataFrame(pandas_df)

pandas_df.dtypes
```

```
col1      object
col2      int64
col3      int64
dtype: object
```

:: Python Code:

```
d = {'col2': 'string', 'col3': 'string'}
pandas_df = pandas_df.astype({'col2': 'str', 'col3': 'str'})
spark_df = spark_df.select(*list(set(spark_df.columns)-set(d.keys()))),
                          *(col(c[0]).astype(c[1]).alias(c[0]) for c in d.
→ items()))
```

:: Comparison:

```
col1      object
col2      object      [('col1', 'string'), ('col2', 'string'), (
→ 'col3', 'string')]
col3      object
dtype: object
```

11.8 Fill Null

```
my_list = [['a', 1, None], ['b', 2, 3], ['c', 3, 4]]
pandas_df = pd.DataFrame(my_list, columns=['A', 'B', 'C'])
spark_df = spark.createDataFrame(my_list, ['A', 'B', 'C'])
#
pandas_df.head()
spark_df.show()
```

:: Comparison:

	A	B	C
0	male	1	NaN
1	female	2	3.0
2	male	3	4.0

	A	B	C
0	male	1	null
1	female	2	3
2	male	3	4

:: Python Code:

```
pandas_df.fillna(-99)
#
spark_df.fillna(-99).show()
```

:: Comparison:

	A	B	C
0	male	1	-99
1	female	2	3.0
2	male	3	4.0

	A	B	C
0	male	1	-99
1	female	2	3
2	male	3	4

11.9 Replace Values

:: Python Code:

```
# caution: you need to chose specific col
pandas_df.A.replace(['male', 'female'],[1, 0], inplace=True)
pandas_df
#caution: Mixed type replacements are not supported
spark_df.na.replace(['male','female'],['1','0']).show()
```

:: Comparison:

	A	B	C
0	1	1	NaN
1	0	2	3.0
2	1	3	4.0

	A	B	C
0	1	1	null
1	0	2	3
2	1	3	4

11.10 Rename Columns

11.10.1 Rename all columns

:: Python Code:

```
pandas_df.columns = ['a', 'b', 'c', 'd']
pandas_df.head(4)
#
spark_df.toDF('a', 'b', 'c', 'd').show(4)
```

:: Comparison:

	a	b	c	d
0	230.1	37.8	69.2	22.1
1	44.5	39.3	45.1	10.4
2	17.2	45.9	69.3	9.3
3	151.5	41.3	58.5	18.5

	a	b	c	d
0	230.1	37.8	69.2	22.1
1	44.5	39.3	45.1	10.4
2	17.2	45.9	69.3	9.3
3	151.5	41.3	58.5	18.5

only showing top 4 rows

11.10.2 Rename one or more columns

```
mapping = {'Newspaper': 'C', 'Sales': 'D'}
```

:: Python Code:

```
pandas_df.rename(columns=mapping).head(4)
#
new_names = [mapping.get(col, col) for col in spark_df.columns]
spark_df.toDF(*new_names).show(4)
```

:: Comparison:

	TV	Radio	C	D
0	230.1	37.8	69.2	22.1
1	44.5	39.3	45.1	10.4
2	17.2	45.9	69.3	9.3
3	151.5	41.3	58.5	18.5

	TV	Radio	C	D
0	230.1	37.8	69.2	22.1
1	44.5	39.3	45.1	10.4
2	17.2	45.9	69.3	9.3
3	151.5	41.3	58.5	18.5

(continues on next page)

(continued from previous page)

```
+-----+-----+-----+-----+
only showing top 4 rows
```

Note: You can also use `withColumnRenamed` to rename one column in PySpark.

:: Python Code:

```
spark_df.withColumnRenamed('Newspaper', 'Paper').show(4
```

:: Comparison:

```
+-----+-----+-----+-----+
|    TV|Radio|Paper|Sales|
+-----+-----+-----+-----+
|230.1| 37.8| 69.2| 22.1|
| 44.5| 39.3| 45.1| 10.4|
| 17.2| 45.9| 69.3|  9.3|
|151.5| 41.3| 58.5| 18.5|
+-----+-----+-----+-----+
only showing top 4 rows
```

11.11 Drop Columns

```
drop_name = ['Newspaper', 'Sales']
```

:: Python Code:

```
pandas_df.drop(drop_name,axis=1).head(4)
#
spark_df.drop(*drop_name).show(4)
```

:: Comparison:

```

      TV  Radio
0  230.1   37.8
1   44.5   39.3
2   17.2   45.9
3  151.5   41.3

+-----+-----+
|    TV|Radio|
+-----+-----+
|230.1| 37.8|
| 44.5| 39.3|
| 17.2| 45.9|
|151.5| 41.3|
+-----+-----+
only showing top 4 rows
```

11.12 Filter

```
pandas_df = pd.read_csv('Advertising.csv')
#
spark_df = spark.read.csv(path='Advertising.csv',
                           header=True,
                           inferSchema=True)
```

:: Python Code:

```
pandas_df[pandas_df.Newspaper<20].head(4)
#
spark_df[spark_df.Newspaper<20].show(4)
```

:: Comparison:

	TV	Radio	Newspaper	Sales
7	120.2	19.6	11.6	13.2
6	13.2			
8	8.6	2.1	1.0	4.8
0	4.8			
11	214.7	24.0	4.0	17.4
0	17.4			
13	97.5	7.6	7.2	9.7
2	9.7			

only showing top 4 rows

:: Python Code:

```
pandas_df[(pandas_df.Newspaper<20) & (pandas_df.TV>100)].head(4)
#
spark_df[(spark_df.Newspaper<20) & (spark_df.TV>100)].show(4)
```

:: Comparison:

	TV	Radio	Newspaper	Sales
--	----	-------	-----------	-------

(continues on next page)

(continued from previous page)

	TV	Radio	Newspaper	Sales	
↪+-----+					+-----+-----+-----
7	120.2	19.6	11.6	13.2	120.2 19.6 11.
↪6 13.2					
11	214.7	24.0	4.0	17.4	214.7 24.0 4.
↪0 17.4					
19	147.3	23.9	19.1	14.6	147.3 23.9 19.
↪1 14.6					
25	262.9	3.5	19.5	12.0	262.9 3.5 19.
↪5 12.0					
					+-----+-----+-----
↪+-----+					

only showing top 4 rows

11.13 With New Column

:: Python Code:

```
pandas_df['tv_norm'] = pandas_df.TV/sum(pandas_df.TV)
pandas_df.head(4)
#
spark_df.withColumn('tv_norm', spark_df.TV/spark_df.groupBy().agg(F.
↪sum("TV")).collect()[0][0]).show(4)
```

:: Comparison:

↪+-----+-----+-----+						+-----+-----+-----	
↪TV Radio Newspaper Sales					tv_norm		
TV Radio Newspaper Sales					tv_norm	+-----+-----+-----	
↪+-----+-----+-----+							
0	230.1	37.8	69.2	22.1	0.007824	230.1 37.8 69.	
↪2 22.1 0.007824268493802813							
1	44.5	39.3	45.1	10.4	0.001513	44.5 39.3 45.	
↪1 10.4 0.001513167961643...							
2	17.2	45.9	69.3	9.3	0.000585	17.2 45.9 69.	
↪3 9.3 5.848649200061207E-4							
3	151.5	41.3	58.5	18.5	0.005152	151.5 41.3 58.	
↪5 18.5 0.005151571824472517							
						+-----+-----+-----	
↪+-----+-----+-----+							

only showing top 4 rows

:: Python Code:

```
pandas_df['cond'] = pandas_df.apply(lambda c: 1 if ((c.TV>100)&(c.Radio
→<40)) else 2 if c.Sales> 10 else 3,axis=1)
#
spark_df.withColumn('cond',F.when((spark_df.TV>100)&(spark_df.Radio
→<40),1)\
                                .when(spark_df.Sales>10, 2)\
                                .otherwise(3)).show(4)
```

:: Comparison:

```
→+-----+-----+
|
→TV|Radio|Newspaper|Sales|cond|
   TV   Radio   Newspaper   Sales   cond
→+-----+-----+
0  230.1   37.8         69.2   22.1     1   |230.1| 37.8|      69.
→2| 22.1|    1|
1  44.5   39.3         45.1   10.4     2   | 44.5| 39.3|      45.
→1| 10.4|    2|
2   17.2   45.9         69.3    9.3     3   | 17.2| 45.9|      69.
→3|  9.3|    3|
3  151.5   41.3         58.5   18.5     2   |151.5| 41.3|      58.
→5| 18.5|    2|
→+-----+-----+
only showing top 4 rows
```

:: Python Code:

```
pandas_df['log_tv'] = np.log(pandas_df.TV)
pandas_df.head(4)
#
spark_df.withColumn('log_tv',F.log(spark_df.TV)).show(4)
```

:: Comparison:

```
→+-----+-----+
|
→TV|Radio|Newspaper|Sales|log_tv|
   TV   Radio   Newspaper   Sales   log_tv
→+-----+-----+
0  230.1   37.8         69.2   22.1   5.438514 |230.1| 37.8|      69.
→2| 22.1|    1| 5.43851399704132|
```

(continues on next page)

(continued from previous page)

```

1    44.5    39.3        45.1    10.4    3.795489    | 44.5| 39.3|    45.
↪1| 10.4|3.7954891891721947|
2    17.2    45.9        69.3     9.3    2.844909    | 17.2| 45.9|    69.
↪3|  9.3|2.8449093838194073|
3   151.5    41.3        58.5    18.5    5.020586    |151.5| 41.3|    58.
↪5| 18.5| 5.020585624949423|

+-----+-----+-----+
↪+-----+-----+-----+
only showing top 4 rows

```

:: Python Code:

```

pandas_df['tv+10'] = pandas_df.TV.apply(lambda x: x+10)
pandas_df.head(4)
#
spark_df.withColumn('tv+10', spark_df.TV+10).show(4)

```

:: Comparison:

```

↪+-----+-----+
TV|Radio|Newspaper|Sales|tv+10|
  TV  Radio  Newspaper  Sales  tv+10
↪+-----+-----+
0   230.1   37.8        69.2   22.1   240.1    |230.1| 37.8|    69.
↪2| 22.1|240.1|
1    44.5   39.3        45.1   10.4   54.5     | 44.5| 39.3|    45.
↪1| 10.4| 54.5|
2    17.2   45.9        69.3    9.3   27.2     | 17.2| 45.9|    69.
↪3|  9.3| 27.2|
3   151.5   41.3        58.5   18.5   161.5    |151.5| 41.3|    58.
↪5| 18.5|161.5|

+-----+-----+-----+
↪+-----+-----+
only showing top 4 rows

```


11.14 Join

```
leftp = pd.DataFrame({'A': ['A0', 'A1', 'A2', 'A3'],
                      'B': ['B0', 'B1', 'B2', 'B3'],
                      'C': ['C0', 'C1', 'C2', 'C3'],
                      'D': ['D0', 'D1', 'D2', 'D3']},
                      index=[0, 1, 2, 3])

rightp = pd.DataFrame({'A': ['A0', 'A1', 'A6', 'A7'],
                       'F': ['B4', 'B5', 'B6', 'B7'],
                       'G': ['C4', 'C5', 'C6', 'C7'],
                       'H': ['D4', 'D5', 'D6', 'D7']},
                       index=[4, 5, 6, 7])

lefts = spark.createDataFrame(leftp)
rights = spark.createDataFrame(rightp)
```

	A	B	C	D
0	A0	B0	C0	D0
1	A1	B1	C1	D1
2	A2	B2	C2	D2
3	A3	B3	C3	D3

	A	F	G	H
4	A0	B4	C4	D4
5	A1	B5	C5	D5
6	A6	B6	C6	D6
7	A7	B7	C7	D7

11.14.1 Left Join

:: Python Code:

```
leftp.merge(rightp,on='A',how='left')
#
lefts.join(rights,on='A',how='left')
      .orderBy('A',ascending=True).show()
```

:: Comparison:

	A	B	C	D	F	G	H
0	A0	B0	C0	D0	B4	C4	D4
1	A1	B1	C1	D1	B5	C5	D5

(continues on next page)

(continued from previous page)

[illegible]

11.14.2 Right Join

:: Python Code:

```
lefttp.merge(righttp,on='A',how='right')
#
lefts.join(rights,on='A',how='right')
      .orderBy('A',ascending=True).show()
```

:: Comparison:

								+--+ +--+ +--+ +--+ +--+ +--+ +---
↪ +								A B C D F G └
↪ H								+--+ +--+ +--+ +--+ +--+ +--+ +---
A	B	C	D	F	G	H		
↪ +								+--+ +--+ +--+ +--+ +--+ +--+ +---
0 A0	B0	C0	D0	B4	C4	D4	A0 B0 C0 D0 B4 C4 └	
↪ D4								
1 A1	B1	C1	D1	B5	C5	D5	A1 B1 C1 D1 B5 C5 └	
↪ D5								
2 A6	NaN	NaN	NaN	B6	C6	D6	A6 null null null B6 C6 └	
↪ D6								
3 A7	NaN	NaN	NaN	B7	C7	D7	A7 null null null B7 C7 └	
↪ D7								
↪ +								+--+ +--+ +--+ +--+ +--+ +--+ +---

11.14.3 Inner Join

:: Python Code:

```
lefttp.merge(righttp,on='A',how='inner')
#
lefts.join(rights,on='A',how='inner')
      .orderBy('A',ascending=True).show()
```

:: Comparison:

	A	B	C	D	F	G	H
0	A0	B0	C0	D0	B4	C4	D4
1	A1	B1	C1	D1	B5	C5	D5

11.14.4 Full Join

:: Python Code:

```
leftp.merge(rightp,on='A',how='full')
#
lefts.join(rights,on='A',how='full')
.orderBy('A',ascending=True).show()
```

:: Comparison:

	A	B	C	D	F	G	H
0	A0	B0	C0	D0	B4	C4	D4
1	A1	B1	C1	D1	B5	C5	D5
2	A2	B2	C2	D2	NaN	NaN	NaN
3	A3	B3	C3	D3	NaN	NaN	NaN
4	A6	NaN	NaN	NaN	B6	C6	D6
5	A7	NaN	NaN	NaN	B7	C7	D7

11.15 Concat Columns

```
my_list = [('a', 2, 3),
           ('b', 5, 6),
           ('c', 8, 9),
           ('a', 2, 3),
           ('b', 5, 6),
           ('c', 8, 9)]
col_name = ['col1', 'col2', 'col3']
#
pandas_df = pd.DataFrame(my_list, columns=col_name)
spark_df = spark.createDataFrame(my_list, schema=col_name)
```

	col1	col2	col3
0	a	2	3
1	b	5	6
2	c	8	9
3	a	2	3
4	b	5	6
5	c	8	9

:: Python Code:

```
# one (or both) of the columns are not string typed, convert it (them)
→first to string,
    pandas_df['concat'] = pandas_df['col1'] + pandas_df['col2'].
→astype(str)
    # alternatively
    pandas_df['concat'] = pandas_df.apply(lambda x: '%s%s'%(x['col1'], x[
→'col2']), axis=1)

# don't use pandas_df['concat'] = pandas_df[['col1', 'col2']].
→apply(lambda x: ''.join(x), axis=1)
# note it will error out as expecting both fields are strings
#
    pandas_df
    #
    spark_df.withColumn('concat', F.concat('col1', 'col2')).show()
```

:: Comparison:

	col1	col2	col3	concat
0	a	2	3	a2
1	b	5	6	b5

(continues on next page)

(continued from previous page)

2	c	8	9	c8		c	8	9	c8
3	a	2	3	a2		a	2	3	a2
4	b	5	6	b5		b	5	6	b5
5	c	8	9	c8		c	8	9	c8
					+-----+-----+-----+-----+				

11.16 GroupBy

:: Python Code:

```
pandas_df.groupby(['col1']).agg({'col2':'min','col3':'mean'})
#
spark_df.groupBy(['col1']).agg({'col2': 'min', 'col3': 'avg'}).show()
```

:: Comparison:

	col2	col3		+-----+-----+-----+
			col1 min(col2) avg(col3)	
col1				+-----+-----+-----+
a	2	3	c	8 9.0
b	5	6	b	5 6.0
c	8	9	a	2 3.0
			+-----+-----+-----+	

11.17 Pivot

:: Python Code:

```
pd.pivot_table(pandas_df, values='col3', index='col1', columns='col2',
→aggfunc=np.sum)
#
spark_df.groupBy(['col1']).pivot('col2').sum('col3').show()
```

:: Comparison:

col2	2	5	8		+-----+-----+-----+
				col1	2 5 8
col1					+-----+-----+-----+
a	6.0	NaN	NaN	c	null null 18
b	NaN	12.0	NaN	b	null 12 null
c	NaN	NaN	18.0	a	6 null null
				+-----+-----+-----+	

11.18 Unixtime to Date

```
from datetime import datetime

my_list = [['a', int("1284101485")], ['b', int("2284101485")], ['c',
    ↪int("3284101485")]]
col_name = ['A', 'ts']

pandas_df = pd.DataFrame(my_list, columns=col_name)
spark_df = spark.createDataFrame(pandas_df)
```

:: Python Code:

```
pandas_df['datetime'] = pd.to_datetime(pandas_df['ts'], unit='s').dt.
    ↪tz_localize('UTC')
pandas_df

spark.conf.set("spark.sql.session.timeZone", "UTC")
from pyspark.sql.types import DateType
spark_df.withColumn('date', F.from_unixtime('ts')).show() #.
    ↪cast(DateType())
```

:: Comparison:

	date	ts	datetime
0	a	1284101485	2010-09-10 06:51:25+00:00
1	b	2284101485	2042-05-19 08:38:05+00:00
2	c	3284101485	2074-01-25 10:24:45+00:00

KAGGLE COMPETITIONS

Chinese proverb

practice makes perfect.

12.1 TODO..

PACKAGE WRAPPER

It's super easy to wrap your own package in Python. I packed some functions which I frequently used in my daily work. You can download and install it from [My ststspy library](#). The hierarchical structure and the directory structure of this package are as follows.

13.1 Hierarchical Structure

```
├── README.md
├── __init__.py
├── requirements.txt
├── setup.py
├── statspy
│   ├── __init__.py
│   ├── basics.py
│   └── tests.py
├── test
│   ├── nb
│   │   └── t.test.ipynb
│   └── test1.py
```

3 directories, 9 files

From the above hierarchical structure, you will find that you have to have `__init__.py` in each directory. I will explain the `__init__.py` file with the example below:

13.2 Set Up

```
from setuptools import setup, find_packages

try:
    with open("README.md") as f:
        long_description = f.read()
except IOError:
    long_description = ""

try:
    with open("requirements.txt") as f:
        requirements = [x.strip() for x in f.read().splitlines() if x.
→strip()]
except IOError:
    requirements = []

setup(name='statspy',
      install_requires=requirements,
      version='1.0',
      description='Statistics python library',
      author='Wenqiang Feng',
      author_email='von198@gmail.com',
      license="MIT",
      url='git@github.com:runawayhorse001/statspy.git',
      packages=find_packages(),
      long_description=long_description,
      long_description_content_type="text/markdown",
      classifiers=[
          "License :: OSI Approved :: MIT License",
          "Programming Language :: Python",
          "Programming Language :: Python :: 2",
          "Programming Language :: Python :: 3",
      ],
      include_package_data=True
    )
```

13.3 Requirements

```
pandas
numpy
scipy
patsy
matplotlib
```

13.4 ReadMe

```
# StatsPy

This is my statistics python library repositories.
The ``API`` can be found at: https://runawayhorse001.github.io/statspy.
If you want to colne and install it, you can use

- clone

```{bash}
git clone git@github.com:runawayhorse001/statspy.git
```

- install

```{bash}
cd statspy
pip install -r requirements.txt
python setup.py install
```

- uninstall

```{bash}
pip uninstall statspy
```

- test

```{bash}
cd statspy/test
python test1.py
```
```


PUBLISH PACKAGE TO PYPI

In this chapter, you'll learn how to upload your own package to PyPI.

14.1 Register PyPI account

If you do not have a PyPI account, you need to register an account at <https://pypi.org/account/register>.

14.2 Install twine

```
pip install twine
```

14.3 Build Your Package

```
python setup.py sdist bdist_wheel
```

Then you will get a new folder dist:

```
.
├── PyAudit-1.0-py3-none-any.whl
├── PyAudit-1.0-py3.6.egg
└── PyAudit-1.0.tar.gz
```

14.4 Upload Your Package

```
twine upload dist/*
```

During the uploading processing, you need to provide your PyPI account username and password:

```
Enter your username: runawayhorse001
Enter your password:
```

14.5 Package at PyPI

Here is my PyAudit package at [PyPI](<https://pypi.org/project/PyAudit>). You can install PyAudit using:

```
pip install PyAudit
```

MODEL DEPLOYMENT WITH FLASK

In this chapter, you'll learn how to deployment your model with `flask`. The main idea and code (I made some essential modification to make it work for Python 3) are from the Git repo:https://github.com/IlSourceCell/how_to_deploy_a_keras_model_to_production. So the copy-right belongs to the original author.

15.1 Install flask

```
pip install Flask
```

15.2 Train and Save your model

You can use the following code to train and save your CNN model:

```
#python 2/3 compatibility
from __future__ import print_function
#simplified interface for building models
import keras
#our handwritten character labeled dataset
from keras.datasets import mnist
#because our models are simple
from keras.models import Sequential
#dense means fully connected layers, dropout is a technique to improve_
→convergence, flatten to reshape our matrices for feeding
#into respective layers
from keras.layers import Dense, Dropout, Flatten
#for convolution (images) and pooling is a technique to help choose_
→the most relevant features in an image
from keras.layers import Conv2D, MaxPooling2D
from keras import backend as K
```

(continues on next page)

(continued from previous page)

```
#mini batch gradient descent ftw
batch_size = 128
#10 difference characters
num_classes = 10
#very short training time
epochs = 12

#input image dimensions
#28x28 pixel images.
img_rows, img_cols = 28, 28

#the data downloaded, shuffled and split between train and test sets
#if only all datasets were this easy to import and format
(x_train, y_train), (x_test, y_test) = mnist.load_data()

#this assumes our data format
#For 3D data, "channels_last" assumes (conv_dim1, conv_dim2, conv_dim3,
→ channels) while
#"channels_first" assumes (channels, conv_dim1, conv_dim2, conv_dim3).
if K.image_data_format() == 'channels_first':
    x_train = x_train.reshape(x_train.shape[0], 1, img_rows, img_cols)
    x_test = x_test.reshape(x_test.shape[0], 1, img_rows, img_cols)
    input_shape = (1, img_rows, img_cols)
else:
    x_train = x_train.reshape(x_train.shape[0], img_rows, img_cols, 1)
    x_test = x_test.reshape(x_test.shape[0], img_rows, img_cols, 1)
    input_shape = (img_rows, img_cols, 1)

#more reshaping
x_train = x_train.astype('float32')
x_test = x_test.astype('float32')
x_train /= 255
x_test /= 255
print('x_train shape:', x_train.shape)
print(x_train.shape[0], 'train samples')
print(x_test.shape[0], 'test samples')

#convert class vectors to binary class matrices
y_train = keras.utils.to_categorical(y_train, num_classes)
y_test = keras.utils.to_categorical(y_test, num_classes)

#build our model
model = Sequential()
```

(continues on next page)

(continued from previous page)

```

#convolutional layer with rectified linear unit activation
model.add(Conv2D(32, kernel_size=(3, 3),
                 activation='relu',
                 input_shape=input_shape))

#again
model.add(Conv2D(64, (3, 3), activation='relu'))
#choose the best features via pooling
model.add(MaxPooling2D(pool_size=(2, 2)))
#randomly turn neurons on and off to improve convergence
model.add(Dropout(0.25))
#flatten since too many dimensions, we only want a classification_
→output
model.add(Flatten())
#fully connected to get all relevant data
model.add(Dense(128, activation='relu'))
#one more dropout for convergence' sake :)
model.add(Dropout(0.5))
#output a softmax to squash the matrix into output probabilities
model.add(Dense(num_classes, activation='softmax'))
#Adaptive learning rate (adaDelta) is a popular form of gradient_
→descent rivaled only by adam and adagrad
#categorical ce since we have multiple classes (10)
model.compile(loss=keras.losses.categorical_crossentropy,
              optimizer=keras.optimizers.Adadelta(),
              metrics=['accuracy'])

#train
model.fit(x_train, y_train,
        batch_size=batch_size,
        epochs=epochs,
        verbose=1,
        validation_data=(x_test, y_test))

#how well did it do?
score = model.evaluate(x_test, y_test, verbose=0)
print('Test loss:', score[0])
print('Test accuracy:', score[1])

#Save the model
# serialize model to JSON
model_json = model.to_json()
with open("model.json", "w") as json_file:
    json_file.write(model_json)
# serialize weights to HDF5
model.save_weights("model.h5")
print("Saved model to disk")

```

15.3 Deployment with Flask

```

#our web app framework!

#you could also generate a skeleton from scratch via
#http://flask-appbuilder.readthedocs.io/en/latest/installation.html

#Generating HTML from within Python is not fun, and actually pretty
→cumbersome because you have to do the
#HTML escaping on your own to keep the application secure. Because of
→that Flask configures the Jinja2 template engine
#for you automatically.
#requests are objects that flask handles (get set post, etc)
from flask import Flask, render_template,request
#scientific computing library for saving, reading, and resizing images
#from scipy.misc import imsave, imread, imresize
# import cv2 library for saving, reading, and resizing images
import cv2
#for matrix math
import numpy as np
#for importing our keras model
import keras.models
#for regular expressions, saves time dealing with string data
import re
# for convert base64 string to image
import base64

#system level operations (like loading files)
import sys
#for reading operating system data
import os
#tell our app where our saved model is
sys.path.append(os.path.abspath("./model"))
from load import *
#inititalize our flask app
app = Flask(__name__)
#global vars for easy reusability
global model, graph
#initialize these variables
model, graph = init()

#decoding an image from base64 into raw representation
def convertImage(imgData1):
    imgData1 = imgData1.decode("utf-8")
    imgstr = re.search(r'base64, (.*)',imgData1).group(1)
    #print(imgstr)

```

(continues on next page)

(continued from previous page)

```

imgstr_64 = base64.b64decode(imgstr)
with open('output/output.png','wb') as output:
    output.write(imgstr_64)

@app.route('/')
def index():
    #initModel()
    #render out pre-built HTML file right on the index page
    return render_template("index.html")

@app.route('/predict/',methods=['GET','POST'])
def predict():
    #whenever the predict method is called, we're going
    #to input the user drawn character as an image into the model
    #perform inference, and return the classification
    #get the raw data format of the image
    imgData = request.get_data()
    #print(imgData)
    #encode it into a suitable format
    convertImage(imgData)
    print("debug")
    #read the image into memory
    x = cv2.imread('output/output.png',0)
    #compute a bit-wise inversion so black becomes white and vice_
    →versa
    x = np.invert(x)
    #make it the right size
    x = cv2.resize(x,(28,28))
    #imshow(x)
    #convert to a 4D tensor to feed into our model
    x = x.reshape(1,28,28,1)
    print("debug2")
    #in our computation graph
    with graph.as_default():
        #perform the prediction
        out = model.predict(x)
        #print(out)
        print(np.argmax(out,axis=1))
        print("debug3")
        #convert the response to a string
        response = np.array_str(np.argmax(out,axis=1))
        return response

```

(continues on next page)

(continued from previous page)

```
if __name__ == "__main__":
    #decide what port to run the app in
    port = int(os.environ.get('PORT', 5000))
    #run the app locally on the givn port
    app.run(host='0.0.0.0', port=port)
    #optional if we want to run in debugging mode
    #app.run(debug=False)
```


15.4 Lunch your app on server

15.4.1 1. Lunch the APP

```
python app.py
```

15.4.2 2. Run the APP

Open the browser with: <http://0.0.0.0:5000>

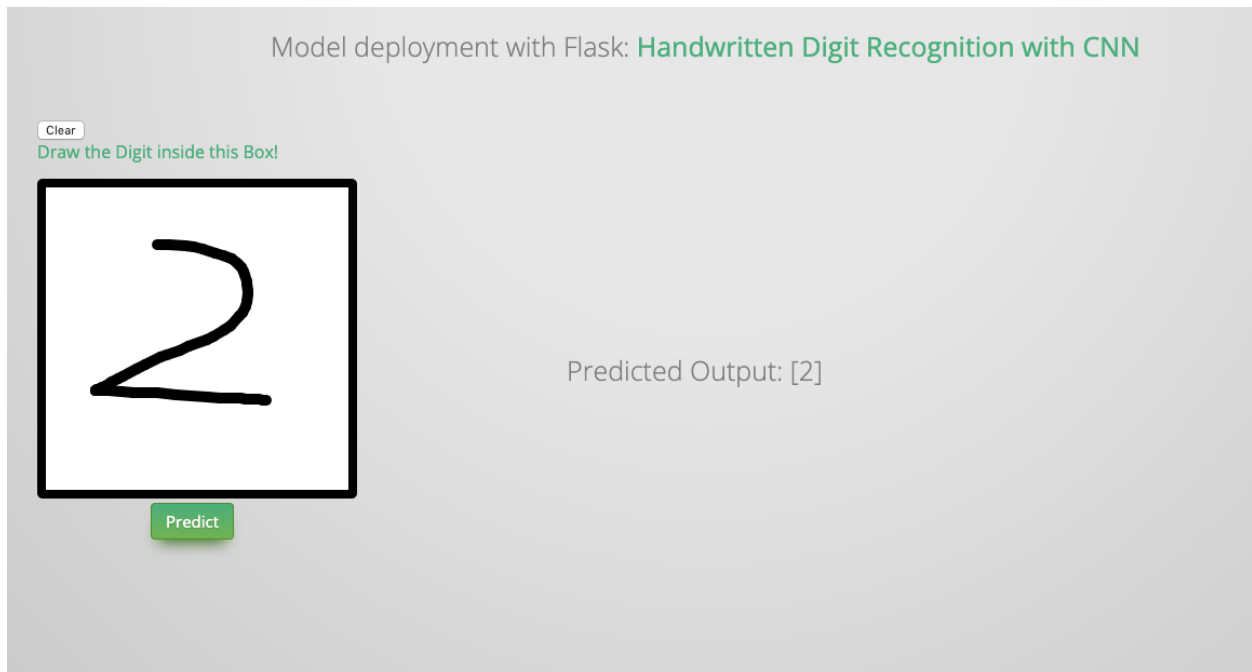

API BOOK

If you developed an amazing library or tool, you need to teach the users how to use it. Now a API book is necessary and a good API book will save a lot of time for the users. The Sphinx provides an awesome auto API book generator. The followings are my statistics python library: `statspy` API demo book:

16.1 Basics Module

16.1.1 `rnorm`

`statspy.basics.rnorm(n, mean=0, sd=1)`

Random generation for the normal distribution with mean equal to mean and standard deviation equal to sd same functions as `rnorm` in R: `rnorm(n, mean=0, sd=1)`

Parameters

- **n** – the number of the observations
- **mean** – vector of means
- **sd** – vector of standard deviations

Returns the vector of the random numbers

Author Wenqiang Feng

Email von198@gmail.com

16.1.2 `dnorm`

`statspy.basics.dnorm(x, mean=0, sd=1, log=False)`

Density of the normal distribution with mean equal to mean and standard deviation equal to sd same functions as `rnorm` in R: `dnorm(x, mean=0, sd=1, log=FALSE)`

Parameters

- **x** – the vector of quantiles
- **mean** – vector of means
- **sd** – vector of standard deviations

Returns the list of the density

Author Wenqiang Feng

Email von198@gmail.com

16.1.3 `runif`

`statspy.basics.runif(n, min=0, max=1)`

Random generation from the uniform distribution same functions as `rnorm` in R: `runif(n, min=0, max=1)`

Parameters

- **n** – the number of the observations
- **min** – the lower limit of the distribution
- **max** – the upper limit of the distribution

Returns the list of n uniform random numbers

Author Wenqiang Feng

Email von198@gmail.com

16.2 Tests Module

16.2.1 T-test

`statspy.tests.t_test(x, y=None, mu=0.0, conf_level=0.95)`

Performs one and two sample t-tests on vectors of data.

same functions as `t.test` in R: `t.test(x, ...)`

`t.test(x, y = NULL,`

```
alternative = c("two.sided", "less", "greater"),  
mu = 0, paired = FALSE, var.equal = FALSE,  
conf.level = 0.95, ...)
```

Parameters

- **x** – a (non-empty) numeric vector of data values.
- **y** – an optional (non-empty) numeric vector of data values.
- **mu** – vector of standard deviations.
- **conf_level** – confidence level of the interval.

Returns the vector of the random numbers.

Author Wenqiang Feng

Email von198@gmail.com

CHAPTER
SEVENTEEN

MAIN REFERENCE

BIBLIOGRAPHY

- [VanderPlas2016] Jake VanderPlas. [Python Data Science Handbook: Essential Tools for Working with Data](#), 2016.
- [McKinney2013] Wes McKinney. [Python for Data Analysis](#), 2013.
- [Georg2018] Georg Brandl. [Sphinx Documentation](#), Release 1.7.10+, 2018.

PYTHON MODULE INDEX

S

`statspy.basics`, [87](#)

`statspy.tests`, [88](#)

M

module

statspy.basics, [87](#)

statspy.tests, [88](#)

R

`rnorm()` (*in module statspy.basics*), [87](#)

S

statspy.basics

module, [87](#)

statspy.tests

module, [88](#)

T

`t_test()` (*in module statspy.tests*), [88](#)