

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)[Go](#)

FEB APR JUN

◀ 25 ▶

2017 2018 2019



▼ About this capture

[99 captures](#)

24 Nov 2009 - 21 Sep 2020

# OpenSCAD User Manual/The OpenSCAD Language

---

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



▼ About this capture

99 captures

24 Nov 2009 - 21 Sep 2020

# Chapter 1 - General

## OpenSCAD User Manual/The OpenSCAD Language

### Introduction

OpenSCAD is a 2D/3D and solid modeling program which is based on a Functional programming language used to create models that are previewed on the screen, and rendered into 3D mesh which allows the model to be exported in a variety of 2D/3D file formats.

A script in the OpenSCAD language is used to create 2D or 3D models. This script is a free format list of action statements.

```
object();
variable = value;
operator()  action();
operator() { action();    action(); }
operator()  operator() { action(); action(); }
operator() { operator()  action();
            operator() { action(); action(); } }
```

### Objects

Objects are the building blocks for models, created by 2D and 3D primitives. Objects end in a semicolon ';'.

### Actions

Action statements include creating objects using primitives and assigning values to variables. Action statements also end in a semicolon ';'.

### Operators

Operators, or transformations, modify the location, color and other properties of objects. Operators use braces '{}' when their scope covers more than one action. More than one operator may be used for the same action or group of actions. Multiple operators are processed Right to Left, that is, the operator closest to the action is processed first. Operators do not end in semicolons ';', but the individual actions they contain do.

#### Examples

```
cube(5);
x = 4+y;
rotate(40) square(5,10);
translate([10,5]) { circle(5); square(4); }
rotate(60) color("red") { circle(5); square(4); }
color("blue") { translate([5,3,0]) sphere(5); rotate([45,0,45]) { cylinder(10); cube([5,6,7]); } }
```

### Comments

Comments are a way of leaving notes within the script, or code, (either to yourself or to future programmers) describing how the code works, or what it does. Comments are not evaluated by the compiler, and should not be used to describe self-evident code.

OpenSCAD uses C++-style comments:

```
// This is a comment
myvar = 10; // The rest of the line is a comment
```

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

25

2017 2018 2019



99 captures

24 Nov 2009 - 21 Sep 2020

About this capture

## Values and Data Types

A value in OpenSCAD is either a Number (like 42), a Boolean (like true), a String (like "foo"), a Range (like [0: 1: 10]), a Vector (like [1,2,3]), or the Undefined value (undef). Values can be stored in variables, passed as function arguments, and returned as function results.

[OpenSCAD is a dynamically typed language with a fixed set of data types. There are no type names, and no user defined types. Functions are not values. In fact, variables and functions occupy disjoint namespaces.]

### Numbers

Numbers are the most important type of value in OpenSCAD, and they are written in the familiar decimal notation used in other languages. Eg, -1, 42, 0.5, 2.99792458e+8. [OpenSCAD does not support octal or hexadecimal notation for numbers.]

In addition to decimal numerals, the following names for special numbers are defined:

- PI

OpenSCAD has only a single kind of number, which is a 64 bit IEEE floating point number. [OpenSCAD does not distinguish integers and floating point numbers as two different types, nor does it support complex numbers.] Because OpenSCAD uses the IEEE floating point standard, there are a few deviations from the behaviour of numbers in mathematics:

- We use binary floating point. A fractional number is not represented exactly unless the denominator is a power of 2. For example, 0.2 (2/10) does not have an exact internal representation, but 0.25 (1/4) and 0.125 (1/8) are represented exactly.
- The largest representable number is about 1e308. If a numeric result is too large, then the result can be infinity (printed as inf by echo).
- The smallest representable number is about -1e308. If a numeric result is too small, then the result can be -infinity (printed as -inf by echo).
- If a numeric result is invalid, then the result can be Not A Number (printed as nan by echo).
- If a non-zero numeric result is too close to zero to be representable, then the result will be -0 if the result is negative, otherwise it will be 0. Zero (0) and negative zero (-0) are treated as two distinct numbers by some of the math operations, and are printed differently by 'echo', although they compare equal.

Note that 'inf' and 'nan' are not supported as numeric constants by OpenSCAD, even though you can compute numbers that are printed this way by 'echo'. You can define variables with these values by using:

```
inf = 1e200 * 1e200;
nan = 0 / 0;
echo(inf,nan);
```

Note that 'nan' is the only OpenSCAD value that is not equal to any other value, including itself. Although you can test if a variable 'x' has the undefined value using 'x == undef', you can't use 'x == 0/0' to test if x is Not A Number. Instead, you must use 'x != x' to test if x is nan.

### Boolean Values

Booleans are truth values. There are two Boolean values, namely **true** and **false**. A Boolean is passed as the argument to conditional statement 'if()'. conditional operator '? :', and logical operators '!' (not), '&&' (and), and '||' (or). In all of these contexts, you can actually pass any quantity. Most values are converted to 'true' in a Boolean context, the values that count as 'false' are:

- false
- 0 and -0
- ""

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



▼ About this capture

## 99 captures

24 Nov 2009 - 21 Sep 2020

the Boolean value false) and o/o (Not A Number) all count as true.

## Strings

A string is a sequence of zero or more unicode characters. String values are used to specify file names when importing a file, and to display text for debugging purposes when using echo(). Strings can also be used with the new text() primitive added in **2015.03**.

A string literal is written as a sequence of characters enclosed in quotation marks "", like this: "" (an empty string), or "this is a string".

To include a " character in a string literal, use \". To include a \ character in a string literal, use \\|. The following escape sequences beginning with \ can be used within string literals:

- \" → "
- \\ → \
- \t → tab
- \n → newline
- \r → carriage return
- \u03a9 → Ω - see **text()** for further information on unicode characters

Note: This behavior is new since OpenSCAD-2011.04. You can upgrade old files using the following sed command: sed 's/\\/\\"/g' non-escaped.scad > escaped.scad

### Example:

```
echo("The quick brown fox \tjumps \"over\" the lazy dog.\rThe quick brown fox.\nThe \\lazy\\ dog.");
```

**result**  
ECHO: "The quick brown fox jumps "over" the lazy dog.  
The quick brown fox.  
The \lazy\ dog."

**old result**  
ECHO: "The quick brown fox \tjumps \"over\" the lazy dog.  
The quick brown fox.\nThe \\lazy\\ dog."

## Ranges

Ranges are used by for() loops and children(). They have 2 varieties:

[*start*:*end*]  
[*start*:*increment*:*end*]

Although enclosed in square brackets [] , they are not vectors. They use colons : for separators rather than commas.

```
r1 = [0:10];  
r2 = [0.5:2.5:20];  
echo(r1); // ECHO: [0: 1: 10]  
echo(r2); // ECHO: [0.5: 2.5: 20]
```

You should avoid step values that cannot be represented exactly as binary floating point numbers. Integers are okay, as are fractional values whose denominator is a power of two. For example, 0.25 (1/4) and 0.125 (1/8) are safe, but 0.2 (2/10) should be avoided. The problem with these step values is that your range may have too many or too few elements, due to inexact arithmetic.

A missing *increment* defaults to 1. A range in the form [*start*:*end*] with *start* greater than *end* will generate a warning and is equivalent to [*end*: 1: *start*]. A range in the form [*start*:1:*end*] with *start* greater than *end* will not generate a warning and is equivalent to []. The *increment* in a range may be negative (for versions after 2014).

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go FEB APR JUN

99 captures

24 Nov 2009 - 21 Sep 2020

◀ 25 ▶

2017 2018 2019



▼ About this capture

equivalent to `null` or `NULL` in other programming languages.

All arithmetic expressions containing `undef` values evaluate as `undef`. In logical expressions, `undef` is equivalent to `false`. Relational operator expressions with `undef` evaluate as `false` except for `undef==undef` which is `true`.

Note that numeric operations may also return 'nan' (not-a-number) to indicate an illegal argument. For example, `0/false` is `undef`, but `0/0` is 'nan'. Relational operators like `<` and `>` return `false` if passed illegal arguments. Although `undef` is a language value, 'nan' is not.

## Variables

OpenSCAD variables are created by a statement with a name or identifier, assignment via an expression and a semicolon. The role of arrays, found in many imperative languages, is handled in OpenSCAD via vectors.

```
var = 25;
xx = 1.25 * cos(50);
y = 2*xx+var;
logic = true;
MyString = "This is a string";
a_vector = [1,2,3];
rr = a_vector[2];      // member of vector
range1 = [-1.5:0.5:3]; // for() loop range
xx = [0:5];           // alternate for() loop range
```

OpenSCAD is a Functional programming language, as such variables are bound to expressions and keep a single value during their entire lifetime due to the requirements of referential transparency. In imperative languages, such as C, the same behavior is seen as constants, which are typically contrasted with normal variables.

In other words OpenSCAD variables are more like constants, but with an important difference. If variables are assigned a value multiple times, only the last assigned value is used in all places in the code. See further discussion at Variables are set at compile-time, not run-time. This behavior is due to the need to supply variable input on the command line, via the use of `-D variable=value` option. OpenSCAD currently places that assignment at the end of the source code, and thus must allow a variables value to be changed for this purpose.

The variable retains its last assigned value at compile time, in line with Functional programming languages. Unlike Imperative languages, such as C, OpenSCAD is not an iterative language, as such the concept of `x = x + 1` is not valid, get to understand this concept and you will understand the beauty of OpenSCAD.

### Before version 2015.03

It was not possible to do assignments at any place except the file top-level and module top-level. Inside an `if/else` or `for` loop, `assign()` was needed.

### Since version 2015.03

Variables can now be assigned in any scope. Note that assignments are only valid within the scope in which they are defined - you are still not allowed to leak values to an outer scope. See Scope of variables for more details.

```
a=0;
if (a==0)
{
  a=1; // before 2015.03 this line would generate a Compile Error
        // since 2015.03 no longer an error, but the value a=1 is confined to within the braces {}
}
```

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go FEB APR JUN

## 99 captures

24 Nov 2009 - 21 Sep 2020

◀ 25 ▶

2017 2018 2019



▼ About this capture

### Example

```
echo("Variable a is ", a);           // Variable a is undef
if (a==undef) {
    echo("Variable a is tested undefined"); // Variable a is tested undefined
}
```

### Scope of variables

When operators such as translate() and color() need to encompass more than one action ( actions end in ;), braces {} are needed to group the actions, creating a new, inner scope. When there is only one semicolon, braces are usually optional.

Each pair of braces creates a new scope inside the scope where they were used. **Since 2015.03**, new variables can be created within this new scope. New values can be given to variables which were created in an outer scope . These variables and their values are also available to further inner scopes created within this scope, but are **not available** to any thing outside this scope. Variables still have only the last value assigned within a scope.

```
// scope 1
a = 6;          // create a
echo(a,b);      //           6, undef
translate([5,0,0]){ // scope 1.1
    a= 10;
    b= 16;        // create b
    echo(a,b);    //           100, 16   a=10; was overridden by later a=100;
    color("blue") { // scope 1.1.1
        echo(a,b); //           100, 20
        cube();
        b=20;
    }             // back to 1,1
    echo(a,b);    //           100, 16
    a=100;        // override a in 1.1
}
echo(a,b);      //           6, undef
color("red"){   // scope 1.2
    cube();
    echo(a,b); //           6, undef
}
echo(a,b);      //           6, undef

//In this example, scopes 1 and 1.1 are outer scopes to 1.1.1 but 1.2 is not.
```

### Anonymous scopes are not considered scopes:

```
{
    angle = 45;
}
rotate(angle) square(10);
```

For() loops are not an exception to the rule about variables having only one value within a scope. A copy of loop contents is created for each pass. Each pass is given its own scope, allowing any variables to have unique values for that pass. No, you still can't do a=a+1;

### Variables are set at compile-time, not run-time

Because OpenSCAD calculates its variable values at compile-time, not run-time, the last variable assignment, within a scope will apply everywhere in that scope, or inner scopes thereof. It may be helpful to think of them as override-able constants rather than as variables.

```
// The value of 'a' reflects only the last set value
a = 0;
echo(a); // 5
a = 3;
```

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go FEB APR JUN

[99 captures](#)

24 Nov 2009 - 21 Sep 2020

◀ 25 ▶

2017 2018 2019



▼ About this capture

files to have default values defined as variables at their root level, when you include that file in your own code, you can 're-define' or override those constants by simply assigning a new value to them.

## Special Variables

Special variables provide an alternate means of passing arguments to modules and functions. All variables starting with a '\$' are special variables, similar to special variables in lisp. As such they are more dynamic than regular variables. (for more details see [Other Language Features](#))

## Vectors

A vector is a sequence of zero or more OpenSCAD values. Vectors are a collection (or list or table) of numeric or boolean values, variables, vectors, strings or any combination thereof. They can also be expressions which evaluate to one of these. Vectors handle the role of arrays found in many imperative languages. The information here also applies to lists and tables which use vectors for their data.

A vector has square brackets, [] enclosing zero or more items (elements or members), separated by commas. A vector can contain vectors, which contain vectors, etc.

### examples

```
[1,2,3]
[a,5,b]
[]
[5.643]
["a","b","string"]
[[1,r],[x,y,z,4,5]]
[3, 5, [6,7], [[8,9],[10,[11,12],13], c, "string"]]
[4/3, 6*1.5, cos(60)]
```

use in OpenSCAD:

```
cube( [width,depth,height] );           // optional spaces shown for clarity
translate( [x,y,z] )
polygon( [ [x0,y0], [x1,y1], [x2,y2] ] );
```

### creation

Vectors are created by writing the list of elements, separated by commas, and enclosed in square brackets. Variables are replaced by their values.

```
cube([10,15,20]);
a1 = [1,2,3];
a2 = [4,5];
a3 = [6,7,8,9];
b = [a1,a2,a3];    // [ [1,2,3], [4,5], [6,7,8,9] ] note increased nesting depth
```

### elements within vectors

Elements within vectors are numbered from 0 to n-1 where n is the length returned by `len()`. Address elements within vectors with the following notation:

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



## 99 captures

24 Nov 2009 - 21 Sep 2020

▼ About this capture

## example elements with lengths from len()

```
e = [ [1], [], [3,4,5], "string", "x", [[10,11],[12,13,14],[[15,16],[17]]] ]; // length 6

address      length   element
e[0]          1         [1]
e[1]          0         []
e[5]          3         [ [10,11], [12,13,14], [[15,16],[17]] ]
e[5][1]        3         [ 12, 13, 14 ]
e[5][2]        2         [ [15,16], [17] ]
e[5][2][0]     2         [ 15, 16 ]
e[5][2][0][1] undef     16

e[3]          6         "string"
e[3 ][2]      1         "r"

s = [2,0,5]; a = 2;
s[a]          undef     5
e[s[a]]       3         [ [10,11], [12,13,14], [[15,16],[17]] ]
```

## alternate dot notation

The first three elements of a vector can be accessed with an alternate dot notation:

```
e.x    //equivalent to e[0]
e.y    //equivalent to e[1]
e.z    //equivalent to e[2]
```

## vector operators

### concat

**[Note: Requires version 2015.03 or later]**

concat() combines the elements of 2 or more vectors into a single vector. No change in nesting level is made.

```
vector1 = [1,2,3]; vector2 = [4]; vector3 = [5,6];
new_vector = concat(vector1, vector2, vector3); // [1,2,3,4,5,6]

string_vector = concat("abc","def");           // ["abc", "def"]
one_string = str(string_vector[0],string_vector[1]); // "abcdef"
```

### len

len() is a function which returns the length of vectors or strings. Indices of elements are from [0] to [length-1].

## vector

Returns the number of elements at this level.  
Single values, which are **not** vectors, return **undef**.

## string

Returns the number of characters in string.

```
a = [1,2,3]; echo(len(a)); // 3
```

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go FEB APR JUN

[99 captures](#)

24 Nov 2009 - 21 Sep 2020

◀ 25 ▶

2017 2018 2019



▼ About this capture

A matrix is a vector of vectors.

```
Example which defines a 2D rotation matrix
mr = [
  [cos(angle), -sin(angle)],
  [sin(angle), cos(angle)]
];
```

## Getting input

Now we have variables, it would be nice to be able to get input into them instead of setting the values from code. There are a few functions to read data from DXF files, or you can set a variable with the -D switch on the command line.

### Getting a point from a drawing

Getting a point is useful for reading an origin point in a 2D view in a technical drawing. The function `dxf_cross` will read the intersection of two lines on a layer you specify and return the intersection point. This means that the point must be given with two lines in the DXF file, and not a point entity.

```
OriginPoint = dxf_cross(file="drawing.dxf", layer="SCAD.Origin",
                        origin=[0, 0], scale=1);
```

### Getting a dimension value

You can read dimensions from a technical drawing. This can be useful to read a rotation angle, an extrusion height, or spacing between parts. In the drawing, create a dimension that does not show the dimension value, but an identifier. To read the value, you specify this identifier from your program:

```
TotalWidth = dxf_dim(file="drawing.dxf", name="TotalWidth",
                      layer="SCAD.Origin", origin=[0, 0], scale=1);
```

For a nice example of both functions, see Example009 and the image on the [homepage of OpenSCAD](https://web.archive.org/web/20180425001407/http://www.openscad.org/) (<https://web.archive.org/web/20180425001407/http://www.openscad.org/>).

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go FEB APR JUN

[99 captures](#)

24 Nov 2009 - 21 Sep 2020

◀ 25 ▶

2017 2018 2019



▼ About this capture

## OpenSCAD User Manual/The OpenSCAD Language

# Primitive Solids

---

## cube

Creates a cube in the first octant. When center is true, the cube is centered on the origin. Argument names are optional if given in the order shown here.

```
cube(size = [x,y,z], center = true/false);
cube(size = x , center = true/false);
```

### parameters:

#### size


single value, cube with all sides this length  
3 value array [x,y,z], cube with dimensions x, y and z.

#### center

**false** (default), 1st (positive) octant, one corner at (0,0,0)  
**true**, cube is centered at (0,0,0)

```
default values: cube(); yields: cube(size = [1, 1, 1], center = false);
```

### examples:

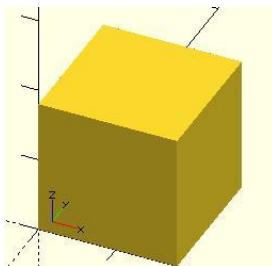

equivalent scripts for this example

```
cube(size = 18);
cube(18);
cube([18,18,18]);
.
cube(18,false);
cube([18,18,18],false);
cube([18,18,18],center=false);
cube(size = [18,18,18], center = false);
cube(center = false,size = [18,18,18] );
```

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



▼ About this capture

## 99 captures

24 Nov 2009 - 21 Sep 2020



equivalent scripts for this example

```
cube([18,28,8],true);
box=[18,28,8];cube(box,true);
```

## sphere

Creates a sphere at the origin of the coordinate system. The r argument name is optional. To use d instead of r, d must be named.

### Parameters

r

Radius. This is the radius of the sphere. The resolution of the sphere will be based on the size of the sphere and the \$fa, \$fs and \$fn variables. For more information on these special variables look at: [OpenSCAD\\_User\\_Manual/Other\\_Language\\_Features](#)

d

Diameter. This is the diameter of the sphere.

(NOTE: d is only available in versions later than 2014.03. Debian is currently known to be behind this)

\$fa

Fragment angle in degrees

\$fs

Fragment size in mm

\$fn

Resolution

default values: sphere(); yields: sphere(\$fn = 0, \$fa = 12, \$fs = 2, r = 1);

### } Usage Examples

```
sphere(r = 1);
sphere(r = 5);
sphere(r = 10);
sphere(d = 2);
sphere(d = 10);
sphere(d = 20);
```

```
// this will create a high resolution sphere with a 2mm radius
sphere(2, $fn=100);
```

```
// will also create a 2mm high resolution sphere but this one
// does not have as many small triangles on the poles of the sphere
sphere(2, $fa=5, $fs=0.1);
```

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go FEB APR JUN

[99 captures](#)


24 Nov 2009 - 21 Sep 2020

◀ 25 ▶

2017 2018 2019



▼ About this capture

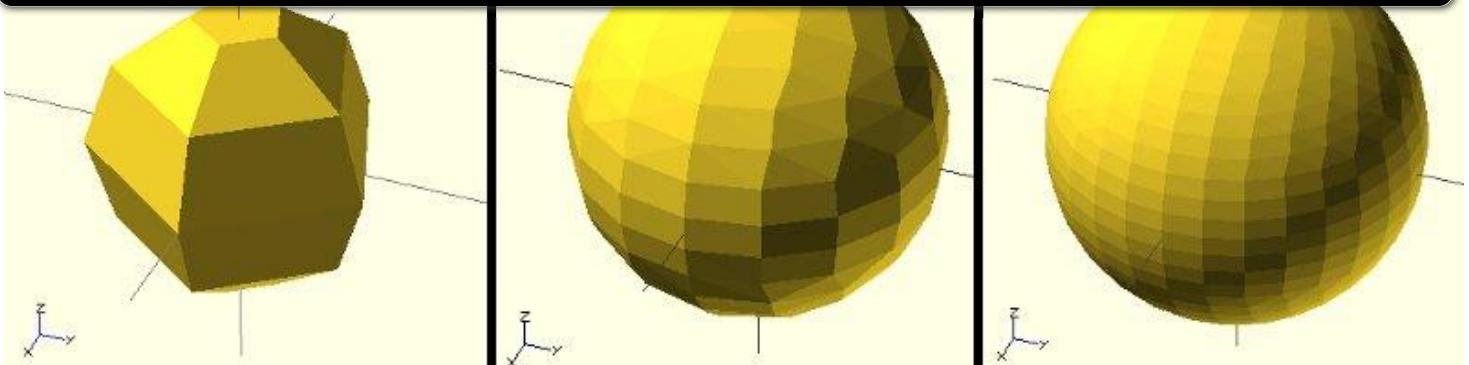

## cylinder

Creates a cylinder or cone centered about the z axis. When center is true, it is also centered vertically along the z axis.

Parameter names are optional if given in the order shown here. If a parameter is named, all following parameters must also be named.

NOTE: If r, d, d1 or d2 are used they must be named.

```
cylinder(h = height, r1 = BottomRadius, r2 = TopRadius, center = true/false);
```

### Parameters

- h** : height of the cylinder or cone
- r** : radius of cylinder.  $r1 = r2 = r$ .
- r1** : radius, bottom of cone.
- r2** : radius, top of cone.
- d** : diameter of cylinder.  $r1 = r2 = d / 2$ .
- d1** : diameter, bottom of cone.  $r1 = d1 / 2$
- d2** : diameter, top of cone.  $r2 = d2 / 2$

(NOTE: d,d1,d2 require 2014.03 or later. Debian is currently known to be behind this)

### center

- false** (default), z ranges from 0 to h
- true**, z ranges from  $-h/2$  to  $+h/2$

**\$fa** : minimum angle (in degrees) of each fragment.

**\$fs** : minimum circumferential length of each fragment.

**\$fn** : **fixed** number of fragments in 360 degrees. Values of 3 or more override \$fa and \$fs

\$fa, \$fs and \$fn must be named. [click here for more details.](#)

```
defaults: cylinder(); yields: cylinder($fn = 0, $fa = 12, $fs = 2, h = 1, r1 = 1, r2 = 1, center = false);
```

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go FEB APR JUN

[99 captures](#)


24 Nov 2009 - 21 Sep 2020

◀ 25 ▶


2017 2018 2019




▼ About this capture

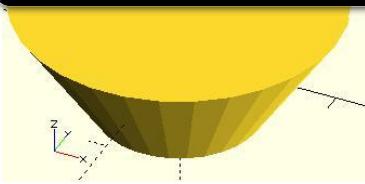


```
equivalent scripts
cylinder(h=15, r1=9.5, r2=19.5, center=false);
cylinder( 15, 9.5, 19.5, false);
cylinder( 15, 9.5, 19.5);
cylinder( 15, 9.5, d2=39 );
cylinder( 15, d1=19, d2=39 );
cylinder( 15, d1=19, r2=19.5);
```

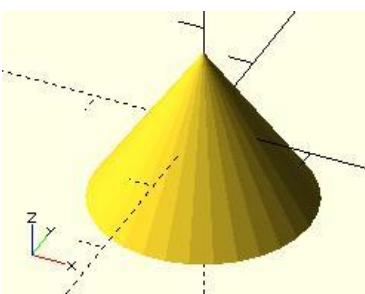

```
equivalent scripts
cylinder(h=15, r1=10, r2=0, center=true);
cylinder( 15, 10, 0, true);
cylinder(h=15, d1=20, d2=0, center=true);
```

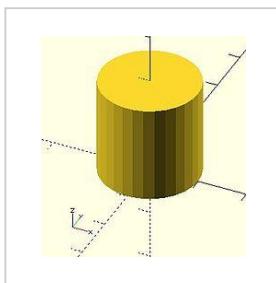

center = false

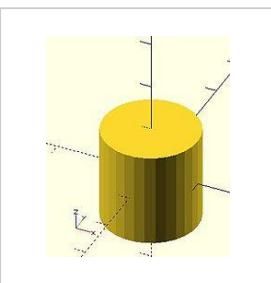

center = true

```
equivalent scripts
cylinder(h=20, r=10, center=true);
cylinder( 20, 10, 10,true);
cylinder( 20, d=20, center=true);
cylinder( 20,r1=10, d2=20, center=true);
cylinder( 20,r1=10, d2=2*10, center=true);
```

### use of \$fn

Larger values of \$fn create smoother, more circular, surfaces at the cost of longer rendering time. Some use medium values during development for the faster rendering, then change to a larger value for the final F6 rendering.

However, use of small values can produce some interesting non circular objects. A few examples are show here:

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go FEB APR JUN

25


2017 2018 2019



## [99 captures](#)

24 Nov 2009 - 21 Sep 2020

About this capture

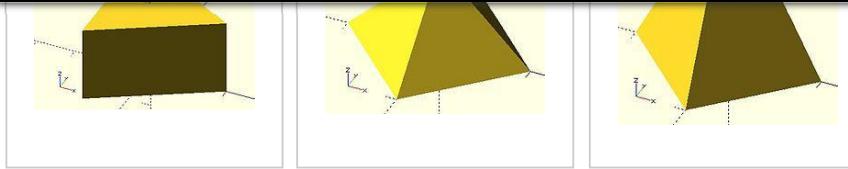


scripts for these examples

```
cylinder(20,20,20,$fn=3);
cylinder(20,20,00,$fn=4);
cylinder(20,20,10,$fn=4);
```

## undersized holes

When using `cylinder()` with `difference()` to place holes in objects, the holes will be undersized. This is because circular paths are approximated with polygons inscribed within a circle. The points of the polygon are on the circle, but straight lines between are inside. To have all of the hole larger than the true circle, the polygon must lie wholly outside of the circle (circumscribed). [Modules for circumscribed holes](#)

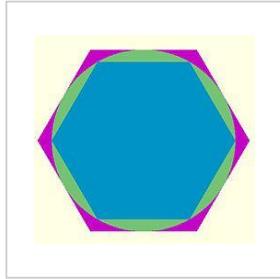

**Notes on accuracy** Circle objects are approximated. The algorithm for doing this matters when you want 3d printed holes to be the right size. Current behavior is illustrated in a diagram (<https://web.archive.org/web/20180425001407/https://camo.githubusercontent.com/533961dfaef3fd5643f3474345e4179a8a328dcf9/68747470733a2f2f662e636c6f75642e6769746875622e636f6d2f6173736574732f313937323936312f313930353837342f34323261383738322d376361352d313165332d383035612d3531303633613361306531322e4a5047>). Discussion regarding optionally changing this behavior happening in a Pull Request (<https://web.archive.org/web/20180425001407/https://github.com/openscad/openscad/pull/599>)

## polyhedron

A polyhedron is the most general 3D primitive solid. It can be used to create any regular or irregular shape including those with concave as well as convex features. Curved surfaces are approximated by a series of flat surfaces.

```
polyhedron( points = [ [X0, Y0, Z0], [X1, Y1, Z1], ... ], triangles = [ [P0, P1, P2], ... ], convexity = N); // before 2014.03
polyhedron( points = [ [X0, Y0, Z0], [X1, Y1, Z1], ... ], faces = [ [P0, P1, P2, P3, ...], ... ], convexity = N); // 2014.03 & later
```

### Parameters

#### points

Vector of 3d points or vertices. Each point is in turn a vector, [x,y,z], of its coordinates. Points may be defined in any order. N points are referenced, in the order defined, as 0 to N-1.

#### triangles (deprecated in version 2014.03, use faces)

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



[99 captures](#)

24 Nov 2009 - 21 Sep 2020

▼ About this capture

Vector of faces which collectively enclose the solid. Each face is a vector containing the indices (0 based) of 3 or more points from the points vector.

Faces may be defined in any order. Define enough faces to fully enclose the solid, with no overlap.

Points which describe a single face must all be on the same plane.


### convexity

Integer. The convexity parameter specifies the maximum number of faces a ray intersecting the object might penetrate. This parameter is only needed for correctly displaying the object in OpenCSG preview mode. It has no effect on the polyhedron rendering. For display problems, setting it to 10 should work fine for most cases.

default values: polyhedron(); yields: polyhedron(points = undef, faces = undef, convexity = 1);

All faces must have points ordered in the same direction . OpenSCAD prefers **clockwise** when looking at each face from outside **inwards**. The back is viewed from the back, the bottom from the bottom, etc..

**Example 1** Using polyhedron to generate cube( [ 10, 7, 5 ] );

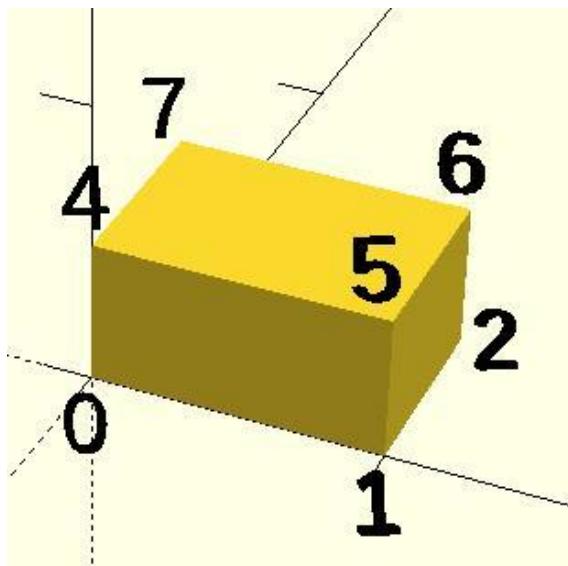

point numbers for cube

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN


◀ 25 ▶

2017 2018 2019



▼ About this capture

24 Nov 2009 - 21 Sep 2020

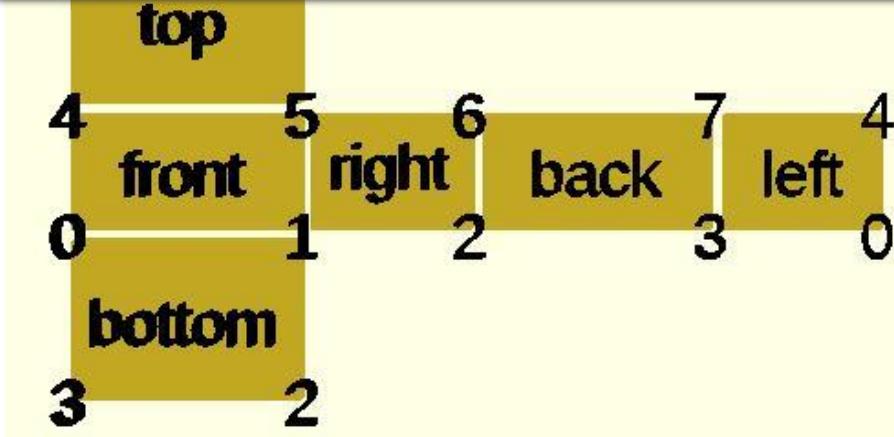

unfolded cube faces

```
CubePoints = [
  [ 0, 0, 0 ], //0
  [ 10, 0, 0 ], //1
  [ 10, 7, 0 ], //2
  [ 0, 7, 0 ], //3
  [ 0, 0, 5 ], //4
  [ 10, 0, 5 ], //5
  [ 10, 7, 5 ], //6
  [ 0, 7, 5 ]]; //7

CubeFaces = [
  [0,1,2,3], // bottom
  [4,5,1,0], // front
  [7,6,5,4], // top
  [5,6,2,1], // right
  [6,7,3,2], // back
  [7,4,0,3]]; // left

polyhedron( CubePoints, CubeFaces );
```

```
equivalent descriptions of the bottom face
[0,1,2,3],
[0,1,2,3,0],
[1,2,3,0],
[2,3,0,1],
[3,0,1,2],
[0,1,2],[2,3,0], // 2 triangles with no overlap
[1,2,3],[3,0,1],
[1,2,3],[0,1,3],
```

### Example 2 A square base pyramid:

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go FEB APR JUN

99 captures


24 Nov 2009 - 21 Sep 2020

◀ 25 ▶

2017 2018 2019




▼ About this capture

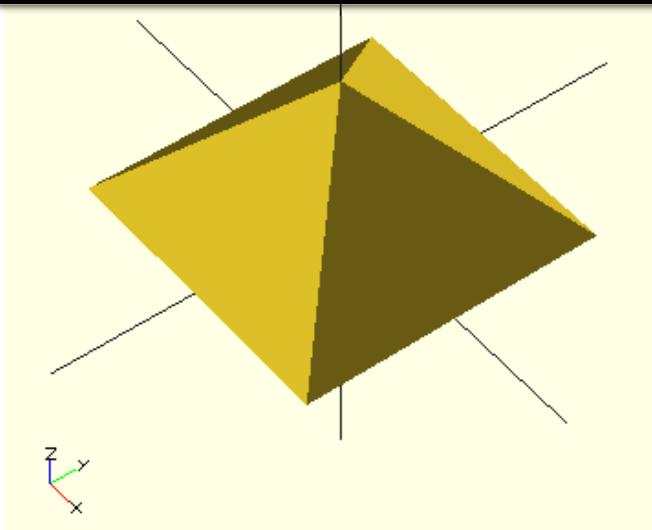

A simple polyhedron, square base pyramid

```
polyhedron(
  points=[ [10,10,0],[10,-10,0],[-10,-10,0],[-10,10,0], // the four points at base
          [0,0,10] ], // the apex point
  faces=[ [0,1,4],[1,2,4],[2,3,4],[3,0,4],
          [1,0,3],[2,1,3] ] // each triangle side
);
// two triangles for square base
```

### Example 3 A triangular prism:

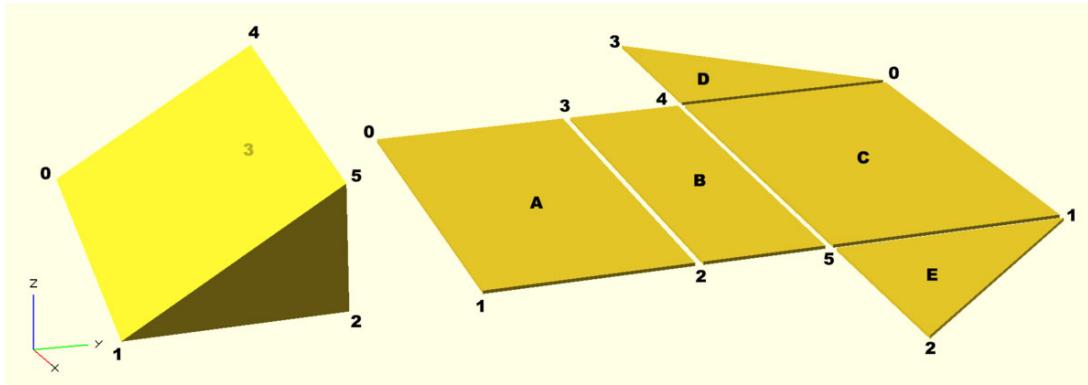

A polyhedron triangular prism

```
module prism(l, w, h){
  polyhedron(
    points=[[0,0,0], [l,0,0], [l,w,0], [0,w,0], [0,w,h], [l,w,h]],
    faces=[[0,1,2,3],[5,4,3,2],[0,4,5,1],[0,3,4],[5,2,1]]
  );
  // preview unfolded (do not include in your function
  z = 0.08;
  separation = 2;
  border = .2;
  translate([0,w+separation,0])
    cube([l,w,z]);
  translate([0,w+separation+w+border,0])
    cube([l,h,z]);
  translate([0,w+separation+w+border+h+border,0])
    cube([l,sqrt(w*w+h*h),z]);
  translate([l+border,w+separation+w+border+h+border,0])
    polyhedron(
      points=[[0,0,0],[h,0,0],[0,sqrt(w*w+h*h),0], [0,0,z],[h,0,z],[0,sqrt(w*w+h*h),z]],
      faces=[[0,1,2,3],[5,4,3,2],[0,4,5,1],[0,3,4],[5,2,1]]
    );
}
```

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go FEB APR JUN

◀ 25 ▶

2017 2018 2019



▼ About this capture

## 99 captures

24 Nov 2009 - 21 Sep 2020

```
    faces=[[1,0,2],[5,3,4],[0,1,4,3],[1,2,5,4],[2,0,3,5]]
  );
}

prism(10, 5, 3);
```

## Debugging polyhedra

Mistakes in defining polyhedra include not having all faces with the same order, overlap of faces and missing faces or portions of faces. As a general rule, the polyhedron faces should also satisfy (manifold conditions):

- exactly two faces should meet at any polyhedron edge.
- if two faces have a vertex in common, they should be in the same cycle face-edge around the vertex.

The first rule eliminates polyhedron like two cubes with a common edge and not watertight models; the second excludes polyhedron like two cubes with a common vertex.

When viewed from the outside, the points describing each face must be in the same order . OpenSCAD prefers CW, and provides a mechanism for detecting CCW. When the thrown together view (F12) is used with F5, CCW faces are shown in pink. Reorder the points for incorrect faces. Rotate the object to view all faces. The pink view can be turned off with F10.

OpenSCAD allows, temporarily, commenting out part of the face descriptions so that only the remaining faces are displayed. Use // to comment out the rest of the line. Use /\* and \*/ to start and end a comment block. This can be part of a line or extend over several lines. Viewing only part of the faces can be helpful in determining the right points for an individual face. Note that a solid is not shown, only the faces. If using F12, all faces have one pink side. Commenting some faces helps also to show any internal face.



```
CubeFaces = [
/* [0,1,2,3], // bottom
 [4,5,1,0], // front */
 [7,6,5,4], // top
/* [5,6,2,1], // right
 [6,7,3,2], // back */
[7,4,0,3]]; // left
```

example 1 showing only 2 faces

After defining a polyhedron, its preview may seem correct. The polyhedron alone may even render fine. However to be sure it is a valid manifold and that it will generate a valid STL file, union it with any cube and render it (F6). If the polyhedron disappears, it means that it is not correct. Revise the winding order of all faces and the two rules stated above.

## Mis-ordered faces

### Example 4 a more complex polyhedron with mis-ordered faces

When you select 'Thrown together' from the view menu and **compile** the design (**not** compile and render!) you will see a preview with the mis-oriented polygons highlighted. Unfortunately this highlighting is not possible in the OpenCSG preview mode because it would interfere with the way the OpenCSG preview mode is implemented.)

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019




▼ About this capture

## 99 captures

24 Nov 2009 - 21 Sep 2020

```
// Bad polyhedron
polyhedron
  (points = [
    [0, -10, 60], [0, 10, 60], [0, 10, 0], [0, -10, 0], [60, -10, 60], [60, 10, 60],
    [10, -10, 50], [10, 10, 50], [10, 10, 30], [10, -10, 30], [30, -10, 50], [30, 10, 50]
  ],
  faces = [
    [0,2,3], [0,1,2], [0,4,5], [0,5,1], [5,4,2], [2,4,3],
    [6,8,9], [6,7,8], [6,10,11], [6,11,7], [10,8,11],
    [10,9,8], [0,3,9], [9,0,6], [10,6, 0], [0,4,10],
    [3,9,10], [3,10,4], [1,7,11], [1,11,5], [1,7,8],
    [1,8,2], [2,8,11], [2,11,5]
  ]
);
```

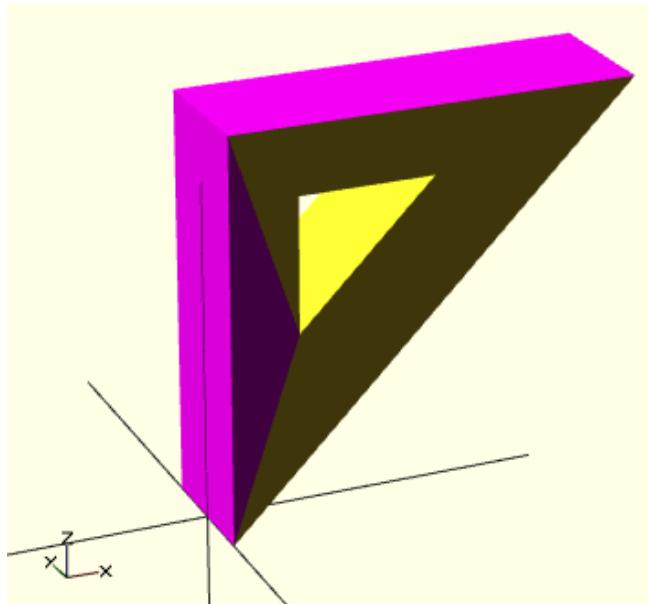

Polyhedron with badly oriented polygons

A correct polyhedron would be the following:

```
polyhedron
  (points = [
    [0, -10, 60], [0, 10, 60], [0, 10, 0], [0, -10, 0], [60, -10, 60], [60, 10, 60],
    [10, -10, 50], [10, 10, 50], [10, 10, 30], [10, -10, 30], [30, -10, 50], [30, 10, 50]
  ],
  faces = [
    [0,3,2], [0,2,1], [4,0,5], [5,0,1], [5,2,4], [4,2,3],
    [6,8,9], [6,7,8], [6,10,11], [6,11,7], [10,8,11],
    [10,9,8], [3,0,9], [9,0,6], [10,6, 0], [0,4,10],
    [3,9,10], [3,10,4], [1,7,11], [1,11,5], [1,8,7],
    [2,8,1], [8,2,11], [5,11,2]
  ]
);
```

### Beginner's tip:

If you don't really understand "orientation", try to identify the mis-oriented pink faces and then invert the sequence of the references to the points vectors until you get it right. E.g. in the above example, the third triangle ( $[0,4,5]$ ) was wrong and we fixed it as  $[4,0,5]$ . Remember that a face list is a circular list. In addition, you may select "Show Edges" from the "View Menu", print a screen capture and number both the points and the faces. In our example, the points are annotated in black and the faces in blue. Turn the object around and make a second copy from the back if needed. This way you can keep track.

### Clockwise Technique:

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go FEB APR JUN

[99 captures](#)

24 Nov 2009 - 21 Sep 2020

◀ 25 ▶

2017 2018 2019




▼ About this capture

& [0,5,4] are good too. If you use the clockwise technique, you'll always have your faces outside (outside of OpenSCAD, other programs do use counter-clockwise as the outside though).

Think of it as a Left Hand Rule:

If you hold the face and the fingers of your right hand curls is the same order as the points, then your thumb points outwards.

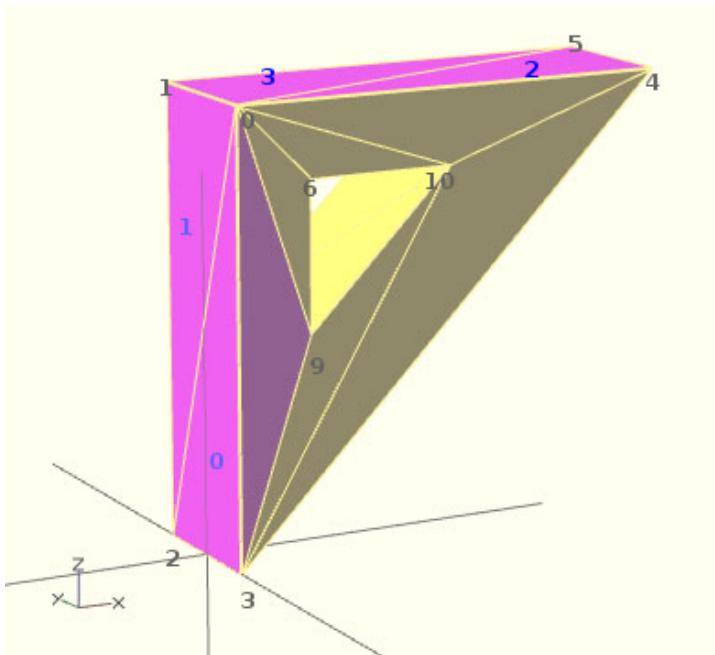

Polyhedron with badly oriented polygons

### Succinct description of a 'Polyhedron'

\* Points define all of the points/vertices in the shape.  
\* Faces is a list of flat polygons that connect up the points/vertices.

Each point, in the point list, is defined with a 3-tuple x,y,z position specification. Points in the point list are automatically enumerated starting from zero for use in the faces list (0,1,2,3,... etc).

Each face, in the faces list, is defined by selecting 3 or more of the points (using the point order number) out of the point list.

e.g. faces=[ [0,1,2] ] defines a triangle from the first point (points are zero referenced) to the second point and then to the third point.

When looking at any face from the outside, the face must list all points in a clockwise order.

### Alternate Face Descriptions

Before 2014.03, faces could only be described via triangles. Since 2014.03, a face description can have any number of points. The points, all in the same plane, must be listed in the proper order. Since version ???, the face vertices do not have to be planar: OpenSCAD will do its best to internally subdivide the face in triangles. Note that this may lead to different results depending on the chosen face triangulation. If a specific result is needed, the non planar face should be broken in triangular pieces by the user.

An alternate (correct) face definition for example 4:

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



## 99 captures

24 Nov 2009 - 21 Sep 2020

[1,2,5,1,7,11,8,7] // back

]

About this capture

### Point repetitions in a polyhedron point list

The point list of the polyhedron definition may have repetitions. When two or more points have the same coordinates they are considered the same polyhedron vertex. So, the following polyhedron:

```
points = [[ 0, 0, 0], [10, 0, 0], [ 0,10, 0],
           [ 0, 0, 0], [10, 0, 0], [ 0,10, 0],
           [ 0,10, 0], [10, 0, 0], [ 0, 0,10],
           [ 0, 0, 0], [ 0, 0,10], [10, 0, 0],
           [ 0, 0, 0], [ 0, 0,10], [ 0,10, 0]];
polyhedron(points, [[0,1,2], [3,4,5], [6,7,8], [9,10,11]] );
```

define the same tetrahedron as:

```
points = [[[0,0,0], [0,10,0], [10,0,0], [0,0,10]];
polyhedron(points, [[0,2,1], [0,1,3], [1,2,3], [0,3,2]] );
```

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go FEB APR JUN

[99 captures](#)

24 Nov 2009 - 21 Sep 2020

◀ 25 ▶


2017 2018 2019



▼ About this capture


Using the `projection()` function, you can create 2d drawings from 3d models, and export them to the `dxf` format. It works by projecting a 3D model to the  $(x,y)$  plane, with  $z$  at 0. If `cut=true`, only points with  $z=0$  will be considered (effectively cutting the object), with `cut=false(the default)`, points above and below the plane will be considered as well (creating a proper projection).

**Example:** Consider example002.scad, that comes with OpenSCAD.

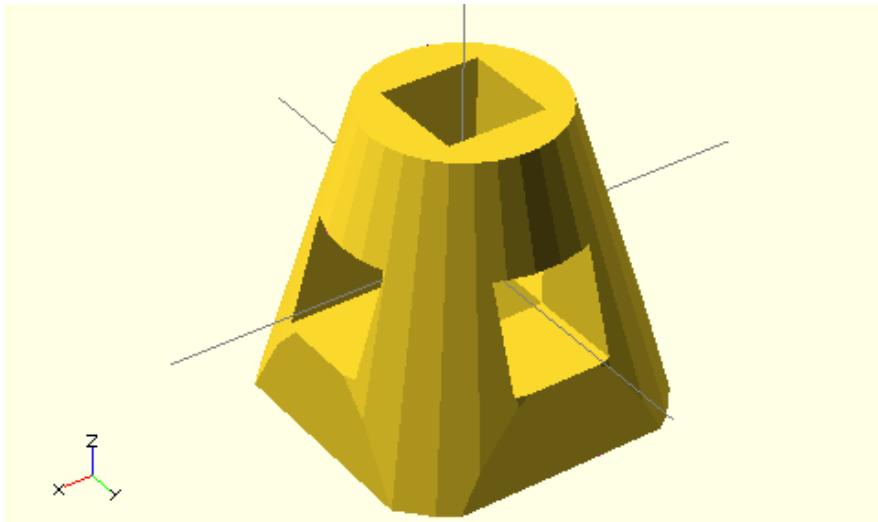

Then you can do a 'cut' projection, which gives you the 'slice' of the  $x$ - $y$  plane with  $z=0$ .

```
projection(cut = true) example002();
```

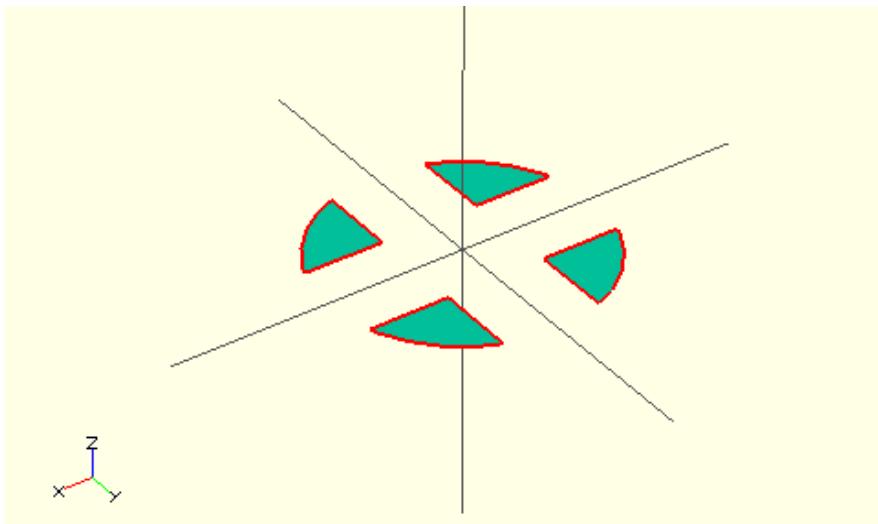

You can also do an 'ordinary' projection, which gives a sort of 'shadow' of the object onto the  $xy$  plane.

```
projection(cut = false) example002();
```

[Openscad example projection 8x.png](#)

### Another Example

You can also use `projection` to get a 'side view' of an object. Let's take `example002`, and move it up, out of the  $X$ - $Y$  plane, and rotate it:

```
translate([0,0,25]) rotate([90,0,0]) example002();
```

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶


2017 2018 2019



▼ About this capture


99 captures

24 Nov 2009 - 21 Sep 2020

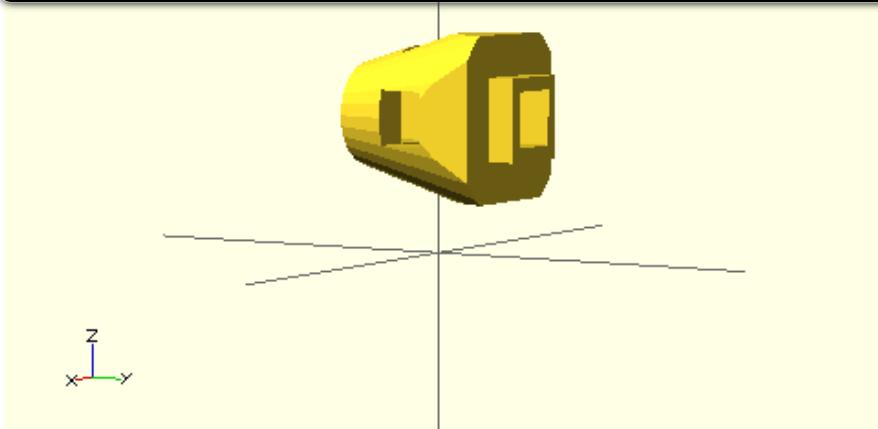

Now we can get a side view with projection()

```
projection() translate([0,0,25]) rotate([90,0,0]) example002();
```

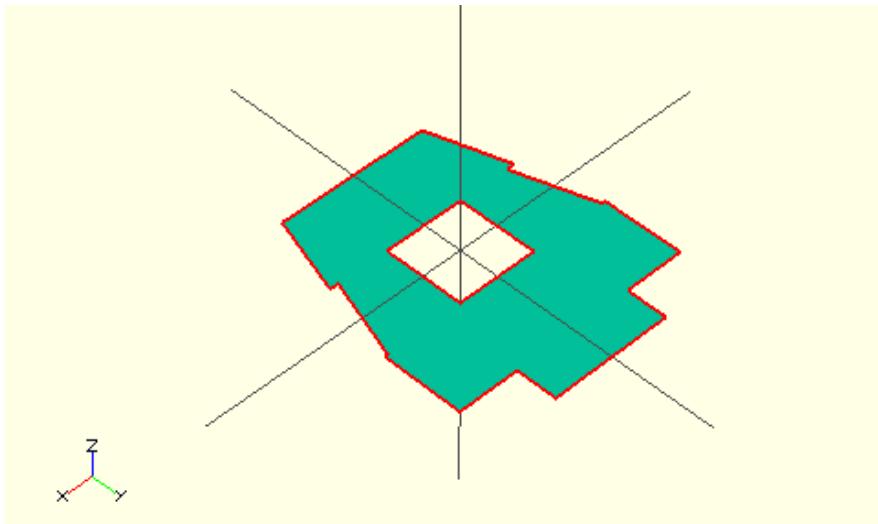

Links:

- [example021.scad](https://web.archive.org/web/20180425001407/http://svn.clifford.at/openscad/trunk/examples/example021.scad) from Clifford Wolf's site (<https://web.archive.org/web/20180425001407/http://svn.clifford.at/openscad/trunk/examples/example021.scad>).
- [More complicated example](https://web.archive.org/web/20180425001407/http://www.gilesbathgate.com/2010/06/extracting-2d-mendel-outlines-using-openscad/) (<https://web.archive.org/web/20180425001407/http://www.gilesbathgate.com/2010/06/extracting-2d-mendel-outlines-using-openscad/>) from Giles Bathgate's blog

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



▼ About this capture

## OpenSCAD User Manual/The OpenSCAD Language

All 2D primitives can be transformed with 3D transformations. Usually used as part of a 3D extrusion. Although infinitely thin, they are rendered with a 1 thickness.

### square

Creates a square or rectangle in the first quadrant. When center is true the square is centered on the origin. Argument names are optional if given in the order shown here.

```
square(size = [x, y], center = true/false);
square(size = x      , center = true/false);
```

#### parameters:

##### size

single value, square with both sides this length  
2 value array [x,y], rectangle with dimensions x and y

##### center


**false** (default), 1st (positive) quadrant, one corner at (0,0)  
**true**, square is centered at (0,0)

```
default values: square(); yields: square(size = [1, 1], center = false);
```

#### examples:



```
equivalent scripts for this example
square(size = 10);
square(10);
square([10,10]);
.
square(10,false);
square([10,10],false);
square([10,10],center=false);
square(size = [10, 10], center = false);
square(center = false,size = [10, 10] );
```

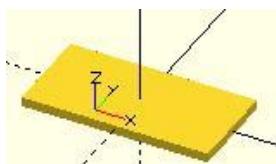

```
equivalent scripts for this example
square([20,10],true);
a=[20,10];square(a,true);
```

### circle

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go FEB APR JUN

99 captures

24 Nov 2009 - 21 Sep 2020

◀ 25 ▶

2017 2018 2019



▼ About this capture

## Parameters

**r** : circle radius. r name is the only one optional with circle.

circle resolution is based on size, using \$fa or \$fs.

For a small, high resolution circle you can make a large circle, then scale it down, or you could set \$fn or other special variables. Note: These examples exceed the resolution of a 3d printer as well as of the display screen.

```
scale([1/100, 1/100, 1/100]) circle(200); // create a high resolution circle with a radius of 2.
circle(2, $fn=50); // Another way.
```

**d** : circle diameter (only available in versions later than 2014.03).


**\$fa** : minimum angle (in degrees) of each fragment.

**\$fs** : minimum circumferential length of each fragment.

**\$fn** : **fixed** number of fragments in 360 degrees. Values of 3 or more override \$fa and \$fs

\$fa, \$fs and \$fn must be named. [click here for more details.](#)

```
defaults: circle(); yields: circle($fn = 0, $fa = 12, $fs = 2, r = 1);
```

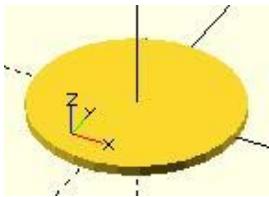


equivalent scripts for this example

```
circle(10);
circle(r=10);
circle(d=20);
circle(d=2+9*2);
```

## ellipse

An ellipse can be created from a circle by using either scale() or resize() to make the x and y dimensions unequal. See [OpenSCAD User Manual/Transformations](#)

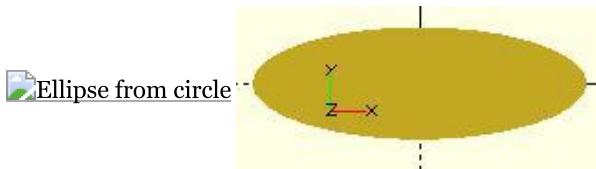

equivalent scripts for this example

```
resize([30,10])circle(d=20);
scale([1.5,.5])circle(d=20);
```

## regular polygon

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go FEB APR JUN

[99 captures](#)


24 Nov 2009 - 21 Sep 2020

◀ 25 ▶

2017 2018 2019



▼ About this capture

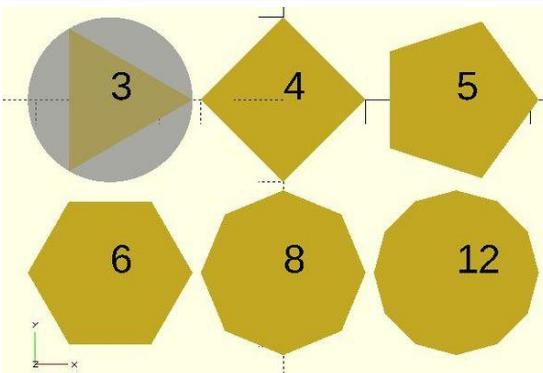

```
script for these examples
translate([-42,  0])circle(20,$fn=3);%circle(20,$fn=90);
translate([ 0,  0]) circle(20,$fn=4);
translate([ 42,  0]) circle(20,$fn=5);
translate([-42,-42]) circle(20,$fn=6);
translate([ 0,-42]) circle(20,$fn=8);
translate([ 42,-42]) circle(20,$fn=12);
```

```
color("black"){
  translate([-42,  0,1])text("3",7,,center);
  translate([ 0,  0,1])text("4",7,,center);
  translate([ 42,  0,1])text("5",7,,center);
  translate([-42,-42,1])text("6",7,,center);
  translate([ 0,-42,1])text("8",7,,center);
  translate([ 42,-42,1])text("12",7,,center);
}
```

## polygon

Creates a multiple sided shape from a list of x,y coordinates. A polygon is the most powerful 2D object. It can create anything that circle and squares can, as well as much more. This includes irregular shapes with both concave and convex edges. In addition it can place holes within that shape.

```
polygon(points = [ [x, y], ... ], paths = [ [p1, p2, p3..], ... ], convexity = N);
```

### Parameters

#### points

The list of x,y points of the polygon. : A vector of 2 element vectors.  
Note: points are indexed from 0 to n-1.

#### paths

default

If no path is specified, all points are used in the order listed.

single vector

The order to traverse the points. Uses indices from 0 to n-1. May be in a different order and use all or part, of the points listed.

#### multiple vectors

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



99 captures

24 Nov 2009 - 21 Sep 2020


▼ About this capture

## convexity

Integer number of "inward" curves, ie. expected path crossings of an arbitrary line through the polygon. See below.

```
defaults:  polygon();  yields:  polygon(points = undef, paths = undef, convexity = 1);
```


### Example no holes

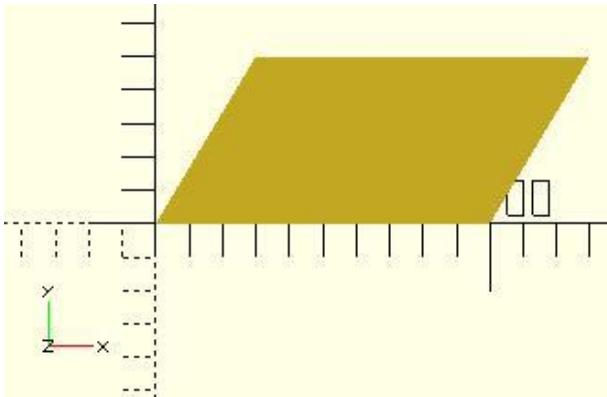

```
equivalent scripts for this example
polygon(points=[[0,0],[100,0],[130,50],[30,50]]);
polygon([[0,0],[100,0],[130,50],[30,50]], paths=[[0,1,2,3]]);
polygon([[0,0],[100,0],[130,50],[30,50]],[[3,2,1,0]]);
polygon([[0,0],[100,0],[130,50],[30,50]],[[1,0,3,2]]);

a=[[0,0],[100,0],[130,50],[30,50]];
b=[[3,0,1,2]];
polygon(a);
polygon(a,b);
polygon(a,[2,3,0,1,2]);
```

### Example one hole

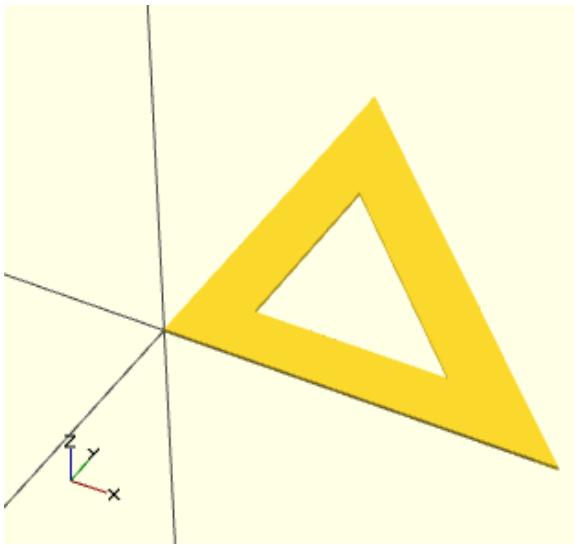

```
equivalent scripts for this example
polygon(points=[[0,0],[100,0],[0,100],[10,10],[80,10],[10,80]], paths=[[0,1,2],[3,4,5]], convexity=10);

triangle_points =[[0,0],[100,0],[0,100],[10,10],[80,10],[10,80]];
```

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go FEB APR JUN

◀ 25 ▶

2017 2018 2019



▼ About this capture

## 99 captures

24 Nov 2009 - 21 Sep 2020

The 1st path vector, [0,1,2], selects the points, [0,0],[100,0],[0,100], for the primary shape.


The 2nd path vector, [3,4,5], selects the points, [10,10],[80,10],[10,80], for the secondary shape.

The secondary shape is subtracted from the primary ( think `difference()` ).

Since the secondary is wholly within the primary, it leaves a shape with a hole.

## Example multi hole


NOTE: `concat()` requires 2015.03 or later

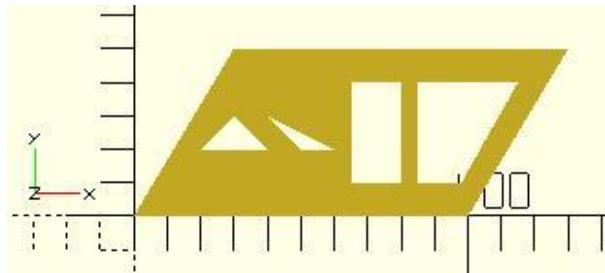

```
//example polygon with multiple holes
a0 = [[0,0],[100,0],[130,50],[30,50]];      // main
b0 = [1,0,3,2];
a1 = [[20,20],[40,20],[30,30]];            // hole 1
b1 = [4,5,6];
a2 = [[50,20],[60,20],[40,30]];            // hole 2
b2 = [7,8,9];
a3 = [[65,10],[80,10],[80,40],[65,40]];    // hole 3
b3 = [10,11,12,13];
a4 = [[98,10],[115,40],[85,40],[85,10]];   // hole 4
b4 = [14,15,16,17];
a = concat (a0,a1,a2,a3,a4);
b = [b0,b1,b2,b3,b4];
polygon(a,b);
//alternate
polygon(a,[b0,b1,b2,b3,b4]);
```

## convexity

The convexity parameter specifies the maximum number of front sides (back sides) a ray intersecting the object might penetrate. This parameter is only needed for correctly displaying the object in OpenCSG preview mode and has no effect on the polyhedron rendering.

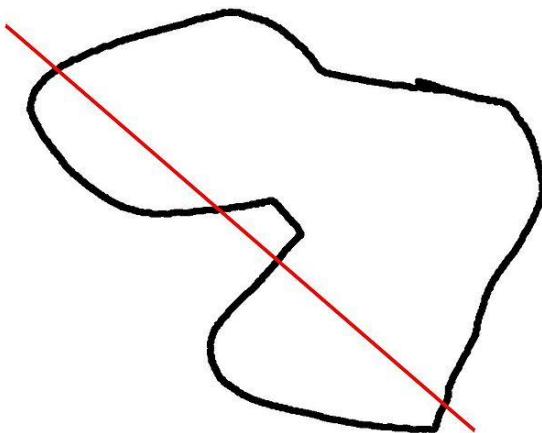

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



[99 captures](#)

24 Nov 2009 - 21 Sep 2020

▼ About this capture

## import\_dxf

DEPRECATED: The import\_dxf() module will be removed in future releases. Use [import\(\)](https://web.archive.org/web/20180425001407/https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language#import) ([https://web.archive.org/web/20180425001407/https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language#import](https://web.archive.org/web/20180425001407/https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language#import)) instead.

Read a DXF file and create a 2D shape.

### Example

```
linear_extrude(height = 5, center = true, convexity = 10)
    import_dxf(file = "example009.dxf", layer = "plate");
```

## Text

The text module creates text as a 2D geometric object, using fonts installed on the local system or provided as separate font file.

**[Note:** Requires version 2015.03]

### Parameters

#### text

String. The text to generate.

#### size

Decimal. The generated text will have approximately an ascent of the given value (height above the baseline). Default is 10.

Note that specific fonts will vary somewhat and may not fill the size specified exactly, usually slightly smaller.

#### font

String. The name of the font that should be used. This is not the name of the font file, but the logical font name (internally handled by the fontconfig library). This can also include a style parameter, see below. A list of installed fonts & styles can be obtained using the font list dialog (Help -> Font List).

#### halign

String. The horizontal alignment for the text. Possible values are "left", "center" and "right". Default is "left".

#### valign

String. The vertical alignment for the text. Possible values are "top", "center", "baseline" and "bottom". Default is "baseline".

#### spacing

Decimal. Factor to increase/decrease the character spacing. The default value of 1 will result in the normal spacing for the font, giving a value greater than 1 will cause the letters to be spaced further apart.

#### direction

String. Direction of the text flow. Possible values are "ltr" (left-to-right), "rtl" (right-to-left), "ttb" (top-to-bottom) and "btt" (bottom-to-top). Default is "ltr".

#### language

String. The language of the text. Default is "en".

#### script

String. The script of the text. Default is "latin".

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go FEB APR JUN

99 captures

24 Nov 2009 - 21 Sep 2020

◀ 25 ▶

2017 2018 2019



▼ About this capture

```
text("OpenSCAD");
```



Example 1: Result.

## Note

To allow specification of particular Unicode characters you can specify them in a string with the following escape codes;

\x03 - single hex character (only allowed values are 01h - 7fh)

\u0123 - unicode char with 4 hexadecimal digits (note: Lowercase)

\U012345 - unicode char with 6 hexadecimal digits (note: Uppercase)

## Example


```
t="\u20AC10 \u263A"; // 10 euro and a smilie
```

## Using Fonts & Styles

Fonts are specified by their logical font name; in addition a style parameter can be added to select a specific font style like "**bold**" or "*italic*", such as:

```
font="Liberation Sans:style=Bold Italic"
```

The font list dialog shows the font name and the font style for each available font. For reference, the dialog also displays the location of the font file. You can drag a font in the font list, into the editor window to use in the text() statement.

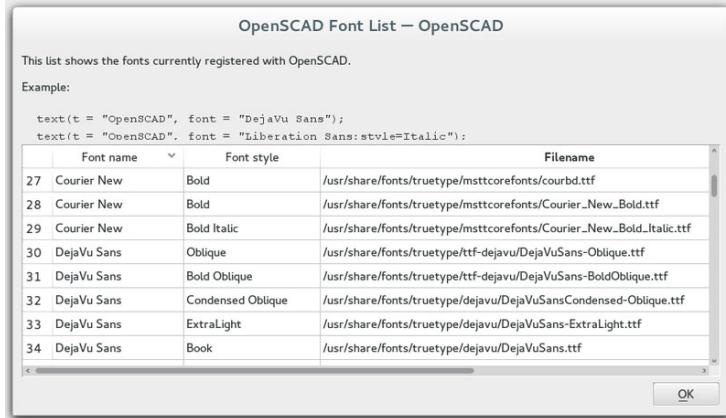

OpenSCAD font list dialog

OpenSCAD includes the fonts *Liberation Mono*, *Liberation Sans*, *Liberation Sans Narrow* and *Liberation Serif*. Hence, as fonts in general differ by platform type, use of these included fonts is likely to be portable across platforms.

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go FEB APR JUN

[99 captures](#)

24 Nov 2009 - 21 Sep 2020

◀ 25 ▶

2017 2018 2019



▼ About this capture

In addition to the installed fonts, it's possible to add project specific font files. Supported font file formats are TrueType Fonts (\*.ttf) and OpenType Fonts (\*.otf). The files need to be registered with `use<>`.

```
use <ttf/paratype-serif/PTF55F.ttf>
```

After the registration, the font will also be listed in the font list dialog, so in case logical name of a font is unknown, it can be looked up there are it was registered.

OpenSCAD uses fontconfig to find and manage fonts, so it's possible to list the system configured fonts on command line using the fontconfig tools in a format similar to the GUI dialog.

```
$ fc-list -f "%-60{{%{family[0]}%{:style[0]=}}}%{file}\n" | sort
...
Liberation Mono:style=Bold Italic /usr/share/fonts/truetype/liberation2/LiberationMono-BoldItalic.ttf
Liberation Mono:style=Bold /usr/share/fonts/truetype/liberation2/LiberationMono-Bold.ttf
Liberation Mono:style=Italic /usr/share/fonts/truetype/liberation2/LiberationMono-Italic.ttf
Liberation Mono:style=Regular /usr/share/fonts/truetype/liberation2/LiberationMono-Regular.ttf
..."
```

## Example

```
square(10);

translate([15, 15]) {
    text("OpenSCAD", font = "Liberation Sans");
}

translate([15, 0]) {
    text("OpenSCAD", font = "Liberation Sans:style=Bold Italic");
}
```



Example 2: Result.

## Alignment

### Vertical alignment

#### top

The text is aligned with the top of the bounding box at the given Y coordinate.

#### center

The text is aligned with the center of the bounding box at the given Y coordinate.

#### baseline

The text is aligned with the font baseline at the given Y coordinate. This is the default.

#### bottom

The text is aligned with the bottom of the bounding box at the given Y coordinate.

```
text = "Align";
font = "Liberation Sans";

valign = [
    [ 0, "top"],
    [ 40, "center"],
    [ 75, "baseline"],
```

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go FEB APR JUN

## 99 captures

24 Nov 2009 - 21 Sep 2020

```
color("red") cube([135, 1, 0.1]);
color("blue") cube([1, 20, 0.1]);
linear_extrude(height = 0.5) {
    text(text = str(text,"_",a[1]), font = font, size = 20, valign = a[1]);
}
}
```

◀ 25 ▶  
2017 2018 2019



▼ About this capture

Align\_center  
Align\_baseline  
Align\_bottom

OpenSCAD vertical text alignment

## Horizontal alignment

### left

The text is aligned with the left side of the bounding box at the given X coordinate. This is the default.

### center

The text is aligned with the center of the bounding box at the given X coordinate.

### right

The text is aligned with the right of the bounding box at the given X coordinate.

```
text = "Align";
font = "Liberation Sans";

halign = [
    [10, "left"],
    [50, "center"],
    [90, "right"]
];

for (a = halign) {
    translate([140, a[0], 0]) {
        color("red") cube([115, 2, 0.1]);
        color("blue") cube([2, 20, 0.1]);
        linear_extrude(height = 0.5) {
            text(text = str(text,"_",a[1]), font = font, size = 20, halign = a[1]);
        }
    }
}
```

Align\_right  
Align\_center  
Align\_left

OpenSCAD horizontal text alignment

## Renderable 3Dtext

It is easy only using the function `linear_extrude(height);`

## 3D to 2D Projection

Using the `projection()` function, you can create 2d drawings from 3d models, and export them to the dxf format. It works by projecting a 3D model to the (x,y) plane, with z at 0. If `cut=true`, only points with `z=0` will be considered (effectively cutting the object), with `cut=false(the default)`, points above and below the plane will be considered as well (creating a proper projection).

**Example:** Consider example002.scad, that comes with OpenSCAD.

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go FEB APR JUN

99 captures


24 Nov 2009 - 21 Sep 2020

◀ 25 ▶

2017 2018 2019




▼ About this capture

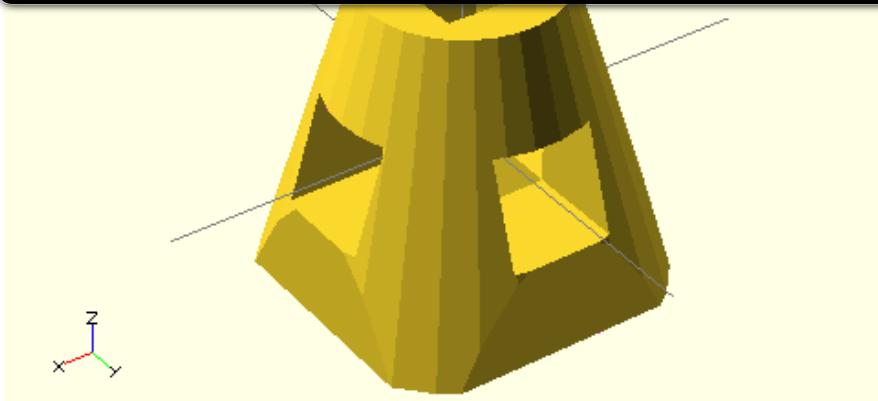

Then you can do a 'cut' projection, which gives you the 'slice' of the x-y plane with z=0.

```
projection(cut = true) example002();
```

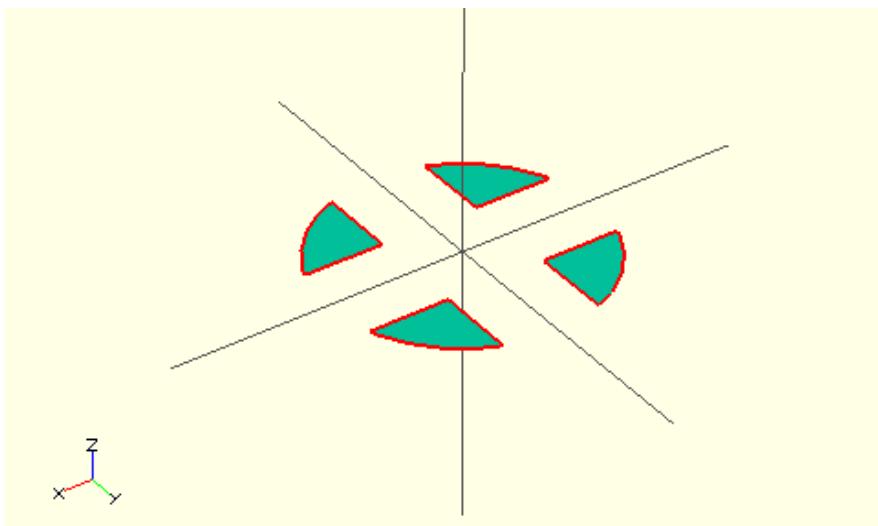

You can also do an 'ordinary' projection, which gives a sort of 'shadow' of the object onto the xy plane.

```
projection(cut = false) example002();
```

[Openscad example projection 8x.png](#)

### Another Example

You can also use projection to get a 'side view' of an object. Let's take example002, and move it up, out of the X-Y plane, and rotate it:

```
translate([0,0,25]) rotate([90,0,0]) example002();
```

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go FEB APR JUN

99 captures


24 Nov 2009 - 21 Sep 2020

◀ 25 ▶

2017 2018 2019




▼ About this capture

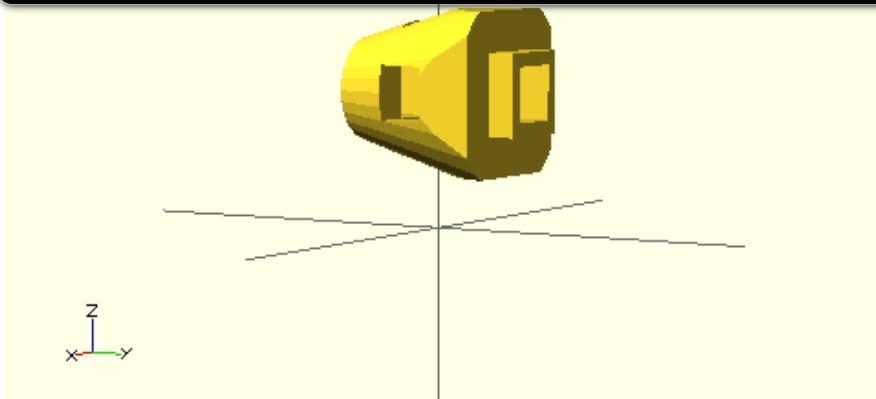

Now we can get a side view with projection()

```
projection() translate([0,0,25]) rotate([90,0,0]) example002();
```

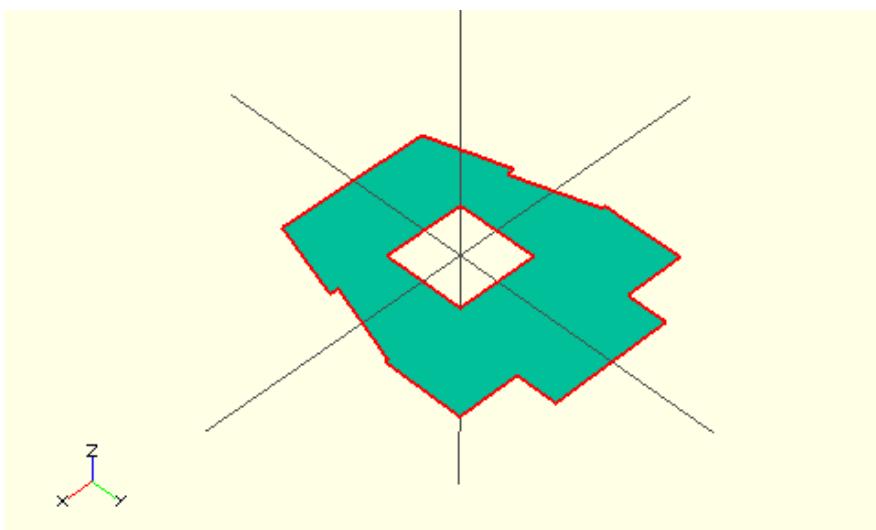

Links:

- [example021.scad](https://web.archive.org/web/20180425001407/http://svn.clifford.at/openscad/trunk/examples/example021.scad) from Clifford Wolf's site (<https://web.archive.org/web/20180425001407/http://svn.clifford.at/openscad/trunk/examples/example021.scad>).
- [More complicated example](https://web.archive.org/web/20180425001407/http://www.gilesbathgate.com/2010/06/extracting-2d-mendel-outlines-using-openscad/) (<https://web.archive.org/web/20180425001407/http://www.gilesbathgate.com/2010/06/extracting-2d-mendel-outlines-using-openscad/>) from Giles Bathgate's blog

## 2D to 3D Extrusion

Extrusion is the process of creating an object with a fixed cross-sectional profile. OpenSCAD provides two commands to create 3D solids from a 2D shape: `linear_extrude()` and `rotate_extrude()`. Linear extrusion is similar to pushing Playdoh through a press with a die of a specific shape.

Rotational extrusion is similar to the process of turning or "throwing" a bowl on the Potter's wheel.

Both extrusion methods work on a (possibly disjointed) 2D shape which exists on the X-Y plane. While transformations that operate on both 2D shapes and 3D solids can move a shape off the X-Y plane, when the extrusion is performed the end result is not very intuitive. What actually happens is that any information in the third coordinate (the Z coordinate) is ignored for any 2D shape, this process amounts to an implicit `projection()` performed on any 2D shape before the extrusion is executed. It is recommended to perform extrusion on shapes that remain strictly on the X-Y plane. See also 3D and 2D objects.

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



▼ About this capture

## 99 captures

24 Nov 2009 - 21 Sep 2020

always performed from XY plane to the height indicate along Z axis; so if you rotate or apply other transformations before extrusion, the extrusion is applied to the projection of the 2D polygon to the XY plane.



linear\_extrude() works like a Playdoh extrusion press

## Usage

```
linear_extrude(height = fanwidth, center = true, convexity = 10, twist = -fanrot, slices = 20, scale = 1.0) {...}
```

You must use parameter names due to a backward compatibility issue.

height must be positive.


If the extrusion fails for a non-trivial 2D shape, try setting the convexity parameter (the default is not 10, but 10 is a "good" value to try). See explanation further down.



rotate\_extrude() emulates throwing a vessel


## Twist

Twist is the number of degrees of through which the shape is extruded. Setting the parameter twist = 360 will extrude through one revolution. The twist direction follows the left hand rule.

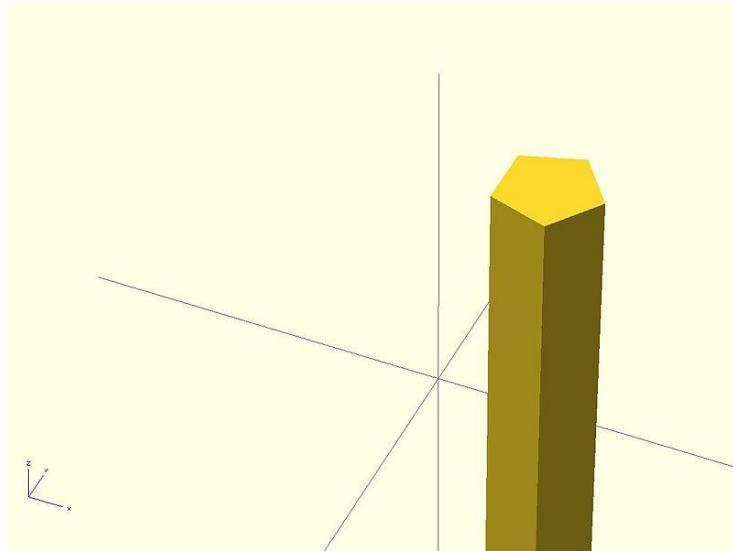

## 0° of Twist

```
linear_extrude(height = 10, center = true, convexity = 10, twist = 0)
translate([2, 0, 0])
circle(r = 1);
```



## -100° of Twist

```
linear_extrude(height = 10, center = true, convexity = 10, twist = -100)
translate([2, 0, 0])
circle(r = 1);
```

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019

[99 captures](#)

24 Nov 2009 - 21 Sep 2020

▼ About this capture

## 100° of Twist

```
linear_extrude(height = 10, center = true, convextiy = 10, twist = 100)
translate([2, 0, 0])
circle(r = 1);
```

## -500° of Twist

```
linear_extrude(height = 10, center = true, convextiy = 10, twist = -500)
translate([2, 0, 0])
circle(r = 1);
```

## Center

It is similar to the parameter center of cylinders. If center is false the linear extrusion Z range is from 0 to height; if it is true, the range is from -height/2 to height/2.

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019

[99 captures](#)

24 Nov 2009 - 21 Sep 2020

▼ About this capture

### center = true

```
linear_extrude(height = 10, center = true, convavity = 10, twist = -500)
translate([2, 0, 0])
circle(r = 1);
```

### center = false

```
linear_extrude(height = 10, center = false, convavity = 10, twist = -500)
translate([2, 0, 0])
circle(r = 1);
```

### Mesh Refinement

The slices parameter defines the number of intermediate points along the Z axis of the extrusion. Its default increases with the value of twist. Explicitly setting slices may improve the output refinement.

[slices = 100](#)

```
linear_extrude(height = 10, center = false, convavity = 10, twist = 360, slices = 100)
translate([2, 0, 0])
```

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



▼ About this capture

## 99 captures

24 Nov 2009 - 21 Sep 2020

defined \$fn value.

```
linear_extrude(height = 10, center = false, convexity = 10, twist = 360, $fn = 100)
translate([2, 0, 0])
circle(r = 1);
```

## Scale

Scales the 2D shape by this value over the height of the extrusion. Scale can be a scalar or a vector:

```
linear_extrude(height = 10, center = true, convexity = 10, scale=3)
translate([2, 0, 0])
circle(r = 1);
```

```
linear_extrude(height = 10, center = true, convexity = 10, scale=[1,5], $fn=100)
translate([2, 0, 0])
circle(r = 1);
```

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



▼ About this capture

99 captures

24 Nov 2009 - 21 Sep 2020

Note that if scale is a vector, the resulting side walls may be nonplanar. Use `twist=0` and the `slices` parameter to avoid asymmetry (<https://web.archive.org/web/20180425001407/https://github.com/openscad/openscad/issues/1341>).

```
linear_extrude(height=10, scale=[1,0.1], slices=20, twist=0)
polygon(points=[[0,0],[20,10],[20,-10]]);
```

## Rotate Extrude

Rotational extrusion spins a 2D shape around the Z-axis to form a solid which has rotational symmetry. One way to think of this operation is to imagine a Potter's wheel placed on the X-Y plane with its axis of rotation pointing up towards +Z. Then place the to-be-made object on this virtual Potter's wheel (possibly extended down below the X-Y plane towards -Z, take the cross-section of this object on the X-Z plane but keep only the right half ( $X \geq 0$ ). That is the 2D shape that need to be fed to `rotate_extrude()` as the child in order to generate this solid.

Since a 2D shape is rendered by OpenSCAD on the X-Y plane, an alternative way to think of this operation is as follows: spins a 2D shape around the Y-axis to form a solid. The resultant solid is placed so that its axis of rotation lies along the Z-axis.

It can not be used to produce a helix or screw threads.

The 2D shape needs to lie completely on either the right (recommended) or the left side of the Y-axis. More precisely speaking, each vertex of the shape must have either  $x \geq 0$  or  $x \leq 0$ . If the shape crosses the X axis a warning will be shown in the console windows and the `rotate_extrude()` will be ignored. For OpenSCAD versions prior to 2016.xxxx, if the shape is in the negative axis the faces will be inside-out, which may cause undesired effects.

## Parameters

### Usage

```
rotate_extrude(angle = 360, convexity = 2) {...}
```

You must use parameter names due to a backward compatibility issue.

### convexity

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



About this capture

[99 captures](#)

24 Nov 2009 - 21 Sep 2020

Defaults to 360. Specifies the number of degrees to sweep, starting at the positive X axis. The direction of the sweep follows the Right Hand Rule, hence a negative angle will sweep clockwise.

## Examples

Right-hand grip rule



A simple torus can be constructed using a rotational extrude.

```
rotate_extrude(convexity = 10)
translate([2, 0, 0])
circle(r = 1);
```

## Mesh Refinement

Rotate extrude wiki 2D C.jpg

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶


2017 2018 2019



▼ About this capture

[99 captures](#)

24 Nov 2009 - 21 Sep 2020

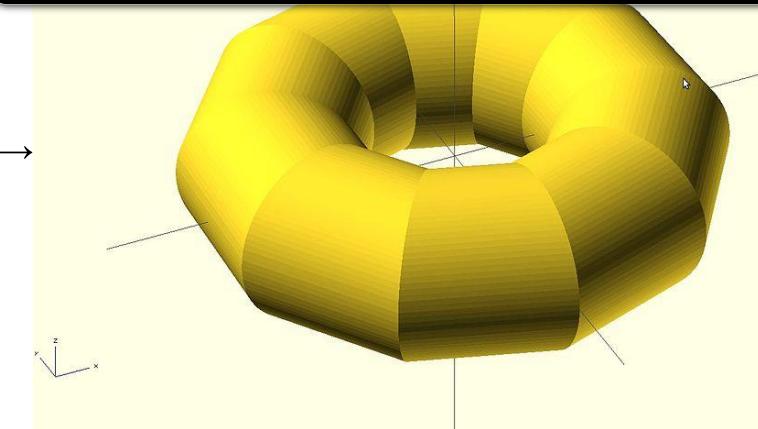

Increasing the number of fragments that the 2D shape is composed of will improve the quality of the mesh, but take longer to render.

```
rotate_extrude(convexity = 10)
translate([2, 0, 0])
circle(r = 1, $fn = 100);
```

[Rotate extrude wiki 2D C.jpg](#)



The number of fragments used by the extrusion can also be increased.

```
rotate_extrude(convexity = 10, $fn = 100)
translate([2, 0, 0])
circle(r = 1, $fn = 100);
```

Using the parameter angle (with OpenSCAD versions 2016.xx), a hook can be modeled .

```
translate([0,60,0])
rotate_extrude(angle=270, convexity=10)
  translate([40, 0]) circle(10);
rotate_extrude(angle=90, convexity=10)
  translate([20, 0]) circle(10);
translate([20,0,0])
  rotate([90,0,0]) cylinder(r=10,h=80);
```

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



▼ About this capture

## 99 captures

24 Nov 2009 - 21 Sep 2020

Here is a simple polygon and its 200 step rotational extrusion. (Note it has been rotated 90 degrees to show how the rotation will look; the `rotate_extrude()` needs it flat).

```
rotate([90,0,0])      polygon( points=[[0,0],[2,1],[1,2],[1,3],[3,4],[0,5]] );
```

OpenSCAD - a hook

```
rotate_extrude($fn=200) polygon( points=[[0,0],[2,1],[1,2],[1,3],[3,4],[0,5]] );
```



For more information on polygons, please see: [2D Primitives: Polygon](#).

## Description of extrude parameters

### Extrude parameters for all extrusion modes

convexity	<p>Integer. The convexity parameter specifies the maximum number of front sides (back sides) a ray intersecting the object might penetrate.</p> <p>This parameter is only needed for correctly displaying the object in OpenCSG preview mode and has no effect on the polyhedron rendering.</p>
-----------	---

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶


2017 2018 2019



▼ About this capture

99 captures

24 Nov 2009 - 21 Sep 2020

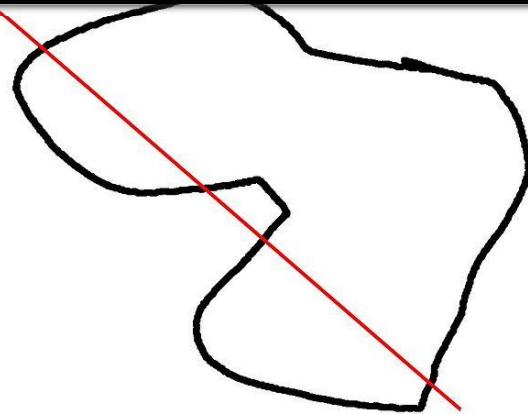

This image shows a 2D shape with a convexity of 4, as the ray indicated in red crosses the 2D shape a maximum of 4 times. The convexity of a 3D shape would be determined in a similar way. Setting it to 10 should work fine for most cases.

#### Extrude parameters for linear extrusion only

height	The extrusion height
center	If true the solid will be centered after extrusion
twist	The extrusion twist in degrees
slices	Similar to special variable \$fn without being passed down to the child 2D shape.
scale	Scales the 2D shape by this value over the height of the extrusion.

## Chapter 4 -- Transform

OpenSCAD User Manual/The OpenSCAD Language

### Basic concept

Transformation affect the child nodes and as the name implies transforms them in various ways such as moving/rotating or scaling the child. Cascading transformations are used to apply a variety of transforms to a final child. Cascading is achieved by nesting statements i.e.

```
rotate([45,45,45])
  translate([10,20,30])
  cube(10);
```

Transformations can be applied to a group of child nodes by using '{' and '}' to enclose the subtree e.g.

```
translate([0,0,-5])
{
  cube(10);
  cylinder(r=5,h=10);
}
```

Transformations are written before the object they affect.

Imagine command like translate, mirror and scale as verbs. Commands like color are like adjectives that describe the object.

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



[99 captures](#)

24 Nov 2009 - 21 Sep 2020

▼ About this capture

## Advanced concept

As OpenSCAD uses different libraries to implement capabilities this can introduce some inconsistencies to the F5 preview behaviour of transformations. Traditional transforms (translate, rotate, scale, mirror & multimatrix) are performed using OpenGL in preview, while other more advanced transforms, such as resize, perform a CGAL operation, behaving like a CSG operation affecting the underlying object, not just transforming it. In particular this can affect the display of modifier characters, specifically "#" and "%", where the highlight may not display intuitively, such as highlighting the pre-resized object, but highlighting the post-scaled object.

### scale

Scales its child elements using the specified vector. The argument name is optional.

```
Usage Example:  
scale(v = [x, y, z]) { ... }
```

```
cube(10);  
translate([15,0,0]) scale([0.5,1,2]) cube(10);
```

**Note:** Do not use negative scale values. Negative scale values appear to work for previews, but they lead to unpredictable errors when rendering through CGAL. Use the mirror() function instead.

### resize

resize() is available since OpenSCAD 2013.06. It modifies the size of the child object to match the given x,y, and z.

There is a bug with shrinking in the 2013.06 release, that will be fixed in the next release.

Usage Example:

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



▼ About this capture

## 99 captures

24 Nov 2009 - 21 Sep 2020

If x,y, or z is 0 then that dimension is left as-is.

```
// resize the 1x1x1 cube to 2x2x1
resize([2,2,0]) cube();
```

If the 'auto' parameter is set to true, it will auto-scale any 0-dimensions to match. For example.

```
// resize the 1x2x0.5 cube to 7x14x3.5
resize([7,0,0], auto=true) cube([1,2,0.5]);
```

The 'auto' parameter can also be used if you only wish to auto-scale a single dimension, and leave the other as-is.

```
// resize to 10x8x1. Note that the z dimension is left alone.
resize([10,0,0], auto=[true,true,false]) cube([5,4,1]);
```

## rotate

Rotates its child 'a' degrees about the axis of the coordinate system or around an arbitrary axis. The argument names are optional if the arguments are given in the same order as specified.

```
//Usage:
rotate(a = deg_a, v = [x, y, z]) { ... }
// or
rotate(deg_a, [x, y, z]) { ... }
rotate(a = [deg_x, deg_y, deg_z]) { ... }
rotate([deg_x, deg_y, deg_z]) { ... }
```

The 'a' argument (deg\_a) can be an array, as expressed in the later usage above; when deg\_a is an array, the 'v' argument is ignored. Where 'a' specifies *multiple axes* then the rotation is applied in the following order: x, y, z. That means the code:

```
rotate(a=[ax,ay,az]) { ... }
```

is equivalent to:

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019

[99 captures](#)

24 Nov 2009 - 21 Sep 2020

About this capture

For example, to flip an object upside-down, you can rotate your object 180 degrees around the 'y' axis.

```
rotate(a=[0,180,0]) { ... }
```

This is frequently simplified to

```
rotate([0,180,0]) { ... }
```

When specifying a single axis the 'v' argument allows you to specify which axis is the basis for rotation. For example, the equivalent to the above, to rotate just around y

```
rotate(a=180, v=[0,1,0]) { ... }
```

When specifying a single axis, 'v' is a vector defining an arbitrary axis for rotation; this is different from the *multiple axis* above. For example, rotate your object 45 degrees around the axis defined by the vector [1,1,0],

```
rotate(a=45, v=[1,1,0]) { ... }
```

---

Rotate with a *single scalar argument* rotates around the Z axis. This is useful in 2D contexts where that is the only axis for rotation. For example:

```
rotate(45) square(10);
```

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶


2017 2018 2019



▼ About this capture

99 captures

24 Nov 2009 - 21 Sep 2020

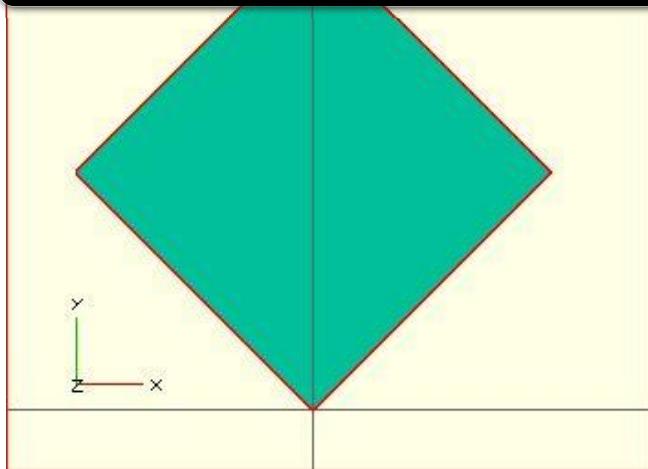

## Rotation rule help

For the case of:

```
rotate([a, b, c]) { ... };
```

"a" is a rotation about the X axis, from the +Y axis, toward the +Z axis.

"b" is a rotation about the Y axis, from the +Z axis, toward the +X axis.

"c" is a rotation about the Z axis, from the +X axis, toward the +Y axis.

These are all cases of the Right Hand Rule. Point your right thumb along the positive axis, your fingers show the direction of rotation.

Right-hand grip rule

Thus if "a" is fixed to zero, and "b" and "c" are manipulated appropriately, this is the *spherical coordinate system*.

So, to construct a cylinder from the origin to some other point (x,y,z):

```
x= 10; y = 10; z = 10; // point coordinates of end of cylinder
length = norm([x,y,z]); // radial distance
b = acos(z/length); // inclination angle
c = atan2(y,x); // azimuthal angle

rotate([0, b, c])
  cylinder(h=length, r=0.5);
%cube([x,y,z]); // corner of cube should coincide with end of cylinder
```

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019

[99 captures](#)

24 Nov 2009 - 21 Sep 2020

▼ About this capture

## translate

Translates (moves) its child elements along the specified vector. The argument name is optional.

Example:  
`translate(v = [x, y, z]) { ... }`

`cube(2,center = true);  
translate([5,0,0])  
 sphere(1,center = true);`

## mirror

Mirrors the child element on a plane through the origin. The argument to mirror() is the normal vector of a plane intersecting the origin through which to mirror the object.

### Function signature:

`mirror(v= [x, y, z] ) { ... }`

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019






▼ About this capture

## 99 captures

24 Nov 2009 - 21 Sep 2020

The original is on the right side. Note that mirror doesn't make a copy. Like rotate and scale, it changes the object.

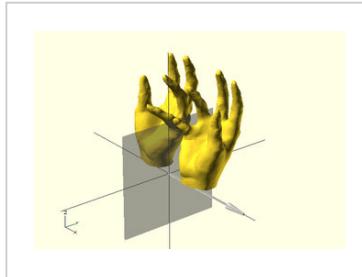

```
hand(); // original
mirror([1,0,0]) hand();
```

```
hand(); // original
mirror([1,1,0]) hand();
```

```
hand(); // original
mirror([1,1,1]) hand();
```

```
rotate([0,0,10]) cube([3,2,1]);
mirror([1,0,0]) translate([1,0,0]) rotate([0,0,10]) cube([3,2,1]);
```

[image of the result of the mirror\(\) transformation in OpenSCAD](#)

## multmatrix

Multiplies the geometry of all child elements with the given 4x4 transformation matrix.

Usage: multmatrix(m = [...]) { ... }

This is a breakdown of what you can do with the independent elements in the matrix (for the first three rows):

[Scale X]	[Scale X sheared along Y]	[Scale X sheared along Z]	[Translate X]
[Scale Y sheared along X]	[Scale Y]	[Scale Y sheared along Z]	[Translate Y]
[Scale Z sheared along X]	[Scale Z sheared along Y]	[Scale Z]	[Translate Z]

the fourth row is used in 3D environments to define a view of the object. it is not used in OpenSCAD and should be [0,0,0,1]

Example which rotates by 45 degrees in XY plane and translates by [10,20,30], ie the same as `translate([10,20,30]) rotate([0,0,45])` would do.

```
angle=45;
multmatrix(m = [
  [cos(angle), -sin(angle), 0, 10],
  [sin(angle), cos(angle), 0, 20],
  [0, 0, 1, 30],
  [0, 0, 0, 1]
]) union() {
  cylinder(r=10.0,h=10,center=false);
  cube(size=[10,10,10],center=false);
}
```

Example that skews a model, something that is not possible with the other transformations. Also shows you can have the matrix in a variable.

```
M = [
  [ 1 , 0 , 0 , 0 ],
  [ 0 , 1 , 0.7 , 0 ], // The "0.7" is the skew value; pushed along the y axis
  [ 0 , 0 , 1 , 0 ],
  [ 0 , 0 , 0 , 1 ] ];
multmatrix(M) { union() {
  cylinder(r=10.0,h=10,center=false);
  cube(size=[10,10,10],center=false);
}}
```

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



[99 captures](#)

24 Nov 2009 - 21 Sep 2020

2017 2018 2019

▼ About this capture

Learn more about it here:

- Affine Transformations ([https://web.archive.org/web/20180425001407/http://en.wikipedia.org/wiki/Transformation\\_matrix#Affine\\_transformations](https://web.archive.org/web/20180425001407/http://en.wikipedia.org/wiki/Transformation_matrix#Affine_transformations)) on wikipedia
- <http://www.senocular.com/flash/tutorials/transformmatrix/>

## color

Displays the child elements using the specified RGB color + alpha value. This is only used for the F5 preview as CGAL and STL (F6) do not currently support color. The alpha value will default to 1.0 (opaque) if not specified.

### Function signature:

```
color( c = [r, g, b, a] ) { ... }
color( c = [r, g, b], alpha = 1.0 ) { ... }
color( "colorname", 1.0 ) { ... }
```

Note that the r, g, b, a values are limited to floating point values in the range **[0,1]** rather than the more traditional integers { 0 ... 255 }. However, nothing prevents you to using R, G, B values from {0 ... 255} with appropriate scaling: `color([ R/255, G/255, B/255 ])` { ... }

Since version *2011.12*, colors can also be defined by name (case **insensitive**). For example, to create a red sphere, you can write `color("red") sphere(5);`. Alpha is specified as an extra parameter for named colors: `color("Blue",0.5) cube(5);`

The available color names are taken from the World Wide Web consortium's SVG color list (<https://web.archive.org/web/20180425001407/http://www.w3.org/TR/css3-color/>). A chart of the color names is as follows,  
(note that both spellings of grey/gray including slategrey/slategray etc are valid):

Purples	Blues	Greens	Yellows	Whites
Lavender	Aqua	GreenYellow	Gold	White
Thistle	Cyan	Chartreuse	Yellow	Snow
Plum	LightCyan	LawnGreen	LightYellow	Honeydew
Violet	PaleTurquoise	Lime	LemonChiffon	MintCream
Orchid	Aquamarine	LimeGreen	LightGoldenrodYellow	Azure
Fuchsia	Turquoise	PaleGreen	PapayaWhip	AliceBlue
Magenta	MediumTurquoise	LightGreen	Moccasin	GhostWhite
MediumOrchid	DarkTurquoise	MediumSpringGreen	PeachPuff	WhiteSmoke
MediumPurple	CadetBlue	SpringGreen	PaleGoldenrod	Seashell
BlueViolet	SteelBlue	MediumSeaGreen	Khaki	Beige
DarkViolet	LightSteelBlue	SeaGreen	DarkKhaki	OldLace
DarkOrchid	PowderBlue	ForestGreen		FloralWhite
DarkMagenta	LightBlue	Green	Cornsilk	Ivory
Purple	SkyBlue	DarkGreen	BlanchedAlmond	AntiqueWhite
Indigo	LightSkyBlue	YellowGreen	Bisque	Linen
DarkSlateBlue	DeepSkyBlue	OliveDrab	NavajoWhite	LavenderBlush
SlateBlue	DodgerBlue	Olive	Wheat	MistyRose
MediumSlateBlue	CornflowerBlue	DarkOliveGreen	BurlyWood	
Pinks	RoyalBlue	MediumAquamarine	Tan	Gainsboro
Pink	Blue	DarkSeaGreen	RosyBrown	LightGrey
LightPink	MediumBlue	LightSeaGreen	SandyBrown	Silver
HotPink	DarkBlue	DarkCyan	Goldenrod	DarkGray

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



▼ About this capture

## 99 captures

24 Nov 2009 - 21 Sep 2020

IndianRed	Coral	SaddleBrown	SlateGray
LightCoral	Tomato	Sienna	DarkSlateGray
Salmon	OrangeRed	Brown	Black
DarkSalmon	DarkOrange	Maroon	
LightSalmon	Orange		
Red			
Crimson			
FireBrick			
DarkRed			

## Example

Here's a code fragment that draws a wavy multicolor object

```
for(i=[0:36]) {
  for(j=[0:36]) {
    color( [0.5+sin(10*i)/2, 0.5+sin(10*j)/2, 0.5+sin(10*(i+j))/2] )
    translate( [i, j, 0] )
    cube( size = [1, 1, 11+10*cos(10*i)*sin(10*j)] );
  }
}
```

↗ Being that  $-1 \leq \sin(x) \leq 1$  then  $0 \leq (1/2 + \sin(x)/2) \leq 1$ , allowing for the RGB components assigned to color to remain within the  $[0,1]$  interval.

*Chart based on "Web Colors" from Wikipedia ([https://web.archive.org/web/20180425001407/http://en.wikipedia.org/wiki/Web\\_colors](https://web.archive.org/web/20180425001407/http://en.wikipedia.org/wiki/Web_colors))*

A 3-D multicolor sine wave

## Example 2

In cases where you want to optionally set a color based on a parameter you can use the following trick:

```
module myModule(withColors=false) {
  c=withColors?"red":undef;
  color(c) circle(r=10);
}
```

Setting the colorname to undef will keep the default colors.

## offset

**[Note: Requires version 2015.03]**

Offset allows moving 2D outlines outward or inward by a given amount.

- This is useful for making thin walls, by differencing a positive-offset exterior and a negative-offset interior.
- Fillet: offset( $r=-3$ ) offset(delta= $+3$ ) rounds all inside (concave) corners, and leaves flat walls unchanged. However, holes less than  $2r$  in diameter will vanish.
- Round: offset( $r=+3$ ) offset(delta= $-3$ ) rounds all outside (convex) corners, and leaves flat walls unchanged. However, walls less than  $2r$  thick will vanish.

## Parameters

### r | delta

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



99 captures

24 Nov 2009 - 21 Sep 2020

▼ About this capture

Boolean. (default *false*) When using the delta parameter, this flag defines if edges should be chamfered (cut off with a straight line) or not (extended to their intersection).

Positive r/delta value

Negative r/delta value

Result for different parameters. The black polygon is the input for the offset() operation.

## Examples

// Example 1

```
linear_extrude(height = 60, twist = 90, slices = 60) {
    difference() {
        offset(r = 10) {
            square(20, center = true);
        }
        offset(r = 8) {
            square(20, center = true);
        }
    }
}
```

Example 1: Result.

// Example 2

```
module fillet(r) {
    offset(r = -r) {
        offset(delta = r) {
            children();
        }
    }
}
```

## minkowski

Displays the [minkowski sum](https://web.archive.org/web/20180425001407/http://www.cgal.org/Manual/latest/doc_html/cgal_manual/Minkowski_sum_3/Chapter_main.html) ([https://web.archive.org/web/20180425001407/http://www.cgal.org/Manual/latest/doc\\_html/cgal\\_manual/Minkowski\\_sum\\_3/Chapter\\_main.html](https://web.archive.org/web/20180425001407/http://www.cgal.org/Manual/latest/doc_html/cgal_manual/Minkowski_sum_3/Chapter_main.html)) of child nodes.

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



▼ About this capture

## 99 captures

24 Nov 2009 - 21 Sep 2020

```
$fn=50;
cube([10,10,1]);
cylinder(r=2,h=1);
```

Then, do a minkowski sum of them (note that the outer dimensions of the box are now  $10+2+2 = 14$  units by 14 units by 2 units high as the heights of the objects are summed):

```
$fn=50;
minkowski()
{
    cube([10,10,1]);
    cylinder(r=2,h=1);
}
```

NB: The origin of the second object is used for the addition. If the second object is not centered, then the addition will be asymmetric. The following minkowski sums are different: the first expands the original cube by 0.5 units in all directions, both positive and negative. The second expands it by +1 in each positive direction, but doesn't expand in the negative directions.

```
minkowski() {
    cube([10, 10, 1]);
    cube(1, center=true);
}
```

```
minkowski() {
    cube([10, 10, 1]);
    cube(1);
}
```

A box and a cylinder

Minkowski sum of the box and cylinder

## hull

Displays the convex hull ([https://web.archive.org/web/20180425001407/http://www.cgal.org/Manual/latest/doc\\_html/cgal\\_manual/Convex\\_hull\\_2/Chapter\\_main.html](https://web.archive.org/web/20180425001407/http://www.cgal.org/Manual/latest/doc_html/cgal_manual/Convex_hull_2/Chapter_main.html)) of child nodes.

Usage example:

```
hull() {
    translate([15,10,0]) circle(10);
    circle(10);
}
```



Two cylinders

Hull with 2D arguments can only produce a 2D result; translating the constituent 2D parts in the Z direction has no effect.

## Combining transformations

When combining transformations, it is a sequential process, but going right-to-left. That is

```
rotate( ... ) translate ( ... ) cube(5) ;
```

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



About this capture

## 99 captures

24 Nov 2009 - 21 Sep 2020

```
translate ( ... ) rotate( ... ) cube(5) ;
```

would first turn the cube and place it at the offset defined by the translate.

```
color("red")  translate([0,10,0] ) rotate([45,0,0])      cube(5);
color("green") rotate([45,0,0])   translate([0,10,0] ) cube(5);
```

Convex hull of two cylinders

Combine two transforms

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go FEB APR JUN

[99 captures](#)

24 Nov 2009 - 21 Sep 2020

◀ 25 ▶

2017 2018 2019




▼ About this capture


## OpenSCAD User Manual/The OpenSCAD Language

### boolean overview

#### 2D examples

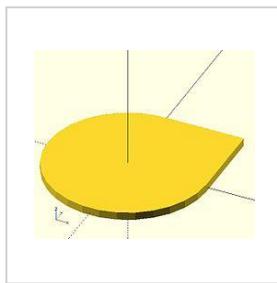

union ( or )  
circle + square



difference ( and not )  
square - circle




difference ( and not )  
circle - square




intersection ( and )  
circle - (circle - square)

```
union()      {square(10);circle(10);} // square or circle
difference() {square(10);circle(10);} // square and not circle
difference() {circle(10);square(10);} // circle and not square
intersection(){square(10);circle(10);} // square and circle
```

#### 3D examples




union ( or )  
sphere + cube



difference ( and not )  
cube - sphere



difference ( and not )  
sphere - cube

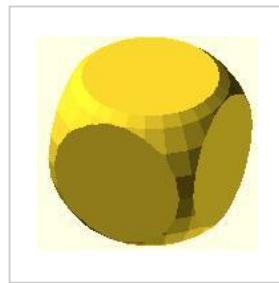

intersection ( and )  
sphere - (sphere - cube)

```
union()      {cube(12, center=true); sphere(8);} // cube or sphere
difference() {cube(12, center=true); sphere(8);} // cube and not sphere
difference() {sphere(8); cube(12, center=true);} // sphere and not cube
intersection(){cube(12, center=true); sphere(8);} // cube and sphere
```

### union

Creates a union of all its child nodes. This is the **sum** of all children (logical **or**).

May be used with either 2D or 3D objects, but don't mix them.

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶


2017 2018 2019



▼ About this capture

99 captures

24 Nov 2009 - 21 Sep 2020

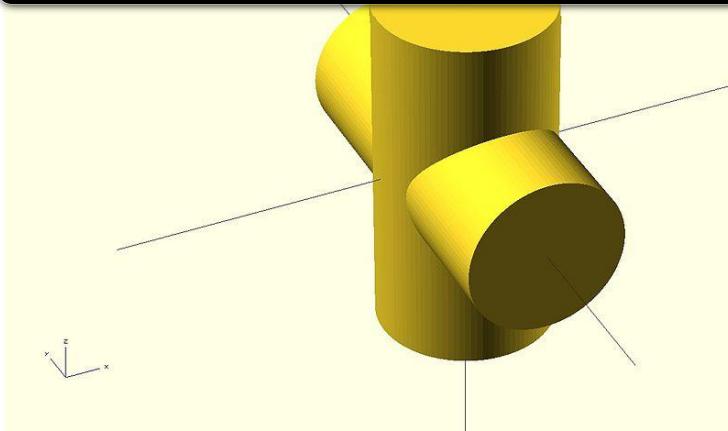


```
//Usage example:
union() {
    cylinder (h = 4, r=1, center = true, $fn=100);
    rotate ([90,0,0]) cylinder (h = 4, r=0.9, center = true, $fn=100);
}
```

Remark: union is implicit when not used. But it is mandatory, for example, in difference to group first child nodes into one.

## difference

Subtracts the 2nd (and all further) child nodes from the first one (logical **and not**).

May be used with either 2D or 3D objects, but don't mix them.

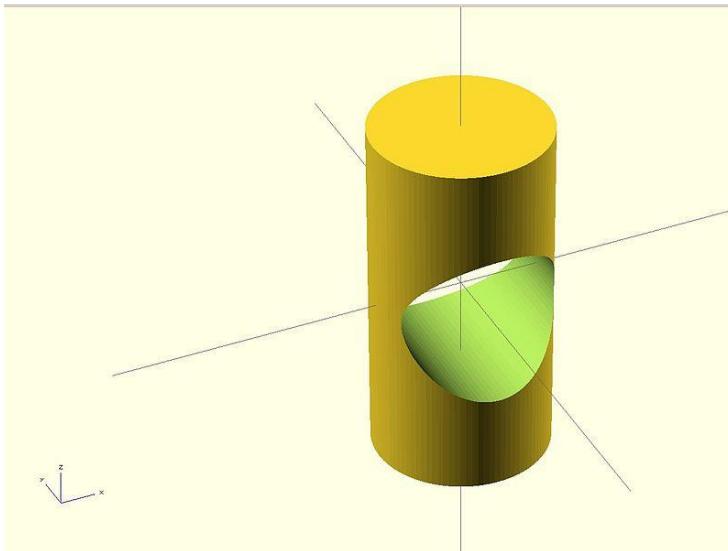

```
Usage example:
difference() {
    cylinder (h = 4, r=1, center = true, $fn=100);
    rotate ([90,0,0]) cylinder (h = 4, r=0.9, center = true, $fn=100);
}
```

## difference with multiple children

Note, in the second instance, the result of adding a union of the 1st and 2nd children.

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go FEB APR JUN

99 captures


24 Nov 2009 - 21 Sep 2020

◀ 25 ▶

2017 2018 2019



▼ About this capture

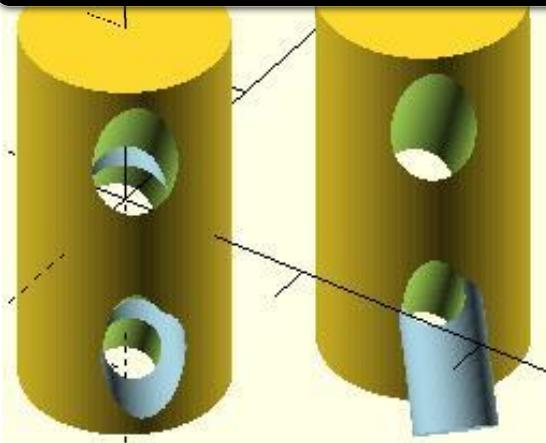

```
// Usage example for difference of multiple children:
$fn=90;
difference(){
    rotate([00,140,-45]) color("LightBlue") cylinder(r=5,h=20,center=true);
    rotate([00,40,-50]) cylinder(r=2,h=25,center=true);
    translate([0,0,-10])rotate([00,40,-50]) cylinder(r=1.4,h=30,center=true);
}


// second instance with added union
translate([10,10,0]){
    difference(){
        union(){} // combine 1st and 2nd children
        cylinder(r=5,h=20,center=true);
        rotate([00,140,-45]) color("LightBlue") cylinder(r=2,h=25,center=true);
    }
    rotate([00,40,-50]) cylinder(r=2,h=30,center=true);
    translate([0,0,-10])rotate([00,40,-50]) cylinder(r=1.4,h=30,center=true);
}
```

## intersection

Creates the intersection of all child nodes. This keeps the **overlapping** portion (logical **and**).

Only the area which is common or shared by **all** children is retained.

May be used with either 2D or 3D objects, but don't mix them.

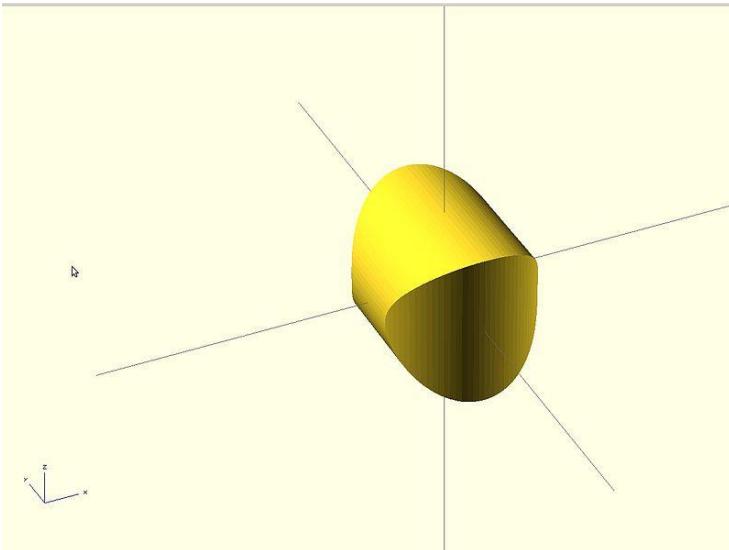

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



▼ About this capture

## render


Always calculate the CSG model for this tree (even in OpenCSG preview mode).

Usage example:

```
render(convexity = 1) { ... }
```

convexity

Integer. The convexity parameter specifies the maximum number of front and back sides a ray intersecting the object might penetrate. This parameter is only needed for correctly displaying the object in OpenCSG preview mode and has no effect on the polyhedron rendering.

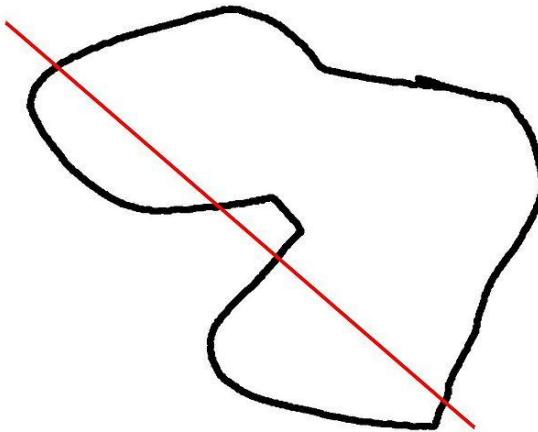

This image shows a 2D shape with a convexity of 4, as the ray indicated in red crosses the 2D shape a maximum of 4 times. The convexity of a 3D shape would be determined in a similar way. Setting it to 10 should work fine for most cases.

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go FEB APR JUN

[99 captures](#)

24 Nov 2009 - 21 Sep 2020

◀ 25 ▶

2017 2018 2019



▼ About this capture

## OpenSCAD User Manual/The OpenSCAD Language

# Conditional and Iterator Functions

## For loop

Evaluate each value in a range or vector, applying it to the following Action.

```
for(variable = [start : increment : end])
for(variable = [start : end])
for(variable = [vector])
```

### parameters

As a range [ start : <increment : > end ] (see section on [range](#))

*Note: For range, values are separated by colons rather than commas used in vectors.*

**start** - initial value

**increment** or step - amount to increase the value, *optional, default = 1*

**end** - stop when next value would be past end

As a vector

The Action is evaluated for each element of the vector

### examples:

```
for (a =[3:5])echo(a);      // 3 4 5
for (a =[3:0])echo(a);      // 0 1 2 3      start < end is invalid, deprecated by 2015.3
for (a =[3:0.5:5])echo(a); // 3 3.5 4 4.5 5
for (a =[0:2:5])echo(a);   // 0 2 4
for (a =[3:-2:-1])echo(a); // 3 1 -1      a never equals end
                                            negative increment requires 2015.3
                                            be sure end < start
for (a =[3,4,1,5])echo(a); // 3 4 1 5
for (a =[0.3,PI,1,99])echo(a); // 0.3 3.14159 1 99
x1=2; x2=8; x3=5.5;
for (a =[x1,x2,x3])echo(a); // 2 8 5.5
for (a =[[1,2],6,"s",[[3,4],[5,6]]])echo(a); // [1,2] 6 "s" [[3,4],[5,6]]
```

for() is an Operator. Operators require braces {} if more than one Action is within its scope. Actions end in semicolons, Operators do not.

for() is not an exception to the rule about variables having only one value within a scope. Each evaluation is given its own scope, allowing any variables to have unique values. No, you still can't do a=a+1;

Remember this is not an iterative language, the for() does not loop in the programmatic sense, it builds a tree of objects one branch for each item in the range/vector, inside each branch the 'variable' is a specific and separate instantiation or scope.

Hence:

```
for (i=[0:3])
  translate([i*10,0,0])
  cube(i+1);
```

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go FEB APR JUN

◀ 25 ▶

2017 2018 2019



## 99 captures

24 Nov 2009 - 21 Sep 2020

▼ About this capture

```
group() {
    multmatrix([[1, 0, 0, 0], [0, 1, 0, 0], [0, 0, 1, 0], [0, 0, 0, 1]]) {
        cube(size = [1, 1, 1], center = false);
    }
    multmatrix([[1, 0, 0, 10], [0, 1, 0, 0], [0, 0, 1, 0], [0, 0, 0, 1]]) {
        cube(size = [2, 2, 2], center = false);
    }
    multmatrix([[1, 0, 0, 20], [0, 1, 0, 0], [0, 0, 1, 0], [0, 0, 0, 1]]) {
        cube(size = [3, 3, 3], center = false);
    }
    multmatrix([[1, 0, 0, 30], [0, 1, 0, 0], [0, 0, 1, 0], [0, 0, 0, 1]]) {
        cube(size = [4, 4, 4], center = false);
    }
}
```

All instances of the for() exist at the same time, they do not iterate sequentially.

## Nested for()

While it is reasonable to nest multiple for() statements such as:

```
for(z=[-180:45:+180])
  for(x=[10:5:50])
    rotate([0,0,z]) translate([x,0,0]) cube(1);
```

instead, all ranges/vectors can be include in the same for() operator.

```
for ( variable1 = <range or vector> , variable2 = <range or vector> ) <do something using both variables>
```

example for() nested 3 deep

```
color_vec = ["black","red","blue","green","pink","purple"];
for (x = [-20:10:20] )
for (y = [0:4] )color(color_vec[y])
for (z = [0,4,10] )
  {translate([x,y*5-10,z])cube();}
```

shorthand nesting for same result

```
color_vec = ["black","red","blue","green","pink","purple"];
for (x = [-20:10:20],
y = [0:4],
z = [0,4,10] )
  translate([x,y*5-10,z]) {color(color_vec[y])cube();}
```

## Examples using vector of vectors

example 1 - iteration over a vector of vectors (rotation)

```
for(i = [ [ 0, 0, 0],
          [ 10, 20, 300],
          [200, 40, 57],
          [ 20, 88, 57] ])
{
  rotate(i)
  cube([100, 20, 20], center = true);
}
```

for() loops nested 3 deep

example 2 - iteration over a vector of vectors (translation)

```
for(i = [ [ 0, 0, 0],
```

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go FEB APR JUN

◀ 25 ▶

2017 2018 2019




▼ About this capture

## 99 captures

24 Nov 2009 - 21 Sep 2020

```
translate(i)
cube([50, 15, 10], center = true);
}

example 3 - iteration over a vector of vectors
for(i = [ [[ 0, 0, 0], 20],
          [[10, 12, 10], 50],
          [[20, 24, 20], 70],
          [[30, 36, 30], 10],
          [[20, 48, 40], 30],
          [[10, 60, 50], 40] ])
{
    translate([i[0][0], 2*i[0][1], 0])
    cube([10, 15, i[1]]);
}
```

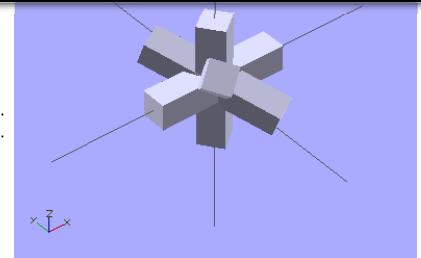


example 1 for() loop vector of vectors (rotation)

## Intersection For Loop


Iterate over the values in a range or vector and create the intersection of objects created by each pass.

Besides creating separate instances for each pass, the standard **for()** also groups all these instances creating an implicit union. **intersection\_for()** is a work around because the implicit union prevents getting the expected results using a combination of the standard **for()** and **intersection()** statements.

**intersection\_for()** uses the same parameters, and works the same as a For Loop, other than eliminating the implicit union.

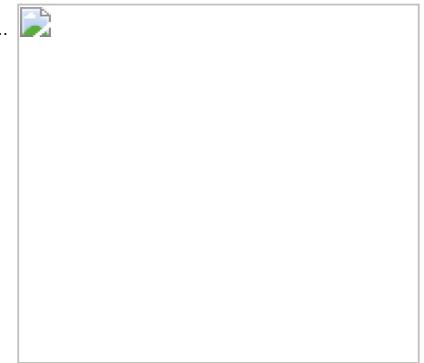

example 2 for() loop vector of vectors (translation)

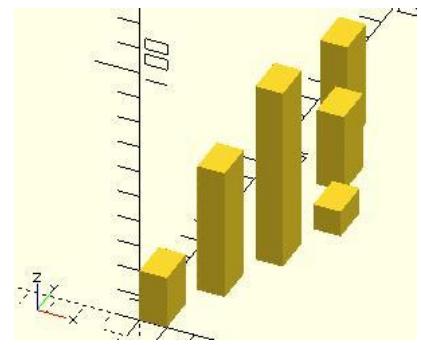

example 3 for() loop vector of vectors

### example 1 - loop over a range:

```
intersection_for(n = [1 : 6])
{
    rotate([0, 0, n * 60])
    {
        translate([5,0,0])
        sphere(r=12);
    }
}
```

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶


2017 2018 2019



About this capture

[99 captures](#)

24 Nov 2009 - 21 Sep 2020

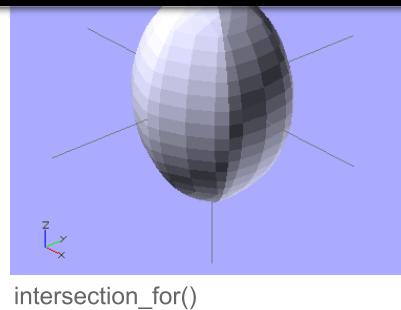


either intersection() for() or for()  
intersection()

## example 2 - rotation :

```
intersection_for(i = [ [ 0, 0, 0],
[ 10, 20, 300],
[200, 40, 57],
[ 20, 88, 57] ])

rotate(i)
cube([100, 20, 20], center = true);
}
```

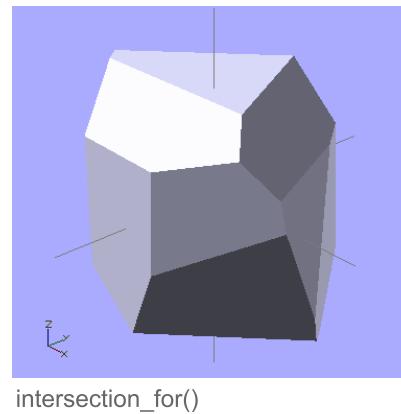

In

## If Statement

Performs a test to determine if the actions in a sub scope should be performed or not.

```
if (test) scope1
if (test){scope1}
if (test) scope1 else scope2
if (test){scope1} else {scope2}
```

### Parameters

**test:** Usually a boolean expression, but can be any value or variable.

[See here for true or false state of values.](#)

[See here for boolean and logical operators](#)

Do not confuse the assignment operator '=' with the equal operator '=='

**scope1:** one or more actions to take when test is **true**.

**scope2:** one or more actions to take when test is **false**.

```
if (b==a) cube(4);
if (b<a) {cube(4); cylinder(6);}
```

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



▼ About this capture

## 99 captures

24 Nov 2009 - 21 Sep 2020

```
if (a==4) {} else echo("a is not 4");
if ((b<5)&&(a>8)) {cube(4); else cylinder(3);}
if (b<5&&a>8) cube(4); else cylinder(3);
```

Since 2015.03 variables can now be assigned in any scope. Note that assignments are only valid within the scope in which they are defined - you are still not allowed to leak values to an outer scope. See [Scope of variables](#) for more details.

## Nested if

The scopes of both the **if()** portion and the **else** portion, can in turn contain **if()** statements. This nesting can be to many depths.

```
if (test1)
{
    scope1 if (test2) {scope2.1}
    else {scope2.2}
}
else
{
    scope2 if (test3) {scope3.1}
    else {scope3.2}
}
```

When scope1 and scope2 contain **only** the **if()** statement, the outer sets of braces can be removed.

```
if (test1)
    if (test2) {scope2.1}
    else {scope2.2}
else
    if (test3) {scope3.1}
    else {scope3.2}
```

One evolution is this:

## else if

```
if(test1) {scope1}
else if(test2) {scope2}
else if(test3) {scope3}
else if(test4) {scope4}
else {scope5}
```

Note that **else** and **if** are two separate words. When working down the chain of tests, the first true will use its scope. All further tests will be skipped.

## example

```
if((k<8)&&(m>1)) cube(10);
else if(y==6) {sphere(6);cube(10);}
else if(y==7) color("blue")sphere(5);
else if(k+m!=8) {cylinder(15,5,0);sphere(8);}
else color("green"){cylinder(12,5,0);sphere(8);}
```

## Conditional ? :

A function which uses a test to determine which of 2 values to return.

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



[99 captures](#)

24 Nov 2009 - 21 Sep 2020

▼ About this capture

## Parameters

**test:** Usually a boolean expression, but can be any value or variable.

[See here for true or false state of values.](#)

[See here for boolean and logical operators](#)

Do not confuse assignment '=' with equal '=='

**TrueValue:** the value to return when test is **true**.

**FalseValue:** the value to return when test is **false**.

A value in OpenSCAD is either a Number (like 42), a Boolean (like true), a String (like "foo"), a Vector (like [1,2,3]), or the Undefined value (undef). Values can be stored in variables, passed as function arguments, and returned as function results.

This works like the ?: operator from the family of C-like programming languages.

## Examples

```
a=1; b=2; c= a==b ? 4 : 5 ;           //  5
a=1; b=2; c= a==b ? "a==b" : "a!=b" ; // "a!=b"

TrueValue = true; FalseValue = false;
a=5; test = a==1;
echo( test ? TrueValue : FalseValue ); // false

L = 75; R = 2; test = (L/R)>25;
TrueValue = [test,L,R,L/R,cos(30)];
FalseValue = [test,L,R,sin(15)];
a1 = test ? TrueValue : FalseValue ;    // [true, 75, 2, 37.5, 0.866025]
```

## Recursive function calls

Recursive function calls are supported. Using the Conditional "... ? ... : ..." it's possible to ensure the recursion is terminated. Note: There is a built-in recursion limit to prevent an application crash. If the limit is hit, the function returns undef.

### example

```
// recursion - find the sum of the values in a vector (array) by calling itself
// from the start (or s'th element) to the i'th element - remember elements are zero based

function sumv(v,i,s=0) = (i==s ? v[i] : v[i] + sumv(v,i-1,s));

vec=[ 10, 20, 30, 40 ];
echo("sum vec=", sumv(vec,2,1)); // calculates 20+30=50
```

Some forms of tail-recursion elimination are supported.

## Assign Statement

Set variables to a new value for a sub-tree.

Since 2015.03 `assign()` is deprecated, as variables can now be assigned anywhere, see 2nd example below. If you prefer this way of setting values, the new Let Statement can be used instead.

## Parameters

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



▼ About this capture

```
for (i = [10:50])
{
    assign (angle = i*360/20, distance = i*10, r = i*2)
    {
        rotate(angle, [1, 0, 0])
        translate([0, distance, 0])
        sphere(r = r);
    }
}
```

```
for (i = [10:50])
{
    angle = i*360/20;
    distance = i*10;
    r = i*2;
    rotate(angle, [1, 0, 0])
    translate([0, distance, 0])
    sphere(r = r);
}
```

## Let Statement

[**Note:** Requires version **2016.XX**] (ie a development version)

Set variables to a new value for a sub-tree. The parameters are evaluated sequentially and may depend on each other (as opposed to the deprecated assign() statement).

### Parameters

The variables that should be set

#### example:

```
for (i = [10:50])
{
    let (angle = i*360/20, r= i*2, distance = r*5)
    {
        rotate(angle, [1, 0, 0])
        translate([0, distance, 0])
        sphere(r = r);
    }
}
```

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



[99 captures](#)

24 Nov 2009 - 21 Sep 2020

▼ About this capture

## Scalar Arithmetical Operators

The scalar arithmetical operators take numbers as operands and produce a new number.

+	add
-	subtract
*	multiply
/	divide
%	modulo

The "-" can also be used as prefix operator to negate a number.

## Relational Operators

Relational operators produce a Boolean result from two operands.

<	less than
<=	less equal
==	equal
!=	not equal
>=	greater equal
>	greater than

If both operands are simple numbers, the meaning is self-evident.

If both operands are strings, alphabetical sorting determines equality and order. E.g., "ab" > "aa" > "a".

If both operands are Booleans, *true* > *false*. If one operand is Boolean, the other operand is converted to Boolean before the comparison is made.

If both operands are vectors, OpenSCAD performs an element-by-element comparison and can only result in *true* if the vectors are equal in size and each and every pair of elements results in *true* upon the comparison. Otherwise, *false* is returned.

Vectors of different sizes are treated as unequal for '==' and '!=' operators, and always result in *false* for '>', '>=' , '<' and '<=' operators. In fact the same principle applies for all comparison between dissimilar types of operand, e.g. comparing a string with a number.

Note that [1] ≠ 1.

*undef* doesn't equal anything but *undef*. *undef* compares ('>' etc.) anything result in *false*.

*nan* doesn't equal anything. See [Numbers](#).

## Logical Operators

All logical operators take Booleans as operands and produce a Boolean. Non-Boolean quantities are converted to Booleans before the operator is evaluated.

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



About this capture

[99 captures](#)

24 Nov 2009 - 21 Sep 2020

Since [false] is true, false || [false] is also true.

Note that how logical operators deal with vectors is different than relational operators:

[1, 1] > [0, 2] is false, but

[false, false] && [false, false] is true.

## Conditional Operator

The ?: operator can be used to conditionally evaluate one or another expression. It works like the ?: operator from the family of C-like programming languages.

?:	Conditional operator
----	----------------------

### Usage Example:

```
a=1;
b=2;
c= a==b ? 4 : 5;
```

If a equals b, then c is set to 4, else c is set to 5.

The part "a==b" must be something that evaluates to a boolean value.

## Vector-Number Operators

The vector-number operators take a vector and a number as operands and produce a new vector.

*	multiply all vector elements by number
/	divide all vector elements by number

### Example

```
L = [1, [2, [3, "a"] ] ];
echo(5*L);
// ECHO: [5, [10, [15, undef]]]
```

## Vector Operators

The vector operators take vectors as operands and produce a new vector.

+	add element-wise
-	subtract element-wise

The "-" can also be used as prefix operator to element-wise negate a vector.

### Example

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



[99 captures](#)

24 Nov 2009 - 21 Sep 2020

▼ About this capture

## Vector Dot-Product Operator

If both operands of multiplication are simple vectors, the result is a number according to the linear algebra rule for dot product.  $c = u \cdot v$ ; results in . If the operands' sizes don't match, the result is `undef`.

## Matrix Multiplication

If one or both operands of multiplication are matrices, the result is a simple vector or matrix according to the linear algebra rules for matrix product. In the following, A, B, C... are matrices, u, v, w... are vectors. Subscripts i, j denote element indices.

For A a matrix of size  $n \times m$  and B a matrix of size  $m \times p$ , their product  $C = A \cdot B$ ; is a matrix of size  $n \times p$  with elements

$$C_{ij} = \sum_{k=0}^{m-1} A_{ik} B_{kj}.$$

$C = B \cdot A$ ; results in `undef` unless  $n = p$ .

For A a matrix of size  $n \times m$  and v a vector of size  $m$ , their product  $u = A \cdot v$ ; is a vector of size  $n$  with elements

.

In linear algebra, this is the product of a matrix and a column vector.

For v a vector of size  $n$  and A a matrix of size  $n \times m$ , their product  $u = v \cdot A$ ; is a vector of size  $m$  with elements

$$u_j = \sum_{k=0}^{n-1} v_k A_{kj}.$$

In linear algebra, this is the product of a row vector and a matrix.

Matrix multiplication is not commutative:  $AB \neq BA, Av \neq vA$ .

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



99 captures

24 Nov 2009 - 21 Sep 2020

About this capture

# Trigonometric Functions

The trig functions use the C Language mathematics functions, which are based in turn on Binary Floating Point mathematics, which use approximations of Real Numbers during calculation. OpenSCAD's math functions use the C++ 'double' type, inside Value.h/Value.cc,

A good resource for the specifics of the C library math functions, such as valid inputs/output ranges, can be found at the Open Group website [math.h](https://web.archive.org/web/20180425001407/http://pubs.opengroup.org/onlinepubs/009695399/basedefs/math.h.html) (<https://web.archive.org/web/20180425001407/http://pubs.opengroup.org/onlinepubs/009695399/basedefs/math.h.html>) & [acos](https://web.archive.org/web/20180425001407/http://pubs.opengroup.org/onlinepubs/009695399/functions/acos.html) (<https://web.archive.org/web/20180425001407/http://pubs.opengroup.org/onlinepubs/009695399/functions/acos.html>)

## cos

Mathematical **cosine** function of degrees. See [Cosine](#)


### Parameters

#### <degrees>

Decimal. Angle in degrees.

### Usage Example:

```
for(i=[0:36])
  translate([i*10,0,0])
    cylinder(r=5,h=cos(i*10)*50+60);
```

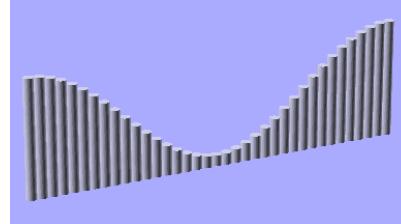

OpenSCAD Cos Function

## sin

Mathematical **sine** function. See [Sine](#)

### Parameters


#### <degrees>

Decimal. Angle in degrees.

### Usage example 1:

```
for (i = [0:5]) {
  echo(360*i/6, sin(360*i/6)*80, cos(360*i/6)*80);
  translate([sin(360*i/6)*80, cos(360*i/6)*80, 0 ])
    cylinder(h = 200, r=10);
}
```

### Usage example 2:

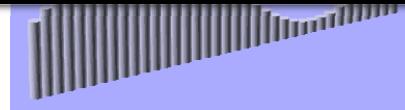

OpenSCAD Sin Function

## tan

Mathematical **tangent** function. See [Tangent](#)

### Parameters

#### <degrees>

Decimal. Angle in degrees.

### Usage example:

```
for (i = [0:5]) {
    echo(360*i/6, tan(360*i/6)*80);
    translate([tan(360*i/6)*80, 0, 0 ])
        cylinder(h = 200, r=10);
}
```

## acos

Mathematical **arccosine**, or **inverse cosine**, expressed in degrees. See: [Inverse trigonometric functions](#)

## asin

Mathematical **arcsine**, or **inverse sine**, expressed in degrees. See: [Inverse trigonometric functions](#)

## atan

Mathematical **arctangent**, or **inverse tangent**, function. Returns the principal value of the arc tangent of x, expressed in degrees. See: [Inverse trigonometric functions](#)

## atan2

Mathematical **two-argument atan** function, taking y as its first argument. Returns the principal value of the arc tangent of y/x, expressed in degrees. See: [atan2](#)

# Other Mathematical Functions

## abs

Mathematical **absolute value** function. Returns the positive value of a signed decimal number.

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



▼ About this capture

## 99 captures

24 Nov 2009 - 21 Sep 2020

```
abs(5.0);
abs(8.0);
```

## Results:

```
5.0
0.0
8.0
```

## ceil

Mathematical **ceiling** function.

Returns the next highest integer value by rounding up value if necessary.

See: [Ceil Function](#)

```
echo(ceil(4.4),ceil(-4.4)); // produces ECHO: 5, -4
```

## concat

[**Note:** Requires version **2015.03**]

Return a vector containing the arguments.

Where an argument is a vector the elements of the vector are individually added to the result vector. Strings are distinct from vectors in this case.

## Usage examples:

```
echo(concat("a","b","c","d","e","f")); // produces ECHO: ["a", "b", "c", "d", "e", "f"]
echo(concat(["a","b","c"],["d","e","f"])); // produces ECHO: ["a", "b", "c", "d", "e", "f"]
echo(concat(1,2,3,4,5,6)); // produces ECHO: [1, 2, 3, 4, 5, 6]
```

Vector of vectors

```
echo(concat([ [1],[2] ], [ [3] ])); // produces ECHO: [[1], [2], [3]]
```

Contrast with strings

```
echo(concat([1,2,3],[4,5,6])); // produces ECHO: [1, 2, 3, 4, 5, 6]
echo(concat("abc","def")); // produces ECHO: ["abc", "def"]
echo(str("abc","def")); // produces ECHO: "abcdef"
```

## cross

Calculates the cross product of two vectors in 3D space. The result is a vector that is perpendicular to both of the input vectors.

Using invalid input parameters (e.g. vectors with a length different from 3 or other types) will produce an undefined result.

## Usage examples:

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



▼ About this capture

24 Nov 2009 - 21 Sep 2020

## exp

Mathematical **exp** function. Returns the base-e exponential function of x, which is the number e raised to the power x. See: [Exponent](#)

```
echo(exp(1),exp(ln(3)*4)); // produces ECHO: 2.71828, 81
```

## floor

Mathematical **floor** function. floor(x) = is the largest integer not greater than x

See: [Floor Function](#)

```
echo(floor(4.4),floor(-4.4)); // produces ECHO: 4, -5
```

## In

Mathematical **natural logarithm**. See: [Natural logarithm](#)

## len

Mathematical **length** function. Returns the length of an array, a vector or a string parameter.

### Usage examples:

```
str1="abcdef"; len_str1=len(str1);
echo(str1,len_str1);

a=6; len_a=len(a);
echo(a,len_a);

array1=[1,2,3,4,5,6,7,8]; len_array1=len(array1);
echo(array1,len_array1);

array2=[[0,0],[0,1],[1,0],[1,1]]; len_array2=len(array2);
echo(array2,len_array2);

len_array2_2=len(array2[2]);
echo(array2[2],len_array2_2);
```

### Results:

```
ECHO: "abcdef", 6
ECHO: 6, undef
ECHO: [1, 2, 3, 4, 5, 6, 7, 8], 8
ECHO: [[0, 0], [0, 1], [1, 0], [1, 1]], 4
ECHO: [1, 0], 2
```

This function allows (e.g.) the parsing of an array, a vector or a string.

### Usage examples:

```
str2="4711";
for (i=[0:len(str2)-1])
```

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



▼ About this capture

```
ECHO: "digit 1 : 4"
ECHO: "digit 2 : 7"
ECHO: "digit 3 : 1"
ECHO: "digit 4 : 1"
```

Note that the `len()` function is not defined when a simple variable is passed as the parameter.

This is useful when handling parameters to a module, similar to how shapes can be defined as a single number, or as an `[x,y,z]` vector; i.e. `cube(5)` or `cube([5,5,5])`

For example

```
module doIt(size) {
    if (len(size) == undef) {
        // size is a number, use it for x,y & z. (or could be undef)
        do([size,size,size]);
    } else {
        // size is a vector, (could be a string but that would be stupid)
        do(size);
    }
}
doIt(5);      // equivalent to [5,5,5]
doIt([5,5,5]); // similar to cube(5) v's cube([5,5,5])
```

## let

**[Note:** Requires version 2015.03]

Sequential assignment of variables inside an expression. The following expression is evaluated in context of the let assignments and can use the variables. This is mainly useful to make complicated expressions more readable by assigning interim results to variables.

### Parameters

```
let (var1 = value1, var2 = f(var1), var3 = g(var1, var2)) expression
```

## Usage Example:

```
echo(let(a = 135, s = sin(a), c = cos(a)) [ s, c ]); // ECHO: [0.707107, -0.707107]
```

## log

Mathematical **logarithm** to the base 10. Example: `log(1000) = 3`. See: [Logarithm](#)

## lookup

Look up value in table, and linearly interpolate if there's no exact match. The first argument is the value to look up. The second is the lookup table -- a vector of key-value pairs.

### Parameters

#### key

A lookup key

#### <key,value> array

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



▼ About this capture

## 99 captures

24 Nov 2009 - 21 Sep 2020


There is a bug where out of range keys will return the first value in the list. Newer versions of OpenSCAD should use the top or bottom end of the table as appropriate instead.

### Usage example:

- Will create a sort of 3D chart made out of cylinders of different height.

```
function get_cylinder_h(p) = lookup(p, [
  [-200, 5 ],
  [-50, 20 ],
  [-20, 18 ],
  [+80, 25 ],
  [+150, 2 ]
]);

for (i = [-100:5:+100]) {
  // echo(i, get_cylinder_h(i));
  translate([-i, 0, -30]) cylinder(r1 = 6, r2 = 2, h = get_cylinder_h(i)*3);
}
```

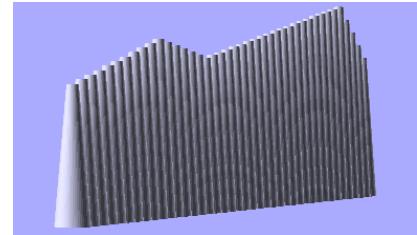

OpenSCAD Lookup Function

## max

Returns the maximum of the parameters. If a single vector is given as parameter, returns the maximum element of that vector.

### Parameters

```
max(n,n{,n}...)
max(vector)
```

### <n>

Two or more decimals

### <vector>

Single vector of decimals (requires OpenSCAD version 2014.06 or later).

### Usage Example:

```
max(3.0,5.0)
max(8.0,3.0,4.0,5.0)
max([8,3,4,5])
```

### Results:

```
5
8
8
```

## min

Returns the minimum of the parameters. If a single vector is given as parameter, returns the minimum element of that vector.

### Parameters

```
min(n,n{,n}...)
min(vector)
```

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



▼ About this capture

## Usage Example:

```
min(3.0,5.0)
min(8.0,3.0,4.0,5.0)
min([8,3,4,5])
```

## Results:

```
3
3
3
```

Looking for **mod** - it's not a function, see [modulo operator \(%\)](#)

## norm

Returns the [euclidean norm](#) of a vector. Note this returns the actual numeric length while **len** returns the number of elements in the vector or array.

## Usage examples:

```
a=[1,2,3,4];
b="abcd";
c=[];
d="";
e=[[1,2,3,4],[1,2,3],[1,2],[1]];
echo(norm(a)); //5.47723
echo(norm(b)); //undef
echo(norm(c)); //0
echo(norm(d)); //undef
echo(norm(e[0])); //5.47723
echo(norm(e[1])); //3.74166
echo(norm(e[2])); //2.23607
echo(norm(e[3])); //1
```

## Results:

```
ECHO: 5.47723
ECHO: undef
ECHO: 0
ECHO: undef
ECHO: 5.47723
ECHO: 3.74166
ECHO: 2.23607
ECHO: 1
```

## pow

Mathematical **power** function.

## Parameters

### <base>

Decimal. Base.

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



[99 captures](#)

24 Nov 2009 - 21 Sep 2020

▼ About this capture

```
for (i = [0:5]) {
    translate([i*25,0,0]) {
        cylinder(h = pow(2,i)*5, r=10);
        echo (i, pow(2,i));
    }
}
```

```
echo(pow(10,2)); // means 10^2 or 10*10
// result: ECHO: 100

echo(pow(10,3)); // means 10^3 or 10*10*10
// result: ECHO: 1000

echo(pow(125,1/3)); // means 125^(0.333...) which equals calculating the cube root of 125
// result: ECHO: 5
```

## rands

Random number generator. Generates a constant vector of pseudo random numbers, much like an array. The numbers are doubles not integers. When generating only one number, you still call it with variable[o]

### Parameters

#### min\_value

Minimum value of random number range

#### max\_value

Maximum value of random number range

#### value\_count

Number of random numbers to return as a vector

#### seed\_value (optional)

Seed value for random number generator for repeatable results. On versions before late 2015, seed\_value gets rounded to the nearest integer

### Usage Examples:

```
// get a single number
single_rand = rands(0,10,1)[0];
echo(single_rand);
```

```
// get a vector of 4 numbers
seed=42;
random_vect=rands(5,15,4,seed);
echo( "Random Vector: ",random_vect);
sphere(r=5);
for(i=[0:3]) {
    rotate(360*i/4) {
        translate([10+random_vect[i],0,0])
        sphere(r=random_vect[i]/2);
    }
}
// ECHO: "Random Vector: ", [8.7454, 12.9654, 14.5071, 6.83435]
```

## round

The "round" operator returns the greatest or least integer part, respectively, if the numeric input is positive or negative.

Some examples:

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



▼ About this capture

## 99 captures

24 Nov 2009 - 21 Sep 2020

```
round(5.4); //--> 5
round(5.5); //--> 6
round(5.6); //--> 6
```

## sign

Mathematical **signum** function. Returns a unit value that extracts the sign of a value see: [Signum function](#)

### Parameters

<x>

Decimal. Value to find the sign of.

### Usage examples:

```
sign(-5.0);
sign(0);
sign(8.0);
```

### Results:

```
-1.0
0.0
1.0
```

## sqrt

Mathematical **square root** function.

### Usage Examples:

```
translate([sqrt(100),0,0])sphere(100);
```

## Infinities and NaNs

How does OpenSCAD deal with inputs like (1/0)? Basically, the behavior is inherited from the language OpenSCAD was written in, the C++ language, and its floating point number types and the associated C math library. This system allows representation of both positive and negative infinity by the special values "Inf" or "-Inf". It also allow representation of creatures like  $\sqrt{-1}$  or  $0/0$  as "NaN", an abbreviation for "Not A Number". Some very nice explanations can be found on the web, for example the [Open Group's site on math.h](#) (<https://web.archive.org/web/20180425001407/http://pubs.opengroup.org/onlinepubs/009695399/basedefs/math.h.html>) or [Wikipedia's page on the IEEE 754 number format](#). However OpenSCAD is it's own language so it may not exactly match everything that happens in C. For example, OpenSCAD uses degrees instead of radians for trigonometric functions. Another example is that  $\sin()$  does not throw a "domain error" when the input is 1/0, although it does return NaN.

Here are some examples of infinite input to OpenSCAD math functions and the resulting output, taken from OpenSCAD's regression test system in late 2015.

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

**99 captures**

24 Nov 2009 - 21 Sep 2020

2017 2018 2019

25

About this capture

0/-0: nan	tan(-1/0): nan	atan(1/0): 90	log(-1/0): inf	sign(-1/0): 1
1/0: inf	ceil(-1/0): -inf	atan(-1/0): -90	log(-1/0): nan	sign(-1/0): -1
1/-0: -inf	ceil(1/0): inf	atan2(1/0, -1/0): 135	max(-1/0, 1/0): inf	sqrt(1/0): inf
-1/0: -inf	floor(-1/0): -inf	exp(1/0): inf	min(-1/0, 1/0): -inf	sqrt(-1/0): nan
-1/-0: inf	floor(1/0): inf	exp(-1/0): 0	pow(2, 1/0): inf	pow(2, -1/0): 0

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



[99 captures](#)

24 Nov 2009 - 21 Sep 2020

▼ About this capture

## str

Convert all arguments to strings and concatenate.

### Usage examples:

```
number=2;
echo ("This is ",number,3," and that's it.");
echo (str("This is ",number,3," and that's it."));
```

### Results:

```
ECHO: "This is ", 2, 3, " and that's it."
ECHO: "This is 23 and that's it."
```

## chr

**[Note:** Requires version **2015.03**]

Convert numbers to a string containing character with the corresponding code. OpenSCAD uses Unicode, so the number is interpreted as Unicode code point. Numbers outside the valid code point range will produce an empty string.

### Parameters

#### chr(Number)

Convert one code point to a string of length 1 (number of bytes depending on UTF-8 encoding) if the code point is valid.

#### chr(Vector)

Convert all code points given in the argument vector to a string.

#### chr(Range)

Convert all code points produced by the range argument to a string.

### Examples

```
echo(chr(65), chr(97));      // ECHO: "A", "a"
echo(chr(65, 97));          // ECHO: "Aa"
echo(chr([66, 98]));        // ECHO: "Bb"
echo(chr([97 : 2 : 102]));   // ECHO: "ace"
echo(chr(-3));              // ECHO: ""
echo(chr(9786), chr(9788)); // ECHO: "ø", "ø"
echo(len(chr(9788)));       // ECHO: 1
```

Note: When used with echo() the output to the console for character codes greater than 127 is platform dependent.

### Also See search()

[search\(\)](#) for text searching.

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



▼ About this capture

[99 captures](#)

24 Nov 2009 - 21 Sep 2020

[Note: Requires version 2015.03]

## Basic Syntax

The list comprehensions provide a flexible way to generate lists using the general syntax

```
[ list-definition expression ]
```

The following elements are supported to construct the list definition

**for (i = sequence)**

Iteration over a range or an existing list

**if (condition)**

Selection criteria, when true the expression will be calculated and added to the result list

**let (x = value)**

Local variable assignment

**for**

The for element defines the input values for the list generation, the syntax is the same as used by the for iterator.

**[ for (i = [start : step : end]) i ]**

Generate output based on a range definition, this version is mainly useful to calculate list values or access existing lists using the range value as index.

## Examples

```
// generate a List with all values defined by a range
list1 = [ for (i = [0 : 2 : 10]) i ];
echo(list1); // ECHO: [0, 2, 4, 6, 8, 10]
```

```
// extract every second character of a string
str = "SomeText";
list2 = [ for (i = [0 : 2 : len(str) - 1]) str[i] ];
echo(list2); // ECHO: ["S", "m", "T", "x"]
```

```
// indexed list access, using function to map input values to output values
function func(x) = x < 1 ? 0 : x + func(x - 1);
input = [1, 3, 5, 8];
output = [for (a = [0 : len(input) - 1]) func(input[a]) ];
echo(output); // ECHO: [1, 6, 15, 36]
```

**[ for (i = [a, b, c, ...]) i ]**

Use list parameter as input, this version can be used to map input values to calculated output values.

## Examples

```
// map input List to output List
list = [ for (i = [2, 3, 5, 7, 11]) i * i ];
echo(list); // ECHO: [4, 9, 25, 49, 121]
```

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



▼ About this capture

## 99 captures

24 Nov 2009 - 21 Sep 2020

```
// calculate Fibonacci numbers
function func(x) = x < 3 ? 1 : func(x - 1) + func(x - 2);
input = [7, 10, 12];
output = [for (a = input) func(a)];
echo(output); // ECHO: [13, 55, 144]
```

## if

The if element allows selection if the expression should be allocated and added to the result list or not. In the simplest case this allows filtering of an list.

### [ for (i = list) if (condition(i)) i ]

When the evaluation of the condition returns true, the expression i is added to the result list.

#### Example

```
list = [ for (a = [ 1 : 8 ]) if (a % 2 == 0) a ];
echo(list); // ECHO: [2, 4, 6, 8]
```

Note that the if element cannot be inside an expression, it should be at the top.

#### Example

```
// from the input List include all positive odd numbers
// and also all even number divided by 2

list = [-10:5];
echo([for(n=list) if(n%2==0 || n>=0) n%2==0 ? n/2 : n ]);
// ECHO: [-5, -4, -3, -2, -1, 0, 1, 1, 3, 2, 5]
// echo([for(n=list) n%2==0 ? n/2 : if(n>=0) n ]); // this would generate a syntactical error
```

## let

The let element allows sequential assignment of variables inside a list comprehension definition.

### [ for (i = list) let (assignments) a ]

#### Example

```
list = [ for (a = [ 1 : 4 ]) let (b = a*a, c = 2 * b) [ a, b, c ] ];
echo(list); // ECHO: [[1, 1, 2], [2, 4, 8], [3, 9, 18], [4, 16, 32]]
```

## Nested loops

There are different ways to define nested loops. Defining multiple loop variables inside one for element and multiple for elements produce both flat result lists. To generate nested result lists an additional [ ] markup is required.

```
// nested Loop using multiple variables
flat_result1 = [ for (a = [ 0 : 2 ], b = [ 0 : 2 ]) a == b ? 1 : 0 ];
echo(flat_result1); // ECHO: [1, 0, 0, 0, 1, 0, 0, 0, 1]
```

```
// nested Loop using multiple for elements
flat_result2 = [ for (a = [ 0 : 2 ]) for (b = [0 : 2]) a == b ? 1 : 0 ];
```

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



▼ About this capture

```
// nested Loop to generate a bi-dimensional matrix
identity_matrix = [ for (a = [ 0 : 2 ]) [ for (b = [ 0 : 2 ]) a == b ? 1 : 0 ] ];
echo(identity_matrix); // ECHO: [[1, 0, 0], [0, 1, 0], [0, 0, 1]]
```

## Advanced Examples

This chapter lists some advanced examples, useful idioms and use-cases for the list comprehension syntax.

### Generating vertices for a polygon

Using list comprehension, a parametric equation can be calculated at a number of points to approximate many curves, such as the following example for an ellipse (using [polygon\(\)](#)):

```
sma = 20; // semi-minor axis
smb = 30; // semi-major axis

polygon(
  [ for (a = [0 : 5 : 359]) [ sma * sin(a), smb * cos(a) ] ]
);
```



Result

### Flattening a nested vector

List comprehension can be used in a user-defined function to perform tasks on or for vectors. Here is a user-defined function that flattens a nested vector.

```
// input : nested list
// output : List with the outer level nesting removed
function flatten(l) = [ for (a = l) for (b = a) b ] ;

nested_list = [ [ 1, 2, 3 ], [ 4, 5, 6 ] ];
echo(flatten(nested_list)); // ECHO: [1, 2, 3, 4, 5, 6]
```

### Sorting a vector

Even a complicated algorithm [Quicksort](#) becomes doable with `for()`, `if()`, `let()` and [recursion](#):

```
// input : list of numbers
// output : sorted list of numbers
function quicksort(arr) = !(len(arr)>0) ? [] : let(
  pivot = arr[floor(len(arr)/2)],
  lesser = [ for (y = arr) if (y < pivot) y ],
  equal = [ for (y = arr) if (y == pivot) y ],
  greater = [ for (y = arr) if (y > pivot) y ]
) concat(
  quicksort(lesser), equal, quicksort(greater)
);

// use seed in rands() to get reproducible results
unsorted = [for (a = rands(0, 10, 6, 3)) ceil(a)];
echo(unsorted); // ECHO: [6, 1, 8, 9, 3, 2]
echo(quicksort(unsorted)); // ECHO: [1, 2, 3, 6, 8, 9]
```

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



▼ About this capture

## 99 captures

24 Nov 2009 - 21 Sep 2020

```
function select(vector,indices) = [ for (index = indices) vector[index] ];

vector1 = [[0,0],[1,1],[2,2],[3,3],[4,4]];
selector1 = [4,0,3];
vector2 = select(vector1,selector1); // [[4, 4], [0, 0], [3, 3]]
vector3 = select(vector1,[0,2,4,4,2,0]); // [[0, 0], [2, 2], [4, 4],[4, 4], [2, 2], [0, 0]]
// range also works as indices
vector4 = select(vector1, [4:-1:0]); // [[4, 4], [3, 3], [2, 2], [1, 1], [0, 0]]
```

## Concatenating two vectors

Using indices:

```
function cat(L1, L2) = [for (i=[0:len(L1)+len(L2)-1])
    i < len(L1)? L1[i] : L2[i-len(L1)]] ;

echo(cat([1,2,3],[4,5])); // concatenates two OpenSCAD lists [1,2,3] and [4,5], giving [1, 2, 3, 4, 5]
```

Without using indices:

```
function cat(L1, L2) = [for(L=[L1, L2], a=L) a];

echo(cat([1,2,3],[4,5])); // concatenates two OpenSCAD lists [1,2,3] and [4,5], giving [1, 2, 3, 4, 5]
```

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



[99 captures](#)

24 Nov 2009 - 21 Sep 2020

▼ About this capture

## Special variables

Special variables provide an alternate means of passing arguments to modules and functions. All user, or OpenSCAD, defined variables starting with a '\$' are special variables, similar to special variables in lisp. Modules and function see all outside variables in addition to those passed as arguments or defined internally.

The value for a regular variable is assigned at compile time and is thus static for all calls.

Special variables pass along their value from within the scope ([see scope of variables](#)) from which the module or function is called. This means that special variables can potentially have a different value each time a module or function is called.

```
regular = "regular global";
$special = "special global";
module show() echo("      in show    ", regular, "  ", $special );

echo ("      outside    ", regular, "  ", $special );
// ECHO:      outside    , "regular global", "  ", "special global"

for ( regular = [0:1] ){ echo("in regular loop    ", regular, "  ", $special ); show(); }
// ECHO: "in regular loop    ", 0, "  ", "special global"
// ECHO: "      in show    ", "regular global", "  ", "special global"
// ECHO: "in regular loop    ", 1, "  ", "special global"
// ECHO: "      in show    ", "regular global", "  ", "special global"

for ( $special = [5:6] ){ echo("in special loop    ", regular, "  ", $special ); show(); }
// ECHO: "in special loop    ", "regular global", "  ", 5
// ECHO: "      in show    ", "regular global", "  ", 5
// ECHO: "in special loop    ", "regular global", "  ", 6
// ECHO: "      in show    ", "regular global", "  ", 6

show();
// ECHO: "      in show    ", "regular global", "  ", "special global"
```

This is useful when multiple arguments need to be passed thru several layers of module calls.

Several special variables are already defined by OpenSCAD.

### \$fa, \$fs and \$fn

The \$fa, \$fs and \$fn special variables control the number of facets used to generate an arc:

\$fa is the minimum angle for a fragment. Even a huge circle does not have more fragments than 360 divided by this number. The default value is 12 (i.e. 30 fragments for a full circle). The minimum allowed value is 0.01. Any attempt to set a lower value will cause a warning.

\$fs is the minimum size of a fragment. Because of this variable very small circles have a smaller number of fragments than specified using \$fa. The default value is 2. The minimum allowed value is 0.01. Any attempt to set a lower value will cause a warning.

\$fn is usually 0. When this variable has a value greater than zero, the other two variables are ignored and full circle is rendered using this number of fragments. The default value is 0.

The higher the number of fragments, the more memory and CPU consumed, large values will bring many systems to their knees. Depending on the design, \$fn values, and the corresponding results of \$fa & \$fs, should be kept small, at least until the design is finalised when it can be increased for the final result. **A \$fn over 100 is not recommended** or only for specific circumstances, and below 50 would be advisable for performance.

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go FEB APR JUN

[99 captures](#)

24 Nov 2009 - 21 Sep 2020

◀ 25 ▶

2017 2018 2019



▼ About this capture

When \$fa and \$fs are used to determine the number of fragments for a circle, then OpenSCAD will never use fewer than 5 fragments.

This is the C code that calculates the number of fragments in a circle:

```
int get.fragments_from_r(double r, double fn, double fs, double fa)
{
    if (r < GRID_FINE) return 3;
    if (fn > 0.0) return (int)(fn >= 3 ? fn : 3);
    return (int)ceil(fmax(fmin(360.0 / fa, r*2*M_PI / fs), 5));
}
```

Spheres are first sliced into as many slices as the number of fragments being used to render a circle of the sphere's radius, and then every slice is rendered into as many fragments as are needed for the slice radius. You might have recognized already that the pole of a sphere is usually a pentagon. This is why.

The number of fragments for a cylinder is determined using the greater of the two radii.

The method is also used when rendering circles and arcs from DXF files. The variables have no effect when importing STL files.

You can generate high resolution spheres by resetting the \$fX values in the instantiating module:

```
$fs = 0.01;
sphere(2);
```

or simply by passing the special variable as parameter:

```
sphere(2, $fs = 0.01);
```

You can even scale the special variable instead of resetting it:

```
sphere(2, $fs = $fs * 0.01);
```

## \$t

The \$t variable is used for animation. If you enable the animation frame with view->animate and give a value for "FPS" and "Steps", the "Time" field shows the current value of \$t. With this information in mind, you can animate your design. The design is recompiled every 1/"FPS" seconds with \$t incremented by 1/"Steps" for "Steps" times, ending at either \$t=1 or \$t=1-1/steps.

If "Dump Pictures" is checked, then images will be created in the same directory as the .scad file, using the following \$t values, and saved in the following files:

- \$t=0/Steps filename="frame00001.png"
- \$t=1/Steps filename="frame00002.png"
- \$t=2/Steps filename="frame00003.png"
- ...
  - \$t=1-3/Steps filename="frame<Steps-2>.png"
  - \$t=1-2/Steps filename="frame<Steps-1>.png"
  - \$t=1-1/Steps filename="frame00000.png"

Or, for other values of Steps, it follows this pattern:

- \$t=0/Steps filename="frame00001.png"
- \$t=1/Steps filename="frame00002.png"
- \$t=2/Steps filename="frame00003.png"

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



▼ About this capture

## 99 captures

24 Nov 2009 - 21 Sep 2020

- \$t=1/Steps filename="frame<Steps>.png"
- \$t=1/Steps filename="frame00000.png"

Which pattern it chooses appears to be an unpredictable, but consistent, function of Steps. For example, when Steps=4, it follows the first pattern, and outputs a total of 4 files. When Steps=3, it follows the second pattern, and also outputs 4 files. It will always output either Steps or Steps+1 files, though it may not be predictable which. When finished, it will wrap around and recreate each of the files, looping through and recreating them forever.

## \$vpr, \$vpt and \$vpd

These contain the current viewport rotation and translation and camera distance - at the time of doing the rendering. Moving the viewport does not update them. During an animation they are updated for each frame.

- \$vpr shows rotation
- \$vpt shows translation (i.e. won't be affected by rotate and zoom)
- \$vpd shows the camera distance [**Note:** Requires version 2015.03]

Example

```
cube([10, 10, $vpr[0] / 10]);
```

which makes the cube change size based on the view angle, if an animation loop is active (which does not need to use the \$t variable)

You can also make bits of a complex model vanish as you change the view.

All three variables are writable but only assignments at the top-level of the main file will have an effect on the viewport. [**Note:** Requires version 2015.03]

Example

```
$vpr = [0, 0, $t * 360];
```

which allows a simple 360 degree rotation around the Z axis in animation mode.

The menu command *Edit - Paste Viewport Rotation/Translation* copies the current value of the viewport, but not the current \$vpr or \$vpt.

## Echo Statements

This function prints the contents to the compilation window (aka Console). Useful for debugging code. Also see the String function str().

Numeric values are rounded to 5 significant digits.

The OpenSCAD console supports a subset of HTML markup language. See Qt Docs (<https://web.archive.org/web/20180425001407/http://doc.qt.io/qt-5/richtext-html-subset.html>) for details.

It can be handy to use 'variable=variable' as the expression to easily label the variables, see the example below.

## Usage examples

### Usage examples:

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



▼ About this capture

## 99 captures

24 Nov 2009 - 21 Sep 2020

```
cylinder(h=my_h, r=my_r);
//echo("<b>Hello</b> <i>Qt!</i>");
```

Shows in the Console as

```
ECHO: "This is a cylinder with h=", 50, " and r=", 100
ECHO: my_h = 50, my_r = 100
ECHO: "Hello Qt!"
```

## Rounding examples

An example for the rounding:

```
a=1.0;
b=1.000002;
echo(a);
echo(b);

if(a==b){ //while echoed the same, the values are still distinct
    echo ("a==b");
}else if(a>b){
    echo ("a>b");
}else if(a<b){
    echo ("a<b");
}else{
    echo ("???");
}
```

## Small and large Numbers

```
c=1000002;
d=0.000002;
echo(c); //1e+06
echo(d); //2e-06
```

## HTML

Working HTML examples:

```
echo("h1>Heading</h1">);
echo("<b>Bold</b> <i>italic</i> <big>big</big>");
echo("i<sub>1</sub><sup>2</sup>");
echo("<font color='red'>red</font> <font color='green'>green</font> <font color='blue'>blue</font>");
```

not really working examples:

```
echo("<img src='http://www.openscad.org/assets/img/logo.png'></img>");
```

```
echo("<a href='http://en.wikibooks.org/'>wikibooks</a>");
```

Note: the Output can be copy and pasted into OpenOffice, where both the image and the link work fine.

## Render

Forces the generation of a mesh even in preview mode. Useful when the boolean operations become too slow to track.

Needs description.

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



▼ About this capture

## 99 captures

24 Nov 2009 - 21 Sep 2020

```
cube([20, 20, 150], center = true);
translate([-10, -10, 0])
cylinder(h = 80, r = 10, center = true);
translate([-10, -10, +40])
sphere(r = 10);
translate([-10, -10, -40])
sphere(r = 10);
}
```

## Surface

Surface reads Heightmap information from text or image files.

### Parameters

#### file

String. The path to the file containing the heightmap data.

#### center

Boolean. This determines the positioning of the generated object. If true, object is centered in X- and Y-axis. Otherwise, the object is placed in the positive quadrant. Defaults to false.

#### invert

Boolean. Inverts how the color values of imported images are translated into height values. This has no effect when importing text data files. Defaults to false. **[Note: Requires version 2015.03]**

#### convexity

Integer. The convexity parameter specifies the maximum number of front sides (back sides) a ray intersecting the object might penetrate. This parameter is only needed for correctly displaying the object in OpenCSG preview mode and has no effect on the final rendering.

### Text file format

The format for text based heightmaps is a matrix of numbers that represent the height for a specific point. Rows are mapped to the Y-axis, columns to the X axis. The numbers must be separated by spaces or tabs. Empty lines and lines starting with a # character are ignored.

### Images

**[Note: Requires version 2015.03]**

Currently only PNG images are supported. Alpha channel information of the image is ignored and the height for the pixel is determined by converting the color value to Grayscale using the linear luminance for the sRGB color space ( $Y = 0.2126R + 0.7152G + 0.0722B$ ). The gray scale values are scaled to be in the range 0 to 100.

### Examples

#### Example 1:

```
//surface.scad
surface(file = "surface.dat", center = true, convexity = 5);
%translate([0,0,5])cube([10,10,10], center =true);
```

```
#surface.dat
10 9 8 7 6 5 5 5 5
9 8 7 6 6 4 3 2 1 0
8 7 6 6 4 3 2 1 0 0
```

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



▼ About this capture

## 99 captures

24 Nov 2009 - 21 Sep 2020

```
3 1 0 0 0 0 0 0 0  
3 0 0 0 0 0 0 0 0
```

Result:

[Openscad surface example x1.png](#)

## Example 2

```
// example010.dat generated using octave:  
// d = (sin(1:0.2:10)' * cos(1:0.2:10)) * 10;  
// save("example010.dat", "d");  
intersection() {  
    surface(file = "example010.dat", center = true, convexity = 5);  
    rotate(45, [0, 0, 1]) surface(file = "example010.dat", center = true, convexity = 5);  
}
```

## Example 3:

[**Note:** Requires version **2015.03**]

```
// Example 3a  
scale([1, 1, 0.1])  
surface(file = "smiley.png", center = true);
```

```
// Example 3b  
scale([1, 1, 0.1])  
surface(file = "smiley.png", center = true, invert = true);
```

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



▼ About this capture

99 captures

24 Nov 2009 - 21 Sep 2020

Input image



Example 3a: surface(invert = false)




Example 3b: surface (invert = true)

Example 3: Using surface() with a PNG image as heightmap input.


#### Example 4:

[**Note:** Requires version **2015.03**]

```
// Example 4
surface(file = "BRGY-Grey.png", center = true, invert = false);
```

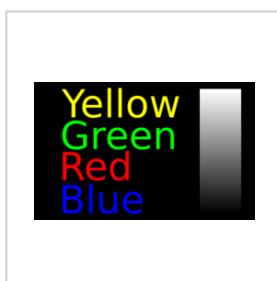

PNG Test File

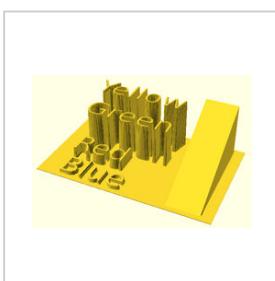

3D Surface

## Search

The search() function is a general-purpose function to find one or more (or all) occurrences of a value or list of values in a vector, string or more complex list-of-list construct.

### Search Usage

```
search( match_value , string_or_vector [, num_returns_per_match [, index_col_num ] ]);
```

### Search Arguments

- **match\_value**

- Can be a single value or vector of values.

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



▼ About this capture

## 99 captures

24 Nov 2009 - 21 Sep 2020

### ▪ **string\_or\_vector**

- The string or vector to search for matches.

### ▪ **num\_returns\_per\_match** (default: 1)

- By default, search only looks for one match per element of match\_value to return as a list of indices
- If num\_returns\_per\_match > 1, search returns a list of lists of up to num\_returns\_per\_match index values for each element of match\_value.

- See **Example 8** below.

- If num\_returns\_per\_match = 0, search returns a list of lists of **all** matching index values for each element of match\_value.

- See **Example 6** below.

### ▪ **index\_col\_num** (default: 0)

- When *string\_or\_vector* is a vector-of-vectors, multidimensional table or more complex list-of-lists construct, the match\_value may not be found in the first (index\_col\_num=0) column.
- See **Example 5** below for a simple usage example.

## Search Usage Examples

See **example023.scad** included with OpenSCAD for a renderable example.

### Index values return as list

Example	Code	Result
1	search("a", "abcdabcd");	[0]
2	search("e", "abcdabcd");	[]
3	search("a", "abcdabcd", 0);	[[0,4]]
4	<pre>data=[      ["a",1],["b",2],["c",3],["d",4],["a",5],           ["b",6],["c",7],["d",8],["e",9] ]; search("a", data, num_returns_per_match=0);</pre>	[[0,4]] (see also Example 6 below)

### Search on different column; return Index values

#### Example 5:

```
data= [ ["a",1],["b",2],["c",3],["d",4],["a",5],["b",6],["c",7],["d",8],["e",9] ];
search(3, data, num_returns_per_match=0, index_col_num=1);
```

Returns:

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



▼ About this capture

## 99 captures

24 Nov 2009 - 21 Sep 2020

### Search on list of values

#### Example 6: Return all matches per search vector element.

```
data= [ ["a",1],["b",2],["c",3],[ "d",4],[ "a",5],["b",6],["c",7],[ "d",8],[ "e",9] ];
search("abc", data, num_returns_per_match=0);
```

Returns:

```
[[0,4],[1,5],[2,6]]
```

#### Example 7: Return first match per search vector element; special case return vector.

```
data= [ ["a",1],["b",2],["c",3],[ "d",4],[ "a",5],["b",6],["c",7],[ "d",8],[ "e",9] ];
search("abc", data, num_returns_per_match=1);
```

Returns:

```
[0,1,2]
```

#### Example 8: Return first two matches per search vector element; vector of vectors.

```
data= [ ["a",1],["b",2],["c",3],[ "d",4],[ "a",5],["b",6],["c",7],[ "d",8],[ "e",9] ];
search("abce", data, num_returns_per_match=2);
```

Returns:

```
[[0,4],[1,5],[2,6],[8]]
```

### Search on list of strings

#### Example 9:

```
1Table2=[ ["cat",1],["b",2],["c",3],[ "dog",4],[ "a",5],["b",6],["c",7],[ "d",8],[ "e",9],["apple",10],["a",11] ];
1Search2=["b","zzz","a","c","apple","dog"];
l2=search(1Search2,1Table2);
echo(str("Default list string search (",1Search2,")": ,l2));
```

Returns

```
ECHO: "Default list string search (["b", "zzz", "a", "c", "apple", "dog"]): [1, [], 4, 2, 9, 3]"
```

### Getting the right results

```
// workout which vectors get the results
v=[ ["0",2],["p",3],["e",9],["n",4],[ "S",5],["C",6],[ "A",7],[ "D",8] ];
//  

echo(v[0]); // -> ["0",2]  

echo(v[1]); // -> ["p",3]  

echo(v[1][0],v[1][1]); // -> "p",3  

echo(search("p",v)); // find "p" -> [1]  

echo(search("p",v)[0]); // -> 1  

echo(search(9,v,0,1)); // find 9 -> [2]  

echo(v[search(9,v,0,1)[0]]); // -> ["e",9]
```

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



▼ About this capture

## 99 captures

24 Nov 2009 - 21 Sep 2020

echo(v[search("D",v,1,0)[0]][1]); // -> 8

## OpenSCAD Version

version() and version\_num() will return OpenSCAD version number.

- The version() function will return the OpenSCAD version as a vector, e.g. [2011, 09, 23]
- The version\_num() function will return the OpenSCAD version as a number, e.g. 20110923

## parent\_module(n) and \$parent\_modules

\$parent\_modules contains the number of modules in the instantiation stack. parent\_module(i) returns the name of the module i levels above the current module in the instantiation stack. The stack is independent of where the modules are defined. It's where they're instantiated that counts. This can be used to e.g. build BOMs.

Example:

```
module top() {
    children();
}
module middle() {
    children();
}
top() middle() echo(parent_module(0)); // prints "middle"
top() middle() echo(parent_module(1)); // prints "top"
```

## assert

**[Note: Requires version 2017.01 Experimental Build]**

*see also Assertion (software development)*

Assert evaluates a logical expression. If the logical expression evaluates to false, the generation of the preview/render is stopped with an error.

For example, assertion can be used in modules to ensure that the parameters are valid.

Currently (2017.01 Experimental Build), OpenSCAD does not output the file name in which the assertion failed. This can be an issue when writing libraries. (see [Issue #1910](https://web.archive.org/web/20180425001407/https://github.com/openscad/openscad/issues/1910) (<https://web.archive.org/web/20180425001407/https://github.com/openscad/openscad/issues/1910>))

## failing example

The simplest example is a simple assert(false);.

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go FEB APR JUN

## 99 captures

24 Nov 2009 - 21 Sep 2020

◀ 25 ▶

2017 2018 2019



▼ About this capture

```
[cube();
assert(false);
sphere();]
```

ERROR: Assertion 'false' failed, line 2  
Compiling design (CSG Products generation)...  
Geometries in cache: 0  
Geometry cache size in bytes: 0  
CGAL Polyhedrons in cache: 0  
CGAL cache size in bytes: 0  
Compiling design (CSG Products normalization)...  
Normalized CSG tree has 0 elements  
Compile and preview finished.  
Total rendering time: 0 hours, 0 minutes, 0 seconds

This example has little use, but the simple `assert(false);` has.

`assert(false);` can be used in code sections that should be unreachable.

### checking parameters

A useful example is checking the validity of input parameters:

```
module row(cnt=1){
    assert(cnt>0); //Error: Count has to be a positive integer greater 0
    for(i = [1 : cnt]){
        translate([i*2,0,0])sphere();
    }
}
row(2);
```

### combining assert with echo

If you write a library containing modules, it could be useful to output additional information to the user in case of a failed assertion. This can be done by using echo.

```
module row(cnt=1){
    if(cnt<=0){
        echo("<font color='red'>Error: Count has to be a positive integer greater 0</font>");
        assert(false);
    }
    for(i = [1 : cnt]){
        translate([i*2,0,0])sphere();
    }
}
cube();
row(0);
```

### assert vs. echo

The benefit of using assert over echo are:

- assert stops the execution, forcing the user to resolve the issue

Benefit of echo over assert:

- with echo, you (for e.g. as library creator) can output a meaningful error message

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



▼ About this capture

99 captures

24 Nov 2009 - 21 Sep 2020

# Modules

## OpenSCAD User Manual/The OpenSCAD Language

### Introduction

Users can extend the language by defining their own modules and functions. This allows grouping portions of script for easy reuse with different values. Well chosen names also help document your script.

OpenSCAD provides:

**functions** which return values.

**modules** which perform actions, but do not return values.

OpenSCAD calculates the value of variables at compile-time, not run-time. The last variable assignment within a scope will apply everywhere in that scope. It also applies to any inner scopes, or children, thereof. See [Scope of variables](#) for more details. It may be helpful to think of them as override-able constants rather than as variables.

For functions and modules OpenSCAD makes copies of pertinent portions of the script for each use. Each copy has its own scope, which contains fixed values for variables and expressions unique to that instance.

The name of functions and modules is case sensitive, therefore **test()** and **TEST()** refer to different functions/modules.

### Functions

Functions operate on values to calculate and return new values.

#### function definition

```
function name ( parameters ) = value ;
```

##### name

Your name for this function. A meaningful name is helpful later.

##### parameters

Zero or more arguments. Parameters can be assigned default values, to use in case they are omitted in the call. Parameter names are local and do not conflict with external variables of the same name.

##### value

an expression which calculates a value. This value can be a vector.

#### function use

When used, functions are treated as values, and do not themselves end with a semi-colon ';'.

```
//example 1
```

```
function func0() = 5;
```

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go FEB APR JUN

◀ 25 ▶

2017 2018 2019



▼ About this capture

## 99 captures

24 Nov 2009 - 21 Sep 2020

```
echo (func0());           // 5
a =  func1();             // 7
b=  func1(5);             // 11
echo (func2());            // [1, 2, 3, 4]
echo( func3(2),func3());   // 2, 5

z= func4(func0(),func1(),func2(),func3()); // [5, 7, [1, 2, 3, 4], 5]

translate([0,-4*func0(),0])cube([func0(),2*func0(),func0()]);
// same as translate([0,-20,0])cube([5,10,5]);
```

//example 2 creates for() range to give desired no of steps to cover range

```
function steps( start, no_steps, end) = [start:(end-start)/(no_steps-1):end];

echo( steps(10,3,5));      // [10 : -2.5 : 5]
for( i=steps(10,3,5))echo(i); // 10 7.5 5

echo(steps(10,3,15));      // [10 : 2.5 : 15]
for( i=steps(10,3,15))echo(i); // 10 12.5 15


echo(steps(0,5,5));        // [0 : 1.25 : 5]
for( i=steps(0,5,5))echo(i); // 0 1.25 2.5 3.75 5
```

//example 3 rectangle with top pushed over, keeping same y

```
function rhomboid(x=1,y=1,angle=90)
= [[0,0],[x,0],
 [x+x*cos(angle)/sin(angle),y],
 [x*cos(angle)/sin(angle),y]];

echo (v1); v1 = rhomboid(10,10,35); // [[0, 0],
 // [10, 0],
 // [24.2815, 10],
 // [14.2815, 10]]

polygon(v1);
polygon(rhomboid(10,10,35)); // alternate
```

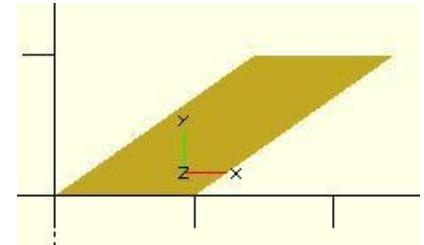

Example 3

//performing the same action with a module

```
module parallelogram(x=1,y=1,angle=90)
{polygon([[0,0],[x,0],
 [x+x*cos(angle)/sin(angle),y],
 [x*cos(angle)/sin(angle),y]]);}

parallelogram(10,10,35);
```

You can also use the **let** statement:

```
function get_square_triangle_perimeter(p1, p2) =
 let(hypotenuse=sqrt(p1*p1+p2*p2))
 p1+p2+hypotenuse;
```

It can be used to store variables in recursive functions.

## Recursive functions

Recursive function calls are supported. Using the Conditional Operator "... ? ... : ... ", it is possible to ensure the recursion is terminated.

```
// recursion example: add all integers up to n
function add_up_to(n) = ( n==0 ? 0 : n + add_up_to(n-1) );
```

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go FEB APR JUN

[99 captures](#)

24 Nov 2009 - 21 Sep 2020

◀ 25 ▶

2017 2018 2019



▼ About this capture

```
function recurse(...) = <test> ? <result> : recurse(...);
```

and

```
function recurse(...) = <test> ? recurse(...) : <result>;
```

The previous example code does not match any of these forms. But the following is entitled to tail-recursion elimination:

```
// tail-recursion elimination example: add all integers up to n
function add_up_to(n, sum=0) =
    n==0 ?
        sum :
        add_up_to(n-1, sum+n);

echo(sum=add_up_to(100000));
// ECHO: sum = 5.00005e+009
```

Tail-recursion elimination allows much higher recursion limits.

## Modules

Modules can be used to define objects or, using `children()`, define operators. Once defined, modules are temporarily added to the language.

### module definition

```
module name ( parameters ) { actions }
```

#### name

Your name for this module. Try to pick something meaningful.

#### parameters

Zero or more arguments. Parameters may be assigned default values, to use in case they are omitted in the call. Parameter names are local and do not conflict with external variables of the same name.

#### actions

Nearly any statement valid outside a module can be included within a module. This includes the definition of functions and other modules. Such functions and modules can only be called from within the enclosing module.

Variables can be assigned, but their scope is limited to within each individual use of the module. There is no mechanism in OpenSCAD for modules to return values to the outside. See [Scope of variables](#) for more details.

### Object modules

Object modules use one or more primitives, with associated operators, to define new objects.

In use, object modules are actions ending with a semi-colon ';

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



About this capture

## 99 captures


24 Nov 2009 - 21 Sep 2020

```
//example_1

translate([-30,-20,0]);
ShowColorBars(Expense);


ColorBreak=[[0,""], // upper limit of color range
[20,"lime"],
[40,"greenyellow"],
[60,"yellow"],
[75,"LightCoral"],
[200,"red"]];
Expense=[16,20,25,85,52,63,45];

module ColorBar(value,period,range){ // 1 color on 1 bar
  RangeHi = ColorBreak[range][0];
  RangeLo = ColorBreak[range-1][0];
  color( ColorBreak[range][1] )
  translate([10*period,0,RangeLo])
    if (value > RangeHi) cube([5,2,RangeHi-RangeLo]);
    else if (value > RangeLo) cube([5,2,value-RangeLo]);
}
module ShowColorBars(values){
  for (month = [0:len(values)-1], range = [1:len(ColorBreak)-1])
    ColorBar(values[month],month,range);
}
```

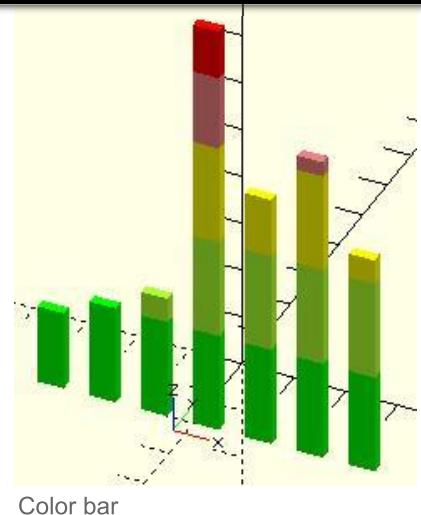

```
//example_2

module house(roof="flat",paint=[1,0,0]) {
  color(paint)
  if(roof=="flat") { translate([0,-1,0]) cube(); }
  else if(roof=="pitched") {
    rotate([90,0,0]) linear_extrude(height=1)
    polygon(points=[[0,0],[0,1],[0.5,1.5],[1,1],[1,0]]);
  }
  else if(roof=="domical") {
    translate([0,-1,0]){
      translate([0.5,0.5,1]) sphere(r=0.5,$fn=20); cube();
    }
  }
  house();
  translate([2,0,0]) house("pitched");
  translate([4,0,0]) house("domical",[0,1,0]);
  translate([6,0,0]) house(roof="pitched",paint=[0,0,1]);
  translate([0,3,0]) house(paint=[0,0,0],roof="pitched");
  translate([2,3,0]) house(roof="domical");
  translate([4,3,0]) house(paint=[0,0.5,0.5]);
}
```

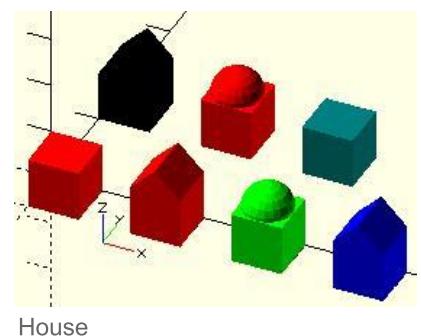

```
//example_3

element_data = [[0,"","",0], // must be in order
[1,"Hydrogen","H",1.008], // indexed via atomic number
[2,"Helium", "He",4.003] // redundant atomic number to preserve your sanity later
];

Hydrogen = 1;
Helium = 2;

module coaster	atomic_number){
  element = element_data[atomic_number][1];
  symbol = element_data[atomic_number][2];
  atomic_mass = element_data[atomic_number][3];
  //rest of script
}
```

## Operator Modules

Use of children() allows modules to act as operators applied to any or all of the objects within this module instantiation. In use, operator modules do not end with a semi-colon.

```
name ( parameter values ){scope of operator}
```

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go FEB APR JUN

[99 captures](#)

24 Nov 2009 - 21 Sep 2020

◀ 25 ▶

2017 2018 2019



▼ About this capture

children();	all children
children(index);	value or variable to select one child
children([start : step : end]);	select from start to end incremented by step
children([start : end]);	step defaults to 1 or -1
children([vector]);	selection of several children

## Deprecated child() module

Up to release 2013.06 the now deprecated `child()` module was used instead. This can be translated to the new `children()` according to the table:


up to 2013.06	2014.03 and later
<code>child()</code>	<code>children(0)</code>
<code>child(x)</code>	<code>children(x)</code>
<code>for (a = [0:\$children-1]) child(a)</code>	<code>children([0:\$children-1])</code>

### Examples

//Use all children

```
module move(x=0,y=0,z=0,rx=0,ry=0,rz=0)
{ translate([x,y,z])rotate([rx,ry,rz]) children(); }

move(10)      cube(10,true);
move(-10)     cube(10,true);
move(z=7.07, ry=45)cube(10,true);
move(z=-7.07,ry=45)cube(10,true);
```

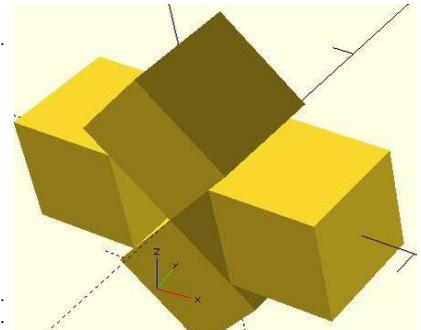


Use all children

//Use only the first child, multiple times

```
module lineup(num, space) {
  for (i = [0 : num-1])
    translate([ space*i, 0, 0 ]) children(0);
}

lineup(5, 65){ sphere(30);cube(35);}
```

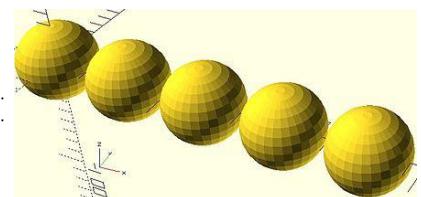


Use only the first child, multiple times

//Separate action for each child

```
module SeparateChildren(space){
  for ( i = [0:1:$children-1] ) // step needed in case $children < 2
    translate([i*space,0,0]) {children(i).text(str(i));}
}

SeparateChildren(-20){
  cube(5);           // 0
  sphere(5);         // 1
  translate([0,20,0]){
    cube(5);         // 2
    sphere(5);
  }
  cylinder(15);     // 3
  cube(8,true);      // 4
}
translate([0,40,0])color("lightblue")
SeparateChildren(20){cube(3,true);}
```

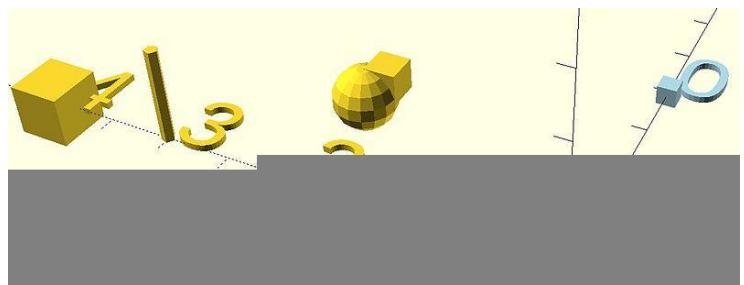

Separate action for each child

//Multiple ranges

```
module MultiRange(){
  color("lightblue") children([0:1]);
  color("lightgreen")children([2:$children-2]);
```

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go FEB APR JUN

◀ 25 ▶

2017 2018 2019



▼ About this capture

## 99 captures

24 Nov 2009 - 21 Sep 2020

```
cube(5);           // 0
sphere(5);         // 1
translate([0,20,0]){
    cube(5);
    sphere(5);
}
cylinder(15);     // 3
cube(8,true);      // 4
}
```

## Further Module Examples

Multiple ranges

### Objects

```
module arrow(){
    cylinder(10);
    cube([4,.5,3],true);
    cube([.5,4,3],true);
    translate([0,0,10]) cylinder(4,2,0,true);
}

module cannon(){
    difference(){union()
        {sphere(10);cylinder(40,10,8);} cylinder(41,4,4);
    }
}

module base(){
    difference(){
        cube([40,30,20],true);
        translate([0,0,5])  cube([50,20,15],true);
    }
}
```

### Operators

```
module aim(elevation,azimuth=0)
{ rotate([0,0,azimuth])
  { rotate([0,90-elevation,0]) children(0);
    children([1:$children-1]);  // step needed in case $children < 2
  }
}

aim(30,20)arrow();
aim(35,270)cannon();
aim(15){cannon();base();}

module RotaryCluster(radius=30,number=8)
  for (azimuth =[0:360/number:359])
    rotate([0,0,azimuth])
    translate([radius,0,0]) { children();
      translate([40,0,30]) text(str(azimuth)); }

RotaryCluster(200,7) color("lightgreen") aim(15){cannon();base();}
rotate([0,0,110]) RotaryCluster(100,4.5) aim(35)cannon();
color("LightBlue")aim(55,30){cannon();base();}
```

### Recursive Modules

Like functions, modules may contain recursive calls. However, there is no tail-recursion elimination for recursive modules.

The code below generates a crude model of a tree. Each tree branch is itself a modified version of the tree and produced by recursion. Be careful to keep the recursion depth (branching) n below 7 as the number of primitives and the preview time grow exponentially.

```
module simple_tree(size, dna, n) {
  if (n > 0) {
    // trunk
    cylinder(r1=size/10, r2=size/12, h=size, $fn=24);
```

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



▼ About this capture

99 captures

24 Nov 2009 - 21 Sep 2020

## Rotary Clusters

```
// branches
translate([0,0,size])
  for(bd = dna) {
    angx = bd[0];
    angz = bd[1];
    scal = bd[2];
    rotate([angx,0,angz])
      simple_tree(scal*size, dna, n-1);
  }
} else // leaves
color("green")
scale([1,1,3])
translate([0,0,size/6])
rotate([90,0,0])
cylinder(r=size/6,h=size/10);
}
// dna is a list of branching data bd of the tree:
//   bd[0] - inclination of the branch
//   bd[1] - Z rotation angle of the branch
//   bd[2] - relative scale of the branch
dna = [ [12, 80, 0.85], [55, 0, 0.6],
[62, 125, 0.6], [57, -125, 0.6] ];
simple_tree(50, dna, 5);
```

A simple tree created with a recursive OpenSCAD module

Another example of recursive module may be found in [Tips and Tricks](#)

## Overwriting built-in modules

It is possible to overwrite the built-in modules.

A simple, but pointless example would be:

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB

APR

JUN



◀ 25 ▶

2017 2018 2019

▼ About this capture

## 99 captures

24 Nov 2009 - 21 Sep 2020

Note that the built-in sphere module can not be called when over written.

A more sensible way to use this language feature is to overwrite the 3D primitives with extruded 2D-primitives. This allows additional to customize the default parameters and to add additional parameters.

## Overwriting built-in functions

It is possible to overwrite the built-in functions.

Source Code	Console output
<pre>echo (sin(1)); ifunction sin() = true; echo (sin(1));</pre>	<pre>Compiling design (CSG Tree generation)... ECHO: true ECHO: true Compiling design (CSG Products generation)...</pre>

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



[99 captures](#)

24 Nov 2009 - 21 Sep 2020

▼ About this capture

## OpenSCAD User Manual/The OpenSCAD Language

Modifier characters are used to change the appearance or behaviours of child nodes. They are particularly useful in debugging where they can be used to highlight specific objects, or include or exclude them from rendering.

### Advanced concept

As OpenSCAD uses different libraries to implement capabilities this can introduce some inconsistencies to the F5 preview behaviour of transformations. Traditional transforms (translate, rotate, scale, mirror & multimatrix) are performed using OpenGL in preview, while other more advanced transforms, such as resize, perform a CGAL operation, behaving like a CSG operation affecting the underlying object, not just transforming it. In particular this can affect the display of modifier characters, specifically "#" and "%", where the highlight may not display intuitively, such as highlighting the pre-resized object, but highlighting the post-scaled object.

Note: The color changes triggered by character modifiers will only be shown in "Compile" mode not "Compile and Render (CGAL)" mode. ([As per the color section](#).)

### Background Modifier

Ignore this subtree for the normal rendering process and draw it in transparent gray (all transformations are still applied to the nodes in this tree).

Because the marked subtree is completely ignored, it might have unexpected effects in case it's used, for example, with the first object in a difference(). In that case this object will be rendered in transparent gray, but it will *not* be the base for the difference()!

#### Usage

```
% { ... }
```

#### Example

```
difference() {
    cylinder (h = 12, r=5, center = true, $fn=100);
    // first object that will be subtracted
    rotate ([90,0,0]) cylinder (h = 15, r=1, center = true, $fn=100);
    // second object that will be subtracted
    %rotate ([0,90,0]) cylinder (h = 15, r=3, center = true, $fn=100);
}
```

#### Example Output

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go FEB APR JUN

[99 captures](#)

24 Nov 2009 - 21 Sep 2020


◀ 25 ▶

2017 2018 2019




▼ About this capture

Output without the modifier.

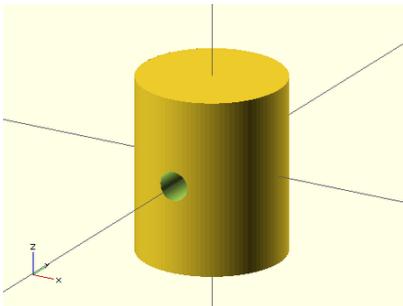

Rendered Model.

Output with modifier added.

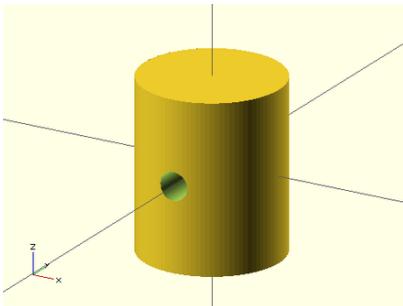

## Debug Modifier

Use this subtree as usual in the rendering process but also draw it unmodified in transparent pink.

### Usage

```
# { ... }
```

### Example

```
difference() {
    // start objects
    cylinder (h = 12, r=5, center = true, $fn=100);
    // first object that will be subtracted
    #rotate ([90,0,0]) cylinder (h = 15, r=1, center = true, $fn=100);
    // second object that will be subtracted
    #rotate ([0,90,0]) cylinder (h = 15, r=3, center = true, $fn=100);
}
```

### Example Output

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



▼ About this capture

[99 captures](#)

24 Nov 2009 - 21 Sep 2020

Output without the modifier.

Output with modifier added.

## Root Modifier

Ignore the rest of the design and use this subtree as design root.

*Usage*

```
! { ... }
```

*Example*

```
difference() {
    cube(10, center = true);
    translate([0, 0, 5]) {
        !rotate([90, 0, 0]) {
            #cylinder(r = 2, h = 20, center = true, $fn = 40);
        }
    }
}
```

*Example Output*

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



▼ About this capture

[99 captures](#)

24 Nov 2009 - 21 Sep 2020

Output without the modifier.

Output with modifier added.

As shown in the example output with the root modifier active, the rotate() is executed as it's part of the subtree marked with the root modifier, but the translate() has no effect.

## Disable Modifier

Simply ignore this entire subtree.

### Usage

```
* { ... }
```

### Example

```
difference() {
    cube(10, center = true);
    translate([0, 0, 5]) {
        rotate([0, 90, 0]) {
            cylinder(r = 2, h = 20, center = true, $fn = 40);
        }
        *rotate([90, 0, 0]) {
            #cylinder(r = 2, h = 20, center = true, $fn = 40);
        }
    }
}
```

### Example Output

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



▼ About this capture

[99 captures](#)

24 Nov 2009 - 21 Sep 2020

Output without the modifier.

Output with modifier added.

The disable modifier allows to comment out one or multiple subtrees. Compared to using the usual line or multi-line comments, it's aware of the hierarchical structure which makes it easier to disable even larger trees without the need to search for the end of the subtree.

## Echo Statements

*see also [OpenSCAD User Manual/Other Language Features#Echo Statements](#)*

This function prints the contents to the compilation window (aka Console). Useful for debugging code. Also see the String function [str\(\)](#).

Numeric values are rounded to 5 significant digits.

The OpenSCAD console supports a subset of HTML markup language. See [here](https://web.archive.org/web/20180425001407/http://doc.qt.io/archives/qt-4.7/richtext-html-subset.html) (<https://web.archive.org/web/20180425001407/http://doc.qt.io/archives/qt-4.7/richtext-html-subset.html>) for details.

It can be handy to use 'variable=variable' as the expression to easily label the variables, see the example below.

### Usage examples:

```
my_h=50;
my_r=100;
echo("This is a cylinder with h=", my_h, " and r=", my_r);
echo(my_h=my_h,my_r=my_r); // shortcut
cylinder(h=my_h, r=my_r);
/
echo("<b>Hello</b> <i>Qt!</i>");
```

Shows in the Console as

```
ECHO: "This is a cylinder with h=", 50, " and r=", 100
ECHO: my_h = 50, my_r = 100
ECHO: "Hello Qt!"
```

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



[99 captures](#)

24 Nov 2009 - 21 Sep 2020

▼ About this capture

## OpenSCAD User Manual/The OpenSCAD Language

# Use and Include

For including code from external files in OpenSCAD, there are two commands available:

- **include <filename>** acts as if the contents of the included file were written in the including file, and
- **use <filename>** imports modules and functions, but does not execute any commands other than those definitions.

Library files are searched for in the same folder as the design was open from, or in the library folder of the OpenSCAD installation. You can use a relative path specification to either. If they lie elsewhere you must give the complete path. Newer versions have predefined user libraries, see the [OpenSCAD\\_User\\_Manual/Libraries](#) page, which also documents a number of library files included in OpenSCAD.

Wildcards (\*, for e.g. *include <MCAD/\*.scad>*) can **not** be used to include multiple files.

### Directory separators

Windows and Linux/Mac use different separators for directories. Windows uses \, e.g. directory\file.ext, while the others use /, e.g. directory/file.ext. This could lead to cross platform issues. However OpenSCAD on Windows correctly handles the use of /, so using / in all **include** or **use** statements will work on all platforms.

To access the parent directory ../ can be used under Linux.

### Variables

#### Scope of variables

Using **include <filename>** allows default variables to be specified in the library. These defaults can be overridden in the main code. An OpenSCAD variable only has one value during the life of the program. When there are multiple assignments it takes the last value, but assigns when the variable is first created. This has an effect when assigning in a library, as any *variables* which you later use to change the default, must be assigned before the **include** statement. See the second example below.

#### Overwriting variables

Default variables in an **include** can be overridden, for example

#### lib.scad

```
i=1;
k=3;
module x() {
    echo("hello world");
    echo("i=",i,"j=",j,"k=",k);
}
```

#### hello.scad

```
j=4;
include <lib.scad>;
x();
i=5;
x();
k=j;
```

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



[99 captures](#)

24 Nov 2009 - 21 Sep 2020

▼ About this capture

```
ECHO: "hello world"
ECHO: "i=", 5, "j=", 4, "k=", 4
ECHO: "hello world"
ECHO: "i=", 5, "j=", 4, "k=", 4
ECHO: "hello world"
ECHO: "i=", 5, "j=", 4, "k=", 4
```

However, placing **j=4;** after the **include** fails, producing

```
ECHO: "hello world"
ECHO: "i=", 5, "j=", 4, "k=", undef
ECHO: "hello world"
ECHO: "i=", 5, "j=", 4, "k=", undef
ECHO: "hello world"
ECHO: "i=", 5, "j=", 4, "k=", undef
```

### Example "Ring-Library"

A library file for generating rings might look like this (defining a function and providing an example):

**ring.scad:**

```
module ring(r1, r2, h) {
    difference() {
        cylinder(r = r1, h = h);
        translate([-0.01, 0, 0]) cylinder(r = r2, h = h+2);
    }
}
ring(5, 4, 10);
```

Including the library using

```
include <ring.scad>;
rotate([90, 0, 0]) ring(10, 1, 1);
```

would result in the example ring being shown in addition to the rotated ring, but

```
use <ring.scad>;
rotate([90, 0, 0]) ring(10, 1, 1);
```

only shows the rotated ring.

If using the use function, make sure to place the use statements at top of the file, or at least not within a module!

This will work fine:

```
// a.scad
use <ring.scad>;
module a() {
    ring();
}
```

but this will result in an syntax error:

```
//a.scad
module a()
```

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go FEB APR JUN

[99 captures](#)

24 Nov 2009 - 21 Sep 2020

◀ 25 ▶

2017 2018 2019



▼ About this capture

## Nested Include and Use

OpenSCAD will execute nested calls to **include** and **use**. There is one caveat to this, that **use** only brings functions and modules into the local file context. As a result, nested calls to **use** will have no effect on the environment of the base file; the child **use** call will work in the parent **use** context, but the modules and functions so imported will fall out of context before they are seen by the base context.

Importing is achieved by the import() command.

**Note:** Requires version 2015.03-2] The *File >> Open* command may be used to insert this command. The file type filter of the Open File dialog may only show OpenSCAD files, but file name can be replaced with a wildcard (e.g. \*.stl) to browse to additional file types.

## import

Imports a file for use in the current OpenSCAD model. OpenSCAD currently supports import of DXF, OFF and STL (both ASCII and Binary) files. The file extension is used to determine which type.

OpenSCAD can export files as STL, OFF, AMF, DXF, SVG, CSG OR PNG(Image).

These file types created by OpenSCAD, or others, can be imported as follows:

STL, OFF and DXF are imported using import().

CSG can be imported using include<> or loaded like an SCAD file

PNG can be imported using surface()

There are open pull requests for SVG and AMF, which require a bit more work/testing.

The file suffix is used to determine type.

## Parameters

### <file>

A string containing the path to the STL, OFF or DXF file.

### <convexity>

An Integer. The convexity parameter specifies the maximum number of front sides (back sides) a ray intersecting the object might penetrate. This parameter is only needed for correctly displaying the object in OpenCSG preview mode and has no effect on the polyhedron rendering. It is optional.

```
import("example012.stl", convexity=3);
import("D:/Documents and Settings/User/My Documents/Gear.stl", convexity=3);
(Windows users must "escape" the backslashes by writing them doubled, or replace the backslashes with forward slashes.)
```

## Convexity

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶


2017 2018 2019



▼ About this capture

99 captures

24 Nov 2009 - 21 Sep 2020

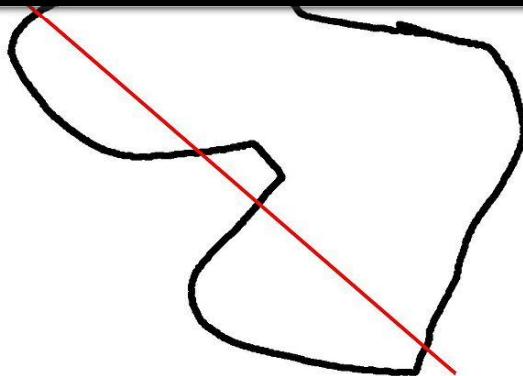

This image shows a 2D shape with a convexity of 4, as the ray indicated in red crosses the 2D shape a maximum of 4 times. The convexity of a 3D shape would be determined in a similar way. Setting it to 10 should work fine for most cases.

## Notes

In the latest version of OpenSCAD, import() is now used for importing both 2D (DXF for extrusion) and 3D (STL) files.

If you want to render the imported STL file later, you have to make sure that the STL file is "clean". This means that the mesh has to be manifold and should not contain holes nor self-intersections. If the STL is not clean, you might get errors like:

```
CGAL error in CGAL_Build_PolySet: CGAL ERROR: assertion violation!
Expr: check_protocol == 0
File: /home/don/openscad_deps/mxe/usr/i686-pc-mingw32/include/CGAL/Polyhedron_incremental_builder_3.h
Line: 199
```

or

```
CGAL error in CGAL_Nef_polyhedron3(): CGAL ERROR: assertion violation!
Expr: pe_prev->is_border() || !internal::Plane_constructor<Plane>::get_plane(pe_prev->facet(),pe_prev->facet()-
>plane()).is_degenerate()
File: /home/don/openscad_deps/mxe/usr/i686-pc-mingw32/include/CGAL/Nef_3/polyhedron_3_to_nef_3.h
Line: 253
```

In order to clean the STL file, you have the following options:

- use [http://wiki.netfabb.com/Semi-Automatic\\_Repair\\_Options](http://wiki.netfabb.com/Semi-Automatic_Repair_Options). This will repair the holes but not the self-intersections.
- use netfabb basic. This free software doesn't have the option to close holes nor can it fix the self-intersections
- use MeshLab, This free software can fix all the issues

Using MeshLab, you can do:

- Render - Show non Manif Edges
- Render - Show non Manif Vertices
- if found, use Filters - Selection - Select non Manifold Edges or Select non Manifold Vertices - Apply - Close. Then click button 'Delete the current set of selected vertices...' or check <http://www.youtube.com/watch?v=oDx0Tgy0UHo> for an instruction video. The screen should show "0 non manifold edges", "0 non manifold vertices"

Next, you can click the icon 'Fill Hole', select all the holes and click Fill and then Accept. You might have to redo this action a few times.

Use File - Export Mesh to save the STL.

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



▼ About this capture

## 99 captures

24 Nov 2009 - 21 Sep 2020

1. Start Bionic

2. `X, 1` to remove the default object
3. File, Import, Stl
4. `Tab` to edit the mesh
5. `A` to de-select all vertices
6. `Alt+Ctrl+Shift+M` to select all non-manifold vertices
7. `MMB` to rotate, `Shift+MMB` to pan, `wheel` to zoom
8. `C` for "circle" select, `Esc` to finish
9. `Alt+M, 1` to merge or `Space` and search for "merge" as alternative
10. Merging vertices is a useful way of filling holes where the vertices are so closely packed that the slight change in geometry is unimportant compared to the precision of a typical 3D printer

## import\_dxf

DEPRECATED: Will be removed in future releases. Use **import()** instead.

Read a DXF file and create a 2D shape.

```
linear_extrude(height = 5, center = true, convexity = 10)
    import_dxf(file = "example009.dxf", layer = "plate");
```

## import\_stl

DEPRECATED: Will be removed in future releases. Use **import()** instead.

Imports an STL file for use in the current OpenSCAD model

```
import_stl("body.stl", convexity = 5);
```

## surface

**surface()** reads Heightmap information from text or image files. It can read **PNG** files.

### Parameters

#### file

String. The path to the file containing the heightmap data.

#### center

Boolean. This determines the positioning of the generated object. If true, object is centered in X- and Y-axis. Otherwise, the object is placed in the positive quadrant. Defaults to false.

#### invert

Boolean. Inverts how the color values of imported images are translated into height values. This has no effect when importing text data files. Defaults to false. [**Note:** Requires version **2015.03**]

#### convexity

Integer. The convexity parameter specifies the maximum number of front sides (back sides) a ray intersecting the object might penetrate. This parameter is only needed for correctly displaying the object in OpenCSG preview mode and has no effect on the final rendering.

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



[99 captures](#)

24 Nov 2009 - 21 Sep 2020

▼ About this capture

ignored.

## Images

[**Note:** Requires version **2015.03**]

Currently only PNG images are supported. Alpha channel information of the image is ignored and the height for the pixel is determined by converting the color value to Grayscale using the linear luminance for the sRGB color space ( $Y = 0.2126R + 0.7152G + 0.0722B$ ). The gray scale values are scaled to be in the range 0 to 100.

## Examples

### Example 1:

```
//surface.scad
surface(file = "surface.dat", center = true, convexity = 5);
%translate([0,0,5])cube([10,10,10], center =true);
```

```
#surface.dat
10 9 8 7 6 5 5 5 5 5
9 8 7 6 6 4 3 2 1 0
8 7 6 6 4 3 2 1 0 0
7 6 6 4 3 2 1 0 0 0
6 6 4 3 2 1 1 0 0 0
6 6 3 2 1 1 1 0 0 0
6 6 2 1 1 1 1 0 0 0
6 6 1 0 0 0 0 0 0 0
3 1 0 0 0 0 0 0 0 0
3 0 0 0 0 0 0 0 0 0
```

Result:



### Example 2

```
// example010.dat generated using octave:
// d = (sin(1:0.2:10)' * cos(1:0.2:10)) * 10;
// save("example010.dat", "d");
intersection() {
    surface(file = "example010.dat", center = true, convexity = 5);
    rotate(45, [0, 0, 1]) surface(file = "example010.dat", center = true, convexity = 5);
}
```

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



▼ About this capture

99 captures

24 Nov 2009 - 21 Sep 2020

### Example 3:

[**Note:** Requires version **2015.03**]

```
// Example 3a
scale([1, 1, 0.1])
surface(file = "smiley.png", center = true);
```

```
// Example 3b
scale([1, 1, 0.1])
surface(file = "smiley.png", center = true, invert = true);
```



Input image

Example 3a: surface(invert = false)



Example 3b: surface(invert = true)

Example 3: Using surface() with a PNG image as heightmap input.

10/12/2020

OpenSCAD User Manual/The OpenSCAD Language - Wikibooks, open books for an open world

[https://en.wikibooks.org/wiki/OpenSCAD\\_User\\_Manual/The\\_OpenSCAD\\_Language](https://en.wikibooks.org/wiki/OpenSCAD_User_Manual/The_OpenSCAD_Language)

Go

FEB APR JUN

◀ 25 ▶

2017 2018 2019



[99 captures](#)

24 Nov 2009 - 21 Sep 2020

▼ About this capture