

```
Adding subport terraform-1.9
Adding subport terraform-1.8
Adding subport terraform-1.7
Adding subport terraform-1.6
Adding subport terraform-1.4
Adding subport terraform-1.5
Adding subport terraform-1.3
Adding subport terraform-1.2
Adding subport terraform-1.1
Adding subport terraform-1.0
Adding subport terraform-0.15
Adding subport terraform-0.14
Adding subport terraform-0.13
Adding subport terraform-0.12
Adding subport terraform_select
Adding subport terraform-0.11
Adding port textproc/jaq
Adding port textproc/ov
Adding port textproc/sad
```

```
Total number of ports parsed: 176
Ports successfully parsed: 176
Ports failed: 0
Up-to-date ports skipped: 39103
```

```
---> MacPorts base is already the latest version
```

```
The ports tree has been updated. To upgrade your installed ports, you should run
port upgrade outdated
```

```
[evgenijkrasnooperov@iMac-Evgenij bin % sudo port install dpkg
```

```
---> Computing dependencies for dpkg
---> Cleaning dpkg
---> Scanning binaries for linking errors
---> No broken files found.
---> No broken ports found.
```

```
[evgenijkrasnooperov@iMac-Evgenij bin % sudo dpkg --list
```

```
sh: pager: command not found
```

```
dpkg-query: ошибка: showing package list on pager subprocess returned error exit status 127
```

```
[evgenijkrasnooperov@iMac-Evgenij bin % apt-get -f install
```

```
zsh: command not found: apt-get
```

```
[evgenijkrasnooperov@iMac-Evgenij bin % apt-get -f install
```

```
zsh: command not found: apt-get
```

```
[evgenijkrasnooperov@iMac-Evgenij bin % sudo dpkg --configure -a
```

```
dpkg: предупреждение: «/opt/local/bin/gnutar» отсутствует в каталогах, перечисленных в PATH, или не является исполняемым
```

```
dpkg: ошибка: в каталогах PATH не найдена 1 ожидаемая программа или исполняемый файл
```

```
Замечание: В PATH суперпользователя обычно должны присутствовать /usr/local/sbin, /usr/sbin и /sbin
```

```
[evgenijkrasnooperov@iMac-Evgenij bin % sudo apt install -f
```

```
The operation couldn't be completed. Unable to locate a Java Runtime.
```


```
Please visit http://www.java.com for information on installing Java.
```

```
[evgenijkrasnooperov@iMac-Evgenij bin % sudo apt update
```

```
The operation couldn't be completed. Unable to locate a Java Runtime.
```

```
Please visit http://www.java.com for information on installing Java.
```

```
evgenijkrasnooperov@iMac-Evgenij bin %
```

```
run@ubuntu:~$ mkdir homework
```

```
run@ubuntu:~$ cd homework/
```

```
run@ubuntu:~/homework$ cat > Pets.txt
```

```
Cat
```

```
Dog
```

```
Fird
```

```
^X
```

```
run@ubuntu:~/homework$ cat > 'Pack animals.txt'
```

```
Hors
```

```
Osel
```

```
Camel
```

```
run@ubuntu:~/homework$ cat Pets.txt 'P
```

```
Pack animals.txt Pets.txt
```

```
run@ubuntu:~/homework$ cat Pets.txt 'Pack animals.txt' > animals.txt
```

```
run@ubuntu:~/homework$ ls
```

```
animals.txt 'Pack animals.txt' Pets.txt
```

```
run@ubuntu:~/homework$ mv animals.txt 'Human Friends'
```

```
run@ubuntu:~/homework$ ls
```

```
'Human Friends' 'Pack animals.txt' Pets.txt
```

```
run@ubuntu:~/homework$ mkdir newdir
```

```
run@ubuntu:~/homework$ mv ~/ 'Human Friends' ~/newdir
```

```
mv: cannot stat '/home/run/Human Friends': No such file or directory
```

```
run@ubuntu:~/homework$ mv / 'Human Friends' /newdir
```

```
mv: cannot stat '/Human Friends': No such file or directory
```

```
run@ubuntu:~/homework$ mv 'Human Friends' newdir
```


```
run@ubuntu:~/homework$ cd newdir/
```

```
run@ubuntu:~/homework/newdir$ ls
```

```
'Human Friends'
```

```
run@ubuntu:~/homework/newdir$
```


run@ubuntu: ~/homework/newdir

run@ubuntu:~/homework/newdir\$ sudo apt install mysql-server mysql-client

Reading package lists... Done

Building dependency tree... Done

Reading state information... Done

The following NEW packages will be installed:

mysql-client mysql-server

0 upgraded, 2 newly installed, 0 to remove and 35 not upgraded.

Need to get 9 368 B/18,8 kB of archives.

After this operation, 71,7 kB of additional disk space will be used.

Get:1 <http://archive.ubuntu.com/ubuntu> focal-updates/main amd64 mysql-client all 8.0.37-0ubuntu0.20.04.3 [9 368 B]

Fetched 9 368 B in 0s (28,2 kB/s)

Selecting previously unselected package mysql-client.

(Reading database ... 239995 files and directories currently installed.)

Preparing to unpack .../mysql-client_8.0.37-0ubuntu0.20.04.3_all.deb ...

Unpacking mysql-client (8.0.37-0ubuntu0.20.04.3) ...


Selecting previously unselected package mysql-server.

Preparing to unpack .../mysql-server_8.0.37-0ubuntu0.20.04.3_all.deb ...

Unpacking mysql-server (8.0.37-0ubuntu0.20.04.3) ...

Setting up mysql-server (8.0.37-0ubuntu0.20.04.3) ...

Setting up mysql-client (8.0.37-0ubuntu0.20.04.3) ...

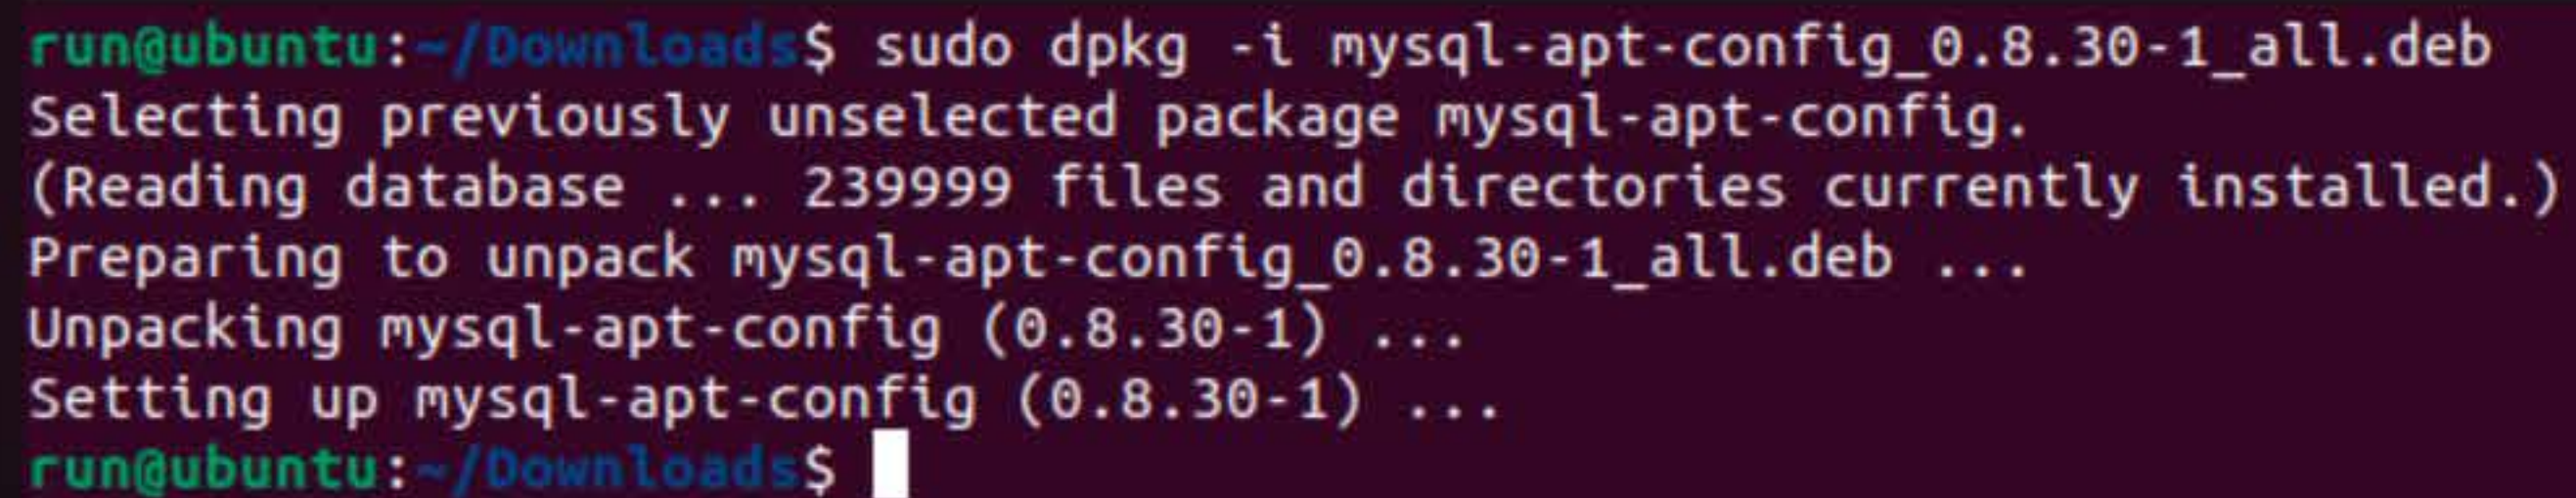

run@ubuntu:~/Downloads\$ sudo dpkg -i mysql-apt-config_0.8.30-1_all.deb
Selecting previously unselected package mysql-apt-config.
(Reading database ... 239999 files and directories currently installed.)
Preparing to unpack mysql-apt-config_0.8.30-1_all.deb ...
Unpacking mysql-apt-config (0.8.30-1) ...
Setting up mysql-apt-config (0.8.30-1) ...
run@ubuntu:~/Downloads\$

Firefox Web Browser

Package configuration

MySQL APT Repo features MySQL Server along with a variety of MySQL components. You may select the appropriate product to choose the version that you wish to receive.

Once you are satisfied with the configuration then select last option 'Ok' to save the configuration, then run 'apt-get update' to load package list. Advanced users can always change the configurations later, depending on their own needs.

Which MySQL product do you wish to configure?

MySQL Server & Cluster (Currently selected: mysql-8.0)
MySQL Tools & Connectors (Currently selected: Enabled)
MySQL Preview Packages (Currently selected: Disabled)
Ok

<Ok>


```
run@ubuntu:~/Downloads$ systemctl status mysql
```

```
● mysql.service - MySQL Community Server
```

```
Loaded: loaded (/lib/systemd/system/mysql.service; enabled; vendor preset: enabled)
```

```
Active: active (running) since Thu 2024-06-27 19:01:51 MSK; 20min ago
```

```
Process: 8326 ExecStartPre=/usr/share/mysql/mysql-systemd-start pre (code=exited, status=0/SUCCESS)
```

```
Main PID: 8334 (mysqld)
```

```
Status: "Server is operational"
```

```
Tasks: 38 (limit: 2261)
```

```
Memory: 85.7M
```

```
CPU: 13.312s
```

```
CGroup: /system.slice/mysql.service
```

```
└─8334 /usr/sbin/mysqld
```

```
run@ubuntu:~/Downloads$
```



run@ubuntu: ~/Downloads



```
run@ubuntu:~/Downloads$ sudo dpkg -r $(dpkg -f mysql-apt-config_0.8.30-1_all.deb Package)
(Reading database ... 240004 files and directories currently installed.)
Removing mysql-apt-config (0.8.30-1) ...
run@ubuntu:~/Downloads$
```

