

Operating System

Day 3

1

BY:

MRS. AKSHITA. S. CHANCHLANI

SUNBEAM INFOTECH

AKSHITA.CHANCHLANI@SUNBEAMINFO.COM

Process Scheduling

2

- Process scheduling decides which process to dispatch (to the Run state) next.
- In a multiprogrammed system several processes compete for a single processor
- **Preemptive**
 - a process **can be removed** from the Run state before it completes or blocks (timer expires or higher priority process enters Ready state).
- **Non preemptive**
 - a process **can not be removed** from the Run state before it completes or blocks.

CPU Scheduling algorithms

3

1. FCFS : First Come First Served
2. SJF: Shortest Job First
3. Priority Scheduling
4. Round Robin
5. Multi-level Queue
6. Multi-level Feedback Queue

CPU Scheduling Algorithm Optimization Criteria's

4

CPU Utilization

- utilization of the CPU must be as max as possible.

Throughput

- It is the total work done per unit time.
- Throughput must be as max as possible.

Waiting time

- It is the total amount of time spent by the process in a ready queue for waiting to get control of the CPU from its time of submission.
- waiting time must be as min as possible.

CPU Scheduling Algorithm Optimization Criteria's

5

Turn Around Time

- It is the total amount of time required for the process to complete its execution from its time of submission., turn around time must be as min as possible.
- **Turn around time = waiting time + execution.**
- turn around time is the sum of periods spent by the process in a ready queue and onto the CPU to completes its execution.

Response time

- It is a time required for the process to get first response from the CPU from its time of submission.
- One need to select such an algorithm in which response time must be as min as possible.

Execution Time and Burst Time

6

- Execution time/Running time
 - It is the total amount of time spent by the process onto the CPU to complete its execution.
- CPU burst time
 - Total no. of CPU cycles required for the process to complete its execution.

First-Come, First-Served (FCFS) Scheduling

7

<u>Process</u>	<u>Burst Time</u>
P_1	24
P_2	3
P_3	3

- Suppose that the processes arrive in the order: P_1, P_2, P_3
- The Gantt Chart for the schedule is:



Waiting time for $P_1 = 0$; $P_2 = 24$; $P_3 = 27$

- Average waiting time: $(0 + 24 + 27)/3 = 17$

convoy effect

as all the other processes wait for the one big process to get off the CPU.

FCFS Scheduling (Cont.)

8

Suppose that the processes arrive in the order
 P_2, P_3, P_1 .

- The Gantt chart for the schedule is:



- Waiting time for $P_1 = 6$; $P_2 = 0$; $P_3 = 3$
- Average waiting time: $(6 + 0 + 3)/3 = 3$
- Much better than previous case.
- *Convoy effect* short process behind long process

Shortest-Job-First (SJF) Scheduling

9

- Associate with each process the length of its next CPU burst. Use these lengths to schedule the process with the shortest time.
- Two schemes:
 - **non preemptive** – once CPU given to the process it cannot be preempted until completes its CPU burst.
 - **preemptive** – if a new process arrives with CPU burst length less than remaining time of current executing process, preempt. This scheme is known as **Shortest-Remaining-Time-First (SRTF)**.
- SJF is optimal – gives minimum average waiting time for a given set of processes.

Example of Non-Preemptive SJF

10


<u>Process</u>	<u>Arrival Time</u>	<u>Burst Time</u>
----------------	---------------------	-------------------

P_1	0.0	7
-------	-----	---

P_2	2.0	4
-------	-----	---

P_3	4.0	1
-------	-----	---

P_4	5.0	4
-------	-----	---

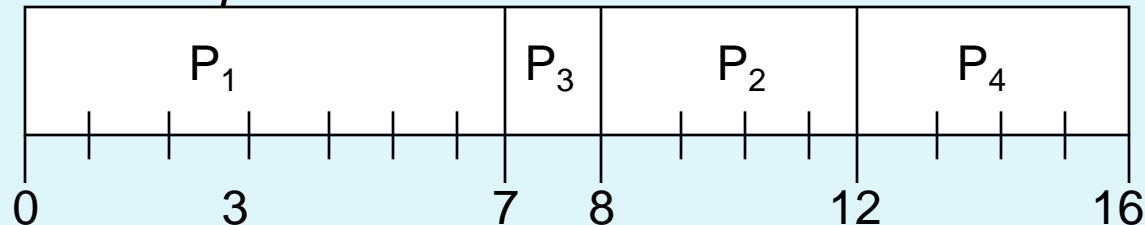

- Average waiting time = $(0 + 6 + 3 + 7)/4 = 4$

- P_1 waiting time = 0
- P_2 waiting time = 6 (8-2)
- P_3 waiting time = 3 (7-4)
- P_4 waiting time = 7 (12-5)

Example of Preemptive SJF (Shortest Remaining Time First [SRTF])

11


Process Arrival Time Burst Time

P_1 0.0 7

P_2 2.0 4

P_3 4.0 1

P_4 5.0 4

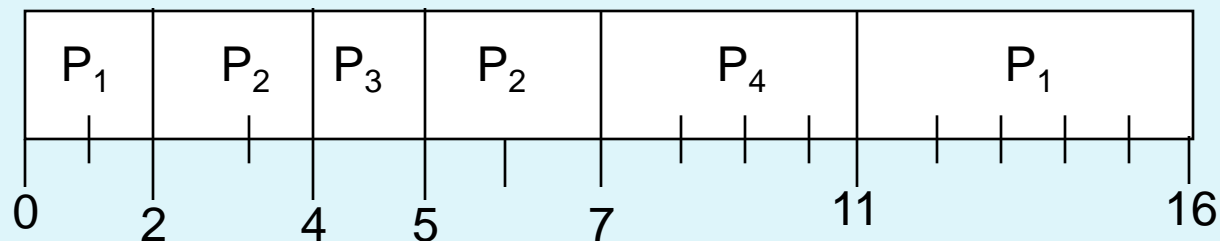

- Average waiting time = $(11 + 1 + 0 + 2)/4 = 3$

Priority Scheduling

12


- A priority number (integer) is associated with each process
- The CPU is allocated to the process with the highest priority (smallest integer \equiv highest priority)
 - Preemptive
 - Nonpreemptive
- Problem \equiv **Starvation** – low priority processes may never execute
- Solution \equiv **Aging** – as time progresses increase the priority of the process

Example of Priority Scheduling

13

<u>Process</u>	<u>Burst Time</u>	<u>Priority</u>
P_1	10	3
P_2	1	1
P_3	2	4
P_4	1	5
P_5	5	2

- Priority scheduling Gantt Chart

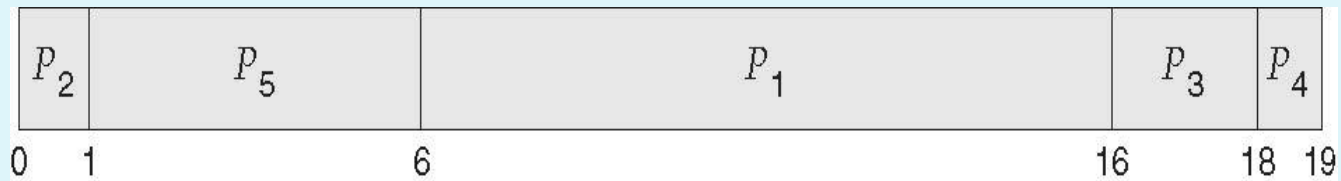

- Average waiting time = 8.2 msec

Round Robin (RR)

14

- Each process gets a small unit of CPU time (*time quantum*), usually 10-100 milliseconds. After this time has elapsed, the process is preempted and added to the end of the ready queue.
- The ready queue is treated as a circular queue.
- The CPU scheduler goes around the ready queue, allocating the CPU to each process for a time interval of up to 1 time quantum.

Example of RR with Time Quantum = 20

15

<u>Process</u>	<u>Burst Time</u>
----------------	-------------------


P_1	53
-------	----

P_2	17
-------	----

P_3	68
-------	----

P_4	24
-------	----

- The Gantt chart is:

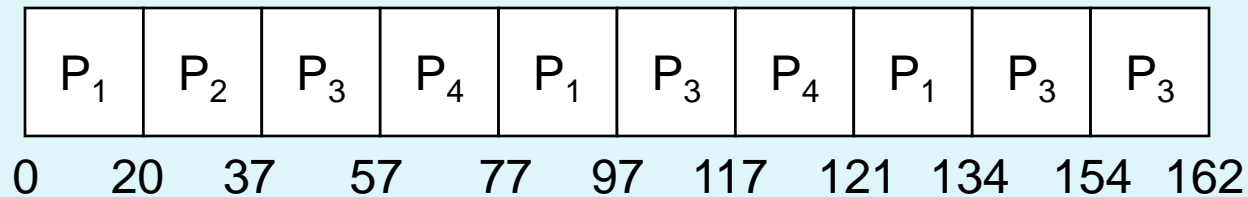


- Typically, higher average turnaround than SJF, but better *response*.

Round Robin Example : Time Quantum = 4

16

<u>Process</u>	<u>Burst Time</u>
P_1	24
P_2	3
P_3	3

- The Gantt chart is:

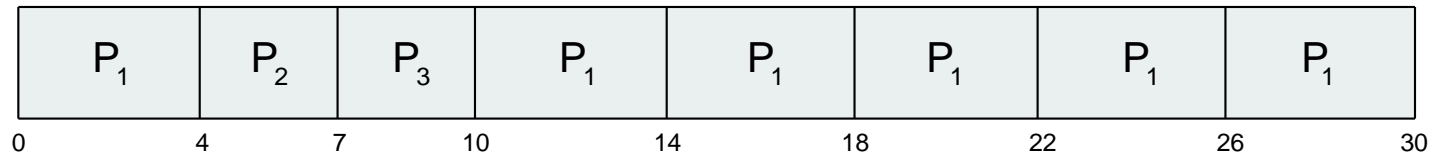

P_1 waits for 6 milliseconds (10 - 4)


P_2 waits for 4 milliseconds

P_3 waits for 7 milliseconds.

Thus, the average waiting time is $17/3 = 5.66$ mss.

Multilevel Queue Scheduling Algorithm


17

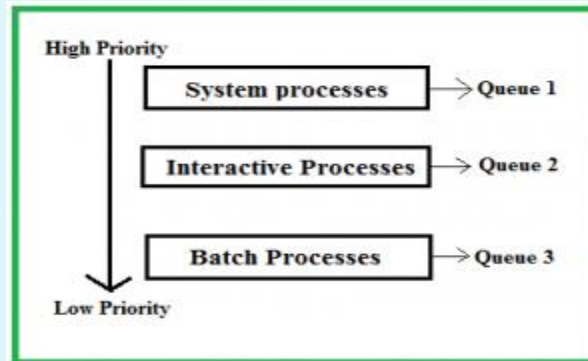

- A multi-level queue scheduling algorithm partitions the ready queue into several separate queues. The processes are permanently assigned to one queue, generally based on some property of the process, such as memory size, process priority, or process type.
- processes are permanently stored in one queue in the system and **do not move between the queue.**
- separate queue for foreground or background processes
- **For example:** A common division is made between foreground(or interactive) processes and background (or batch) processes.
- These two types of processes have different response-time requirements, and so might have different scheduling needs. In addition, foreground processes may have priority over background processes

Multilevel feedback queue scheduling

18

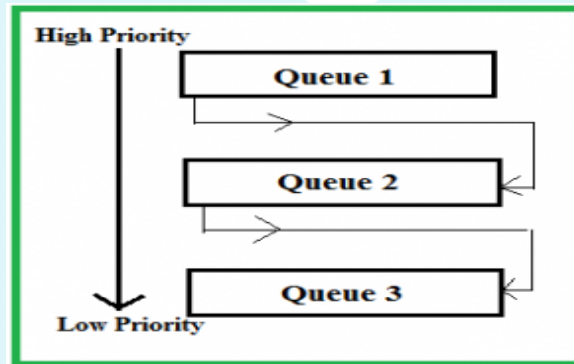

- keep analyzing the behavior (time of execution) of processes and according to which it changes its priority.
- If a process uses too much CPU time then it will be moved to the lowest priority queue.
- This leaves I/O bound and interactive processes in the higher priority queue.
- Similarly, the process which waits too long in a lower priority queue may be moved to a higher priority queue.
- The **multilevel feedback queue scheduler** has the following parameters:
 - The number of queues in the system.
 - The scheduling algorithm for each queue in the system.
 - The method used to determine when the process is upgraded to a higher-priority queue.
 - The method used to determine when to demote a queue to a lower - priority queue.
 - The method used to determine which process will enter in queue and when that process needs service.

Features of OS

19

multi-programming

- system in which execution more than one programs/processes can be starts at a time.

multi-tasking/time sharing

- system in which the CPU can run/execute more than one programs processs/tasks concurrently/simultaneously.

multi-threading

- system in which the CPU can execute multiple threads of either same process or of different processes concurrently/simultaneously.

multi-user

- system in which the CPU can execute programs of multiple users concurrently

multi-processor

- system can run on such a machine in which more than one CPU's/processors are connected in a closed circuit.

Inter process Communication (IPC)

20

- Passing information between processes
- Used to coordinate process activity
- Processes within a system may be **independent** or **cooperating**

Independent process

- do not get affected by the execution of another process

Cooperating process

- get affected by the execution of another process
- Reasons for cooperating processes:
 - Information sharing
 - Computation speedup
 - Modularity
 - Convenience
- Cooperating processes need **interprocess communication (IPC)**


IPC Requirements

21


- If P and Q wish to communicate, they need to:
 - establish communication link between them.
 - exchange messages via send/receive.
- Implementation of communication link:
 - physical (e.g., shared memory, hardware bus)
 - logical (e.g., logical properties)

Two models/Mechanisms of IPC:

22

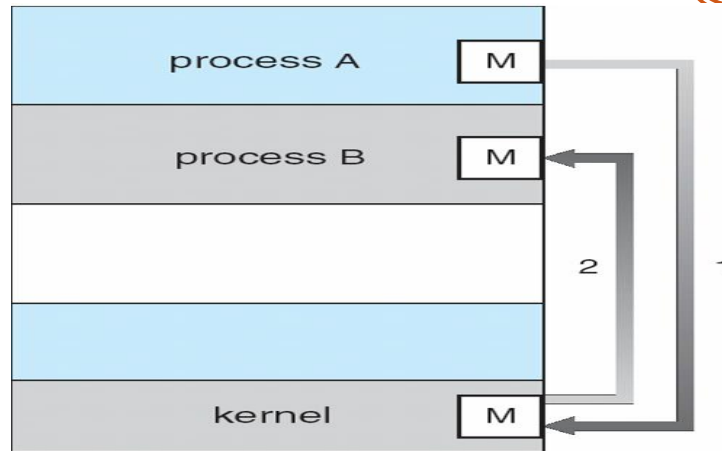

(a) Message Passing

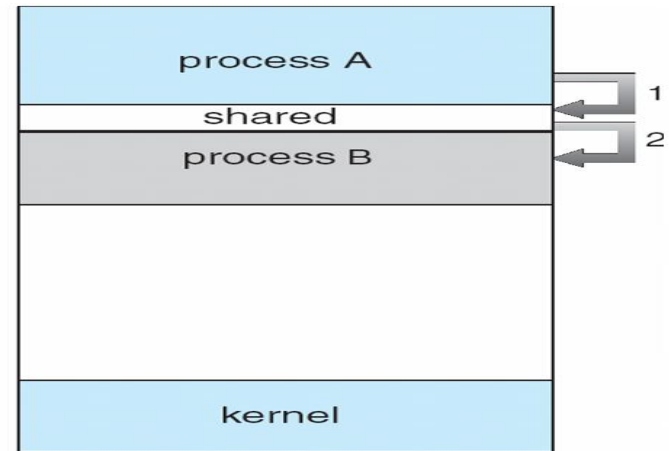

(b) Shared Memory Model

Message Passing

- communication takes place by means of messages exchanged between the cooperating processes
- Uses two primitives : Send and Receive

Shared Memory

- In the shared-memory model, a region of memory that is shared by cooperating processes is established.
- Processes can then exchange information by reading and writing data to the shared region.

Message Passing Mechanisms

23

Pipe

- Allowing two processes to communicate in unidirectional way
- by using pipe one process can send message to another process at a time
 - unnamed pipe --- two related processes can communicate with other.
 - **"related process"** -- processes which are of same parent
 - named pipe -- non-related processes can also communicate with each other.

Message Queue

- It is bidirectional communication
- processes communicate with each other through message primitives.
 - **send(destination, message)** or **send(message)**
 - **receive(source, message)** or **receive(message)**

Signal

- Processes communicates with each other by means of signals.
- Signals have predefined meaning
- Eg. SIGTERM (Terminate) SIGKILL, SIGSTOP, SIGCONT etc....

Socket

- A **socket** is defined as an *endpoint for communication*
- e.g. Host to Webserver
- socket = ip addr + port number

e.g. chatting application

Process Synchronization

24

- Concurrent access to shared data may result in **data inconsistency**.
- Maintaining data consistency requires mechanisms to ensure the orderly execution of cooperating processes.
- **Race condition:** The situation where several processes access – and manipulate shared data concurrently. The final value of the shared data depends upon which process finishes last.
- To prevent race conditions, concurrent processes must be **synchronized**.

The Critical Section / Region Problem

25

- Occurs in systems where multiple processes all compete for the use of shared data.
- Each process includes a section of code (the **critical section**) where it accesses this shared data.
- The problem is to ensure that **only one process at a time is allowed** to be operating in its critical section.

Critical-Section Problem

26

- Consider system of n processes $\{p_0, p_1, \dots, p_{n-1}\}$
- Each process has **critical section** segment of code
 - Process may be changing common variables, updating table, writing file, etc
 - When one process in critical section, no other may be in its critical section
- Each process must ask permission to enter critical section in **entry section**, may follow critical section with **exit section**, then **remainder section**
- Problem – ensure that when one process is executing in its critical section, no other process is allowed to execute in its critical section.

```
repeat
    entry to section
        critical section
    exit section
        remainder of program
until false;
```

Solution to Critical-Section Problem

27

Mutual Exclusion.

- If process P_i is executing in its critical section, then no other processes can be executing in their critical sections.

Progress

- If no process is executing in its critical section and there exist some processes that wish to enter their critical section, then the selection of the processes that will enter the critical section next cannot be postponed indefinitely.

Bounded Waiting

- A bound must exist on the number of times that other processes are allowed to enter their critical sections after a process has made a request to enter its critical section and before that request is granted.

THANK YOU!!