

Lab – ReactJS part 2


Login & Register with Supabase (React + Vite)

Step 1: Configure Supabase Authentication

For development purposes, email confirmation will be disabled.


Step 1.1: Open Authentication Settings

Navigate to **Authentication** in your Supabase Dashboard.

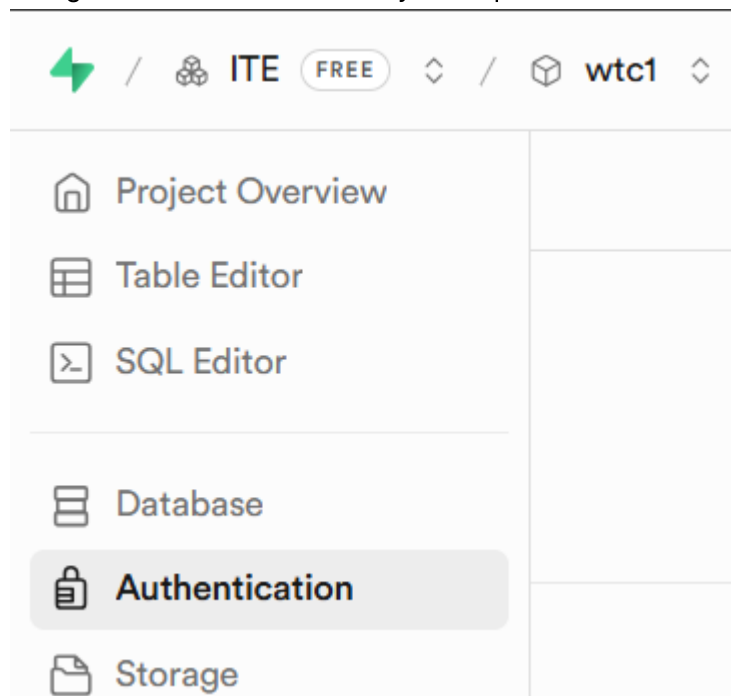

Step 1.2: Open Sign-In Providers

Go to **Sign In / Providers**.

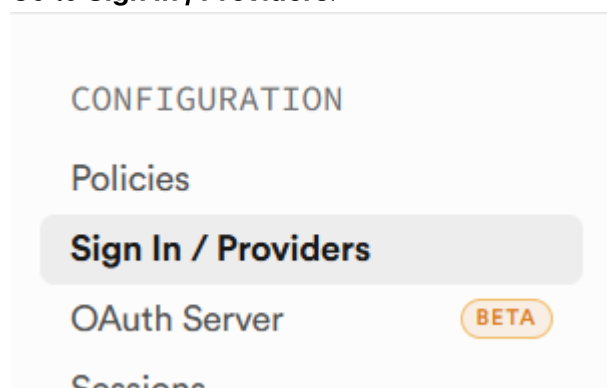

Step 1.3: Disable Email Confirmation

Turn **OFF** the **Confirm email** option (development mode only).

Supabase Auth

Third-Party Auth

User Signups

Allow new users to sign up
If this is disabled, new users will not be able to sign up to your application

Allow manual linking
Enable [manual linking APIs](#) for your project

Allow anonymous sign-ins
Enable [anonymous sign-ins](#) for your project

Confirm email
Users will need to confirm their email address before signing in for the first time

Save changes

Step 2: Configure Environment Variables

Create a file named **.env.local** in the root of your project.

```
VITE_SUPABASE_URL=YOUR_PROJECT_URL
VITE_SUPABASE_ANON_KEY=YOUR_ANON_KEY_HERE
```

Replace **YOUR_PROJECT_URL** with your ****Project url**** from the Supabase Dashboard. Replace **YOUR_ANON_KEY_HERE** with your ****Publishable key**** from the Supabase Dashboard.

Step 3: Setup Supabase Client in your project by Install Dependencies

```
npm install @supabase/supabase-js react-router-dom
```

Step 4: Create Supabase Client

Create a Supabase client to connect your app.

File: **src/lib/supabaseClient.js**

```
import { createClient } from "@supabase/supabase-js";

const SUPABASE_URL = import.meta.env.VITE_SUPABASE_URL;
const SUPABASE_ANON_KEY = import.meta.env.VITE_SUPABASE_ANON_KEY;

export const supabase = createClient(SUPABASE_URL, SUPABASE_ANON_KEY);
```

Step 5: App Component & Session Management

In File: `src/main.jsx`

```
import React from "react";
import ReactDOM from "react-dom/client";
import { BrowserRouter } from "react-router-dom";
import App from "./App.jsx";
import "./index.css";

ReactDOM.createRoot(document.getElementById("root")).render(
  <React.StrictMode>
    <BrowserRouter>
      <App />
    </BrowserRouter>
  </React.StrictMode>
);
```

In File: `src/App.jsx`

```
import { useEffect, useState } from "react";
import { Routes, Route } from "react-router-dom";
import { supabase } from "../lib/supabaseClient";
import Navbar from "../components/Navbar";
import Footer from "../components/Footer";
import HomePage from "../pages/HomePage";
import LoginPage from "../pages/LoginPage";
import RegisterPage from "../pages/RegisterPage";

export default function App() {
  const [user, setUser] = useState(null);
  const [checkingSession, setCheckingSession] = useState(true);

  useEffect(() => {
    async function checkSession() {
      const { data } = await supabase.auth.getSession();
      setUser(data?.session?.user || null);
      setCheckingSession(false);
    }

    checkSession();
  }, []);

  async function handleLogout() {
    await supabase.auth.signOut();
    setUser(null);
  }

  function handleLoginSuccess(loggedInUser) {
```

```
    setUser(loggedInUser);
  }

  if (checkingSession) {
    return (
      <div className="min-h-screen flex items-center justify-center">
        <p className="text-gray-600">Checking session...</p>
      </div>
    );
  }

  return (
    <div className="flex flex-col min-h-screen bg-gray-50">
      <Navbar user={user} onLogout={handleLogout} />

      <main className="flex-1 container mx-auto px-4 py-6">
        <Routes>
          <Route path="/" element={<HomePage user={user} />} />
          <Route
            path="/login"
            element={<LoginPage onLoginSuccess={handleLoginSuccess} />}
          />
          <Route path="/register" element={<RegisterPage />} />
        </Routes>
      </main>

      <Footer />
    </div>
  );
}
```

Step 6. Implement Register Page (sign up)

To allows users to create a new account.

File: `src/pages/RegisterPage.jsx`

```
import { useState } from "react";
import { useNavigate } from "react-router-dom";
import { supabase } from "../lib/supabaseClient";

export default function RegisterPage() {
  const [email, setEmail] = useState("");
  const [password, setPassword] = useState("");
  const [confirmPassword, setConfirmPassword] = useState("");
  const [loading, setLoading] = useState(false);
  const [error, setError] = useState(null);
  const [success, setSuccess] = useState(null);
  const navigate = useNavigate();

  async function handleRegister(e) {
```

```
e.preventDefault();
setError(null);
setSuccess(null);

// simple password checks (keep or remove as you like)
if (password !== confirmPassword) {
  setError("Passwords do not match");
  return;
}

if (password.length < 6) {
  setError("Password must be at least 6 characters");
  return;
}

setLoading(true);

try {
  const { error: authError } = await supabase.auth.signUp({
    email,
    password,
  });

  if (authError) {
    setError(authError.message);
  } else {
    // no "check your email" message
    setSuccess("Account created! You can log in now.");
    setEmail("");
    setPassword("");
    setConfirmPassword("");
    // optional: redirect to login quickly
    setTimeout(() => navigate("/login"), 1500);
  }
} catch {
  setError("An unexpected error occurred. Please try again.");
} finally {
  setLoading(false);
}
}

return (
  <section className="flex-1 flex items-center justify-center bg-gray-50 px-4">
    <div className="w-full max-w-md bg-white rounded-2xl border border-gray-200 p-8">
      <h1 className="text-3xl font-bold mb-6 text-center">Register</h1>

      <form onSubmit={handleRegister} className="space-y-4">
        <input
          type="email"
          value={email}
          disabled={loading}
          onChange={(e) => setEmail(e.target.value)}
        />
      </form>
    </div>
  </section>
)
```

```

        placeholder="Email"
        required
        className="w-full px-4 py-2 border border-gray-300 rounded-lg
focus:outline-none focus:ring-2 focus:ring-blue-600"
      />

      <input
        type="password"
        value={password}
        disabled={loading}
        onChange={(e) => setPassword(e.target.value)}
        placeholder="Password"
        required
        className="w-full px-4 py-2 border border-gray-300 rounded-lg
focus:outline-none focus:ring-2 focus:ring-blue-600"
      />

      <input
        type="password"
        value={confirmPassword}
        disabled={loading}
        onChange={(e) => setConfirmPassword(e.target.value)}
        placeholder="Confirm Password"
        required
        className="w-full px-4 py-2 border border-gray-300 rounded-lg
focus:outline-none focus:ring-2 focus:ring-blue-600"
      />

      {error && (
        <p className="text-red-600 mb-1 text-sm">
          {error}
        </p>
      )}

      {success && (
        <p className="text-green-600 mb-1 text-sm">
          {success}
        </p>
      )}

      <button
        type="submit"
        disabled={loading}
        className="w-full bg-blue-600 text-white py-2 rounded-lg
hover:bg-blue-500 disabled:bg-gray-400"
      >
        {loading ? "Creating account..." : "Register"}
      </button>
    </form>

    <p className="mt-4 text-center text-sm">
      Already have an account?{" "}
      <a href="/login" className="text-blue-600 hover:underline">
        Login

```

```
        </a>
      </p>
    </div>
  </section>
);
}
```

Step 7. Implement Login Page (sign in)

To allows registered users to log in.

File: `src/pages/LoginPage.jsx`

```
import { useState } from "react";
import { Link, useNavigate } from "react-router-dom";
import { supabase } from "../lib/supabaseClient";

export default function LoginPage({ onLoginSuccess }) {
  const [email, setEmail] = useState(""); // form state
  const [password, setPassword] = useState("");
  const [loading, setLoading] = useState(false); // loading state
  const [error, setError] = useState(null); // error message state

  const navigate = useNavigate();

  async function handleLogin(e) {
    e.preventDefault();
    setError(null);
    setLoading(true);

    try {
      const { data, error: authError } =
        await supabase.auth.signInWithPassword({
          email,
          password,
        });

      if (authError) {
        console.error("Supabase auth error:", authError);
        setError(authError.message);
        return;
      } else {
        // login success → save user in App and go Home
        onLoginSuccess(data.user);
        navigate("/");
      }
    } catch {
      setError("An unexpected error occurred. Please try again.");
    } finally {

```

```

        setLoading(false);
    }
}

return (
    <section className="flex-1 flex items-center justify-center bg-gray-50
px-4">
        <div className="w-full max-w-md bg-white rounded-2xl border border-
gray-200 p-8">
            {/* Title */}
            <h2 className="text-3xl font-bold text-center text-gray-800 mb-1">
                Welcome Back
            </h2>
            <p className="text-center text-sm text-gray-500 mb-4">
                Login to your account
            </p>

            {/* Form */}
            <form className="space-y-5" onSubmit={handleLogin}>
                {/* Email */}
                <div>
                    <label className="block text-sm font-medium text-gray-700 mb-
1">
                        Email Address
                    </label>
                    <input
                        type="email"
                        placeholder="you@example.com"
                        value={email}
                        disabled={loading}
                        onChange={(e) => setEmail(e.target.value)}
                        required
                        className="w-full rounded-lg border border-gray-300 px-4 py-
2.5 text-sm
                                placeholder-gray-400
                                focus:outline-none focus:ring-2 focus:ring-blue-
600 focus:border-blue-600"
                    />
                </div>

                {/* Password */}
                <div>
                    <label className="block text-sm font-medium text-gray-700 mb-
1">
                        Password
                    </label>
                    <input
                        type="password"
                        placeholder="••••••••"
                        value={password}
                        disabled={loading}
                        onChange={(e) => setPassword(e.target.value)}

```



```

        required
        className="w-full rounded-lg border border-gray-300 px-4 py-
2.5 text-sm
                placeholder-gray-400
                focus:outline-none focus:ring-2 focus:ring-blue-
600 focus:border-blue-600"
      />
    </div>

    { /* Error */ }
    { error && (
      <p className="mb-4 text-sm text-red-600 text-center">
        { error }
      </p>
    ) }

    { /* Submit Button */ }
    <button
      type="submit"
      disabled={loading}
      className="w-full rounded-lg bg-blue-600 py-2.5 text-white
font-semibold
                hover:bg-blue-700 active:scale-[0.99]
                transition-all duration-200 disabled:bg-gray-400"
    >
      { loading ? "Signing in..." : "Sign In" }
    </button>
  </form>

  { /* Footer */ }
  <p className="mt-6 text-center text-sm text-gray-600">
    Don't have an account?{" "}
    <Link
      to="/register"
      className="font-medium text-blue-600 hover:underline"
    >
      Register
    </Link>
  </p>
</div>
</section>
);
}

```

Step 8: Navbar with Authentication State and Footer

The Navbar updates based on login status.

File: `src/components/Navbar.jsx`

```

import { Link, useLocation } from "react-router-dom";

export default function Navbar({ user, onLogout }) {
  const location = useLocation();

  const linkClass =
    "px-3 py-2 rounded-md text-sm font-medium hover:bg-gray-100";

  const activeClass =
    "px-3 py-2 rounded-md text-sm font-semibold bg-blue-600 text-white";

  return (
    <header className="bg-white shadow">
      <nav className="container mx-auto flex items-center justify-between px-4 py-5">

        {/* Logo */}
        <Link to="/" className="text-xl font-bold text-blue-600">
          MyApp
        </Link>

        {/* Right side */}
        <div className="flex items-center gap-4">

          {/* Left group: navigation links */}
          <div className="flex gap-2">
            <Link
              to="/"
              className={location.pathname === "/" ? activeClass :
linkClass}
            >
              Home
            </Link>

            {!user && (
              <Link
                to="/register"
                className={
linkClass
                  location.pathname === "/register" ? activeClass :
linkClass
                }
              >
                Register
              </Link>
            )}

            <div className="border" />

            {!user && (
              <Link
                to="/login"
                className={
                  location.pathname === "/login" ? activeClass : linkClass

```

```

        }
      >
      Login
    </Link>
  )}

  { /* Right group: user info / logout */ }
  { user && (
    <div>
      <button
        onClick={onLogout}
        className="px-3 py-2 rounded-md text-sm font-semibold
bg-red-600 text-white hover:bg-red-500"
      >
        Logout
      </button>
    </div>
  )}
</div>
</div>
</nav>
</header>
);
}

```

File: `src/components/Footer.jsx`

```

export default function Footer() {
  return (
    <footer>
      <div className="max-w-6xl mx-auto px-4 py-6 flex items-center
justify-center">
        <p className="text-sm ">
          © {new Date().getFullYear()} MyReactSite. All rights reserved.
        </p>
      </div>
    </footer>
  );
}

```

Step 9: Make a component Dashboard

Create component dashboard for can call it to use any layer **Files:**

`src/components/DashboardComponents.jsx`

```

export function StatCard({ title, value, color = "text-blue-600" }) {
  return (
    <div className="bg-white rounded-xl border shadow-sm p-5">

```

```

        <p className="text-sm text-gray-500">{title}</p>
        <p className={`text-3xl font-bold mt-2 ${color}`}>{value}</p>
    </div>
    );
}

export function TableRow({ id, name, status }) {
    const statusColor =
        status === "Active"
        ? "text-green-600"
        : status === "Pending"
        ? "text-yellow-600"
        : "text-red-600";

    return (
        <tr>
            <td className="px-6 py-3">{id}</td>
            <td className="px-6 py-3">{name}</td>
            <td className={`px-6 py-3 font-medium ${statusColor}`}>
                {status}
            </td>
        </tr>
    );
}

```

Step 10: Home Page & Dashboard Component

Displays different content depending on authentication status.

File: `src/pages/HomePage.jsx`

```

import StemBuilding from "../assets/stem.jpeg";
import { StatCard, TableRow } from "../components/DashboardComponents";

export default function HomePage({ user }) {
    // ===== DASHBOARD =====
    if (user) {
        return (
            <main className="bg-gray-50">
                <div className="max-w-6xl mx-auto space-y-8">

                    {/* Header */}
                    <div className="flex items-center justify-between bg-white p-6 rounded-2xl shadow-sm border">
                        <div>
                            <h1 className="text-2xl md:text-3xl font-bold text-gray-800">
                                Dashboard
                            </h1>
                            <p className="text-sm text-gray-500 mt-1">
                                Welcome back, {" "}

```

```

        <span className="font-medium">{user.email}</span>
      </p>
    </div>

    <div className="w-12 h-12 rounded-full bg-gray-600 text-white
flex items-center justify-center font-semibold text-lg shadow-sm">
      {user.email.charAt(0).toUpperCase()}
    </div>
  </div>

  { /* Stats */ }
  <div className="grid grid-cols-1 sm:grid-cols-2 lg:grid-cols-4
gap-4">
    <StatCard title="Total Projects" value="12" />
    <StatCard title="Active" value="8" color="text-green-600" />
    <StatCard title="Pending" value="3" color="text-yellow-600" />
    <StatCard title="Inactive" value="1" color="text-red-600" />
  </div>

  { /* Table */ }
  <div className="bg-white rounded-2xl shadow-sm border overflow-
hidden">
    <div className="px-6 py-4 border-b flex items-center justify-
between">
      <h2 className="text-lg font-semibold text-gray-800">
        Project Overview
      </h2>
      <span className="text-xs text-gray-500 uppercase">
        Sample Data
      </span>
    </div>

    <div className="overflow-x-auto">
      <table className="min-w-full text-sm">
        <thead className="bg-gray-50 text-gray-600">
          <tr>
            <th className="px-6 py-3 text-left font-
medium">ID</th>
            <th className="px-6 py-3 text-left font-
medium">Name</th>
            <th className="px-6 py-3 text-left font-
medium">Status</th>
          </tr>
        </thead>
        <tbody className="divide-y">
          <TableRow id="1" name="Sample Item A" status="Active" />
          <TableRow id="2" name="Sample Item B" status="Pending"
/>
          <TableRow id="3" name="Sample Item C" status="Inactive"
/>
        </tbody>
      </table>
    </div>
  </div>

```

```

        </div>
    </main>
    );
}

// ===== PUBLIC PAGE =====
return (
    <main className="flex-1 flex flex-col items-center justify-center
space-y-6">
        <section className="flex text-start px-4 space-x-4">
            <img
                src={profilePic}
                alt="Profile"
                className="w-40 h-40 rounded-full shadow-lg border-4 border-
white"
            />
            <div className="space-y-4">
                <h1 className="text-4xl md:text-5xl font-bold">
                    Welcome to My React Site
                </h1>
                <p className="text-lg md:text-xl">
                    Hello! I'm learning{" "}
                    <span className="font-semibold text-blue-600">React</span>.
                </p>
            </div>
        </section>

        <img src={StemBuilding} alt="StemBuilding" className="max-w-3xl" />
    </main>
    );
}

```

Note: please follow previous lab to install tailwindcss and react-router

- Install Tailwind CSS `npm install tailwindcss @tailwindcss/vite`
- Install react-router `npm install react-router-dom`
- Git repository: https://github.com/rupp-ite/wct1_reactjs/tree/part2