


aktiv_morgens
aktivMORGENS
ShopID shop_id
aktiv_abends
AKTIVAbends
KUNDEN_id kunden_id
datum
Datum
AktivGESTERN
aktiv_gestern

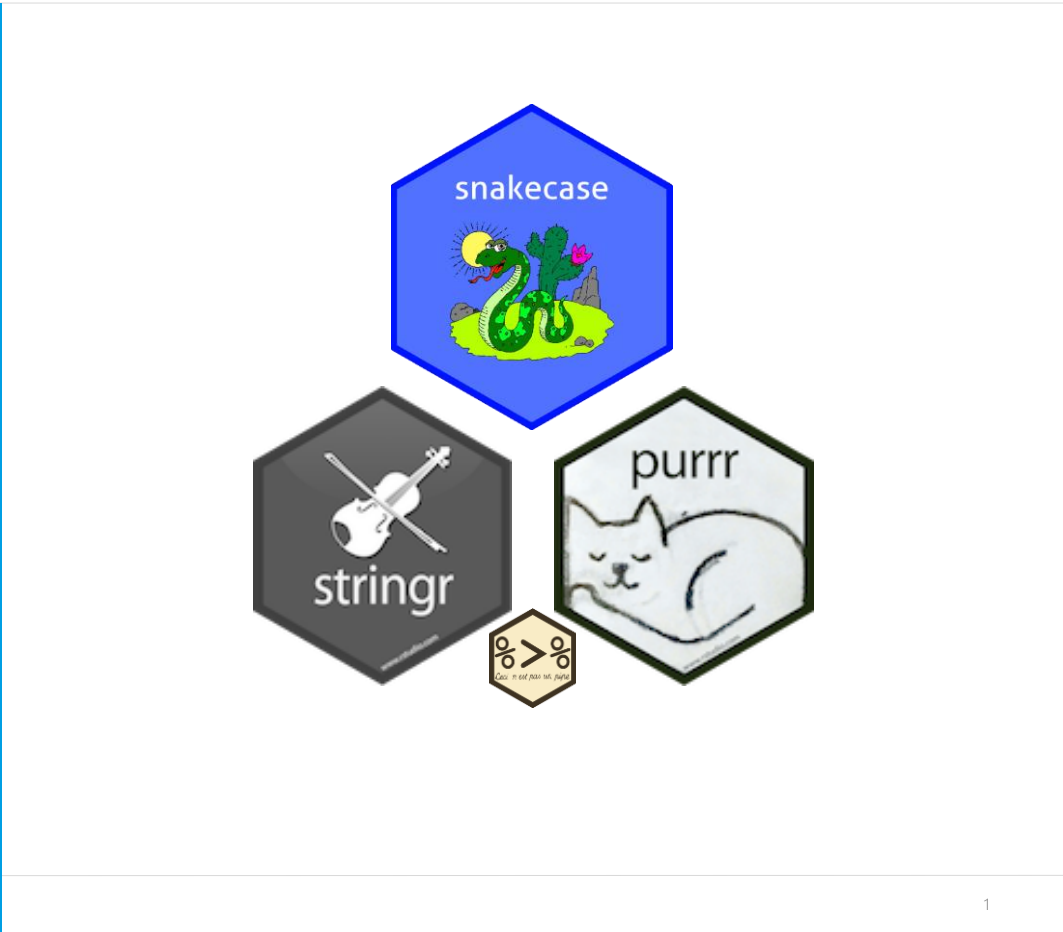


1. Simple caseconversion

RStudio → R_Studio

```
✨ to_any_case(string, case =  
  👁 "parsed"  
  🐍 "screaming_snake"  
  🐍 "snake"  
  🐪 "small_camel"  
  🐪 "big_camel")
```

1. Simple caseconversion

RStudio

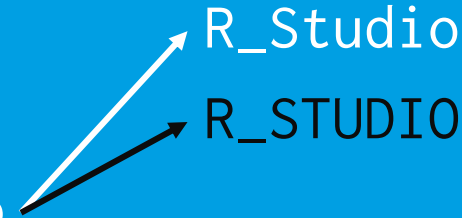

A diagram on a blue background. The word 'RStudio' is on the left. Two arrows originate from its right side: a white arrow pointing up and to the right to the text 'R_Studio', and a black arrow pointing down and to the right to the text 'R_STUDIO'.


R_Studio

R_STUDIO

SCREAMING_SNAKE_CASE

```
✨ to_any_case(string, case =  
  👁 "parsed"  
  🐍 "screaming_snake"  
  🐍 "snake"  
  🐪 "small_camel"  
  🐪 "big_camel")
```


1. Simple caseconversion

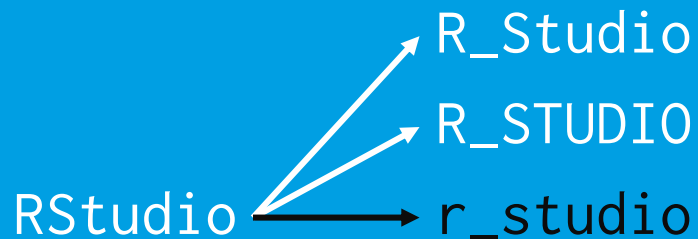

snake_case

```
✨ to_any_case(string, case =  
  👁 "parsed"  
  🐍 "screaming_snake"  
  🐍 "snake"  
  🐫 "small_camel"  
  🐫 "big_camel")
```


1. Simple caseconversion

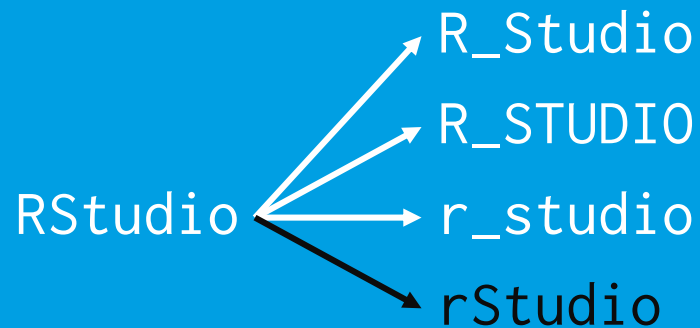

smallCamelCase

```
✨ to_any_case(string, case =  
  👁 "parsed"  
  🐍 "screaming_snake"  
  🐍 "snake"  
  🐫 "small_camel"  
  🐫 "big_camel")
```


1. Simple caseconversion

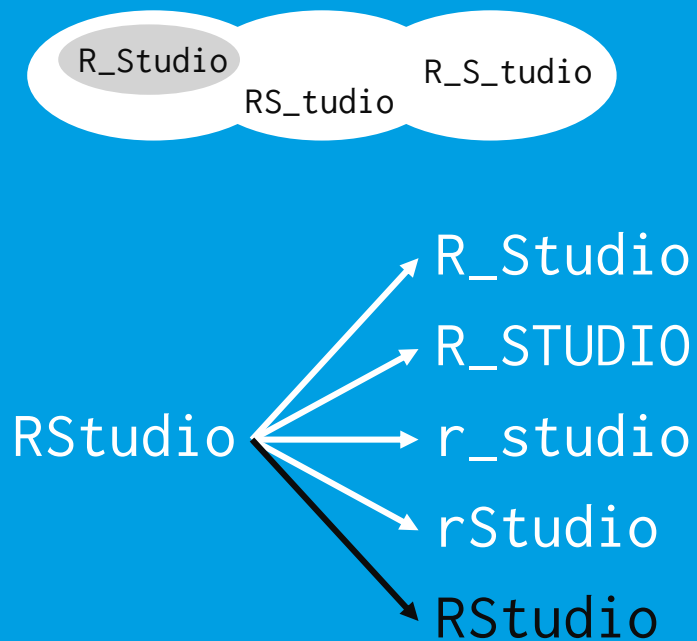


BigCamelCase

```
✨ to_any_case(string, case =  
  👁 "parsed"  
  🐍 "screaming_snake"  
  🐍 "snake"  
  🐪 "small_camel"  
  🐪 "big_camel")
```

2. Design philosophy

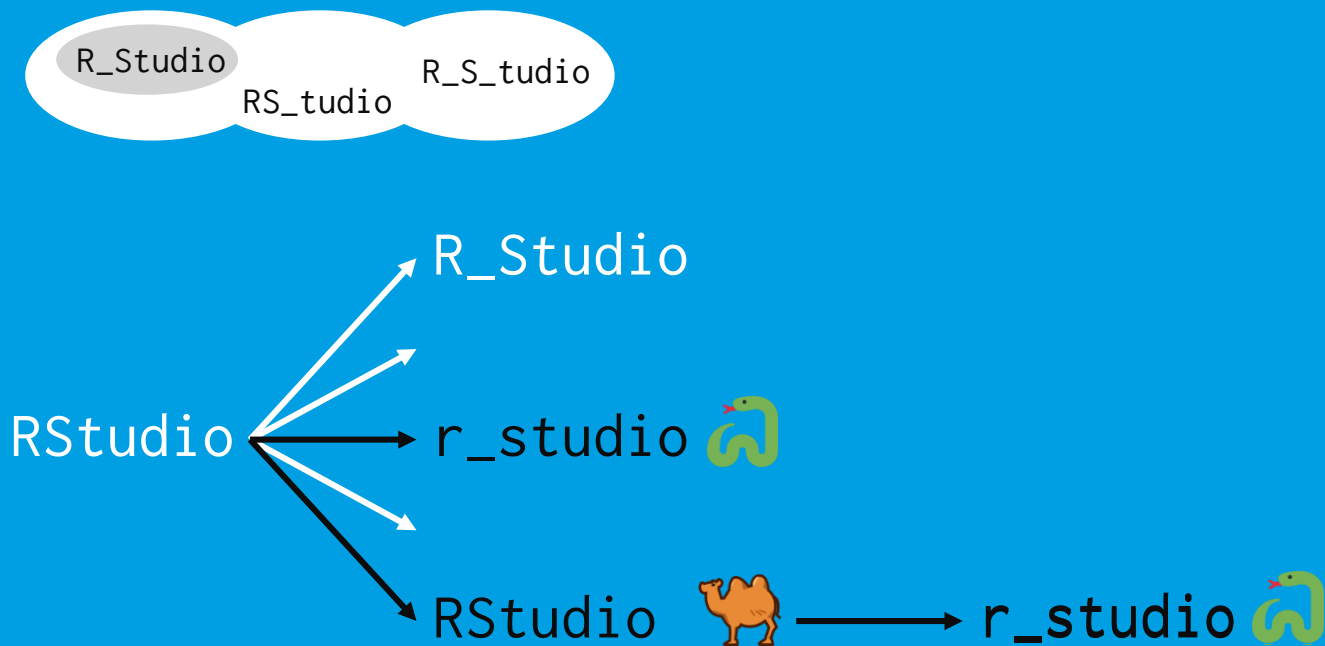

2. Design philosophy

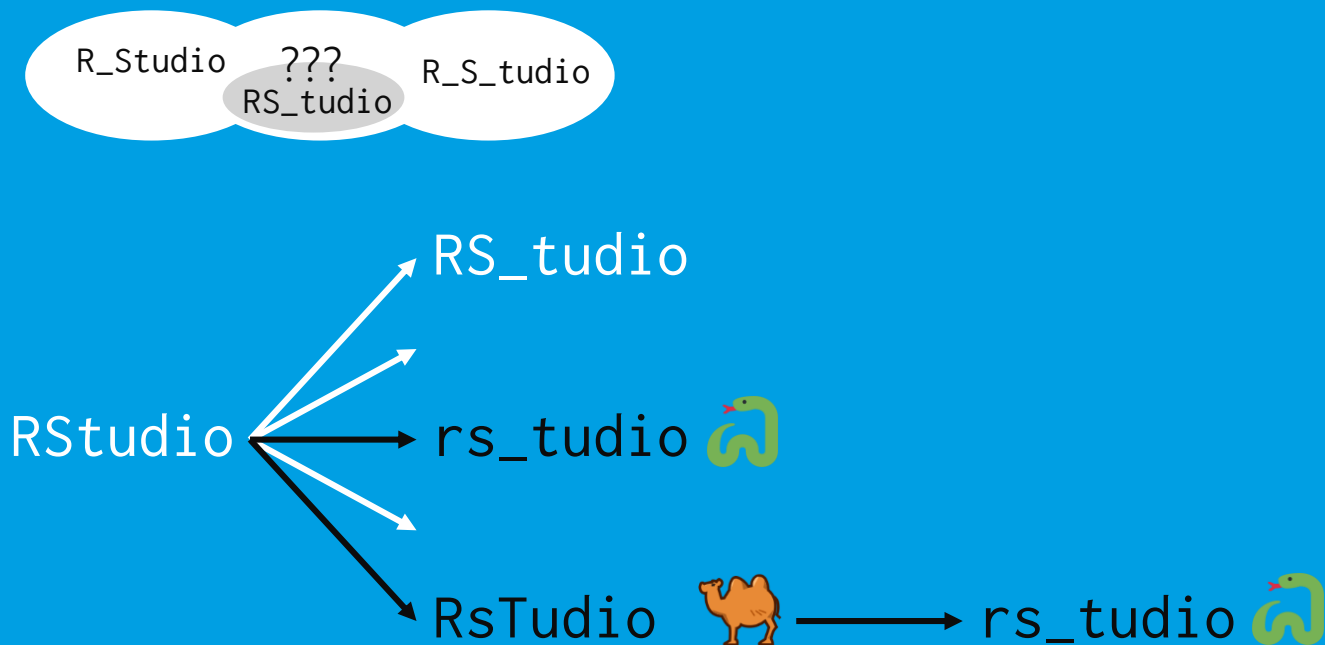

2. Design philosophy



3. General caseconversion (more than "_" and "\\s")

R.Stüdio: v.1.0.143



r_._stüdio_:_v_._1_._0_._143

```
to_any_case(string,  
  case = "snake",  
  preprocess = NULL,  
  protect = NULL,  
  replace_special_characters = FALSE,  
  postprocess = NULL,  
  prefix = "",  
  postfix = ""  
)
```

3. General caseconversion (more than "_" and "\\s")

R.Stüdio: v.1.0.143

→ r_._stüdio_:_v_._1_._0_._143

→ r_stüdio_v_1_0_143

```
to_any_case(string,  
  case = "snake",  
  preprocess = ":",  
  protect = NULL,  
  replace_special_characters = FALSE,  
  postprocess = NULL,  
  prefix = "",  
  postfix = ""  
)
```

3. General caseconversion (more than "_" and "\\s")

R.Stüdio: v.1.0.143

→ r_._stüdio_:_v_._1_._0_._143

→ r_stüdio_v_1_0_143

→ **r.stüdio:v.1.0.143**

```
to_any_case(string,  
  case = "snake",  
  preprocess = NULL,  
  protect = ":\|\\.",  
  replace_special_characters = FALSE,  
  postprocess = NULL,  
  prefix = "",  
  postfix = ""  
)
```

3. General caseconversion (more than "_" and "\\s")

R.Stüdio: v.1.0.143

→ r_._stüdio_:._v_.1_.0_.143

→ r_stüdio_v_1_0_143

→ r.stüdio:v.1.0.143

→ r_stüdio_v_1.0.143

```
to_any_case(string,  
  case = "snake",  
  preprocess = ":(?!\\d)\\.",  
  protect = "\\.",  
  replace_special_characters = FALSE  
  postprocess = NULL,  
  prefix = "",  
  postfix = ""  
)
```

3. General caseconversion (more than "_" and "\\s")

R.Stüdio: v.1.0.143

→ r_._stüdio_:_v_.1_.0_.143

→ r_stüdio_v_1_0_143

→ r.stüdio:v.1.0.143

→ r_stüdio_v_1.0.143

→ r_stuedio_v_1.0.143

```
to_any_case(string,  
  case = "snake",  
  preprocess = ":|(?<!\d)\\.\"",  
  protect = "\\.",  
  replace_special_characters = TRUE,  
  postprocess = NULL,  
  prefix = "",  
  postfix = ""  
)
```

3. General caseconversion (more than "_" and "\\s")

R.Stüdio: v.1.0.143

→ r_._stüdio_:v_._1_._0_._143

→ r_stüdio_v_1_0_143

→ r.stüdio:v.1.0.143

→ r_stüdio_v_1.0.143

→ r_stuedio_v_1.0.143

→ pre.R Stuedio v 1.0.143.post

```
to_any_case(string,  
  case = "parsed",  
  preprocess = ":(?!\\d)\\.",  
  protect = "\\.",  
  replace_special_characters = TRUE,  
  postprocess = " ",  
  prefix = "pre.",  
  postfix = ".post"  
)
```

Thank you for your attention!

Questions?

<https://github.com/Tazinho/snakecase>

Malte Grosser

Business Analyst

implexis analytics GmbH

Lilienstraße 15 • 20095 Hamburg • Germany

T +49 406077 127 1 0 M +49 151 1463 4525

E malte.grosser@implexis-analytics.com

