

NAME: Rushikesh Rajendra Shinde

PRN:202501070142

BRANCH : ENTC

DIVISION :ET21

PRACTICAL EDS :

1.1.1 Write a program that accepts the mass of an object (in kilograms) and its velocity (in meters per second), then calculates and displays the momentum of the object. The momentum is calculated using the formula:

where:

is the mass of the object (in kilograms).

is the velocity of the object (in meters per second).

Input Format:

- A single floating-point number representing the mass of the object in kilograms.
- A single floating-point number representing the velocity of the object in meters per second.

Output Format:

- The output will display calculated momentum with appropriate units (kgm/s) (rounded up to 2 decimal places).

The screenshot shows a code editor window titled "calculate...". The code is as follows:

```
1 #Type Content here...
2 mass=float(input(""))
3 velocity=float(input(""))
4 momentum=mass*velocity
5 print(f"momentum: .2f)kgm/s")
```

Below the code editor, there is a test results section. It shows the average time (0.016 s) and maximum time (0.029 s) for the code. It also indicates that 2 out of 2 shown test case(s) passed and 2 out of 2 hidden test case(s) passed. The test results are as follows:

Test case	Expected output	Actual output
Test case 1	5.8	5.8
Test case 2	18.8	18.8

- 1.1.2 practical
- Write a Python program that accepts an integer as input. Depending on the number of digits in .
-
- Constraints:**
- $1 \leq \leq 999$
-
- Input Format:**
- The input consists of a single integer .
-
- Output Format:**
- If is a single-digit number, print its square.
- If is a two-digit number, print its square root (rounded to two decimal places).
- If is a three-digit number, print its cube root (rounded to two decimal places).
- Else print "Invalid".

The screenshot shows a web-based code editor interface for DE TANTRA. The editor contains a Python program that takes an integer input and performs different operations based on the number of digits. The program uses conditional logic to calculate the square, square root, or cube root of the input, or prints "Invalid" if the input is not a valid integer within the constraints.

```

1 #write your code here...
2 import math
3 n=int(input(""))
4 if 1<=n<=9 :
5     print(n*n)
6 elif 10<=n<=99 :
7     print(f"{math.sqrt(n):.2f}")
8 elif 100<=n<=999 :
9     print(f"{n**(1/3):.2f}")
10 else :
11     print("Invalid")
12

```

Below the code editor, the test results are displayed. The average time for the code execution is 0.006 s, and the maximum time is 0.010 s. The code has passed 4 out of 4 shown test cases and 3 out of 3 hidden test cases. The test cases are listed as follows:

- Test case 2: Passed
- Test case 3: Passed
- Test case 4: Passed

1.1.3

Write a Python program to calculate number of days between two dates.

Input Format:


- The first line contains the first date in the format .
- The second line contains the second date in the format .

Output Format:

- An integer representing the number of days between the given dates.

Note:

- The first date should always be considered earlier than the second date.

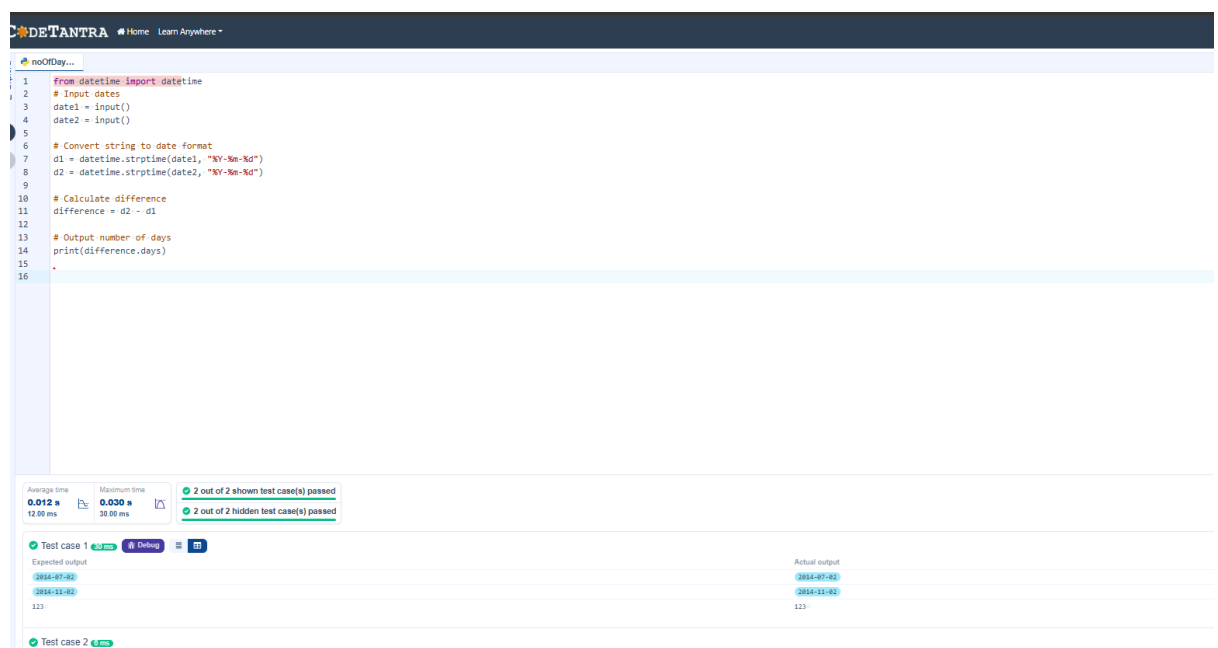

```
1 from datetime import datetime
2 # Input dates
3 date1 = input()
4 date2 = input()
5
6 # Convert string to date format
7 d1 = datetime.strptime(date1, "%Y-%m-%d")
8 d2 = datetime.strptime(date2, "%Y-%m-%d")
9
10 # Calculate difference
11 difference = d2 - d1
12
13 # Output number of days
14 print(difference.days)
15
16
```

Average time: 0.012 s, Maximum time: 0.030 s, 2 out of 2 shown test case(s) passed, 2 out of 2 hidden test case(s) passed

Test case 1	Expected output	Actual output
2014-07-01 2014-11-01	123	123

Test case 2

1.1.4

Write a Python program to reverse the digits of the number and print the reversed number.

Input Format:

- The input is a single integer.

Output Format:

- The output prints a single integer, which is the reversed number.

The screenshot displays the CodeTANTRA web interface. At the top, the URL is <https://mitaoe.codetantra.com/secure/course.jsp?euclid=698c54860aba96214c8b7d5e#/contents/698c54860aba96214c8b7d5f>. The page title is "CODETANTRA" with navigation links for "Home" and "Learn Anywhere". The main content area shows a code editor with the following Python code:

```
1 #write your code here...
2 n=int(input(""))
3 rev=int(str(n)[::-1])
4 print(rev)
```

Below the code editor, the test results are displayed. The average time is 0.005 s (4.80 ms) and the maximum time is 0.005 s (5.00 ms). The results show that 2 out of 2 shown test cases passed and 3 out of 3 hidden test cases passed. Test case 1 is detailed below:

Test case 1	5 ms	Debug
Expected output	5367	Actual output
7635		7635

Test case 2 is also shown as passed in 4 ms.

1.1.5

Write a Python program that takes an integer as input and prints the multiplication table for that integer from 1 to 10.

Input Format:

- The first line of input contains an integer that represents the number for which the multiplication table is to be printed.

Output Format:

- Print the multiplication table for the given number in the format:

<number> x <multiplier> = <result>

Note:

- The character "x" is used in the output to represent multiplication.
- Refer to the visible test-cases for more clarity.

The screenshot shows a web browser window with the URL <https://mitaoe.codetantra.com/secure/course.jsp?euclid=698c54860aba96214c8b7d5e#/contents/698c54860aba96214c8b7d5f/698c5486...>. The page header includes the logo "CODETANTRA", navigation links "Home" and "Learn Anywhere", and a user ID "2025010701266".

The code editor displays the following Python code:

```
1 #write your code here...
2 num=int(input(""))
3 for i in range(1,11):
4     print(f"{num} x {i} = {num*i}")
5
6
7
```

The test results section shows:

- Average time: 0.011 s (11.25 ms)
- Maximum time: 0.019 s (19.00 ms)
- 2 out of 2 shown test case(s) passed
- 2 out of 2 hidden test case(s) passed

The test cases are displayed in two columns:

Input	Output
8	8
8 x 1 = 8	8 x 1 = 8
8 x 2 = 16	8 x 2 = 16
8 x 3 = 24	8 x 3 = 24
8 x 4 = 32	8 x 4 = 32
8 x 5 = 40	8 x 5 = 40
8 x 6 = 48	8 x 6 = 48
8 x 7 = 56	8 x 7 = 56
8 x 8 = 64	8 x 8 = 64

1.2.1

Write a Python program that accepts the number of courses and the marks of a student in those courses.

The grade is determined based on the aggregate percentage:

- If the aggregate percentage is greater than 75, the grade is Distinction.
- If the aggregate percentage is greater than or equal to 60 but less than 75, the grade is First Division.
- If the aggregate percentage is greater than or equal to 50 but less than 60, the grade is Second Division.
- If the aggregate percentage is greater than or equal to 40 but less than 50, the grade is Third Division.

Input Format:

- The first input will be an integer , the number of courses.

- The second input will be integers representing the marks of the student in each of the courses, separated by a space.

Output Format:

If the student passes all courses:

- Print the aggregate percentage (formatted to two decimal places).
- Print the grade based on the aggregate percentage.

If the student fails any course (marks < 40 in any course), print:

- "Fail".

Note:

- Aggregate Percentage: Average performance across all courses, calculated by summing all marks and dividing by the number of courses.

Sample Test Cases

write your code here

```
n=int(input())
```

```
marks = list(map(int, input().split()))
```

```
failed = False
```

```
for i in marks:
```

```
if i < 40 :
```

```
failed=True
```

```
break
```

```
if failed:
```

```
print("Fail")
```

```
else :
```

```
agg=sum(marks)/n
```

```
print("Aggregate Percentage: {:.2f}")

if agg > 75 :

print("Grade: Distinction")

elif agg >=65 :

print("Grade: First Division")

elif agg >=50:

print("Grade: Second Division")


elif agg >= 40:

print("Grade: Third Division")
```

Translation Failed

Reason for late submission

Please enter at least 15 characters

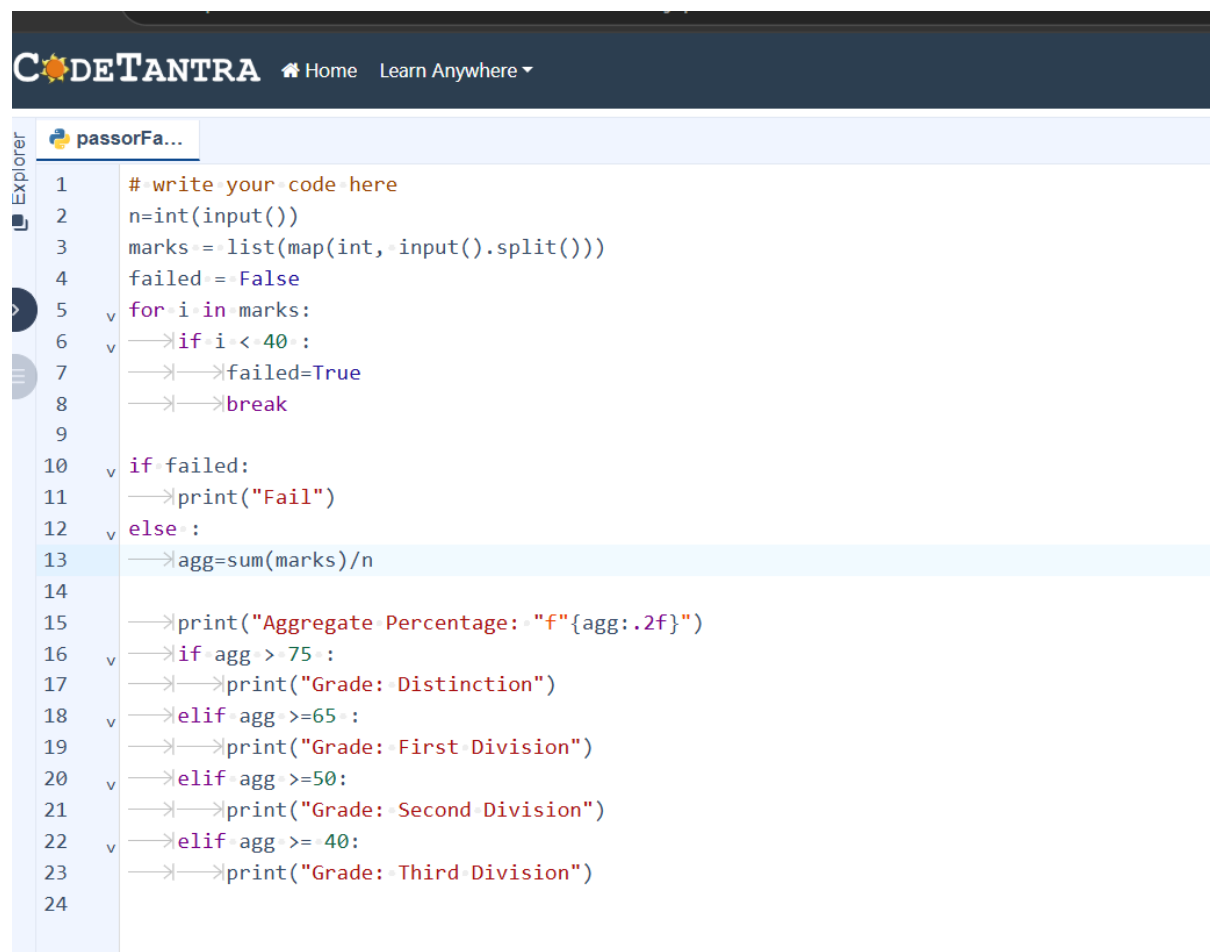

The screenshot shows the CodeTANTRA IDE interface. At the top, there is a dark blue header with the 'CODETANTRA' logo and navigation links for 'Home' and 'Learn Anywhere'. Below the header, a tab labeled 'passorFa...' is active. The main editor area displays a Python script with line numbers 1 through 24. The script calculates the aggregate percentage from a list of marks and prints the corresponding grade based on the following logic: if the aggregate is greater than 75, it's a Distinction; if greater than or equal to 65, it's the First Division; if greater than or equal to 50, it's the Second Division; if greater than or equal to 40, it's the Third Division; otherwise, it prints 'Fail'. The script also includes a 'break' statement in the loop that checks for marks less than 40.

```
1  # write your code here
2  n=int(input())
3  marks= list(map(int, input().split()))
4  failed= False
5  for i in marks:
6      if i < 40 :
7          failed=True
8          break
9
10 if failed:
11     print("Fail")
12 else :
13     agg=sum(marks)/n
14
15     print("Aggregate Percentage: {:.2f}")
16     if agg > 75:
17         print("Grade: Distinction")
18     elif agg >=65 :
19         print("Grade: First Division")
20     elif agg >=50:
21         print("Grade: Second Division")
22     elif agg >= 40:
23         print("Grade: Third Division")
24
```

CODETANTRA

HomeLearn Anywhere

passorFa...

1# write your code here

2n=int(input())

3marks = list(map(int, input().split()))

4failed = False

5for i in marks:

Average time

0.009 s

9.20 ms

Maximum time

0.013 s

13.00 ms

5 out of 5 shown test case(s) passed

5 out of 5 hidden test case(s) passed

Test case 17 msDebug

Expected output

4

55 65 78 89

Aggregate Percentage: 71.75

Grade: First Division

Actual output

4

55 65 78 89

Aggregate Percentage: 71.75

Grade: First Division

Test case 210 ms

Terminal

Test cases

1.2.2

Write a Python program that uses recursion to print the first terms of the Fibonacci series.

Input Format:

- A single integer representing the number of terms to generate.

Output Format:

- A single line containing the first terms of the Fibonacci sequence, separated by spaces.


```
1 def fibonacci(n):
2
3     # write the code..
4     if n==1:
5         return 0
6     elif n==2:
7         return 1
8     else:
9         return fibonacci(n-1)+fibonacci(n-2)
10
11
12 n = int(input())
13 for i in range(1, n + 1):
14     print(fibonacci(i), end=" ")
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
```

Average time: 0.014 s, 14.25 ms | Maximum time: 0.039 s, 39.00 ms | 2 out of 2 shown test case(s) passed | 2 out of 2 hidden test case(s) passed

Test case 1: 5 ms | Debug | Expected output: 0 1 1 2 3

Test case 2: 8 ms

Terminal | Test cases

1.2.3

Write a Python program to print a pattern of asterisks in the form of a right-angled triangle.

Input Format:

- The input is an integer, representing the number of rows in the pattern.

Output Format

- The output should display the pattern of asterisks (*), with each row containing an increasing number of asterisks.

Note: Refer to the displayed test cases for the sample pattern.

rightangl...

1

#Type Content here...

2

n=int(input())

3

for i in range(1,n+1):

4

print(" "*i)

Average time

0.006 s

5.67 ms

Maximum time

0.008 s

8.00 ms

2 out of 2 shown test case(s) passed

4 out of 4 hidden test case(s) passed

Test case 1

7 ms

Test case 2

6 ms

1.2.4

Write a Python program to print a right-angled triangle pattern of numbers.

Input Format:

- The input is an integer, representing the number of rows in the pattern.

Output Format:

- The output should display the pattern of numbers separated by space, with each row containing increasing numbers starting from 1 up to the row number.

Note:

- Refer to the displayed test cases for the sample pattern.

 numberP...

```

1  n = int(input())
2
3  # Loop for rows
4  for i in range(1, n + 1):
5      # Loop for printing numbers
6      for j in range(1, i + 1):
7          print(j, end=" ")
8      print()

```

 numberP...

```

1  n = int(input())
2
3  # Loop for rows
4  for i in range(1, n + 1):
5      # Loop for printing numbers

```

Average time

0.009 s

9.00 ms



Maximum time

0.018 s

18.00 ms


 2 out of 2 shown test case(s) passed

 2 out of 2 hidden test case(s) passed

 Test case 1 **6 ms**
 Test case 2 **18 ms**