

SESSION-5:

1.

Create a simple IPL Fan Bot that takes your favorite IPL team name as input and uses if-else-if statements to print a unique cheer message for each team (e.g., 'Go Mumbai Indians!', 'Chennai Super Kings for the win!'). If the team is not recognized, print 'Team not found!' const readline = require("readline");

```
#include <stdio.h>
```

```
#include <string.h>
```

```
int main() {
```

```
    char team[50];
```

```
    printf("Enter your favorite IPL team: ");
```

```
    fgets(team, sizeof(team), stdin);
```

```
    team[strcspn(team, "\n")] = '\0';
```

```
    if (strcmp(team, "Mumbai Indians") == 0) {
```

```
        printf("Go Mumbai Indians!\n");
```

```
    }
```

```
    else if (strcmp(team, "Chennai Super Kings") == 0) {
```

```
        printf("Chennai Super Kings for the win!\n");
```

```
    }
```

```
    else if (strcmp(team, "Royal Challengers Bengaluru") == 0) {
```

```
        printf("Go RCB! Ee Sala Cup Namde!\n");
```

```
    }
```

```
    else if (strcmp(team, "Kolkata Knight Riders") == 0) {
```


```
        printf("Come on KKR!\n");
```

```

    }
    else if (strcmp(team, "Rajasthan Royals") == 0) {
        printf("Go Rajasthan Royals!\n");
    }
    else if (strcmp(team, "Sunrisers Hyderabad") == 0) {
        printf("Go Sunrisers Hyderabad!\n");
    }
    else if (strcmp(team, "Delhi Capitals") == 0) {
        printf("Go Delhi Capitals!\n");
    }
    else if (strcmp(team, "Punjab Kings") == 0) {
        printf("Go Punjab Kings!\n");
    }
    else if (strcmp(team, "Lucknow Super Giants") == 0) {
        printf("Go Lucknow Super Giants!\n");
    }
    else if (strcmp(team, "Gujarat Titans") == 0) {
        printf("Go Gujarat Titans!\n");
    }
    else {
        printf("Team not found!\n");
    }

    return 0;
}

```

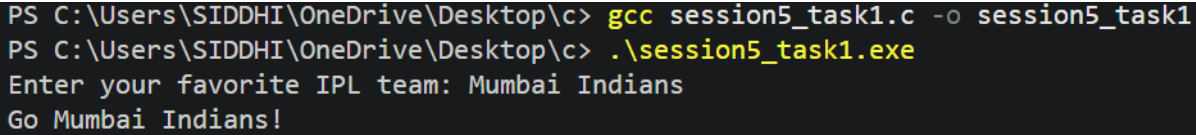

```

PS C:\Users\SIDDHI\OneDrive\Desktop\c> gcc session5_task1.c -o session5_task1
PS C:\Users\SIDDHI\OneDrive\Desktop\c> .\session5_task1.exe
Enter your favorite IPL team: Mumbai Indians
Go Mumbai Indians!

```

2.

Build a Zomato-style food suggestion tool: take the user's preferred meal time ('breakfast', 'lunch', 'dinner', or 'snack') and use a switch-case statement to

suggest a popular dish for that time. If the input doesn't match any meal, suggest 'Try some fruits!'.

```
#include <stdio.h>
```

```
#include <string.h>
```

```
int main() {
```

```
    char meal[20];
```

```
    printf("Enter your preferred meal time: ");
```

```
    scanf("%19s", meal);
```

```
    if (strcmp(meal, "breakfast") == 0) {
```

```
        printf("Suggested dish: Masala Dosa\n");
```

```
    }
```

```
    else if (strcmp(meal, "lunch") == 0) {
```

```
        printf("Suggested dish: Roti with Dal and Sabzi\n");
```

```
    }
```

```
    else if (strcmp(meal, "dinner") == 0) {
```

```
        printf("Suggested dish: Butter Paneer with Naan\n");
```

```
    }
```

```
    else if (strcmp(meal, "snack") == 0) {
```

```
        printf("Suggested dish: Samosa\n");
```

```
    }
```

```
    else {
```

```
        printf("Try some fruits!\n");
```

```
    }
```

```
    return 0;
}
```

```
PS C:\Users\SIDDHI\OneDrive\Desktop\c> gcc session5_task2.c -o session5_task2
PS C:\Users\SIDDHI\OneDrive\Desktop\c> .\session5_task2.exe
Enter your preferred meal time: lunch
Suggested dish: Roti with Dal and Sabzi
```

3.

Create a Flipkart discount calculator that asks the user for the total cart amount. Use nested if statements to check: if amount > 2000, apply 20% discount; else if amount > 1000, apply 10% discount; else, no discount. Print the final amount to pay.

Hint: Use nested ifs to check each discount slab.

```
#include <stdio.h>
```

```
int main() {
```

```
    float amount;
```

```
    float discount;
```

```
    float finalAmount;
```

```
    printf("Enter your total cart amount: Rs. ");
```

```
    scanf("%f", &amount);
```

```
    if (amount > 2000) {
```

```
        discount = amount * 20 / 100;
```

```
        finalAmount = amount - discount;
```

```
    }
```

```
    else {
```

```
        if (amount > 1000) {
```

```
            discount = amount * 10 / 100;
```

```

        finalAmount = amount - discount;
    }
    else {
        discount = 0;
        finalAmount = amount;
    }
}

printf("Discount: Rs. %.2f\n", discount);
printf("Final Amount to Pay: Rs. %.2f\n", finalAmount);

return 0;
}

```

```

PS C:\Users\SIDDHI\OneDrive\Desktop\c> gcc session5_task3.c -o session5_task3
PS C:\Users\SIDDHI\OneDrive\Desktop\c> .\session5_task3.exe
Enter your total cart amount: Rs. 8338
Discount: Rs. 1667.60
Final Amount to Pay: Rs. 6670.40

```

4.

Write a program that takes a user's age and checks eligibility for three things using if-else statements: if age ≥ 18 , print 'Eligible for Driving License'; if age ≥ 21 , also print 'Eligible for Credit Card'; if age ≥ 25 , also print 'Eligible for Car Rental'. Print all applicable messages for the given age.

```

#include <stdio.h>

int main() {
    int age;

    printf("Enter your age: ");
    scanf("%d", &age);

```

```
if (age >= 18) {  
    printf("Eligible for Driving License\n");  
  
    if (age >= 21) {  
        printf("Eligible for Credit Card\n");  
  
        if (age >= 25) {  
            printf("Eligible for Car Rental\n");  
        }  
    }  
}  
else {  
    printf("Not eligible for any of the above.\n");  
}  
  
return 0;  
}
```

```
PS C:\Users\SIDDHI\OneDrive\Desktop\c> gcc session5_task4.c -o session5_task4  
PS C:\Users\SIDDHI\OneDrive\Desktop\c> .\session5_task4.exe  
Enter your age: 21  
Eligible for Driving License  
Eligible for Credit Card
```