

SESSION-9:

Tasks

1.

Declare a 1D array called `dailySteps` with 7 elements to store your step count for each day of the week, assign sample values, and print each value using a loop.

```
#include <stdio.h>
```

```
int main() {
```

```
    int dailySteps[7] = {5000, 7200, 6500, 8000, 9000, 7500, 6000};
```


```
    for (int i = 0; i < 7; i++) {
```

```
        printf("Day %d: %d steps\n", i + 1, dailySteps[i]);
```

```
    }
```

```
    return 0;
```

```
}
```

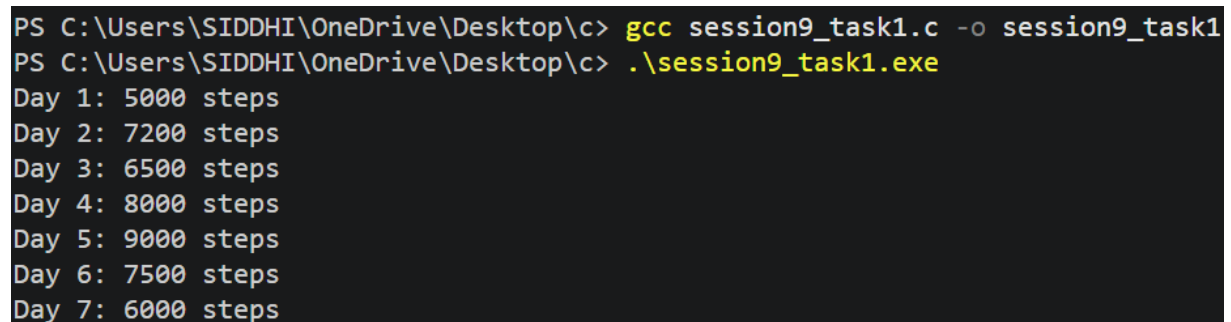

```
PS C:\Users\SIDDHI\OneDrive\Desktop\c> gcc session9_task1.c -o session9_task1
PS C:\Users\SIDDHI\OneDrive\Desktop\c> .\session9_task1.exe
Day 1: 5000 steps
Day 2: 7200 steps
Day 3: 6500 steps
Day 4: 8000 steps
Day 5: 9000 steps
Day 6: 7500 steps
Day 7: 6000 steps
```

2.

Create a 2D array called `playlistRatings` to store ratings for 3 Spotify playlists over 5 days (rows = playlists, columns = days). Fill it with sample numbers and print the ratings for the second playlist.

```
#include <stdio.h>
```

```

int main() {
    int playlistRatings[3][5] = {
        {4, 5, 4, 3, 5},
        {5, 4, 5, 5, 4},
        {3, 4, 4, 5, 3}
    };

    printf("Ratings for the second playlist:\n");

    for (int i = 0; i < 5; i++) {
        printf("Day %d: %d\n", i + 1, playlistRatings[1][i]);
    }

    return 0;
}

```

```

PS C:\Users\SIDDHI\OneDrive\Desktop\c> gcc session9_task2.c -o session9_task2
PS C:\Users\SIDDHI\OneDrive\Desktop\c> .\session9_task2.exe
Ratings for the second playlist:
Day 1: 5
Day 2: 4
Day 3: 5
Day 4: 5
Day 5: 4

```

3.

Build a function that takes a 1D array of 7 integers representing your daily Zomato order amounts and calculates the average spend for the week.

Hint: Use a loop to sum the values, then divide by the array length.

```
#include <stdio.h>
```

```
float calculateAverage(int orders[], int size) {
```

```

int sum = 0;

for (int i = 0; i < size; i++) {
    sum += orders[i];
}

return (float)sum / size;
}

int main() {
    int dailyOrders[7] = {250, 180, 320, 150, 400, 275, 225};

    float average = calculateAverage(dailyOrders, 7);

    printf("Average weekly spend: Rs. %.2f\n", average);

    return 0;
}

```

```

PS C:\Users\SIDDHI\OneDrive\Desktop\c> gcc session9_task3.c -o session9_task3
PS C:\Users\SIDDHI\OneDrive\Desktop\c> .\session9_task3.exe
Average weekly spend: Rs. 257.14

```

4.

Given a 2D array called cricketScores where each row represents an IPL match and columns represent runs scored by each team, write code to print the highest score from each match.

```
#include <stdio.h>
```

```
int main() {
```

```
int cricketScores[4][2] = {
    {180, 165},
    {195, 190},
    {150, 175},
    {210, 205}
};

for (int i = 0; i < 4; i++) {
    if (cricketScores[i][0] > cricketScores[i][1]) {
        printf("Match %d highest score: %d\n", i + 1, cricketScores[i][0]);
    } else {
        printf("Match %d highest score: %d\n", i + 1, cricketScores[i][1]);
    }
}

return 0;
}
```

```
PS C:\Users\SIDDHI\OneDrive\Desktop\c> gcc session9_task4.c -o session9_task4
PS C:\Users\SIDDHI\OneDrive\Desktop\c> .\session9_task4.exe
Match 1 highest score: 180
Match 2 highest score: 195
Match 3 highest score: 175
Match 4 highest score: 210
```