
Closed / finished fit

Nominal assembly envelope at this pose: 191.600 × 60.430 × 140.800 mm (X / Y / Z)

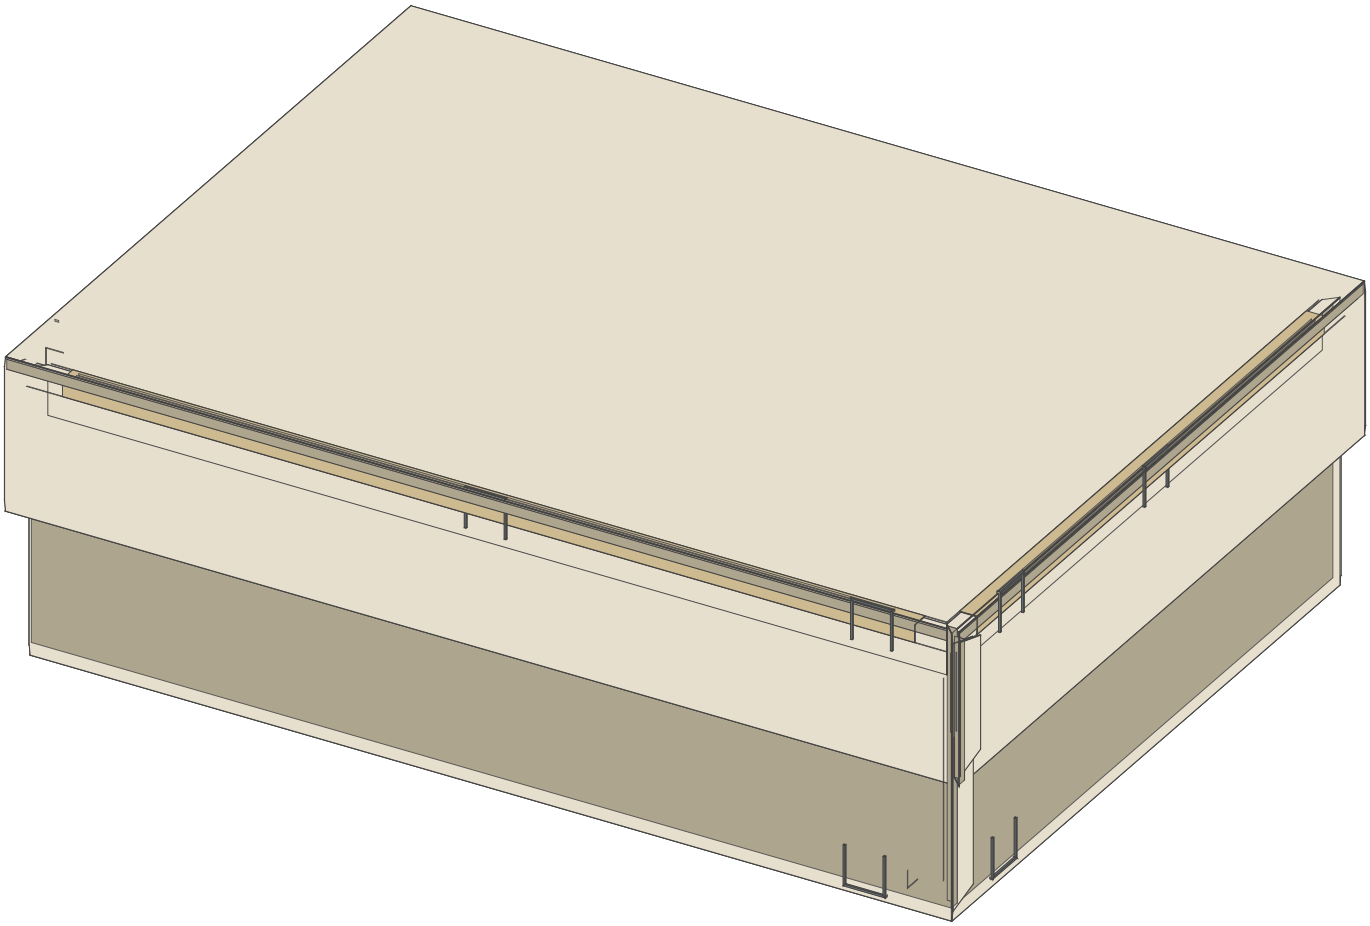


Nominal centered-stock panels, declared ply calipers and actual rectangular installed wire sections; separate native view verifies curved bends, relief and material response. Diagram is not a machine tool path.

Reference diagram fitted to this page. Use Actual-size-pattern-proofs.pdf or nominal SVG files for physical cut scale.
Source 498de2f1eb5e3dc670933a279bc9ee5734bb9c5c5a8145dcbf58cc5f3c521363

Partially lifted lid

Nominal assembly envelope at this pose: 191.600 × 87.310 × 140.800 mm (X / Y / Z)

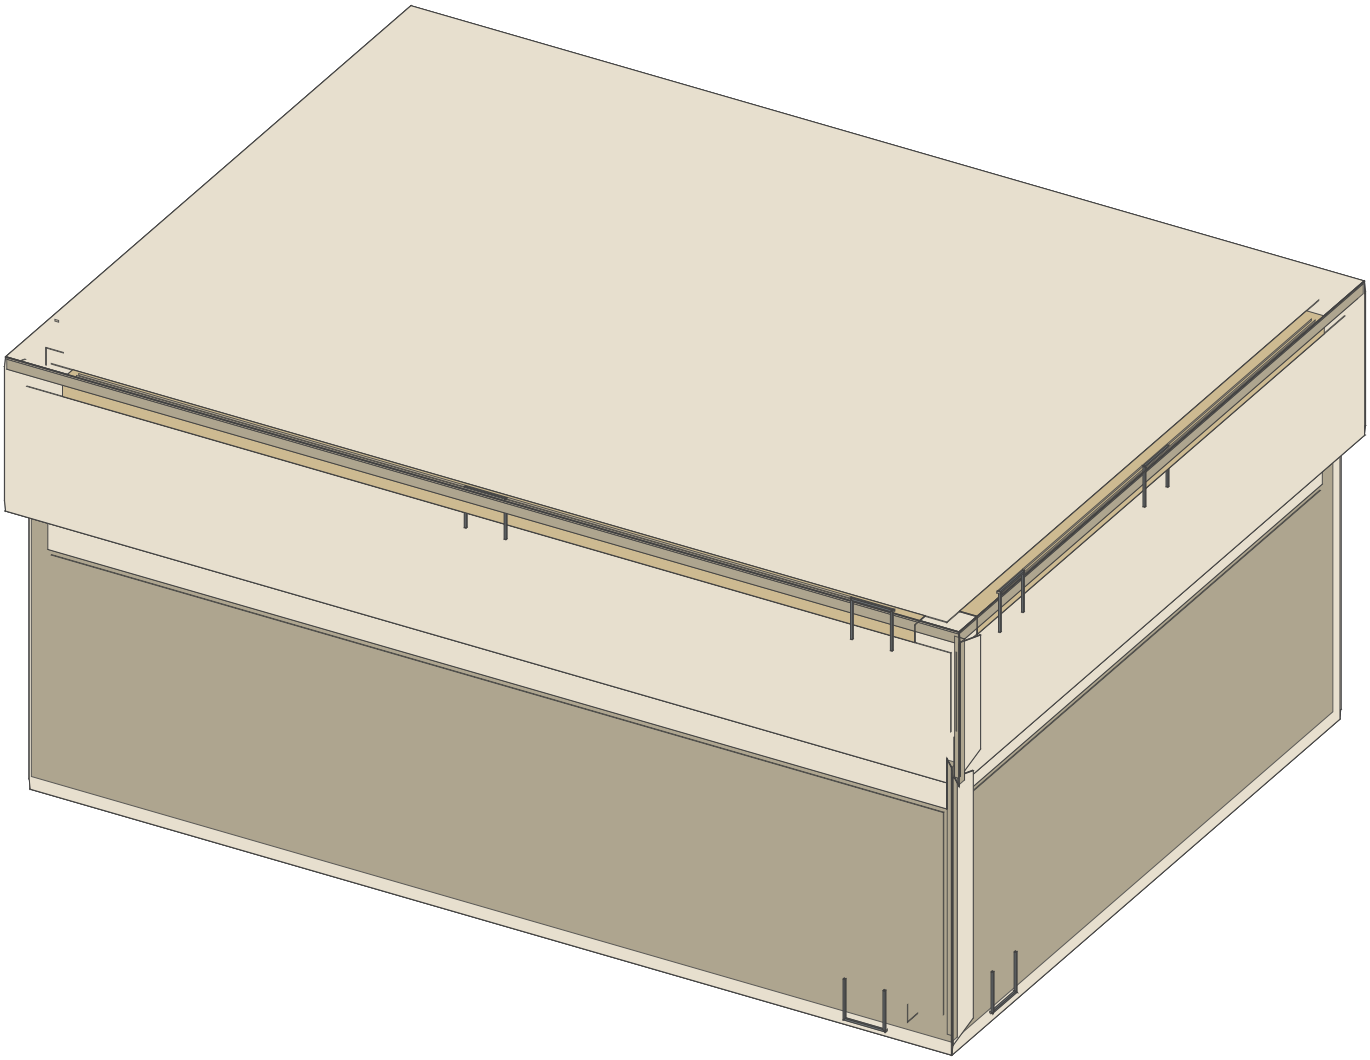


Nominal centered-stock panels, declared ply calipers and actual rectangular installed wire sections; separate native view verifies curved bends, relief and material response. Diagram is not a machine tool path.

Reference diagram fitted to this page. Use Actual-size-pattern-proofs.pdf or nominal SVG files for physical cut scale.
Source 498de2f1eb5e3dc670933a279bc9ee5734bb9c5c5a8145dcbf58cc5f3c521363

Removed lid / interior

Nominal assembly envelope at this pose: 421.800 × 57.730 × 140.800 mm (X / Y / Z)

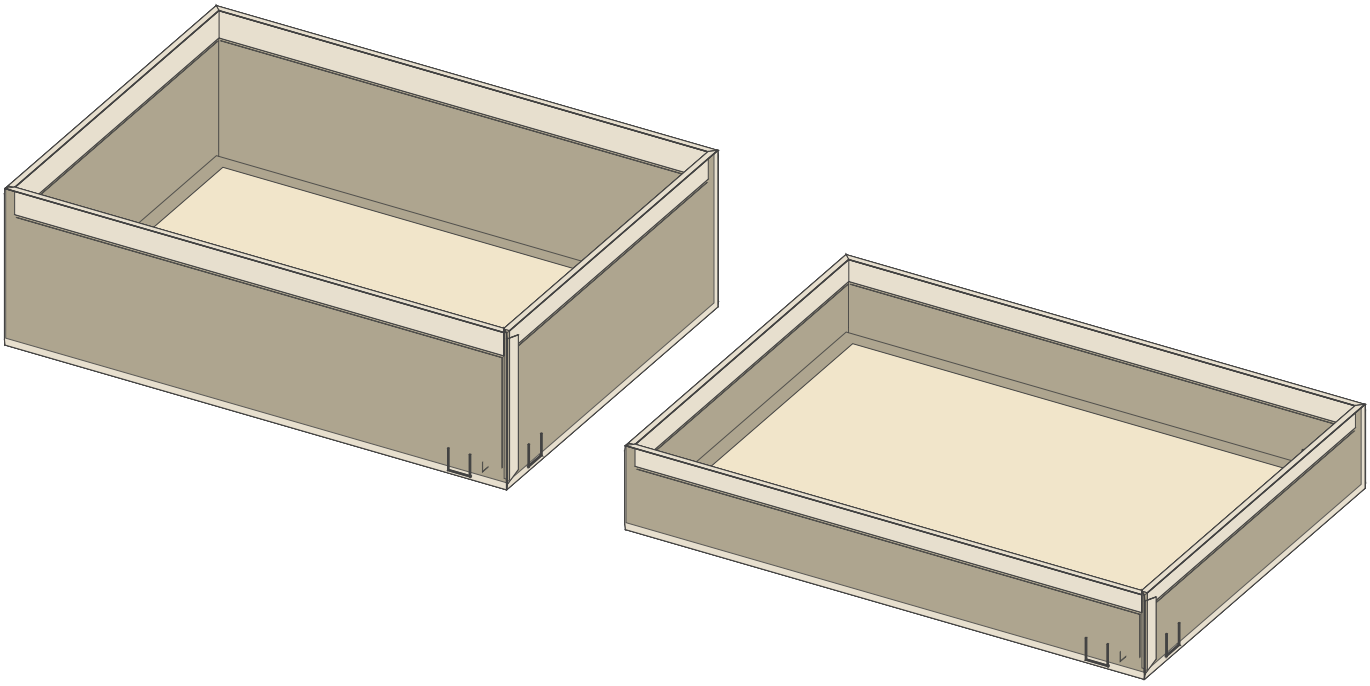


Nominal centered-stock panels, declared ply calipers and actual rectangular installed wire sections; separate native view verifies curved bends, relief and material response. Diagram is not a machine tool path.

Reference diagram fitted to this page. Use Actual-size-pattern-proofs.pdf or nominal SVG files for physical cut scale.
Source 498de2f1eb5e3dc670933a279bc9ee5734bb9c5c5a8145dcbf58cc5f3c521363

Exploded independent stock

Nominal assembly envelope at this pose: 465.000 × 180.430 × 184.400 mm (X / Y / Z)

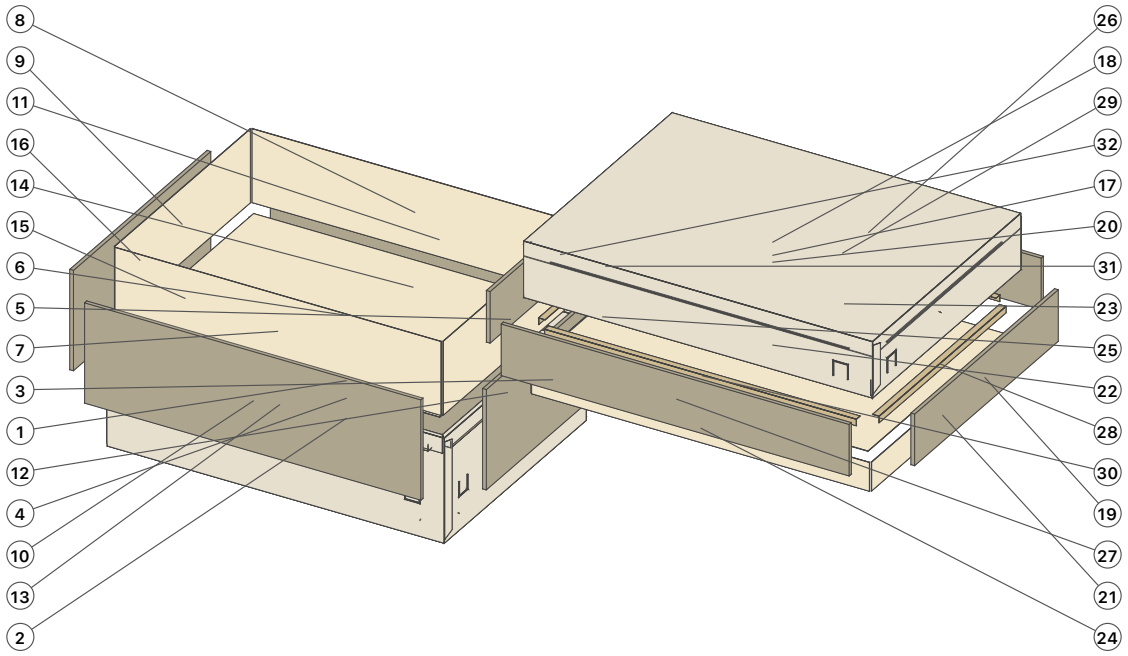

1	b-cross-p	2	b-crown-backing
3	b-e	4	b-floor
5	b-liner-e	6	b-liner-floor
7	b-liner-n	8	b-liner-s
9	b-liner-w	10	b-n
11	b-s	12	b-tape-e
13	b-tape-n	14	b-tape-s
15	b-tape-w	16	b-w
17	l-cross-p	18	l-crown-backing
19	l-e	20	l-floor
21	l-liner-e	22	l-liner-floor
23	l-liner-n	24	l-liner-s
25	l-liner-w	26	l-n
27	l-s	28	l-tape-e
29	l-tape-n	30	l-tape-s
31	l-tape-w	32	l-w

Nominal centered-stock panels, declared ply calipers and actual rectangular installed wire sections; separate native view verifies curved bends, relief and material response. Diagram is not a machine tool path.

Reference diagram fitted to this page. Use Actual-size-pattern-proofs.pdf or nominal SVG files for physical cut scale.
Source 498de2f1eb5e3dc670933a279bc9ee5734bb9c5c5a8145dcbf58cc5f3c521363

Closed length section / actual layers

Nominal assembly envelope at this pose: 191.600 × 60.430 × 140.800 mm (X / Y / Z)



Section plane X = 0.0 mm. Independent material layers retain their declared calipers.

Nominal centered-stock panels, declared ply calipers and actual rectangular installed wire sections; separate native view verifies curved bends, relief and material response. Diagram is not a machine tool path.

Reference diagram fitted to this page. Use Actual-size-pattern-proofs.pdf or nominal SVG files for physical cut scale.
Source 498de2f1eb5e3dc670933a279bc9ee5734bb9c5c5a8145dcbf58cc5f3c521363

Closed width section / actual layers

Nominal assembly envelope at this pose: 191.600 × 60.430 × 140.800 mm (X / Y / Z)



Section plane Z = 0.0 mm. Independent material layers retain their declared calipers.

Nominal centered-stock panels, declared ply calipers and actual rectangular installed wire sections; separate native view verifies curved bends, relief and material response. Diagram is not a machine tool path.

Reference diagram fitted to this page. Use Actual-size-pattern-proofs.pdf or nominal SVG files for physical cut scale.
Source 498de2f1eb5e3dc670933a279bc9ee5734bb9c5c5a8145dcbf58cc5f3c521363

04B / Covered crowns · real slotted backing / source-authored assembly order

Source 498de2f1eb5e3dc670933a279bc9ee5734bb9c5c5a8145dcbf58cc5f3c521363

Production quantity 1. Nominal millimeters; no cutter compensation applied. Printing, score/groove tool paths, fold/turn-in/seam guides, and assembly marks remain distinct.

1. Cut independent stock

Parts: b-floor, b-n, b-e, b-s, b-w, l-floor, l-n, l-e, l-s, l-w, b-crown-backing, l-crown-backing

Cut separate boards, selected backing and physical seating parts at their nominal contours. Grain and all quantities come from each piece. No score or groove is implied on independent boards. Retain printed source registration.

2. Assemble supported board joints

Parts: b-floor, b-n, b-e, b-s, b-w, l-floor, l-n, l-e, l-s, l-w

Joints: b-floor-n, b-floor-e, b-floor-s, b-floor-w, l-floor-n, l-floor-e, l-floor-s, l-floor-w

Dry assemble the selected floor and spanning-wall arrangement. Apply only the declared board glue regions. Where selected, drive the configured staples from the bare floor underside into the actual wall bottom edges. Inspect receiving depth and both leg paths. Do not substitute a carton or publication stapler. Tool settings require a physical sample.

3. Apply actual inside seam tape

Parts: b-tape-n, b-tape-e, b-tape-s, b-tape-w, l-tape-n, l-tape-e, l-tape-s, l-tape-w

Apply each selected strip across the two scheduled floor/wall contact regions. Fold the physical strip; use its own length, width, caliper and effective bond. Tape remains visible when the interior is unlined.

4. Level covered staple crowns

Parts: b-crown-backing, l-crown-backing

For a covered stapled half, add the actual slotted backing sheet around the crowns. Slots cover the retained placement envelope; changing staple placement updates this piece. The backing plus crown build remains in exterior dimensions. Bare stapled halves retain exposed crowns.

5. Base · paper · complete cross wrap

Parts: b-cross-p

Joints: b-cross-p-bond-n, b-cross-p-bond-e, b-cross-p-bond-s, b-cross-p-bond-w, b-cross-p-cap-bond-backing

After the selected tape and any crown-leveling backing: Apply the declared exterior-face and side adhesive regions. Fold four outer wings, then the four relieved corner tabs, the actual caliper traversals and the independent edge turn-ins. Keep the corner tabs beneath the adjacent side covering; they remain real local double layers. Use this piece's own stock/caliper, orientation, corner relief and adhesive assumption.

6. Base · floor / top liner

Parts: b-liner-floor

Joints: b-liner-floor-bond

After this half's selected covering: apply the declared adhesive regions and independent floor lining pieces. Respect their actual tape setback, turn-in setback, caliper and face orientation. No omitted lining is implied by this step.

7. Base · wall liners

Parts: b-liner-n, b-liner-e, b-liner-s, b-liner-w

Joints: b-liner-n-bond, b-liner-e-bond, b-liner-s-bond, b-liner-w-bond

After this half’s selected covering: apply the declared adhesive regions and independent walls lining pieces. Respect their actual tape setback, turn-in setback, caliper and face orientation. No omitted lining is implied by this step.

8. Lid · paper · complete cross wrap

Parts: l-cross-p

Joints: l-cross-p-bond-n, l-cross-p-bond-e, l-cross-p-bond-s, l-cross-p-bond-w, l-cross-p-cap-bond-backing

After the selected tape and any crown-leveling backing: Apply the declared exterior-face and side adhesive regions. Fold four outer wings, then the four relieved corner tabs, the actual caliper traversals and the independent edge turn-ins. Keep the corner tabs beneath the adjacent side covering; they remain real local double layers. Use this piece’s own stock/caliper, orientation, corner relief and adhesive assumption.

9. Lid · floor / top liner

Parts: l-liner-floor

Joints: l-liner-floor-bond

After this half’s selected covering: apply the declared adhesive regions and independent floor lining pieces. Respect their actual tape setback, turn-in setback, caliper and face orientation. No omitted lining is implied by this step.

10. Lid · wall liners

Parts: l-liner-n, l-liner-e, l-liner-s, l-liner-w

Joints: l-liner-n-bond, l-liner-e-bond, l-liner-s-bond, l-liner-w-bond

After this half’s selected covering: apply the declared adhesive regions and independent walls lining pieces. Respect their actual tape setback, turn-in setback, caliper and face orientation. No omitted lining is implied by this step.

Independent cutting and materials

b-floor / Base floor / top / group base / Recycled greyboard, 2.000 mm / 184.400 × 134.400 mm / cut 1 / grain parallelWidth.

b-n / Base Front wall / group base / Recycled greyboard, 2.000 mm / 184.400 × 54.980 mm / cut 1 / grain parallelWidth.

b-e / Base Right wall / group base / Recycled greyboard, 2.000 mm / 130.400 × 54.980 mm / cut 1 / grain parallelWidth.

b-s / Base Back wall / group base / Recycled greyboard, 2.000 mm / 184.400 × 54.980 mm / cut 1 / grain parallelWidth.

b-w / Base Left wall / group base / Recycled greyboard, 2.000 mm / 130.400 × 54.980 mm / cut 1 / grain parallelWidth.

l-floor / Lid floor / top / group lid / Recycled greyboard, 2.000 mm / 190.800 × 140.400 mm / cut 1 / grain parallelWidth.

l-n / Lid Front wall / group lid / Recycled greyboard, 2.000 mm / 190.800 × 28.250 mm / cut 1 / grain parallelWidth.

l-e / Lid Right wall / group lid / Recycled greyboard, 2.000 mm / 136.400 × 28.250 mm / cut 1 / grain parallelWidth.

l-s / Lid Back wall / group lid / Recycled greyboard, 2.000 mm / 190.800 × 28.250 mm / cut 1 / grain parallelWidth.

l-w / Lid Left wall / group lid / Recycled greyboard, 2.000 mm / 136.400 × 28.250 mm / cut 1 / grain parallelWidth.

b-cross-p / Base paper complete wrap / group base / Uncoated oat covering paper, 0.160 mm / 324.260 × 274.260 mm / cut 1 / grain parallelWidth.

l-cross-p / Lid paper complete wrap / group lid / Uncoated oat covering paper, 0.160 mm / 273.200 × 222.800 mm / cut 1 / grain parallelWidth.

b-liner-floor / Base floor / top lining / group base / Warm ivory lining paper, 0.150 mm / 173.100 × 123.100 mm / cut 1 / grain parallelWidth.

b-liner-n / Base N wall lining / group base / Warm ivory lining paper, 0.150 mm / 178.800 × 40.530 mm / cut 1 / grain parallelWidth.

b-liner-e / Base E wall lining / group base / Warm ivory lining paper, 0.150 mm / 128.800 × 40.530 mm / cut 1 / grain parallelWidth.

b-liner-s / Base S wall lining / group base / Warm ivory lining paper, 0.150 mm / 178.800 × 40.530 mm / cut 1 / grain parallelWidth.

b-liner-w / Base W wall lining / group base / Warm ivory lining paper, 0.150 mm / 128.800 × 40.530 mm / cut 1 / grain parallelWidth.

l-liner-floor / Lid floor / top lining / group lid / Warm ivory lining paper, 0.150 mm / 179.500 × 129.100 mm / cut 1 / grain parallelWidth.

l-liner-n / Lid N wall lining / group lid / Warm ivory lining paper, 0.150 mm / 185.200 × 15.800 mm / cut 1 / grain parallelWidth.

l-liner-e / Lid E wall lining / group lid / Warm ivory lining paper, 0.150 mm / 134.800 × 15.800 mm / cut 1 / grain parallelWidth.

l-liner-s / Lid S wall lining / group lid / Warm ivory lining paper, 0.150 mm / 185.200 × 15.800 mm / cut 1 / grain parallelWidth.

l-liner-w / Lid W wall lining / group lid / Warm ivory lining paper, 0.150 mm / 134.800 × 15.800 mm / cut 1 / grain parallelWidth.

b-tape-n / Base N inside seam tape / group base / Gummed kozo reinforcement tape, 0.120 mm / 164.400 × 7.000 mm / cut 1 / grain parallelWidth.

b-tape-e / Base E inside seam tape / group base / Gummed kozo reinforcement tape, 0.120 mm / 114.400 × 7.000 mm / cut 1 / grain parallelWidth.

b-tape-s / Base S inside seam tape / group base / Gummed kozo reinforcement tape, 0.120 mm / 164.400 × 7.000 mm / cut 1 / grain parallelWidth.

b-tape-w / Base W inside seam tape / group base / Gummed kozo reinforcement tape, 0.120 mm / 114.400 × 7.000 mm / cut 1 / grain parallelWidth.

l-tape-n / Lid N inside seam tape / group lid / Gummed kozo reinforcement tape, 0.120 mm / 170.800 × 7.000 mm / cut 1 / grain parallelWidth.

l-tape-e / Lid E inside seam tape / group lid / Gummed kozo reinforcement tape, 0.120 mm / 120.400 × 7.000 mm / cut 1 / grain parallelWidth.

l-tape-s / Lid S inside seam tape / group lid / Gummed kozo reinforcement tape, 0.120 mm / 170.800 × 7.000 mm / cut 1 / grain parallelWidth.

l-tape-w / Lid W inside seam tape / group lid / Gummed kozo reinforcement tape, 0.120 mm / 120.400 × 7.000 mm / cut 1 / grain parallelWidth.

b-crown-backing / Base crown-leveling backing / group base / Crown-leveling paperboard backing, 0.350 mm / 184.400 × 134.400 mm / cut 1 / grain parallelWidth.

l-crown-backing / Lid crown-leveling backing / group lid / Crown-leveling paperboard backing, 0.350 mm / 190.800 × 140.400 mm / cut 1 / grain parallelWidth.

Crown-leveling paperboard backing / 0.350 mm: 1 sheet allocation(s), 0.051 m² net pieces, 0.700 m² stock. Nesting waste 92.747%; explicit additional allowance 8.000%. Repacking never moves canonical artwork.

Recycled greyboard / 2.000 mm: 1 sheet allocation(s), 0.105 m² net pieces, 0.700 m² stock. Nesting waste 85.047%; explicit additional allowance 8.000%. Repacking never moves canonical artwork.

Uncoated oat covering paper / 0.160 mm: 1 roll allocation(s), 0.125 m² net pieces, 0.482 m² stock. Nesting waste 73.981%; explicit additional allowance 8.000%. Repacking never moves canonical artwork.

Warm ivory lining paper / 0.150 mm: 1 sheet allocation(s), 0.080 m² net pieces, 0.700 m² stock. Nesting waste 88.639%; explicit additional allowance 8.000%. Repacking never moves canonical artwork.

Gummed kozo reinforcement tape / 0.120 mm: 1 roll allocation(s), 0.008 m² net pieces, 0.095 m² stock. Nesting waste 91.635%; explicit additional allowance 8.000%. Repacking never moves canonical artwork.

Tape cutting and placement

b-floor-n/tape → joint b-floor-n, cut piece b-tape-n. Gummed kozo reinforcement tape, 0.120 mm; 7.000 × 164.400 mm; quantity 1. Side inside; end offsets 0.000 / 0.000 mm; overlap 0.000 mm; effective bond 0.030 mm. Targets b-floor / b-n, with exact face/edge regions in Tape-schedule.json. Install 2: Inside tape after board fastening; before cover and lining. Present parts: b-floor, b-n, b-e, b-s, b-w, b-tape-n. Later covered by: .

b-floor-e/tape → joint b-floor-e, cut piece b-tape-e. Gummed kozo reinforcement tape, 0.120 mm; 7.000 × 114.400 mm; quantity 1. Side inside; end offsets 0.000 / 0.000 mm; overlap 0.000 mm; effective bond 0.030 mm. Targets b-floor / b-e, with exact face/edge regions in Tape-schedule.json. Install 2: Inside tape after board fastening; before cover and lining. Present parts: b-floor, b-n, b-e, b-s, b-w, b-tape-e. Later covered by: .

b-floor-s/tape → joint b-floor-s, cut piece b-tape-s. Gummed kozo reinforcement tape, 0.120 mm; 7.000 × 164.400 mm; quantity 1. Side inside; end offsets 0.000 / 0.000 mm; overlap 0.000 mm; effective bond 0.030 mm. Targets b-floor / b-s, with exact face/edge regions in Tape-schedule.json. Install 2: Inside tape after board fastening; before cover and lining. Present parts: b-floor, b-n, b-e, b-s, b-w, b-tape-s. Later covered by: .

b-floor-w/tape → joint b-floor-w, cut piece b-tape-w. Gummed kozo reinforcement tape, 0.120 mm; 7.000 × 114.400 mm; quantity 1. Side inside; end offsets 0.000 / 0.000 mm; overlap 0.000 mm; effective bond 0.030 mm. Targets b-floor / b-w, with exact face/edge regions in Tape-schedule.json. Install 2: Inside tape after board fastening; before cover and lining. Present parts: b-floor, b-n, b-e, b-s, b-w, b-tape-w. Later covered by: .

l-floor-n/tape → joint l-floor-n, cut piece l-tape-n. Gummed kozo reinforcement tape, 0.120 mm; 7.000 × 170.800 mm; quantity 1. Side inside; end offsets 0.000 / 0.000 mm; overlap 0.000 mm; effective bond 0.030 mm. Targets l-floor / l-n, with exact face/edge regions in Tape-schedule.json. Install 2: Inside tape after board fastening; before cover and lining. Present parts: l-floor, l-n, l-e, l-s, l-w, l-tape-n. Later covered by: .

l-floor-e/tape → joint l-floor-e, cut piece l-tape-e. Gummed kozo reinforcement tape, 0.120 mm; 7.000 × 120.400 mm; quantity 1. Side inside; end offsets 0.000 / 0.000 mm; overlap 0.000 mm; effective bond 0.030 mm. Targets l-floor / l-e, with exact face/edge regions in Tape-schedule.json. Install 2: Inside tape after board fastening; before cover and lining. Present parts: l-floor, l-n, l-e, l-s, l-w, l-tape-e. Later covered by: .

l-floor-s/tape → joint l-floor-s, cut piece l-tape-s. Gummed kozo reinforcement tape, 0.120 mm; 7.000 × 170.800 mm; quantity 1. Side inside; end offsets 0.000 / 0.000 mm; overlap 0.000 mm; effective bond 0.030 mm. Targets l-floor / l-s, with exact face/edge regions in Tape-schedule.json. Install 2: Inside tape after board fastening; before cover and lining. Present parts: l-floor, l-n, l-e, l-s, l-w, l-tape-s. Later covered by: .

l-floor-w/tape → joint l-floor-w, cut piece l-tape-w. Gummed kozo reinforcement tape, 0.120 mm; 7.000 × 120.400 mm; quantity 1. Side inside; end offsets 0.000 / 0.000 mm; overlap 0.000 mm; effective bond 0.030 mm. Targets l-floor / l-w, with exact face/edge regions in Tape-schedule.json. Install 2: Inside tape after board fastening; before cover and lining. Present parts: l-floor, l-n, l-e, l-s, l-w, l-tape-w. Later covered by: .

Board-joint staple schedule

b-floor-n/wire:0 → joint b-floor-n. Entry b-floor; receiving b-n. Crown 8.000 mm, wire 0.350 × 0.350 mm, legs

8.000 mm; buried. Tool: Declared narrow-nose board-edge stitcher; physical trial required. Install 1: Bare board underside into wall bottom edge, before tape / covering / lining. Source coordinate positions/orientation and actual leg/material intervals are in Staple-schedule.json. These are assembly marks, not drill/punch instructions.

Entry side inside. Driver access 24.000 mm; clearance 0.500 mm; minimum receiving depth 2.000 mm, edge distance 0.150 mm, end margin 0.100 mm; maximum joint gap 0.200 mm. Definition count 3, spacing 74.200 mm. Receiving entry boundaries: cutEdge, cutEdge. Through-exit geometry is recorded independently of the declared buried/exposed/clinch termination.

Leg 1: b-floor [0.175, 2.175] mm; b-n [2.175, 8.000] mm

Leg 2: b-floor [0.175, 2.175] mm; b-n [2.175, 8.000] mm

b-floor-n/wire:1 → joint b-floor-n. Entry b-floor; receiving b-n. Crown 8.000 mm, wire 0.350 × 0.350 mm, legs 8.000 mm; buried. Tool: Declared narrow-nose board-edge stitcher; physical trial required. Install 1: Bare board underside into wall bottom edge, before tape / covering / lining. Source coordinate positions/orientation and actual leg/material intervals are in Staple-schedule.json. These are assembly marks, not drill/punch instructions.

Entry side inside. Driver access 24.000 mm; clearance 0.500 mm; minimum receiving depth 2.000 mm, edge distance 0.150 mm, end margin 0.100 mm; maximum joint gap 0.200 mm. Definition count 3, spacing 74.200 mm. Receiving entry boundaries: cutEdge, cutEdge. Through-exit geometry is recorded independently of the declared buried/exposed/clinch termination.

Leg 1: b-floor [0.175, 2.175] mm; b-n [2.175, 8.000] mm

Leg 2: b-floor [0.175, 2.175] mm; b-n [2.175, 8.000] mm

b-floor-n/wire:2 → joint b-floor-n. Entry b-floor; receiving b-n. Crown 8.000 mm, wire 0.350 × 0.350 mm, legs 8.000 mm; buried. Tool: Declared narrow-nose board-edge stitcher; physical trial required. Install 1: Bare board underside into wall bottom edge, before tape / covering / lining. Source coordinate positions/orientation and actual leg/material intervals are in Staple-schedule.json. These are assembly marks, not drill/punch instructions.

Entry side inside. Driver access 24.000 mm; clearance 0.500 mm; minimum receiving depth 2.000 mm, edge distance 0.150 mm, end margin 0.100 mm; maximum joint gap 0.200 mm. Definition count 3, spacing 74.200 mm. Receiving entry boundaries: cutEdge, cutEdge. Through-exit geometry is recorded independently of the declared buried/exposed/clinch termination.

Leg 1: b-floor [0.175, 2.175] mm; b-n [2.175, 8.000] mm

Leg 2: b-floor [0.175, 2.175] mm; b-n [2.175, 8.000] mm

b-floor-e/wire:0 → joint b-floor-e. Entry b-floor; receiving b-e. Crown 8.000 mm, wire 0.350 × 0.350 mm, legs 8.000 mm; buried. Tool: Declared narrow-nose board-edge stitcher; physical trial required. Install 1: Bare board underside into wall bottom edge, before tape / covering / lining. Source coordinate positions/orientation and actual leg/material intervals are in Staple-schedule.json. These are assembly marks, not drill/punch instructions.

Entry side inside. Driver access 24.000 mm; clearance 0.500 mm; minimum receiving depth 2.000 mm, edge distance 0.150 mm, end margin 0.100 mm; maximum joint gap 0.200 mm. Definition count 3, spacing 47.200 mm. Receiving entry boundaries: cutEdge, cutEdge. Through-exit geometry is recorded independently of the declared buried/exposed/clinch termination.

Leg 1: b-floor [0.175, 2.175] mm; b-e [2.175, 8.000] mm

Leg 2: b-floor [0.175, 2.175] mm; b-e [2.175, 8.000] mm

b-floor-e/wire:1 → joint b-floor-e. Entry b-floor; receiving b-e. Crown 8.000 mm, wire 0.350 × 0.350 mm, legs 8.000 mm; buried. Tool: Declared narrow-nose board-edge stitcher; physical trial required. Install 1: Bare board underside into wall bottom edge, before tape / covering / lining. Source coordinate positions/orientation and actual leg/material intervals are in Staple-schedule.json. These are assembly marks, not drill/punch instructions.

Entry side inside. Driver access 24.000 mm; clearance 0.500 mm; minimum receiving depth 2.000 mm, edge distance 0.150 mm, end margin 0.100 mm; maximum joint gap 0.200 mm. Definition count 3, spacing 47.200 mm. Receiving entry boundaries: cutEdge, cutEdge. Through-exit geometry is recorded independently of the declared buried/exposed/clinch termination.

Leg 1: b-floor [0.175, 2.175] mm; b-e [2.175, 8.000] mm

Leg 2: b-floor [0.175, 2.175] mm; b-e [2.175, 8.000] mm

b-floor-e/wire:2 → joint b-floor-e. Entry b-floor; receiving b-e. Crown 8.000 mm, wire 0.350 × 0.350 mm, legs 8.000 mm; buried. Tool: Declared narrow-nose board-edge stitcher; physical trial required. Install 1: Bare board underside into wall bottom edge, before tape / covering / lining. Source coordinate positions/orientation and actual leg/material intervals are in Staple-schedule.json. These are assembly marks, not drill/punch instructions.

Entry side inside. Driver access 24.000 mm; clearance 0.500 mm; minimum receiving depth 2.000 mm, edge distance 0.150 mm, end margin 0.100 mm; maximum joint gap 0.200 mm. Definition count 3, spacing 47.200 mm. Receiving entry boundaries: cutEdge, cutEdge. Through-exit geometry is recorded independently of the declared buried/exposed/clinch termination.

Leg 1: b-floor [0.175, 2.175] mm; b-e [2.175, 8.000] mm

Leg 2: b-floor [0.175, 2.175] mm; b-e [2.175, 8.000] mm

b-floor-s/wire:0 → joint b-floor-s. Entry b-floor; receiving b-s. Crown 8.000 mm, wire 0.350 × 0.350 mm, legs 8.000 mm; buried. Tool: Declared narrow-nose board-edge stitcher; physical trial required. Install 1: Bare board underside into wall bottom edge, before tape / covering / lining. Source coordinate positions/orientation and actual leg/material intervals are in Staple-schedule.json. These are assembly marks, not drill/punch instructions.

Entry side inside. Driver access 24.000 mm; clearance 0.500 mm; minimum receiving depth 2.000 mm, edge distance 0.150 mm, end margin 0.100 mm; maximum joint gap 0.200 mm. Definition count 3, spacing 74.200 mm. Receiving entry boundaries: cutEdge, cutEdge. Through-exit geometry is recorded independently of the declared buried/exposed/clinch termination.

Leg 1: b-floor [0.175, 2.175] mm; b-s [2.175, 8.000] mm

Leg 2: b-floor [0.175, 2.175] mm; b-s [2.175, 8.000] mm

b-floor-s/wire:1 → joint b-floor-s. Entry b-floor; receiving b-s. Crown 8.000 mm, wire 0.350 × 0.350 mm, legs 8.000 mm; buried. Tool: Declared narrow-nose board-edge stitcher; physical trial required. Install 1: Bare board underside into wall bottom edge, before tape / covering / lining. Source coordinate positions/orientation and actual leg/material intervals are in Staple-schedule.json. These are assembly marks, not drill/punch instructions.

Entry side inside. Driver access 24.000 mm; clearance 0.500 mm; minimum receiving depth 2.000 mm, edge distance 0.150 mm, end margin 0.100 mm; maximum joint gap 0.200 mm. Definition count 3, spacing 74.200 mm. Receiving entry boundaries: cutEdge, cutEdge. Through-exit geometry is recorded independently of the declared buried/exposed/clinch termination.

Leg 1: b-floor [0.175, 2.175] mm; b-s [2.175, 8.000] mm

Leg 2: b-floor [0.175, 2.175] mm; b-s [2.175, 8.000] mm

b-floor-s/wire:2 → joint b-floor-s. Entry b-floor; receiving b-s. Crown 8.000 mm, wire 0.350 × 0.350 mm, legs 8.000 mm; buried. Tool: Declared narrow-nose board-edge stitcher; physical trial required. Install 1: Bare board underside into wall bottom edge, before tape / covering / lining. Source coordinate positions/orientation and actual leg/material intervals are in Staple-schedule.json. These are assembly marks, not drill/punch instructions.

Entry side inside. Driver access 24.000 mm; clearance 0.500 mm; minimum receiving depth 2.000 mm, edge distance 0.150 mm, end margin 0.100 mm; maximum joint gap 0.200 mm. Definition count 3, spacing 74.200 mm. Receiving entry boundaries: cutEdge, cutEdge. Through-exit geometry is recorded independently of the declared buried/exposed/clinch termination.

Leg 1: b-floor [0.175, 2.175] mm; b-s [2.175, 8.000] mm

Leg 2: b-floor [0.175, 2.175] mm; b-s [2.175, 8.000] mm

b-floor-w/wire:0 → joint b-floor-w. Entry b-floor; receiving b-w. Crown 8.000 mm, wire 0.350 × 0.350 mm, legs 8.000 mm; buried. Tool: Declared narrow-nose board-edge stitcher; physical trial required. Install 1: Bare board underside into wall bottom edge, before tape / covering / lining. Source coordinate positions/orientation and actual leg/material intervals are in Staple-schedule.json. These are assembly marks, not drill/punch instructions.

Entry side inside. Driver access 24.000 mm; clearance 0.500 mm; minimum receiving depth 2.000 mm, edge distance 0.150 mm, end margin 0.100 mm; maximum joint gap 0.200 mm. Definition count 3, spacing 47.200 mm. Receiving entry boundaries: cutEdge, cutEdge. Through-exit geometry is recorded independently of the declared buried/exposed/clinch termination.

Leg 1: b-floor [0.175, 2.175] mm; b-w [2.175, 8.000] mm

Leg 2: b-floor [0.175, 2.175] mm; b-w [2.175, 8.000] mm

b-floor-w/wire:1 → joint b-floor-w. Entry b-floor; receiving b-w. Crown 8.000 mm, wire 0.350 × 0.350 mm, legs 8.000 mm; buried. Tool: Declared narrow-nose board-edge stitcher; physical trial required. Install 1: Bare board underside into wall bottom edge, before tape / covering / lining. Source coordinate positions/orientation and actual leg/material intervals are in Staple-schedule.json. These are assembly marks, not drill/punch instructions.

Entry side inside. Driver access 24.000 mm; clearance 0.500 mm; minimum receiving depth 2.000 mm, edge distance 0.150 mm, end margin 0.100 mm; maximum joint gap 0.200 mm. Definition count 3, spacing 47.200 mm. Receiving entry boundaries: cutEdge, cutEdge. Through-exit geometry is recorded independently of the declared buried/exposed/clinch termination.

Leg 1: b-floor [0.175, 2.175] mm; b-w [2.175, 8.000] mm

Leg 2: b-floor [0.175, 2.175] mm; b-w [2.175, 8.000] mm

b-floor-w/wire:2 → joint b-floor-w. Entry b-floor; receiving b-w. Crown 8.000 mm, wire 0.350 × 0.350 mm, legs 8.000 mm; buried. Tool: Declared narrow-nose board-edge stitcher; physical trial required. Install 1: Bare board underside into wall bottom edge, before tape / covering / lining. Source coordinate positions/orientation and actual leg/material intervals are in Staple-schedule.json. These are assembly marks, not drill/punch instructions.

Entry side inside. Driver access 24.000 mm; clearance 0.500 mm; minimum receiving depth 2.000 mm, edge distance 0.150 mm, end margin 0.100 mm; maximum joint gap 0.200 mm. Definition count 3, spacing 47.200 mm. Receiving entry boundaries: cutEdge, cutEdge. Through-exit geometry is recorded independently of the declared buried/exposed/clinch termination.

Leg 1: b-floor [0.175, 2.175] mm; b-w [2.175, 8.000] mm

Leg 2: b-floor [0.175, 2.175] mm; b-w [2.175, 8.000] mm

l-floor-n/wire:0 → joint l-floor-n. Entry l-floor; receiving l-n. Crown 8.000 mm, wire 0.350 × 0.350 mm, legs 8.000 mm; buried. Tool: Declared narrow-nose board-edge stitcher; physical trial required. Install 1: Bare board underside into wall bottom edge, before tape / covering / lining. Source coordinate positions/orientation and actual leg/material intervals are in Staple-schedule.json. These are assembly marks, not drill/punch instructions.

Entry side inside. Driver access 24.000 mm; clearance 0.500 mm; minimum receiving depth 2.000 mm, edge distance 0.150 mm, end margin 0.100 mm; maximum joint gap 0.200 mm. Definition count 3, spacing 77.400 mm. Receiving entry boundaries: cutEdge, cutEdge. Through-exit geometry is recorded independently of the declared buried/exposed/clinch termination.

Leg 1: l-floor [0.175, 2.175] mm; l-n [2.175, 8.000] mm

Leg 2: l-floor [0.175, 2.175] mm; l-n [2.175, 8.000] mm

l-floor-n/wire:1 → joint l-floor-n. Entry l-floor; receiving l-n. Crown 8.000 mm, wire 0.350 × 0.350 mm, legs 8.000 mm; buried. Tool: Declared narrow-nose board-edge stitcher; physical trial required. Install 1: Bare

board underside into wall bottom edge, before tape / covering / lining. Source coordinate positions/orientation and actual leg/material intervals are in Staple-schedule.json. These are assembly marks, not drill/punch instructions.

Entry side inside. Driver access 24.000 mm; clearance 0.500 mm; minimum receiving depth 2.000 mm, edge distance 0.150 mm, end margin 0.100 mm; maximum joint gap 0.200 mm. Definition count 3, spacing 77.400 mm. Receiving entry boundaries: cutEdge, cutEdge. Through-exit geometry is recorded independently of the declared buried/exposed/clinch termination.

Leg 1: l-floor [0.175, 2.175] mm; l-n [2.175, 8.000] mm

Leg 2: l-floor [0.175, 2.175] mm; l-n [2.175, 8.000] mm

l-floor-n/wire:2 → joint l-floor-n. Entry l-floor; receiving l-n. Crown 8.000 mm, wire 0.350 × 0.350 mm, legs 8.000 mm; buried. Tool: Declared narrow-nose board-edge stitcher; physical trial required. Install 1: Bare board underside into wall bottom edge, before tape / covering / lining. Source coordinate positions/orientation and actual leg/material intervals are in Staple-schedule.json. These are assembly marks, not drill/punch instructions.

Entry side inside. Driver access 24.000 mm; clearance 0.500 mm; minimum receiving depth 2.000 mm, edge distance 0.150 mm, end margin 0.100 mm; maximum joint gap 0.200 mm. Definition count 3, spacing 77.400 mm. Receiving entry boundaries: cutEdge, cutEdge. Through-exit geometry is recorded independently of the declared buried/exposed/clinch termination.

Leg 1: l-floor [0.175, 2.175] mm; l-n [2.175, 8.000] mm

Leg 2: l-floor [0.175, 2.175] mm; l-n [2.175, 8.000] mm

l-floor-e/wire:0 → joint l-floor-e. Entry l-floor; receiving l-e. Crown 8.000 mm, wire 0.350 × 0.350 mm, legs 8.000 mm; buried. Tool: Declared narrow-nose board-edge stitcher; physical trial required. Install 1: Bare board underside into wall bottom edge, before tape / covering / lining. Source coordinate positions/orientation and actual leg/material intervals are in Staple-schedule.json. These are assembly marks, not drill/punch instructions.

Entry side inside. Driver access 24.000 mm; clearance 0.500 mm; minimum receiving depth 2.000 mm, edge distance 0.150 mm, end margin 0.100 mm; maximum joint gap 0.200 mm. Definition count 3, spacing 50.200 mm. Receiving entry boundaries: cutEdge, cutEdge. Through-exit geometry is recorded independently of the declared buried/exposed/clinch termination.

Leg 1: l-floor [0.175, 2.175] mm; l-e [2.175, 8.000] mm

Leg 2: l-floor [0.175, 2.175] mm; l-e [2.175, 8.000] mm

l-floor-e/wire:1 → joint l-floor-e. Entry l-floor; receiving l-e. Crown 8.000 mm, wire 0.350 × 0.350 mm, legs 8.000 mm; buried. Tool: Declared narrow-nose board-edge stitcher; physical trial required. Install 1: Bare board underside into wall bottom edge, before tape / covering / lining. Source coordinate positions/orientation and actual leg/material intervals are in Staple-schedule.json. These are assembly marks, not drill/punch instructions.

Entry side inside. Driver access 24.000 mm; clearance 0.500 mm; minimum receiving depth 2.000 mm, edge distance 0.150 mm, end margin 0.100 mm; maximum joint gap 0.200 mm. Definition count 3, spacing 50.200 mm. Receiving entry boundaries: cutEdge, cutEdge. Through-exit geometry is recorded independently of the declared buried/exposed/clinch termination.

Leg 1: l-floor [0.175, 2.175] mm; l-e [2.175, 8.000] mm

Leg 2: l-floor [0.175, 2.175] mm; l-e [2.175, 8.000] mm

l-floor-e/wire:2 → joint l-floor-e. Entry l-floor; receiving l-e. Crown 8.000 mm, wire 0.350 × 0.350 mm, legs 8.000 mm; buried. Tool: Declared narrow-nose board-edge stitcher; physical trial required. Install 1: Bare board underside into wall bottom edge, before tape / covering / lining. Source coordinate positions/orientation and actual leg/material intervals are in Staple-schedule.json. These are assembly marks, not drill/punch instructions.

Entry side inside. Driver access 24.000 mm; clearance 0.500 mm; minimum receiving depth 2.000 mm, edge

distance 0.150 mm, end margin 0.100 mm; maximum joint gap 0.200 mm. Definition count 3, spacing 50.200 mm. Receiving entry boundaries: cutEdge, cutEdge. Through-exit geometry is recorded independently of the declared buried/exposed/clinch termination.

Leg 1: l-floor [0.175, 2.175] mm; l-e [2.175, 8.000] mm

Leg 2: l-floor [0.175, 2.175] mm; l-e [2.175, 8.000] mm

l-floor-s/wire:0 → joint l-floor-s. Entry l-floor; receiving l-s. Crown 8.000 mm, wire 0.350 × 0.350 mm, legs 8.000 mm; buried. Tool: Declared narrow-nose board-edge stitcher; physical trial required. Install 1: Bare board underside into wall bottom edge, before tape / covering / lining. Source coordinate positions/orientation and actual leg/material intervals are in Staple-schedule.json. These are assembly marks, not drill/punch instructions.

Entry side inside. Driver access 24.000 mm; clearance 0.500 mm; minimum receiving depth 2.000 mm, edge distance 0.150 mm, end margin 0.100 mm; maximum joint gap 0.200 mm. Definition count 3, spacing 77.400 mm. Receiving entry boundaries: cutEdge, cutEdge. Through-exit geometry is recorded independently of the declared buried/exposed/clinch termination.

Leg 1: l-floor [0.175, 2.175] mm; l-s [2.175, 8.000] mm

Leg 2: l-floor [0.175, 2.175] mm; l-s [2.175, 8.000] mm

l-floor-s/wire:1 → joint l-floor-s. Entry l-floor; receiving l-s. Crown 8.000 mm, wire 0.350 × 0.350 mm, legs 8.000 mm; buried. Tool: Declared narrow-nose board-edge stitcher; physical trial required. Install 1: Bare board underside into wall bottom edge, before tape / covering / lining. Source coordinate positions/orientation and actual leg/material intervals are in Staple-schedule.json. These are assembly marks, not drill/punch instructions.

Entry side inside. Driver access 24.000 mm; clearance 0.500 mm; minimum receiving depth 2.000 mm, edge distance 0.150 mm, end margin 0.100 mm; maximum joint gap 0.200 mm. Definition count 3, spacing 77.400 mm. Receiving entry boundaries: cutEdge, cutEdge. Through-exit geometry is recorded independently of the declared buried/exposed/clinch termination.

Leg 1: l-floor [0.175, 2.175] mm; l-s [2.175, 8.000] mm

Leg 2: l-floor [0.175, 2.175] mm; l-s [2.175, 8.000] mm

l-floor-s/wire:2 → joint l-floor-s. Entry l-floor; receiving l-s. Crown 8.000 mm, wire 0.350 × 0.350 mm, legs 8.000 mm; buried. Tool: Declared narrow-nose board-edge stitcher; physical trial required. Install 1: Bare board underside into wall bottom edge, before tape / covering / lining. Source coordinate positions/orientation and actual leg/material intervals are in Staple-schedule.json. These are assembly marks, not drill/punch instructions.

Entry side inside. Driver access 24.000 mm; clearance 0.500 mm; minimum receiving depth 2.000 mm, edge distance 0.150 mm, end margin 0.100 mm; maximum joint gap 0.200 mm. Definition count 3, spacing 77.400 mm. Receiving entry boundaries: cutEdge, cutEdge. Through-exit geometry is recorded independently of the declared buried/exposed/clinch termination.

Leg 1: l-floor [0.175, 2.175] mm; l-s [2.175, 8.000] mm

Leg 2: l-floor [0.175, 2.175] mm; l-s [2.175, 8.000] mm

l-floor-w/wire:0 → joint l-floor-w. Entry l-floor; receiving l-w. Crown 8.000 mm, wire 0.350 × 0.350 mm, legs 8.000 mm; buried. Tool: Declared narrow-nose board-edge stitcher; physical trial required. Install 1: Bare board underside into wall bottom edge, before tape / covering / lining. Source coordinate positions/orientation and actual leg/material intervals are in Staple-schedule.json. These are assembly marks, not drill/punch instructions.

Entry side inside. Driver access 24.000 mm; clearance 0.500 mm; minimum receiving depth 2.000 mm, edge distance 0.150 mm, end margin 0.100 mm; maximum joint gap 0.200 mm. Definition count 3, spacing 50.200 mm. Receiving entry boundaries: cutEdge, cutEdge. Through-exit geometry is recorded independently of the declared buried/exposed/clinch termination.

Leg 1: l-floor [0.175, 2.175] mm; l-w [2.175, 8.000] mm

Leg 2: l-floor [0.175, 2.175] mm; l-w [2.175, 8.000] mm

l-floor-w/wire:1 → joint l-floor-w. Entry l-floor; receiving l-w. Crown 8.000 mm, wire 0.350 × 0.350 mm, legs 8.000 mm; buried. Tool: Declared narrow-nose board-edge stitcher; physical trial required. Install 1: Bare board underside into wall bottom edge, before tape / covering / lining. Source coordinate positions/orientation and actual leg/material intervals are in Staple-schedule.json. These are assembly marks, not drill/punch instructions.

Entry side inside. Driver access 24.000 mm; clearance 0.500 mm; minimum receiving depth 2.000 mm, edge distance 0.150 mm, end margin 0.100 mm; maximum joint gap 0.200 mm. Definition count 3, spacing 50.200 mm. Receiving entry boundaries: cutEdge, cutEdge. Through-exit geometry is recorded independently of the declared buried/exposed/clinch termination.

Leg 1: l-floor [0.175, 2.175] mm; l-w [2.175, 8.000] mm

Leg 2: l-floor [0.175, 2.175] mm; l-w [2.175, 8.000] mm

l-floor-w/wire:2 → joint l-floor-w. Entry l-floor; receiving l-w. Crown 8.000 mm, wire 0.350 × 0.350 mm, legs 8.000 mm; buried. Tool: Declared narrow-nose board-edge stitcher; physical trial required. Install 1: Bare board underside into wall bottom edge, before tape / covering / lining. Source coordinate positions/orientation and actual leg/material intervals are in Staple-schedule.json. These are assembly marks, not drill/punch instructions.

Entry side inside. Driver access 24.000 mm; clearance 0.500 mm; minimum receiving depth 2.000 mm, edge distance 0.150 mm, end margin 0.100 mm; maximum joint gap 0.200 mm. Definition count 3, spacing 50.200 mm. Receiving entry boundaries: cutEdge, cutEdge. Through-exit geometry is recorded independently of the declared buried/exposed/clinch termination.

Leg 1: l-floor [0.175, 2.175] mm; l-w [2.175, 8.000] mm

Leg 2: l-floor [0.175, 2.175] mm; l-w [2.175, 8.000] mm

Adhesive declarations

b-floor-n/glue: PVA board-edge bond / prototype allowance, effective 0.030 mm, coverage 90.000%. Bond regions and exclusions on b-floor / b-n are retained in Adhesive-regions.json; no bond-strength simulation is claimed.

b-floor-e/glue: PVA board-edge bond / prototype allowance, effective 0.030 mm, coverage 90.000%. Bond regions and exclusions on b-floor / b-e are retained in Adhesive-regions.json; no bond-strength simulation is claimed.

b-floor-s/glue: PVA board-edge bond / prototype allowance, effective 0.030 mm, coverage 90.000%. Bond regions and exclusions on b-floor / b-s are retained in Adhesive-regions.json; no bond-strength simulation is claimed.

b-floor-w/glue: PVA board-edge bond / prototype allowance, effective 0.030 mm, coverage 90.000%. Bond regions and exclusions on b-floor / b-w are retained in Adhesive-regions.json; no bond-strength simulation is claimed.

l-floor-n/glue: PVA board-edge bond / prototype allowance, effective 0.030 mm, coverage 90.000%. Bond regions and exclusions on l-floor / l-n are retained in Adhesive-regions.json; no bond-strength simulation is claimed.

l-floor-e/glue: PVA board-edge bond / prototype allowance, effective 0.030 mm, coverage 90.000%. Bond regions and exclusions on l-floor / l-e are retained in Adhesive-regions.json; no bond-strength simulation is claimed.

l-floor-s/glue: PVA board-edge bond / prototype allowance, effective 0.030 mm, coverage 90.000%. Bond regions and exclusions on l-floor / l-s are retained in Adhesive-regions.json; no bond-strength simulation is claimed.

l-floor-w/glue: PVA board-edge bond / prototype allowance, effective 0.030 mm, coverage 90.000%. Bond regions and exclusions on l-floor / l-w are retained in Adhesive-regions.json; no bond-strength simulation is claimed.

b-cross-p-bond-n/adhesive: Covering PVA / effective dry bond assumption, effective 0.040 mm, coverage 95.000%. Bond regions and exclusions on b-n / b-cross-p/n outer wall are retained in Adhesive-regions.json; no bond-strength simulation is claimed.

b-cross-p-bond-e/adhesive: Covering PVA / effective dry bond assumption, effective 0.040 mm, coverage 95.000%. Bond regions and exclusions on b-e / b-cross-p/e outer wall are retained in Adhesive-regions.json; no bond-strength simulation is claimed.

b-cross-p-bond-s/adhesive: Covering PVA / effective dry bond assumption, effective 0.040 mm, coverage 95.000%. Bond regions and exclusions on b-s / b-cross-p/s outer wall are retained in Adhesive-regions.json; no bond-strength simulation is claimed.

b-cross-p-bond-w/adhesive: Covering PVA / effective dry bond assumption, effective 0.040 mm, coverage 95.000%. Bond regions and exclusions on b-w / b-cross-p/w outer wall are retained in Adhesive-regions.json; no bond-strength simulation is claimed.

b-cross-p-cap-bond-backing/adhesive: Face covering PVA / actual backing contact, effective 0.040 mm, coverage 95.000%. Bond regions and exclusions on b-crown-backing / b-cross-p are retained in Adhesive-regions.json; no bond-strength simulation is claimed.

l-cross-p-bond-n/adhesive: Covering PVA / effective dry bond assumption, effective 0.040 mm, coverage 95.000%. Bond regions and exclusions on l-n / l-cross-p/n outer wall are retained in Adhesive-regions.json; no bond-strength simulation is claimed.

l-cross-p-bond-e/adhesive: Covering PVA / effective dry bond assumption, effective 0.040 mm, coverage 95.000%. Bond regions and exclusions on l-e / l-cross-p/e outer wall are retained in Adhesive-regions.json; no bond-strength simulation is claimed.

l-cross-p-bond-s/adhesive: Covering PVA / effective dry bond assumption, effective 0.040 mm, coverage 95.000%. Bond regions and exclusions on l-s / l-cross-p/s outer wall are retained in Adhesive-regions.json; no bond-strength simulation is claimed.

l-cross-p-bond-w/adhesive: Covering PVA / effective dry bond assumption, effective 0.040 mm, coverage 95.000%. Bond regions and exclusions on l-w / l-cross-p/w outer wall are retained in Adhesive-regions.json; no bond-strength simulation is claimed.

l-cross-p-cap-bond-backing/adhesive: Face covering PVA / actual backing contact, effective 0.040 mm, coverage 95.000%. Bond regions and exclusions on l-crown-backing / l-cross-p are retained in Adhesive-regions.json; no bond-strength simulation is claimed.

b-liner-floor-bond/adhesive: Lining PVA; regions stop short of tape and turn-ins, effective 0.030 mm, coverage 90.000%. Bond regions and exclusions on b-floor / b-liner-floor are retained in Adhesive-regions.json; no bond-strength simulation is claimed.

b-liner-n-bond/adhesive: Lining PVA; regions stop short of tape and turn-ins, effective 0.030 mm, coverage 90.000%. Bond regions and exclusions on b-n / b-liner-n are retained in Adhesive-regions.json; no bond-strength simulation is claimed.

b-liner-e-bond/adhesive: Lining PVA; regions stop short of tape and turn-ins, effective 0.030 mm, coverage 90.000%. Bond regions and exclusions on b-e / b-liner-e are retained in Adhesive-regions.json; no bond-strength simulation is claimed.

b-liner-s-bond/adhesive: Lining PVA; regions stop short of tape and turn-ins, effective 0.030 mm, coverage 90.000%. Bond regions and exclusions on b-s / b-liner-s are retained in Adhesive-regions.json; no bond-strength simulation is claimed.

b-liner-w-bond/adhesive: Lining PVA; regions stop short of tape and turn-ins, effective 0.030 mm, coverage 90.000%. Bond regions and exclusions on b-w / b-liner-w are retained in Adhesive-regions.json; no bond-strength simulation is claimed.

l-liner-floor-bond/adhesive: Lining PVA; regions stop short of tape and turn-ins, effective 0.030 mm, coverage 90.000%. Bond regions and exclusions on l-floor / l-liner-floor are retained in Adhesive-regions.json; no bond-strength simulation is claimed.

l-liner-n-bond/adhesive: Lining PVA; regions stop short of tape and turn-ins, effective 0.030 mm, coverage

90.000%. Bond regions and exclusions on l-n / l-liner-n are retained in Adhesive-regions.json; no bond-strength simulation is claimed.

l-liner-e-bond/adhesive: Lining PVA; regions stop short of tape and turn-ins, effective 0.030 mm, coverage 90.000%. Bond regions and exclusions on l-e / l-liner-e are retained in Adhesive-regions.json; no bond-strength simulation is claimed.

l-liner-s-bond/adhesive: Lining PVA; regions stop short of tape and turn-ins, effective 0.030 mm, coverage 90.000%. Bond regions and exclusions on l-s / l-liner-s are retained in Adhesive-regions.json; no bond-strength simulation is claimed.

l-liner-w-bond/adhesive: Lining PVA; regions stop short of tape and turn-ins, effective 0.030 mm, coverage 90.000%. Bond regions and exclusions on l-w / l-liner-w are retained in Adhesive-regions.json; no bond-strength simulation is claimed.

Recorded construction/process assumptions

Original CASK / COLLECT project-authored example, using generic independently stocked cut-piece hinge trees. Every separate board is one actual piece; covering hinges are physical folds, not board scores.

Material appearance, dry adhesive layers, calipers, backed-fabric ply ratio, turn-in allowances and wire tool access are declared prototype assumptions. Stock/vendor strength, moisture, compression and sliding force require physical samples.

Finished usable space is bounded by the largest actual inward local tape / lining / turn-in buildup. Liners deliberately stop short of tape and turn-ins; they do not silently stack through those pieces.

Lid clear span is derived from the base finished side envelope over the overlap region plus twice the per-side running clearance. Exterior seating ledges below that region do not enlarge the sliding opening.

Cross-wrap neutral-line edge allowance is board caliper plus two bond layers and one covering caliper. The two side faces carry corner tabs and therefore double build; front/back carry one layer. Band mode has one front seam overlap; its asymmetric finished envelope shifts the closed lid centre. All local buildups remain actual geometry.

Band-and-patch mode applies the exterior face patch first, then overlaps bottom turn-under flaps. The central patch is locally recessed by one covering/bond layer; no imaginary air layer flattens it.

Staple route accepted here: separate floor below walls, driven from floor underside into vertical wall bottom edges. Buried termination is intentional. Inset floor plus staples rejects rather than reinterpreting the receiving route.

Wire crown buildup is retained. Covered stapled halves contain a real slotted leveling backing with thickness equal to the wire depth. Four retained vent/clearance slots support per-seam method switching.

A lid is one coherent parent group. Closed, raised, fully removed and exploded views share the same accepted dimensions and canonical artwork. Presentation does not change fit or cutting files.

Seating is physical: zero axial space is actual ceiling/rim contact; positive top-seat space creates rim shims; locked overlap creates exterior stop ledges. Conflicting locked depth/headspace rejects.

Finish relief adds up to 0.08 mm above the lid exterior cap. The lid finished skirt-depth control excludes this local decorative peak; exact physical envelope reports it separately.

All production cut channels are actual-size nominal design geometry. No kerf or blade compensation is silently applied. Technical guides and staple placement marks are not cutting or punching commands.

Repacking stock changes material sheet placement only. It never changes canonical artwork, finish-mask IDs, source dimensions, source anchors, folded geometry or saved options.

Declared kerf assumption: 0.000 mm. It has not been applied to these nominal cut files; do not compensate twice.

Nominal design packet; physical print bleed, cutter compensation and stapler adjustment require explicit production settings. No machine commands are issued.

Actual manufacturing samples, sliding feel, material compression, staple performance and bond strength remain physical evaluations. No printing, cutting, machine motion or heating command was sent.