




Waktu.php

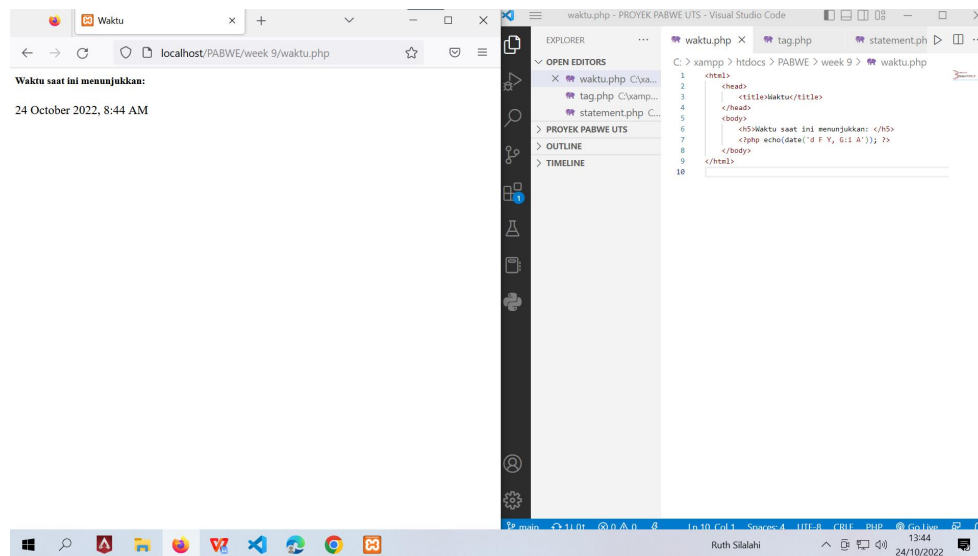


Tag.php

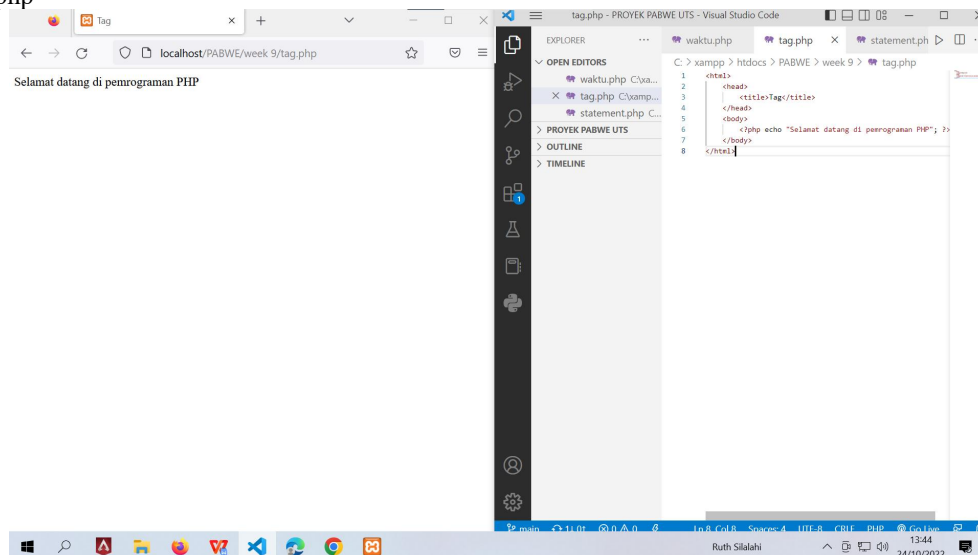


Statement.php

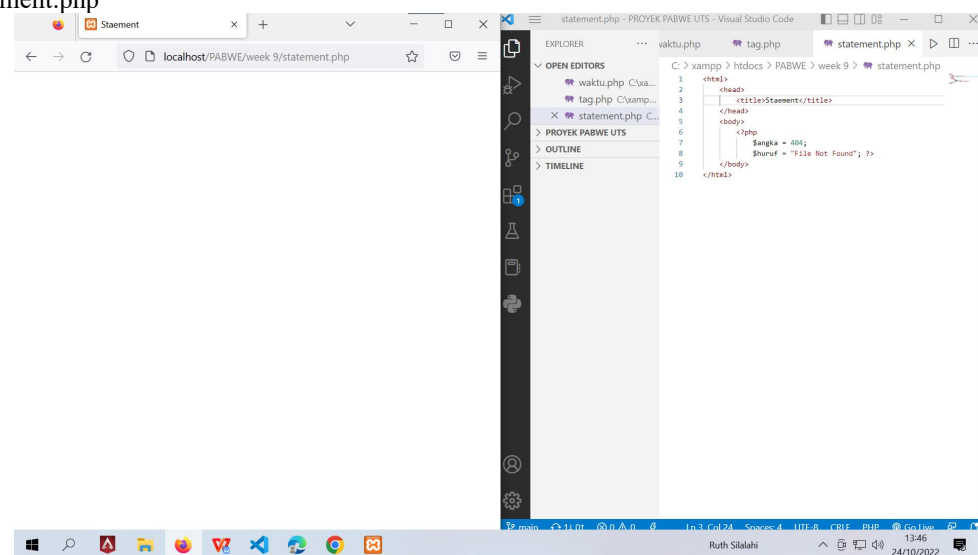


Variable.php

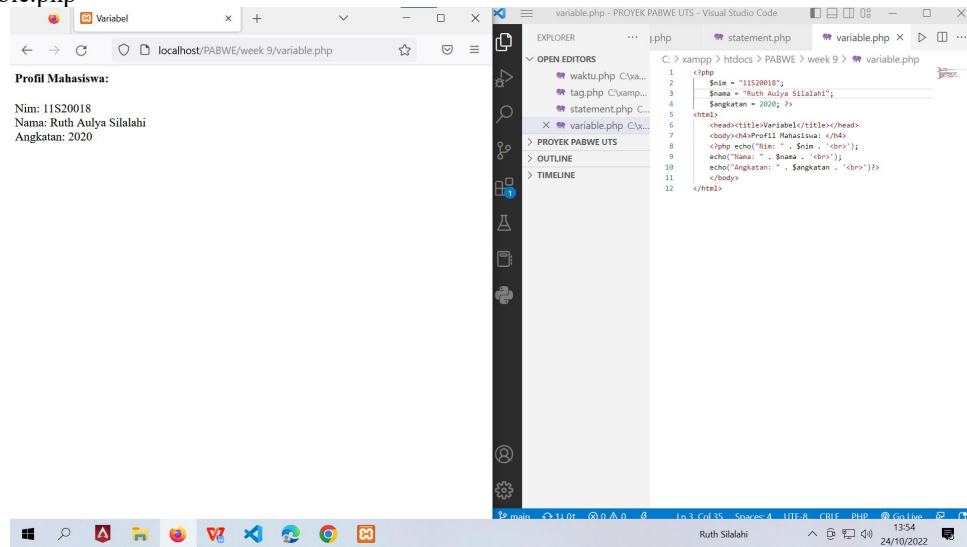

Konstanta.php

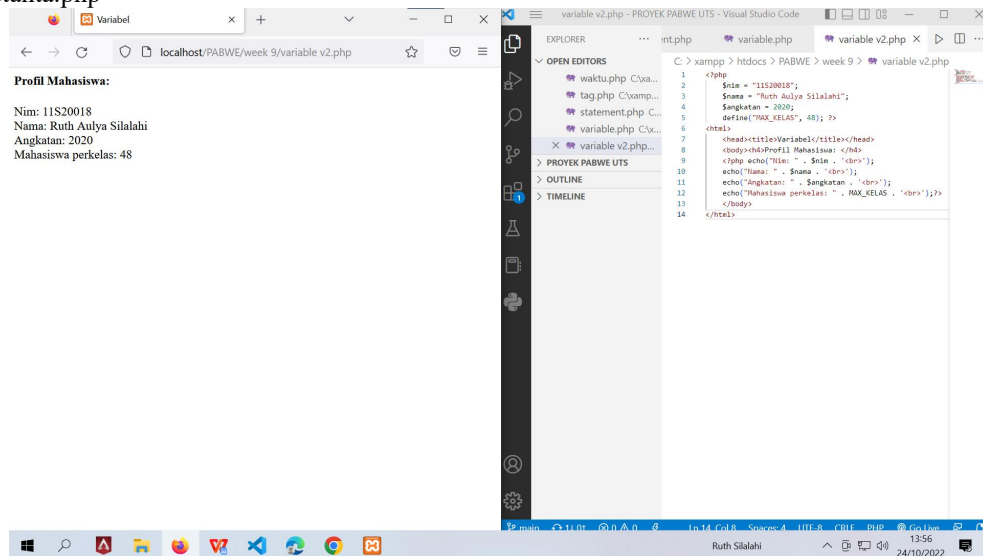

Operator.php

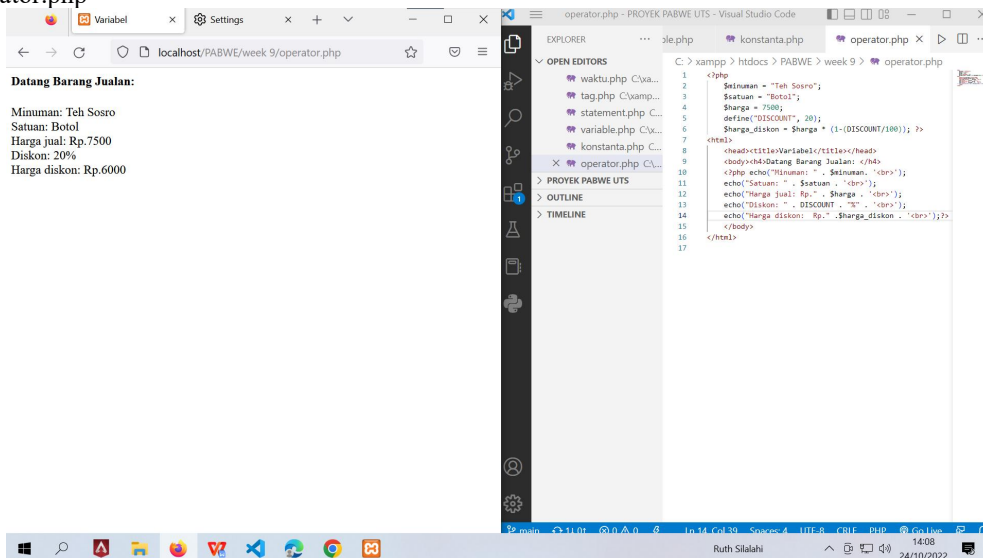

The screenshot shows a web browser window with the address bar displaying 'localhost/PABWE/week 9/array.php'. The page content lists items for sale:

- Minuman : Teh Soso
- Satuan : Botol
- Harga Jual : Rp.7500
- Diskon : 20%
- Harga Diskon : Rp.6000

Below the browser window, a code editor (Visual Studio Code) is open, showing the PHP script 'array.php' in the 'PROYECT PABWE UTS' workspace. The script calculates the discount and displays the item details in an HTML table.

```

1 <?php
2 define("DISCOUNT", 20);
3 $dataBarang = array("Teh Soso", "Botol",
4     'harga' => 7500);
5 $harga_diskon = $dataBarang['harga'] * (1-(DISCOUNT/100));
6
7 <head><title>Variables</title></head>
8 <body><h2>Data Barang Jualan: </h2>
9 <table>
10     <tr>
11         <td>Minuman : " . $dataBarang[0] . "<br>";
12         <td>Satuan : " . $dataBarang[1] . "<br>";
13         <td>Harga Jual : Rp." . $dataBarang['harga'] .
14             "<br>";
15         <td>Diskon : " . DISCOUNT . "% . "<br>";
16         <td>Harga Diskon : Rp." . $harga_diskon . "<br>";
17     </tr>
18 </table>

```