


```
kali@kali ~  
Session Actions Edit View Help  
(kali@kali)-[~]  
$ nslookup example.com  
Server:      192.168.1.1  
Address:     192.168.1.1#53  
  
Non-authoritative answer:  
Name:   example.com  
Address: 172.66.147.243  
Name:   example.com  
Address: 104.20.23.154  
Name:   example.com  
Address: 2606:4700:90d5:72db:f243:6da:ef6b:ff98  
  
(kali@kali)-[~]  
$ whois example.com  
Domain Name: EXAMPLE.COM  
Registry Domain ID: 2336799_DOMAIN_COM-VRSN  
Registrar WHOIS Server: whois.iana.org  
Registrar URL: http://res-dom.iana.org  
Updated Date: 2026-08-14T08:01:43Z  
Creation Date: 1995-08-14T04:00:00Z  
Registry Expiry Date: 2027-08-13T04:00:00Z  
Registrar: RESERVED-Internet Assigned Numbers Authority  
Registrar IANA ID: 376  
Registrar Abuse Contact Email:  
Registrar Abuse Contact Phone:  
Domain Status: clientDeleteProhibited https://icann.org/epp#clientDeleteProhibited  
Domain Status: clientTransferProhibited https://icann.org/epp#clientTransferProhibited  
Domain Status: clientUpdateProhibited https://icann.org/epp#clientUpdateProhibited  
Name Server: ELLIOTT.NS.CLOUDFLARE.COM  
Name Server: HERA.NS.CLOUDFLARE.COM  
DNSSEC: signedDelegation  
DNSSEC DS Data: 2371 13 2 C988EC423E3880EB8DD8A46FE06CA230EE23F35B578D64E78B29C3E1C83D245A  
URL of the ICANN Whois Inaccuracy Complaint Form: https://www.icann.org/wicf/  
>>> Last update of whois database: 2026-09-25T11:18:05Z <<<  
  
For more information on Whois status codes, please visit https://icann.org/epp  
  
NOTICE: The expiration date displayed in this record is the date the  
registrar's sponsorship of the domain name registration in the registry is  
currently set to expire. This date does not necessarily reflect the expiration  
date of the domain name registrant's agreement with the sponsoring  
registrar. Users may consult the sponsoring registrar's Whois database to  
view the registrar's reported date of expiration for this registration.  
  
TERMS OF USE: You are not authorized to access or query our Whois  
database through the use of electronic processes that are high-volume and  
automated except as reasonably necessary to register domain names or
```

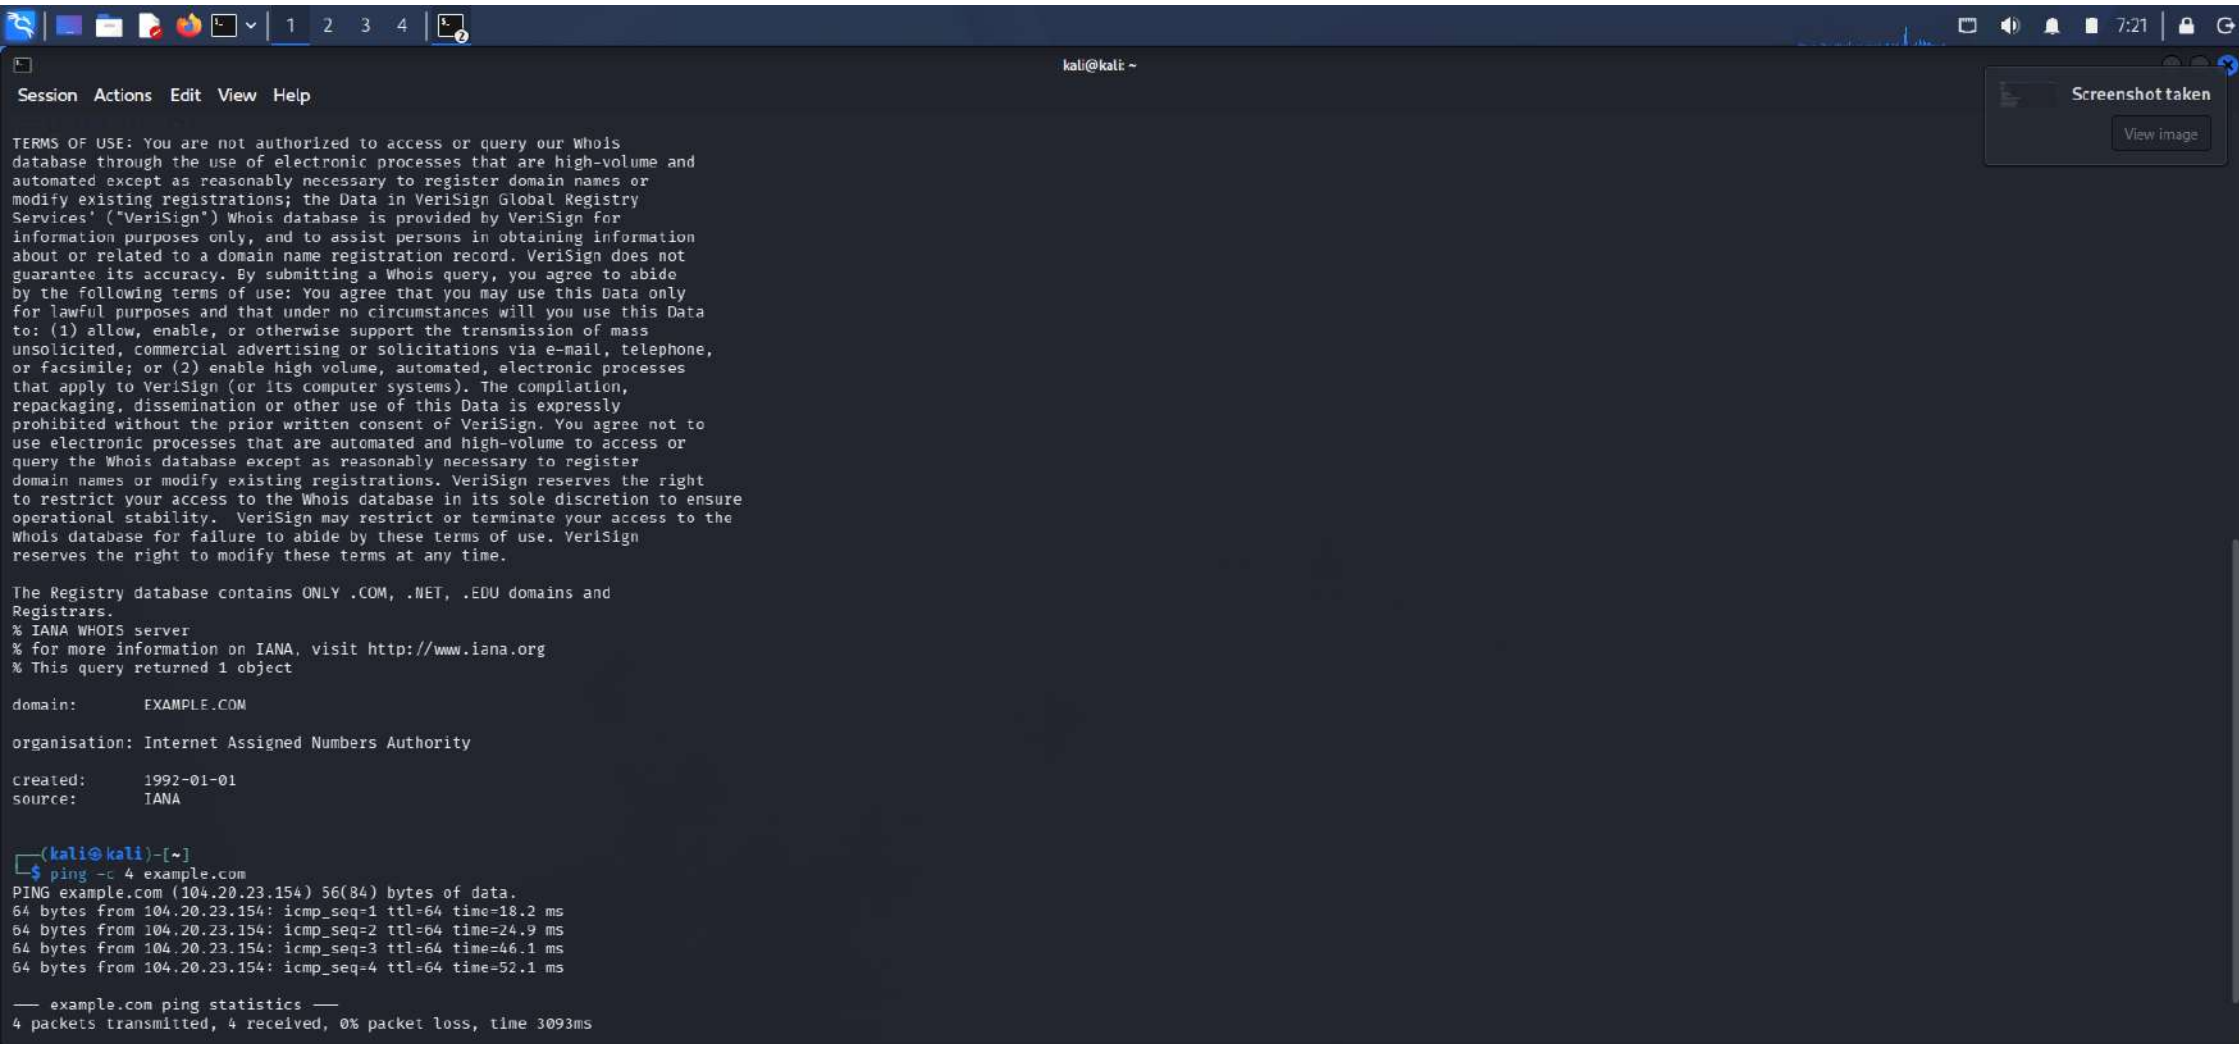

The image shows a Kali Linux terminal window. The top bar includes a menu with 'Session', 'Actions', 'Edit', 'View', and 'Help'. The terminal output displays the terms of use for a WHOIS database, followed by a WHOIS query for 'EXAMPLE.COM'. The query results show the domain is managed by the Internet Assigned Numbers Authority (IANA), created in 1992, and sourced from IANA. Below this, a ping command is executed against example.com, showing four successful pings with varying response times. A screenshot notification is visible in the top right corner.

```
kali@kali ~  
Session Actions Edit View Help  
  
TERMS OF USE: You are not authorized to access or query our Whois  
database through the use of electronic processes that are high-volume and  
automated except as reasonably necessary to register domain names or  
modify existing registrations; the Data in VeriSign Global Registry  
Services' ("VeriSign") Whois database is provided by VeriSign for  
information purposes only, and to assist persons in obtaining information  
about or related to a domain name registration record. VeriSign does not  
guarantee its accuracy. By submitting a Whois query, you agree to abide  
by the following terms of use: You agree that you may use this Data only  
for lawful purposes and that under no circumstances will you use this Data  
to: (1) allow, enable, or otherwise support the transmission of mass  
unsolicited, commercial advertising or solicitations via e-mail, telephone,  
or facsimile; or (2) enable high volume, automated, electronic processes  
that apply to VeriSign (or its computer systems). The compilation,  
repackaging, dissemination or other use of this Data is expressly  
prohibited without the prior written consent of VeriSign. You agree not to  
use electronic processes that are automated and high-volume to access or  
query the Whois database except as reasonably necessary to register  
domain names or modify existing registrations. VeriSign reserves the right  
to restrict your access to the Whois database in its sole discretion to ensure  
operational stability. VeriSign may restrict or terminate your access to the  
Whois database for failure to abide by these terms of use. VeriSign  
reserves the right to modify these terms at any time.  
  
The Registry database contains ONLY .COM, .NET, .EDU domains and  
Registrars.  
% IANA WHOIS server  
% for more information on IANA, visit http://www.iana.org  
% This query returned 1 object  
  
domain:      EXAMPLE.COM  
  
organisation: Internet Assigned Numbers Authority  
  
created:      1992-01-01  
source:      IANA  
  
(kali@kali)-[~]  
$ ping -c 4 example.com  
PING example.com (104.20.23.154) 56(84) bytes of data:  
64 bytes from 104.20.23.154: icmp_seq=1 ttl=64 time=18.2 ms  
64 bytes from 104.20.23.154: icmp_seq=2 ttl=64 time=24.9 ms  
64 bytes from 104.20.23.154: icmp_seq=3 ttl=64 time=46.1 ms  
64 bytes from 104.20.23.154: icmp_seq=4 ttl=64 time=52.1 ms  
  
— example.com ping statistics —  
4 packets transmitted, 4 received, 0% packet loss, time 3093ms
```

```
link/ether 08:00:27:5a:87:bc brd ff:ff:ff:ff:ff:ff
inet 10.0.2.15/24 brd 10.0.2.255 scope global dynamic noprefixroute eth0
    valid_lft 86172sec preferred_lft 86172sec
inet6 fd17:625c:f037:2:69cd:fd52:f476:7041/64 scope global dynamic noprefixroute
    valid_lft 86039sec preferred_lft 14039sec
inet6 fe80::48a0:212b:bcdc:a0de/64 scope link noprefixroute
    valid_lft forever preferred_lft forever

(kali@kali)-[~]
$ ip net 10.0.2.15/24
Command 'inet' not found, did you mean:
  command 'rnet' from deb rupture
  command 'net' from deb samba-common-bin
  command 'inetd' from deb openbsd-inetd
  command 'init' from deb finit-sysv
  command 'init' from deb runit-init
  command 'init' from deb systemd-sysv
  command 'init' from deb sysvinit-core
Try: sudo apt install <deb name>

(kali@kali)-[~]
$ ip route
default via 10.0.2.2 dev eth0 proto dhcp src 10.0.2.15 metric 100
10.0.2.0/24 dev eth0 proto kernel scope link src 10.0.2.15 metric 100

(kali@kali)-[~]
$ ip addr
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: eth0: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP group default qlen 1000
    link/ether 08:00:27:5a:87:bc brd ff:ff:ff:ff:ff:ff
    inet 10.0.2.15/24 brd 10.0.2.255 scope global dynamic noprefixroute eth0
        valid_lft 86068sec preferred_lft 86068sec
    inet6 fd17:625c:f037:2:69cd:fd52:f476:7041/64 scope global dynamic noprefixroute
        valid_lft 85935sec preferred_lft 13935sec
    inet6 fe80::48a0:212b:bcdc:a0de/64 scope link noprefixroute
        valid_lft forever preferred_lft forever

(kali@kali)-[~]
$ ip route
default via 10.0.2.2 dev eth0 proto dhcp src 10.0.2.15 metric 100
10.0.2.0/24 dev eth0 proto kernel scope link src 10.0.2.15 metric 100

(kali@kali)-[~]
$
```

```
kali@kali ~  
Session Actions Edit View Help  
(kali@kali)-[~]  
$ nmap -sS 127.0.0.1  
Starting Nmap 7.99 ( https://nmap.org ) at 2026-09-25 07:29 -0400  
Nmap scan report for localhost (127.0.0.1)  
Host is up (0.0000020s latency).  
All 1000 scanned ports on localhost (127.0.0.1) are in ignored states.  
Not shown: 1000 closed tcp ports (reset)  
  
Nmap done: 1 IP address (1 host up) scanned in 0.11 seconds  
  
(kali@kali)-[~]  
$ sudo nmap -sU --top-ports 20 127.0.0.1  
[sudo] password for kali:  
Starting Nmap 7.99 ( https://nmap.org ) at 2026-09-25 07:30 -0400  
Nmap scan report for localhost (127.0.0.1)  
Host is up (0.000013s latency).  
  
PORT      STATE SERVICE  
53/udp    closed domain  
67/udp    closed dhcps  
68/udp    closed dhcpc  
69/udp    closed tftp  
123/udp   closed ntp  
135/udp   closed msrpc  
137/udp   closed netbios-ns  
138/udp   closed netbios-dgm  
139/udp   closed netbios-ssn  
161/udp   closed snmp  
162/udp   closed snmptrap  
445/udp   closed microsoft-ds  
500/udp   closed isakmp  
514/udp   closed syslog  
520/udp   closed route  
631/udp   closed ipp  
1434/udp  closed ms-sql-m  
1900/udp  closed upnp  
4500/udp  closed nat-t-ike  
49152/udp closed unknown  
  
Nmap done: 1 IP address (1 host up) scanned in 0.15 seconds  
  
(kali@kali)-[~]  
$ nmap -sV 127.0.0.1  
Starting Nmap 7.99 ( https://nmap.org ) at 2026-09-25 07:30 -0400  
Nmap scan report for localhost (127.0.0.1)  
Host is up (0.0000030s latency).  
All 1000 scanned ports on localhost (127.0.0.1) are in ignored states.  
Not shown: 1000 closed tcp ports (reset)
```

Session Actions Edit View Help

```
53/udp closed domain
67/udp closed dhcp
68/udp closed dhcp
69/udp closed tftp
123/udp closed ntp
135/udp closed msrpc
137/udp closed netbios-ns
138/udp closed netbios-dgm
139/udp closed netbios-ssn
161/udp closed snmp
162/udp closed snmptrap
445/udp closed microsoft-ds
500/udp closed isakmp
514/udp closed syslog
520/udp closed route
631/udp closed ipp
1434/udp closed ms-sql-m
1900/udp closed upnp
4500/udp closed nat-t-ike
49152/udp closed unknown
```

Nmap done: 1 IP address (1 host up) scanned in 0.15 seconds

```
(kali@kali)-[~]
$ nmap -sV 127.0.0.1
Starting Nmap 7.99 ( https://nmap.org ) at 2026-09-25 07:30 -0400
Nmap scan report for localhost (127.0.0.1)
Host is up (0.0000030s latency).
All 1000 scanned ports on localhost (127.0.0.1) are in ignored states.
Not shown: 1000 closed tcp ports (reset)
```

Service detection performed. Please report any incorrect results at <https://nmap.org/submit/> .
Nmap done: 1 IP address (1 host up) scanned in 0.25 seconds

```
(kali@kali)-[~]
$ sudo nmap -O 127.0.0.1
Starting Nmap 7.99 ( https://nmap.org ) at 2026-09-25 07:31 -0400
Nmap scan report for localhost (127.0.0.1)
Host is up (0.000050s latency).
All 1000 scanned ports on localhost (127.0.0.1) are in ignored states.
Not shown: 1000 closed tcp ports (reset)
Too many fingerprints match this host to give specific OS details
Network Distance: 0 hops
```

OS detection performed. Please report any incorrect results at <https://nmap.org/submit/> .
Nmap done: 1 IP address (1 host up) scanned in 1.63 seconds

```
(kali@kali)-[~]
$
```

Wireshark interface showing network traffic capture on eth0. The top bar displays the interface name and status. The menu bar includes File, Edit, View, Go, Capture, Analyze, Statistics, Telephony, Wireless, Tools, and Help. The toolbar contains various icons for packet capture and analysis.

The packet list pane shows the following entries:


No.	Time	Source	Destination	Protocol	Length	Info
142	1.634040854	10.0.2.15	140.248.129.91	HTTP	364	GET /success.txt?ip=10.0.2.15 HTTP/1.1
164	1.714347840	140.248.129.91	10.0.2.15	HTTP	429	HTTP/1.1 200 OK (text/plain)
285	31.622480952	10.0.2.15	172.66.147.243	HTTP	385	GET / HTTP/1.1
303	32.175706947	172.66.147.243	10.0.2.15	HTTP	60	HTTP/1.1 200 OK (text/html)


The packet details pane shows the following information for the selected packet (No. 142):

- Frame 142: Packet, 364 bytes on wire (2912 bits), 364 bytes captured (2912 bits) on interface eth0, id 142
- Ethernet II, Src: PCSSystemtec_5a:87:bc (08:00:27:5a:87:bc), Dst: 52:54:00:12:35:00 (52:54:00:12:35:00)
- Internet Protocol Version 4, Src: 10.0.2.15, Dst: 140.248.129.91
- Transmission Control Protocol, Src Port: 39084, Dst Port: 80, Seq: 1, Ack: 1, Len: 310
- Hypertext Transfer Protocol

The packet bytes pane shows the raw data of the packet, including the HTTP request and response headers and body.

At the bottom, the status bar displays: Packets: 424 · Displayed: 4 (0.9%) · Dropped: 0 (0.0%) · Profile: Default

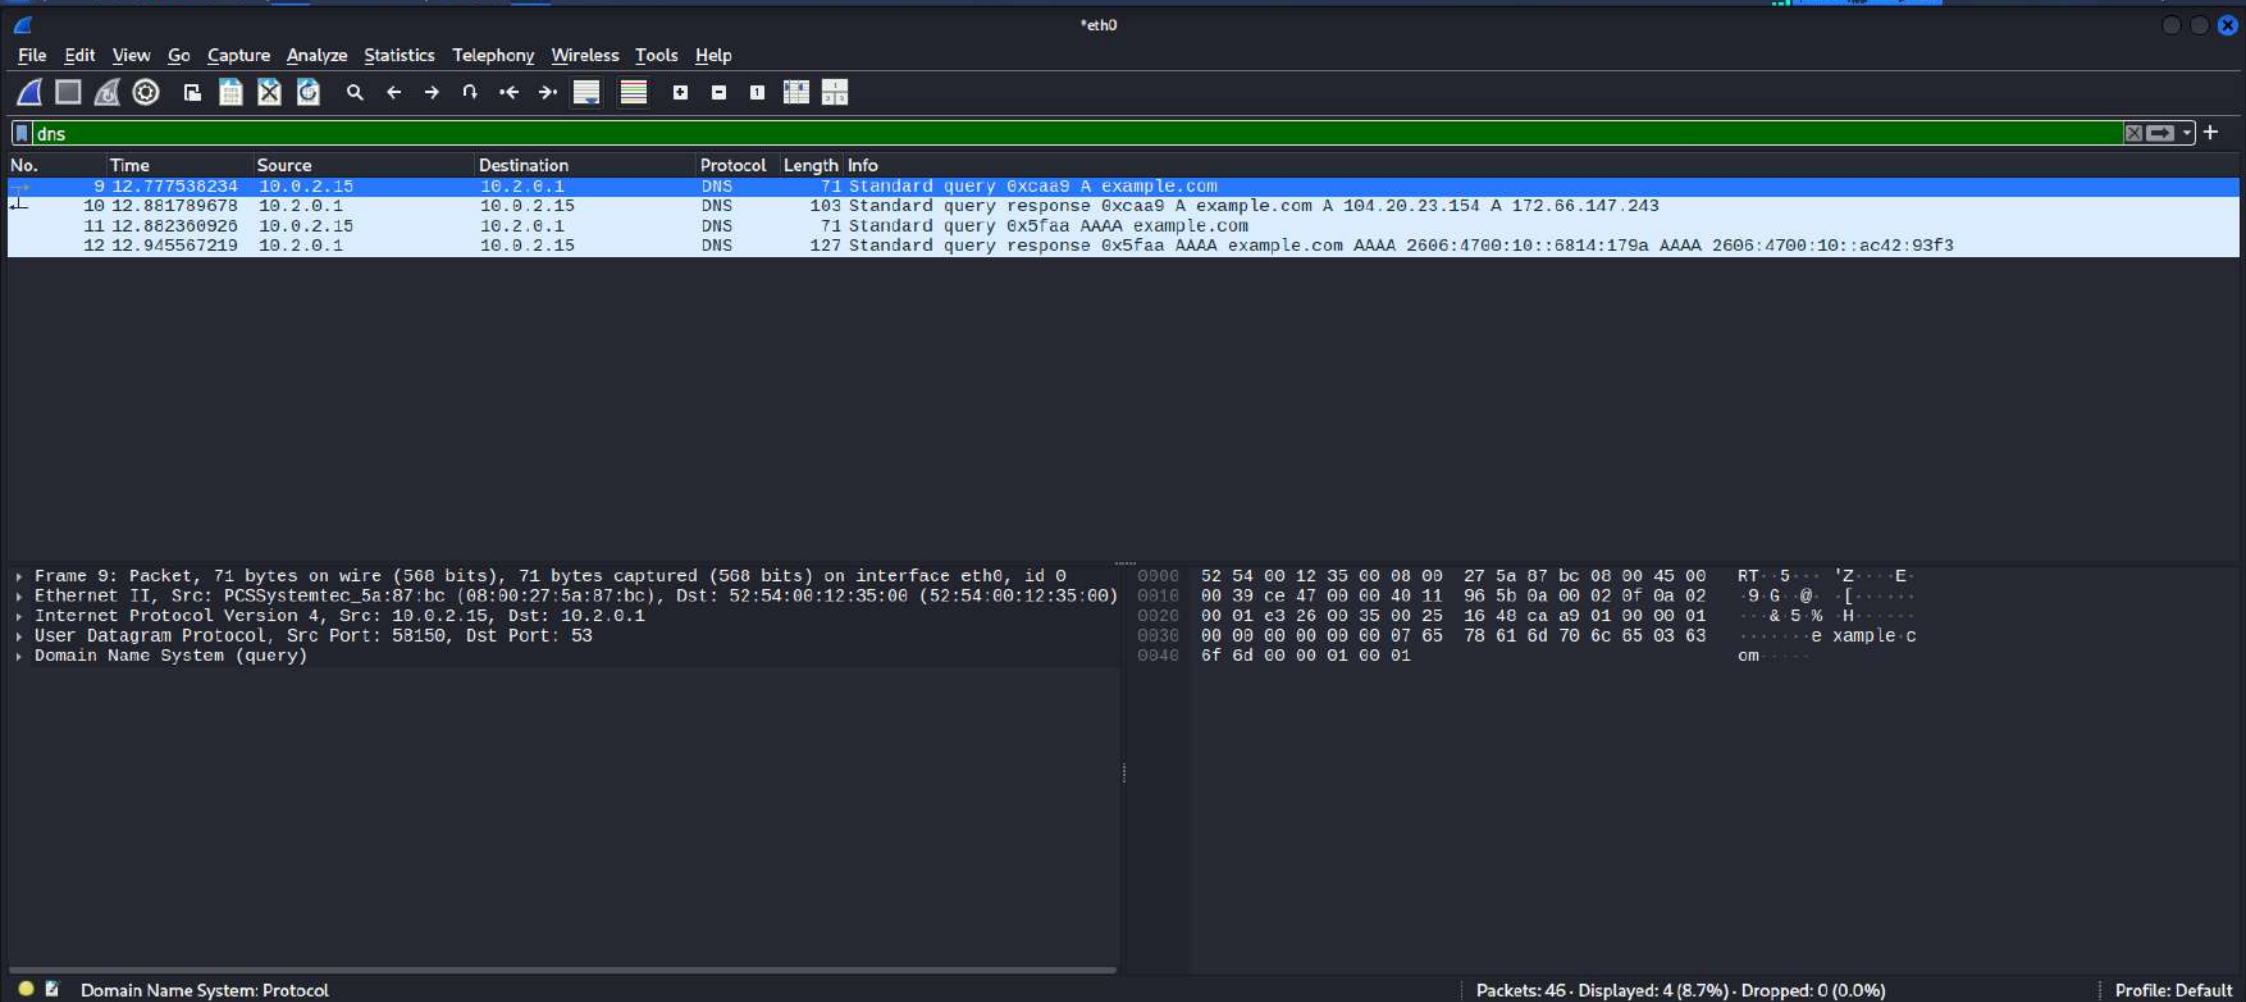

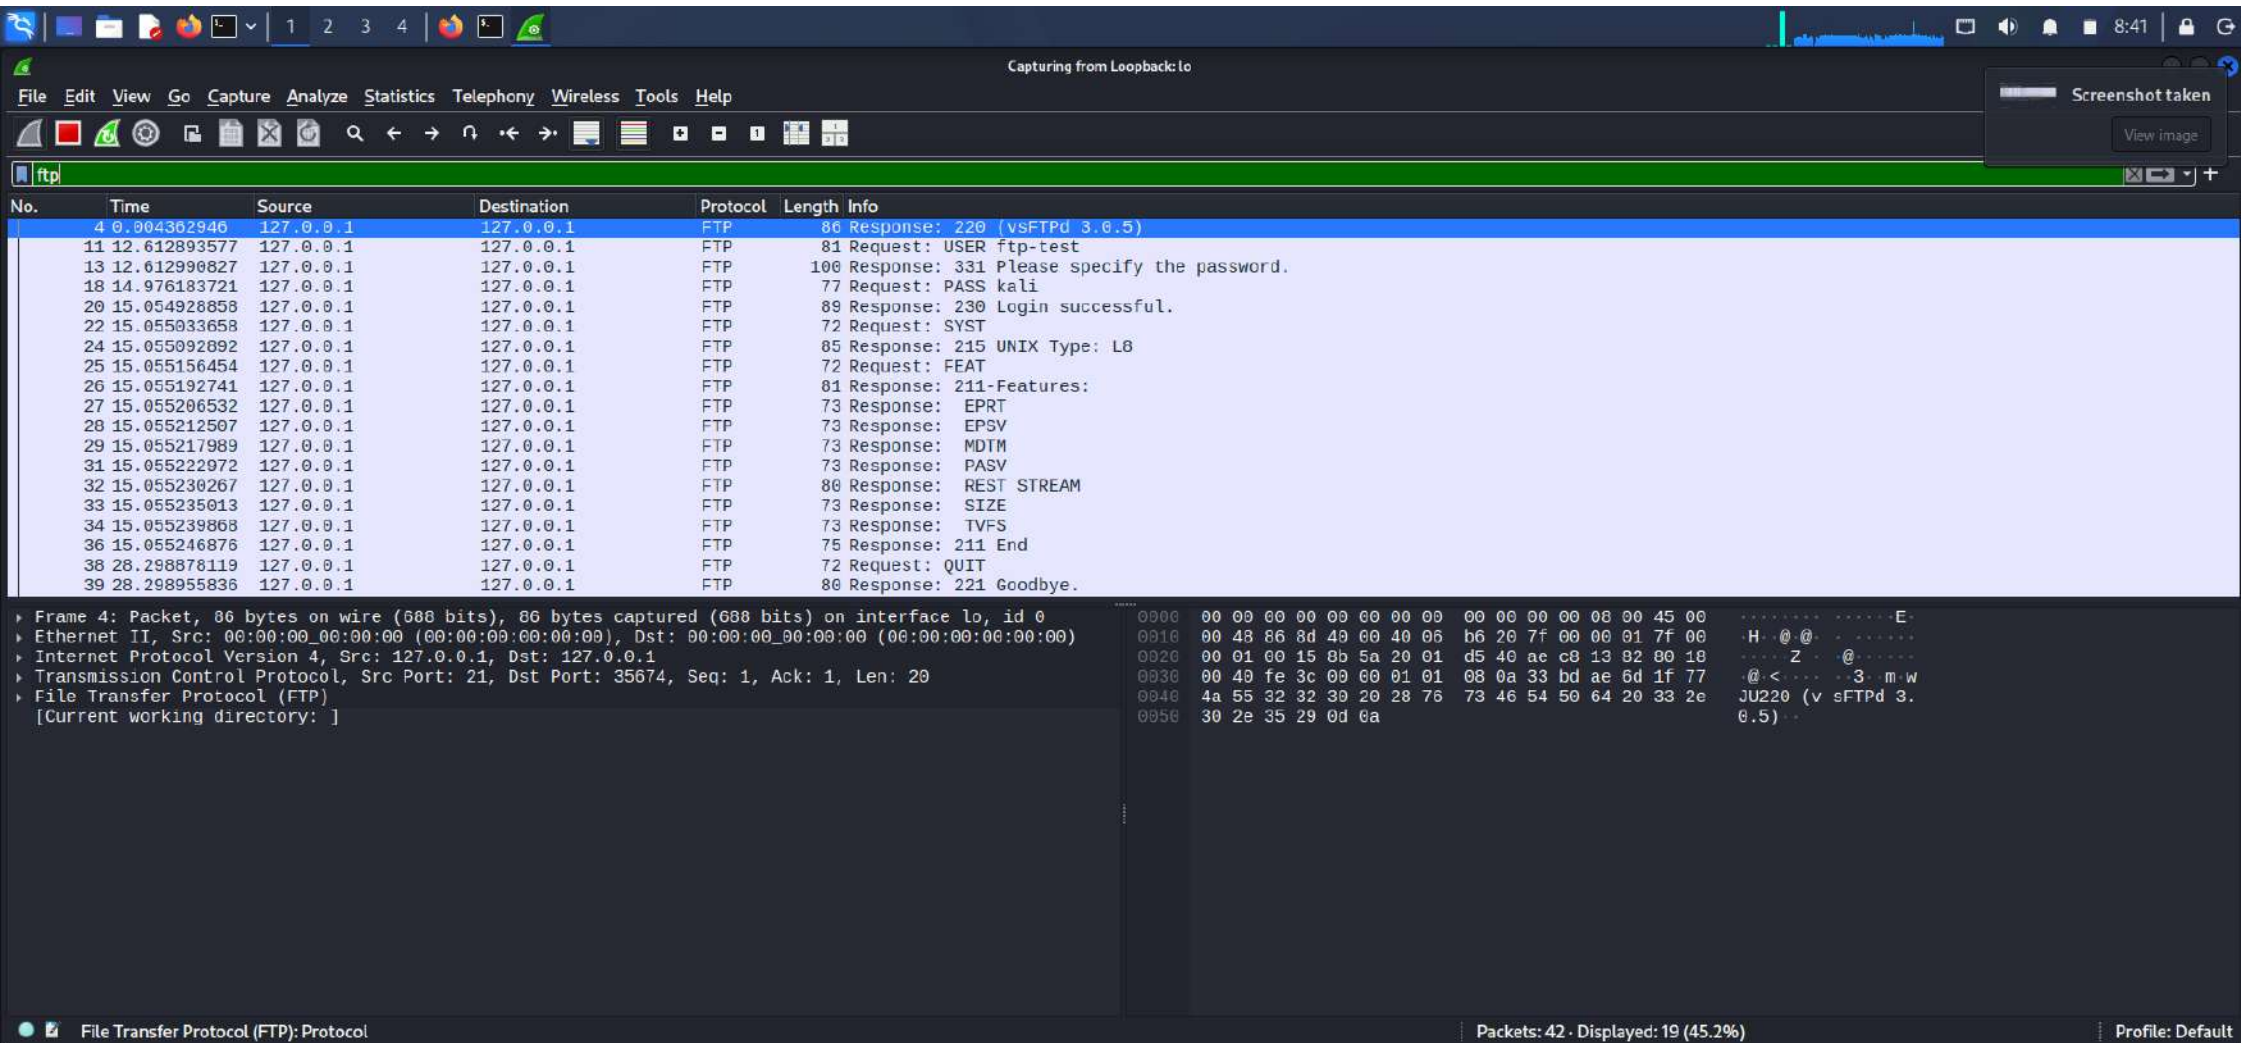

```
Session Actions Edit View Help
Get:3 http://kali.download/kali kali-rolling/main amd64 Contents (deb) [54.1 MB]
Fetched 75.7 MB in 26s (2,908 kB/s)
1343 packages can be upgraded. Run 'apt list --upgradable' to see them.

(kali@kali)-[~]
$ sudo apt install vsftpd -y
Installing:
vsftpd

Summary:
  Upgrading: 0, Installing: 1, Removing: 0, Not Upgrading: 1343
  Download size: 145 kB
  Space needed: 367 kB / 34.6 GB available

Get:1 http://mirrors.esto.network/kali kali-rolling/main amd64 vsftpd amd64 3.0.5-1 [145 kB]
Fetched 145 kB in 2s (73.8 kB/s)
Preconfiguring packages ...
Selecting previously unselected package vsftpd.
(Reading database... 427035 files and directories currently installed.)
Preparing to unpack ../vsftpd_3.0.5-1_amd64.deb...
Unpacking vsftpd (3.0.5-1)...
Setting up vsftpd (3.0.5-1)...
Creating group 'ftp' with GID 967.
Creating user 'ftp' (ftp daemon) with UID 967 and GID 967.
update-rc.d: We have no instructions for the vsftpd init script.
update-rc.d: It looks like a network service, we disable it.
vsftpd.service is a disabled or a static unit, not starting it.
Processing triggers for man-db (2.13.1-1)...
Processing triggers for kali-menu (2026.2.6)...

(kali@kali)-[~]
$ sudo systemctl start vsftpd

(kali@kali)-[~]
$ sudo systemctl status vsftpd --no-pager
● vsftpd.service - vsftpd FTP server
   Loaded: loaded (/usr/lib/systemd/system/vsftpd.service; disabled; preset: disabled)
   Active: active (running) since Sun 2026-09-27 08:35:27 EDT; 26s ago
  Invocation: 481189b779ea482399d3208df124749b
     Docs: man:vsftpd(8)
   Process: 59897 ExecStartPre=/bin/mkdir -p /run/vsftpd/empty (code=exited, status=0/SUCCESS)
    Main PID: 59899 (vsftpd)
       Tasks: 1 (limit: 9300)
      Memory: 916K (peak: 2.2M)
         CPU: 17ms
    CGroup: /system.slice/vsftpd.service
            └─59899 /usr/sbin/vsftpd /etc/vsftpd.conf

Sep 27 08:35:27 kali systemd[1]: Starting vsftpd.service - vsftpd FTP server ...
```




```
kali@kali ~  
Session Actions Edit View Help  
Sep 27 08:35:27 kali systemd[1]: Starting vsftpd.service - vsftpd FTP server...  
Sep 27 08:35:27 kali systemd[1]: Started vsftpd.service - vsftpd FTP server.  
  
(kali@kali)-[~]  
$ sudo adduser ftp-test  
New password:  
Retype new password:  
passwd: password updated successfully  
Changing the user information for ftp-test  
Enter the new value, or press ENTER for the default  
Full Name []:  
Room Number []:  
Work Phone []:  
Home Phone []:  
Other []:  
Is the information correct? [Y/n]  
  
(kali@kali)-[~]  
$ ftp 127.0.0.1  
Connected to 127.0.0.1.  
220 (vsFTPd 3.0.5)  
Name (127.0.0.1:kali): kali  
331 Please specify the password.  
Password:  
230 Login successful.  
Remote system type is UNIX.  
Using binary mode to transfer files.  
ftp> quit  
221 Goodbye.  
  
(kali@kali)-[~]  
$ ftp 127.0.0.1  
Connected to 127.0.0.1.  
220 (vsFTPd 3.0.5)  
Name (127.0.0.1:kali): ftp-test  
331 Please specify the password.  
Password:  
230 Login successful.  
Remote system type is UNIX.  
Using binary mode to transfer files.  
ftp> quit  
221 Goodbye.  
  
(kali@kali)-[~]  
$ ftp 127.0.0.1  
Connected to 127.0.0.1.  
220 (vsFTPd 3.0.5)  
Name (127.0.0.1:kali): ftp-test  
331 Please specify the password.
```

Screenshot taken

View image

```
kali@kali ~  
Session Actions Edit View Help  
230 Login successful.  
Remote system type is UNIX.  
Using binary mode to transfer files.  
ftp> quit  
221 Goodbye.  
  
(kali@kali)-[~]  
$ ftp 127.0.0.1  
Connected to 127.0.0.1.  
220 (vsFTPd 3.0.5)  
Name (127.0.0.1:kali): ftp-test  
331 Please specify the password.  
Password:  
230 Login successful.  
Remote system type is UNIX.  
Using binary mode to transfer files.  
ftp> quit  
221 Goodbye.  
  
(kali@kali)-[~]  
$ sudo hping3 -S -p 80 -c 20 127.0.0.1  
HPING 127.0.0.1 (lo 127.0.0.1): S set, 40 headers + 0 data bytes  
len=40 ip=127.0.0.1 ttl=64 DF id=0 sport=80 flags=RA seq=0 win=0 rtt=0.5 ms  
len=40 ip=127.0.0.1 ttl=64 DF id=0 sport=80 flags=RA seq=1 win=0 rtt=1.8 ms  
len=40 ip=127.0.0.1 ttl=64 DF id=0 sport=80 flags=RA seq=2 win=0 rtt=1.4 ms  
len=40 ip=127.0.0.1 ttl=64 DF id=0 sport=80 flags=RA seq=3 win=0 rtt=0.8 ms  
len=40 ip=127.0.0.1 ttl=64 DF id=0 sport=80 flags=RA seq=4 win=0 rtt=1.0 ms  
len=40 ip=127.0.0.1 ttl=64 DF id=0 sport=80 flags=RA seq=5 win=0 rtt=2.1 ms  
len=40 ip=127.0.0.1 ttl=64 DF id=0 sport=80 flags=RA seq=6 win=0 rtt=0.9 ms  
len=40 ip=127.0.0.1 ttl=64 DF id=0 sport=80 flags=RA seq=7 win=0 rtt=1.2 ms  
len=40 ip=127.0.0.1 ttl=64 DF id=0 sport=80 flags=RA seq=8 win=0 rtt=0.8 ms  
len=40 ip=127.0.0.1 ttl=64 DF id=0 sport=80 flags=RA seq=9 win=0 rtt=1.3 ms  
len=40 ip=127.0.0.1 ttl=64 DF id=0 sport=80 flags=RA seq=10 win=0 rtt=1.2 ms  
len=40 ip=127.0.0.1 ttl=64 DF id=0 sport=80 flags=RA seq=11 win=0 rtt=1.7 ms  
len=40 ip=127.0.0.1 ttl=64 DF id=0 sport=80 flags=RA seq=12 win=0 rtt=0.3 ms  
len=40 ip=127.0.0.1 ttl=64 DF id=0 sport=80 flags=RA seq=13 win=0 rtt=0.6 ms  
len=40 ip=127.0.0.1 ttl=64 DF id=0 sport=80 flags=RA seq=14 win=0 rtt=0.5 ms  
len=40 ip=127.0.0.1 ttl=64 DF id=0 sport=80 flags=RA seq=15 win=0 rtt=1.4 ms  
len=40 ip=127.0.0.1 ttl=64 DF id=0 sport=80 flags=RA seq=16 win=0 rtt=1.0 ms  
len=40 ip=127.0.0.1 ttl=64 DF id=0 sport=80 flags=RA seq=17 win=0 rtt=0.2 ms  
len=40 ip=127.0.0.1 ttl=64 DF id=0 sport=80 flags=RA seq=18 win=0 rtt=2.1 ms  
len=40 ip=127.0.0.1 ttl=64 DF id=0 sport=80 flags=RA seq=19 win=0 rtt=1.9 ms  
  
--- 127.0.0.1 hping statistic ---  
20 packets transmitted, 20 packets received, 0% packet loss  
round-trip min/avg/max = 0.2/1.1/2.1 ms  
  
(kali@kali)-[~]  
$
```



© 2007 The Authors
Journal compilation © 2007 Blackwell Publishing Ltd

```

Ethernet II, Src: 00:00:00 00:00:00 (00:00:00:00:00:00), Dst: 00:00:00 00:00:00 (00:00:00:00:00:00)

```

Transmission Control Protocol, Src Port: 2616, Dst Port: 80

[illegible]

```
Session Actions Edit View Help
len=40 ip=127.0.0.1 ttl=64 DF id=0 sport=80 flags=RA seq=9 win=0 rtt=1.3 ms
len=40 ip=127.0.0.1 ttl=64 DF id=0 sport=80 flags=RA seq=10 win=0 rtt=1.2 ms
len=40 ip=127.0.0.1 ttl=64 DF id=0 sport=80 flags=RA seq=11 win=0 rtt=1.7 ms
len=40 ip=127.0.0.1 ttl=64 DF id=0 sport=80 flags=RA seq=12 win=0 rtt=0.3 ms
len=40 ip=127.0.0.1 ttl=64 DF id=0 sport=80 flags=RA seq=13 win=0 rtt=0.6 ms
len=40 ip=127.0.0.1 ttl=64 DF id=0 sport=80 flags=RA seq=14 win=0 rtt=0.5 ms
len=40 ip=127.0.0.1 ttl=64 DF id=0 sport=80 flags=RA seq=15 win=0 rtt=1.4 ms
len=40 ip=127.0.0.1 ttl=64 DF id=0 sport=80 flags=RA seq=16 win=0 rtt=1.0 ms
len=40 ip=127.0.0.1 ttl=64 DF id=0 sport=80 flags=RA seq=17 win=0 rtt=0.2 ms
len=40 ip=127.0.0.1 ttl=64 DF id=0 sport=80 flags=RA seq=18 win=0 rtt=2.1 ms
len=40 ip=127.0.0.1 ttl=64 DF id=0 sport=80 flags=RA seq=19 win=0 rtt=1.9 ms

— 127.0.0.1 hping statistic —
20 packets transmitted, 20 packets received, 0% packet loss
round-trip min/avg/max = 0.2/1.1/2.1 ms

(kali@kali)-[~]
$ sudo iptables -L -n -v
Chain INPUT (policy ACCEPT 0 packets, 0 bytes)
pkts bytes target      prot opt in      out     source            destination
0 0 DROP        tcp  --  all    all     0.0.0.0/0         0.0.0.0/0
Chain FORWARD (policy ACCEPT 0 packets, 0 bytes)
pkts bytes target      prot opt in      out     source            destination
0 0 DROP        tcp  --  all    all     0.0.0.0/0         0.0.0.0/0
Chain OUTPUT (policy ACCEPT 0 packets, 0 bytes)
pkts bytes target      prot opt out     source            destination
0 0 DROP        tcp  --  all    all     0.0.0.0/0         0.0.0.0/0

(kali@kali)-[~]
$ sudo iptables -A INPUT -i lo -p tcp --dport 8080 -j DROP

(kali@kali)-[~]
$ sudo iptables -L INPUT -n -v
Chain INPUT (policy ACCEPT 0 packets, 0 bytes)
pkts bytes target      prot opt in      out     source            destination
0 0 DROP        tcp  --  lo      *       0.0.0.0/0         0.0.0.0/0          tcp dpt:8080

(kali@kali)-[~]
$ sudo nmap -p 8080 127.0.0.1
Starting Nmap 7.99 ( https://nmap.org ) at 2026-09-27 08:53 -0400
Nmap scan report for localhost (127.0.0.1)
Host is up.

PORT      STATE      SERVICE
8080/tcp  filtered  http-proxy

Nmap done: 1 IP address (1 host up) scanned in 2.17 seconds

(kali@kali)-[~]
$
```