

Experiment No.5

```
t = (10, 20, 30, 40, 50)

print("Tuple:", t)

# Slicing

print("t[1:4] =", t[1:4])

print("t[:3] =", t[:3])

print("t[2:] =", t[2:])

print("t[-3:] =", t[-3:])

print("t[::-1] =", t[::-1]) # Reverse


#Tuple methods

t2 = (1, 2, 2, 3, 2)


# count()


print("Count of 2:", t2.count(2))


# index()

t3 = (10, 20, 30, 40)

print("Index of 30:", t3.index(30))
```

Output:

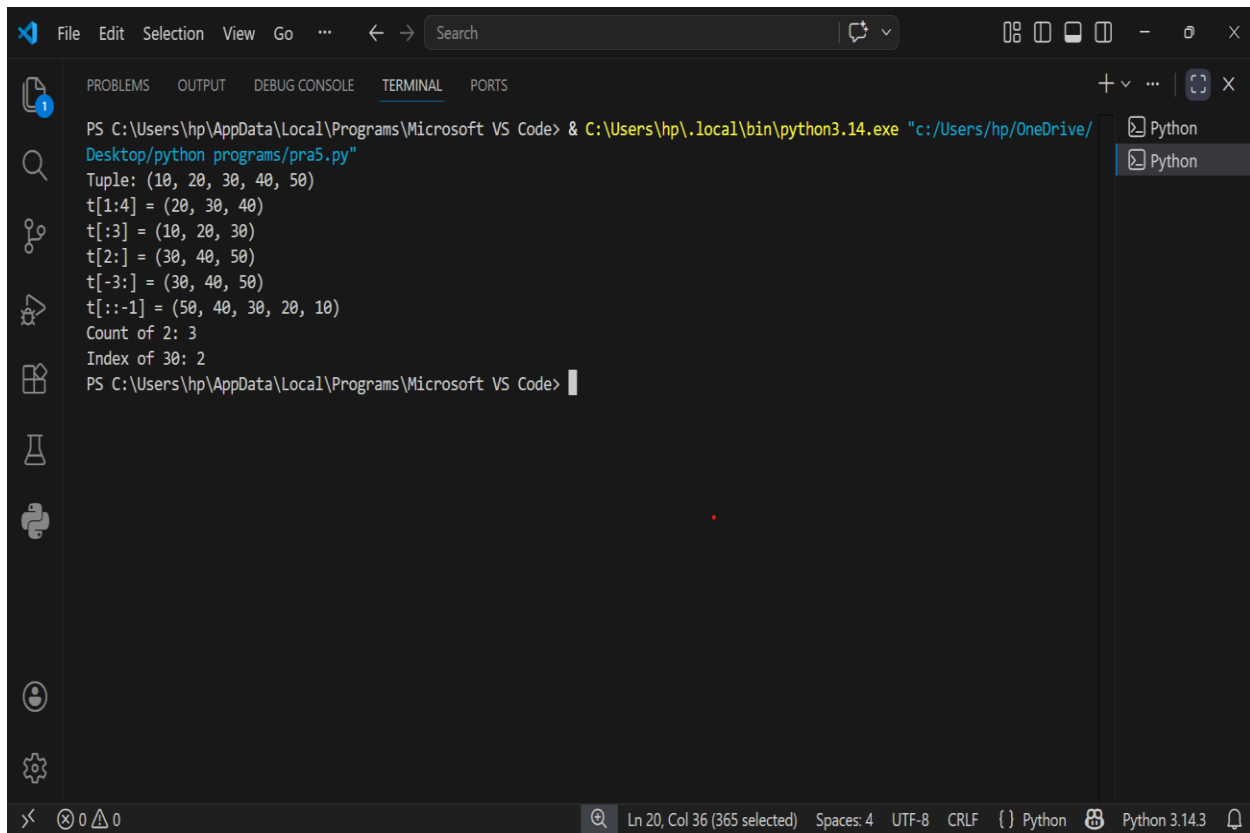

```
PS C:\Users\hp\AppData\Local\Programs\Microsoft VS Code> & C:\Users\hp\.local\bin\python3.14.exe "c:/Users/hp/OneDrive/Desktop/python programs/pra5.py"
Tuple: (10, 20, 30, 40, 50)
t[1:4] = (20, 30, 40)
t[:3] = (10, 20, 30)
t[2:] = (30, 40, 50)
t[-3:] = (30, 40, 50)
t[::-1] = (50, 40, 30, 20, 10)
Count of 2: 3
Index of 30: 2
PS C:\Users\hp\AppData\Local\Programs\Microsoft VS Code>
```

Ln 20, Col 36 (365 selected) Spaces: 4 UTF-8 CRLF {} Python Python 3.14.3