


# Notes to self

- . Importing js files : <https://doc.qt.io/qt-5/qtqml-javascript-imports.html>
- . You add them as QML files in the CMake file
- . This lecture : Import js into QML
  - . The syntax :
    - . `import "utilities1.js" as Utilities1`
- . What if we want to import JS from another js file? That's indirect import. We cover that in the next lecture.

# JS Direct Import

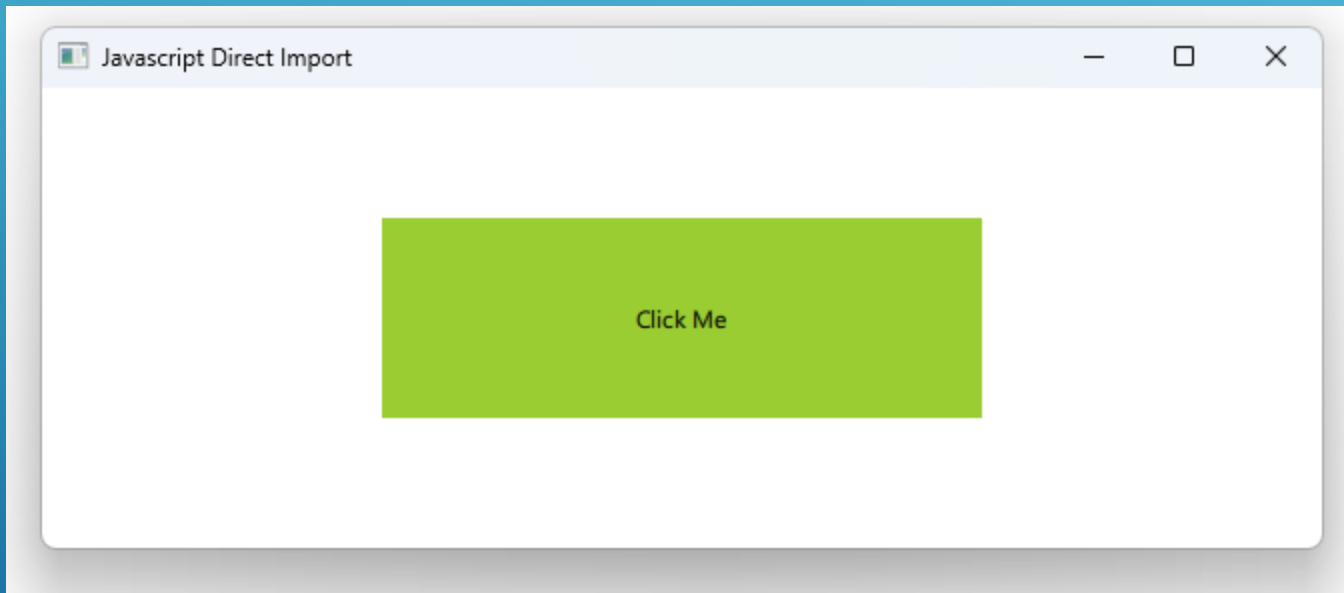

# utilities1.js

```
function greeting()  
{  
    console.log("Hello there from external JS file utilities1.js")  
}
```

# main.qml

```
import "utilities1.js" as Utilities1
Window {
    visible: true
    width: 640
    height: 480
    title: qsTr("Javascript Direct Import")

    Rectangle {
        color: "yellowgreen"
        MouseArea {
            anchors.fill: parent
            onClicked: {
                Utilities1.greeting()
            }
        }
    }
}
```