


Notes to self

- . Exploring the Repeater
- . The Repeater type is used to create a large number of similar items
- . The Repeater type creates all of its delegate items when the repeater is first created. This can be inefficient if there are a large number of delegate items and not all of the items are required to be visible at the same time. If this is the case, consider using other view types like `ListView` (which only creates delegate items when they are scrolled into view) or use the Dynamic Object Creation methods to create items as they are required.
- . Use info above , especially the docs and Qt5 course to improvise on this.

Repeater

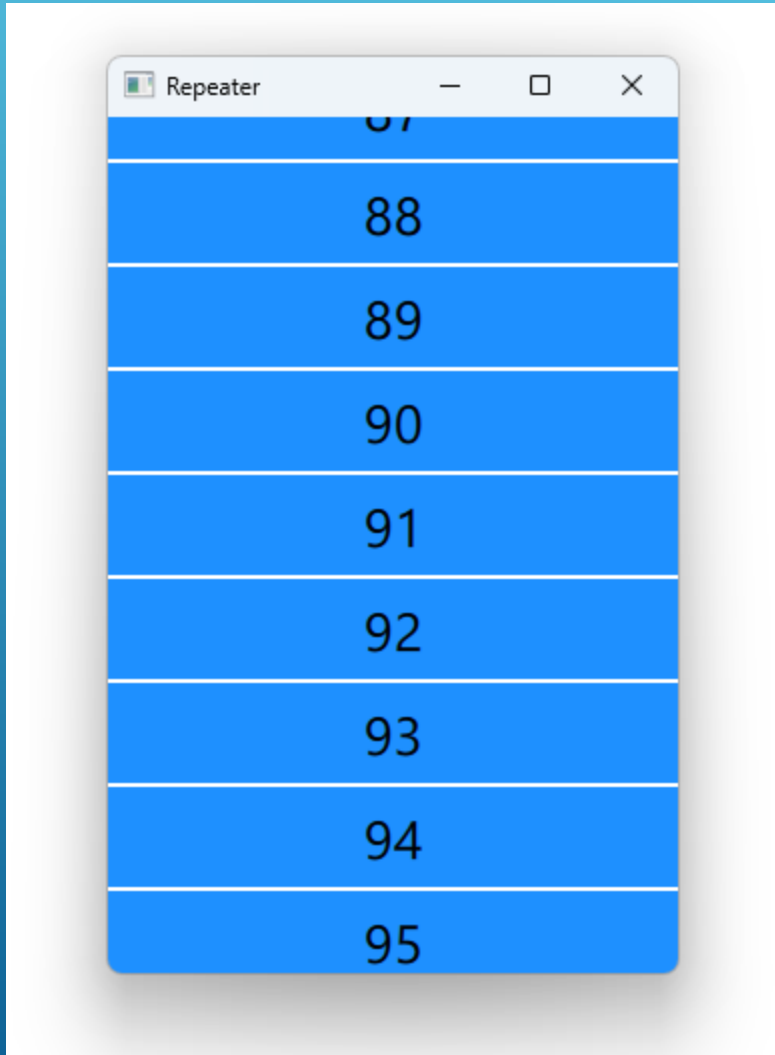

Repeater

```
Flickable {
    Column {
        id : columnId
        Repeater {

            model : 100
            // model: ["Jan", "Feb", "March", "April", "May", "June", "July", "Aug", "Sept", "Oct", "Nov", "Dec"]
            delegate : Rectangle {
                color: "dodgerblue"
                Text {
                    text: modelData
                }
                MouseArea{
                    anchors.fill: parent
                    onClicked: {
                        console.log("Clicked on :"+modelData)
                    }
                }
            }
        }
    }
}
```

CMake

```
find_package(Qt6 6.2 COMPONENTS Quick QuickControls2 REQUIRED)
...
target_link_libraries(app2-Button
    PRIVATE Qt6::Quick Qt6::QuickControls2)
```