


OUTPUTS

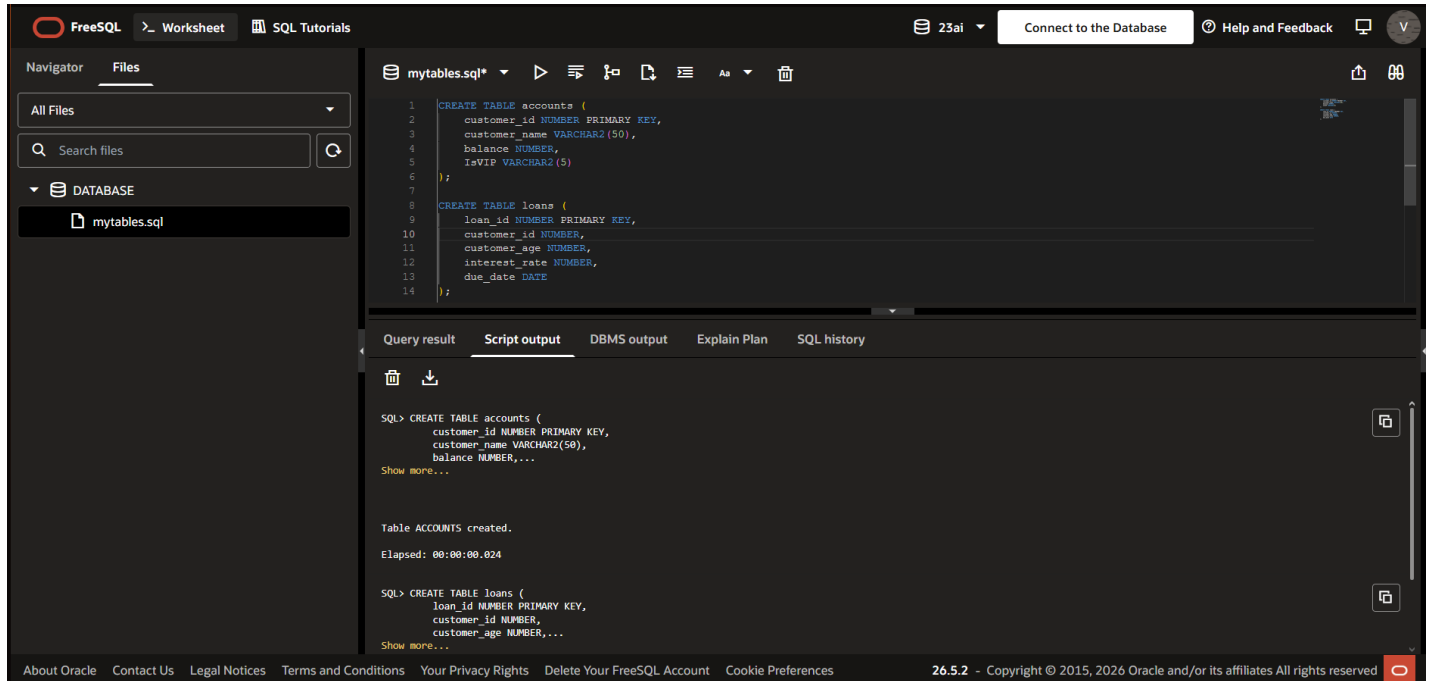


The screenshot shows the FreeSQL web application interface. The top bar includes the FreeSQL logo, navigation links for 'Worksheet' and 'SQL Tutorials', a user profile icon, and a 'Connect to the Database' button. The left sidebar contains a 'Navigator' section with 'Files' and 'DATABASE' tabs. The 'Files' tab shows a search bar and a list of files, including 'mytables.sql'. The main editor area displays the SQL script for creating two tables: 'accounts' and 'loans'. The 'Script output' tab shows the execution results, including the SQL commands and the confirmation messages: 'Table ACCOUNTS created.' and 'Table LOANS created.'.

```
1 CREATE TABLE accounts (  
2   customer_id NUMBER PRIMARY KEY,  
3   customer_name VARCHAR2(50),  
4   balance NUMBER,  
5   isVIP VARCHAR2(5)  
6 );  
7  
8 CREATE TABLE loans (  
9   loan_id NUMBER PRIMARY KEY,  
10  customer_id NUMBER,  
11  customer_age NUMBER,  
12  interest_rate NUMBER,  
13  due_date DATE  
14 );
```

SQL> CREATE TABLE accounts (
customer_id NUMBER PRIMARY KEY,
customer_name VARCHAR2(50),
balance NUMBER,...
Show more...

Table ACCOUNTS created.
Elapsed: 00:00:00.024

SQL> CREATE TABLE loans (
loan_id NUMBER PRIMARY KEY,
customer_id NUMBER,
customer_age NUMBER,...
Show more...

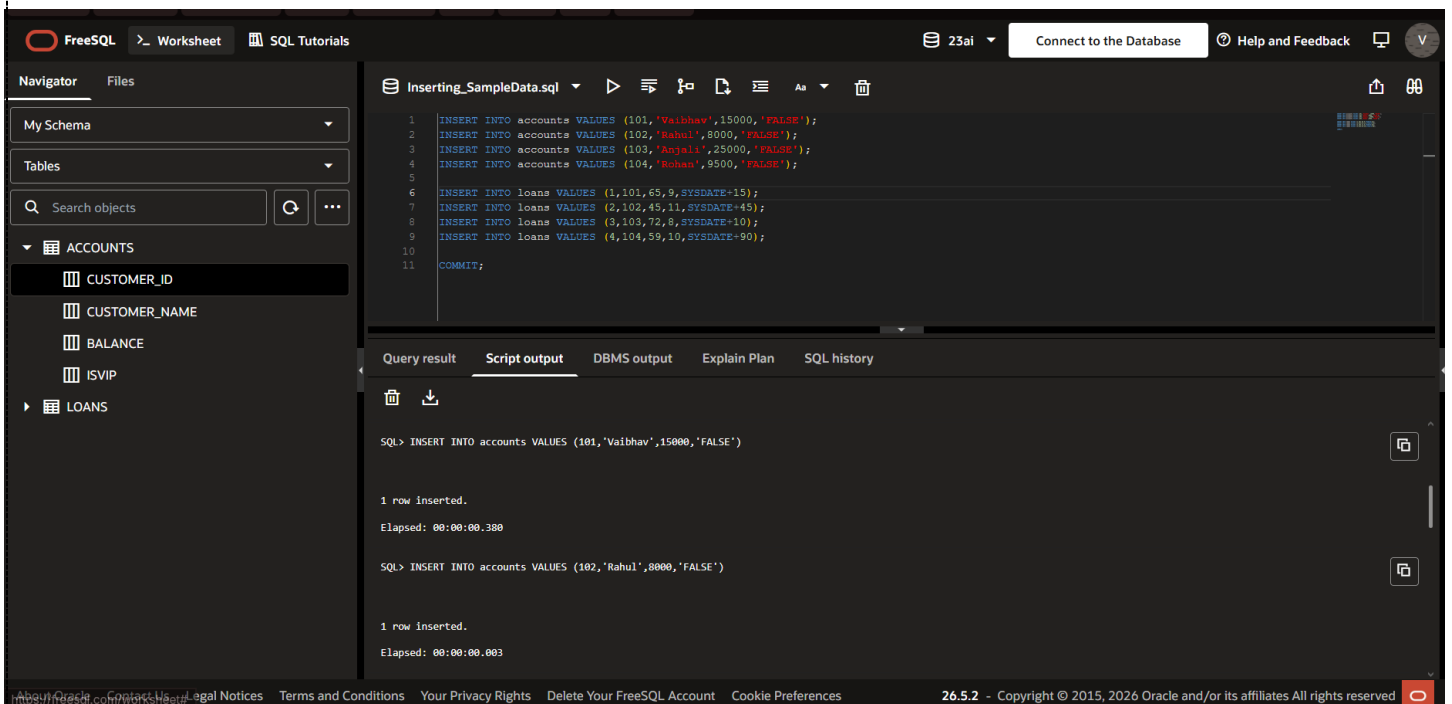

The screenshot shows the FreeSQL web application interface. The top bar includes the FreeSQL logo, navigation links for 'Worksheet' and 'SQL Tutorials', a user profile icon, and a 'Connect to the Database' button. The left sidebar contains a 'Navigator' section with 'Files' and 'My Schema' tabs. The 'My Schema' tab shows a search bar and a list of objects, including 'ACCOUNTS' and 'LOANS'. The main editor area displays the SQL script for inserting sample data into the 'accounts' and 'loans' tables. The 'Script output' tab shows the execution results, including the SQL commands and the confirmation messages: '1 row inserted.' and 'Elapsed: 00:00:00.380'.

```
1 INSERT INTO accounts VALUES (101,'Vaibhav',15000,'FALSE');  
2 INSERT INTO accounts VALUES (102,'Rahul',8000,'FALSE');  
3 INSERT INTO accounts VALUES (103,'Anjali',25000,'FALSE');  
4 INSERT INTO accounts VALUES (104,'Rohan',9500,'FALSE');  
5  
6 INSERT INTO loans VALUES (1,101,65,9,SYSDATE+15);  
7 INSERT INTO loans VALUES (2,102,45,11,SYSDATE+45);  
8 INSERT INTO loans VALUES (3,103,72,8,SYSDATE+10);  
9 INSERT INTO loans VALUES (4,104,59,10,SYSDATE+90);  
10  
11 COMMIT;
```

SQL> INSERT INTO accounts VALUES (101,'Vaibhav',15000,'FALSE')

1 row inserted.
Elapsed: 00:00:00.380

SQL> INSERT INTO accounts VALUES (102,'Rahul',8000,'FALSE')

1 row inserted.
Elapsed: 00:00:00.003

FreeSQL > Worksheet SQL Tutorials 23ai Connect to the Database Help and Feedback

Navigator Files

My Schema

Tables

Search objects

ACCOUNTS

- CUSTOMER_ID
- CUSTOMER_NAME
- BALANCE
- ISVIP

LOANS

- LOAN_ID
- CUSTOMER_ID
- CUSTOMER_AGE
- INTEREST_RATE
- DUE_DATE

DisplayData.sql

```
1 SELECT * FROM Accounts;
2 SELECT * FROM Loans;
```

Query result Script output DBMS output Explain Plan SQL history

SQL> SELECT * FROM Loans

LOAN_ID	CUSTOMER_ID	CUSTOMER_AGE	INTEREST_RATE	DUE_DATE
1	101	65	9	07/18/2026, 12:34:46 AM
2	102	45	11	08/17/2026, 12:34:46 AM
3	103	72	8	07/13/2026, 12:34:46 AM
4	104	59	10	10/01/2026, 12:34:46 AM

Elapsed: 00:00:00.001
4 rows selected.

FreeSQL > Worksheet SQL Tutorials 23ai Connect to the Database Help and Feedback

Navigator Files

My Schema

Tables

Search objects

ACCOUNTS

- CUSTOMER_ID
- CUSTOMER_NAME
- BALANCE
- ISVIP

LOANS

- LOAN_ID
- CUSTOMER_ID
- CUSTOMER_AGE
- INTEREST_RATE
- DUE_DATE

DisplayData.sql

```
1 SELECT * FROM Accounts;
2 SELECT * FROM Loans;
```

Query result Script output DBMS output Explain Plan SQL history

Elapsed: 00:00:00.001
4 rows selected.

SQL> SELECT * FROM Loans

LOAN_ID	CUSTOMER_ID	CUSTOMER_AGE	INTEREST_RATE	DUE_DATE
1	101	65	9	07/18/2026, 12:34:46 AM
2	102	45	11	08/17/2026, 12:34:46 AM
3	103	72	8	07/13/2026, 12:34:46 AM
4	104	59	10	10/01/2026, 12:34:46 AM

Elapsed: 00:00:00.015
4 rows selected.

FreeSQL > Worksheet SQL Tutorials 23ai Connect to the Database Help and Feedback

Navigator Files

My Schema

Tables

Search objects

ACCOUNTS

- CUSTOMER_ID
- CUSTOMER_NAME
- BALANCE
- ISVIP

LOANS

- LOAN_ID
- CUSTOMER_ID
- CUSTOMER_AGE
- INTEREST_RATE
- DUE_DATE

Scenario1.sql

```
1 -- scenario 1: apply a 1% discount to loan interest rates for customers above 60 years old
2 DECLARE
3     -- cursor to fetch customers older than 60 with active loans
4     CURSOR c_senior_customers IS
5         SELECT customer_id, interest_rate
6         FROM loans
7         WHERE customer_age > 60;
8 BEGIN
9     DBMS_OUTPUT.PUT_LINE('--- vaibhav mishra senior loan discount processing ---');
10    FOR f_customer IN c_senior_customers LOOP
11        UPDATE loans
12        SET interest_rate = interest_rate - 1
13        WHERE customer_id = f_customer.customer_id;
14        DBMS_OUTPUT.PUT_LINE('Applied 1 percent discount for customer id: ' || f_customer.customer_id);
15    END LOOP;
16    COMMIT;
17 END;
```

Query result Script output DBMS output Explain Plan SQL history

SQL> DECLARE
-- cursor to fetch customers older than 60 with active loans
CURSOR c_senior_customers IS
SELECT customer_id, interest_rate ...
Show more...

--- vaibhav mishra senior loan discount processing ---
Applied 1 percent discount for customer id: 101
Applied 1 percent discount for customer id: 103

PL/SQL procedure successfully completed.
Elapsed: 00:00:00.017

Query result Script output DBMS output Explain Plan SQL history					
 					
Elapsed: 00:00:00.027					
SQL> SELECT * FROM Loans					
LOAN_ID	CUSTOMER_ID	CUSTOMER_AGE	INTEREST_RATE	DUE_DATE	
1	101	65	8	07/18/2026, 12:47:27 AM	
2	102	45	11	08/17/2026, 12:47:27 AM	
3	103	72	7	07/13/2026, 12:47:27 AM	
4	104	59	10	10/01/2026, 12:47:27 AM	
Elapsed: 00:00:00.005					
4 rows selected.					

 FreeSQL
 >_ Worksheet
  SQL Tutorials

23ai
 Connect to the Database
 Help and Feedback
 

Navigator
 Files

All Files
 Search files

DATABASE
 DisplayData.sql
 Inserting_SampleData.sql
 Scenario1.sql
 Scenario2.sql
 mytables.sql

Scenario2.sql*


```

1  -- Scenario 2: promote customers with a balance over 10000 to vip status
2
3  DECLARE
4
5  -- cursor to fetch customers with high balances
6  CURSOR c_vip_candidates IS
7      SELECT customer_id, balance
8      FROM accounts
9      WHERE balance > 10000;
10
11 BEGIN
12     DBMS_OUTPUT.PUT_LINE('--- vaibhav mishra vip promotion processing ---');
13     FOR r_vip IN c_vip_candidates LOOP
14         UPDATE accounts
15         SET isvip = 'TRUE'
16         WHERE customer_id = r_vip.customer_id;
17         DBMS_OUTPUT.PUT_LINE('promoted customer id to vip: ' || r_vip.customer_id);
18     END LOOP;
19     COMMIT;
20 END;
21

```

Query result Script output DBMS output Explain Plan SQL history




SQL> DECLARE
 -- cursor to fetch customers with high balances
 CURSOR c_vip_candidates IS
 SELECT customer_id, balance ...
 Show more...

--- vaibhav mishra vip promotion processing ---
 promoted customer id to vip: 101
 promoted customer id to vip: 103

PL/SQL procedure successfully completed.
 Elapsed: 00:00:00.017

Query result Script output DBMS output Explain Plan SQL history					
  Download Execution time: 0.005 seconds					
	CUSTOMER_ID	CUSTOMER_NAME	BALANCE	ISVIP	
1	101	Vaibhav	15000	TRUE	
2	102	Rahul	8000	FALSE	
3	103	Anjali	25000	TRUE	
4	104	Rohan	9500	FALSE	

NavigatorFiles

All Files

Search files

DATABASE

ClearTable.sql

DisplayData.sql

Inserting_SampleData.sql

Scenario1.sql

Scenario2.sql

Scenario3.sql

mytables.sql

Scenario3.sql

```
1  -- scenario 3: print reminders for customers whose loans are due within the next 30 days
2
3  DECLARE
4      -- here I am using cursor to find loans due soon using sysdate
5      CURSOR c_due_loans IS
6          SELECT customer_id, loan_id, due_date
7          FROM loans
8          WHERE due_date BETWEEN SYSDATE AND SYSDATE + 30;
9  BEGIN
10     DBMS_OUTPUT.PUT_LINE('--- vaibhav mishras loan due reminder system ---');
11     FOR r_loan IN c_due_loans LOOP
12         DBMS_OUTPUT.PUT_LINE('reminder message sent to customer id ' || r_loan.customer_id || ' for loan id ' || r_loan.loan_id || ' due on ' || r_loan.d
13     END LOOP;
14 END;
15 /
16
```

Query resultScript outputDBMS outputExplain PlanSQL history

SQL> DECLARE
-- here I am using cursor to find loans due soon using sysdate
CURSOR c_due_loans IS
 SELECT customer_id, loan_id, due_date ...
Show more...

--- vaibhav mishras loan due reminder system ---
reminder message sent to customer id 181 for loan id 1 due on 17-JUL-26
reminder message sent to customer id 183 for loan id 3 due on 12-JUL-26

PL/SQL procedure successfully completed.

Elapsed: 00:00:00.021