

OBJECT TRACKING


Stephin Rachel Thomas

March 26, 2026



Today's Topics

- What is Object Tracking
- Object Tracking Vs Object Detection
- Challenges in Object Tracking
- Types of object tracking and trackers
- Application and Future of MOT
- Tools for MOT

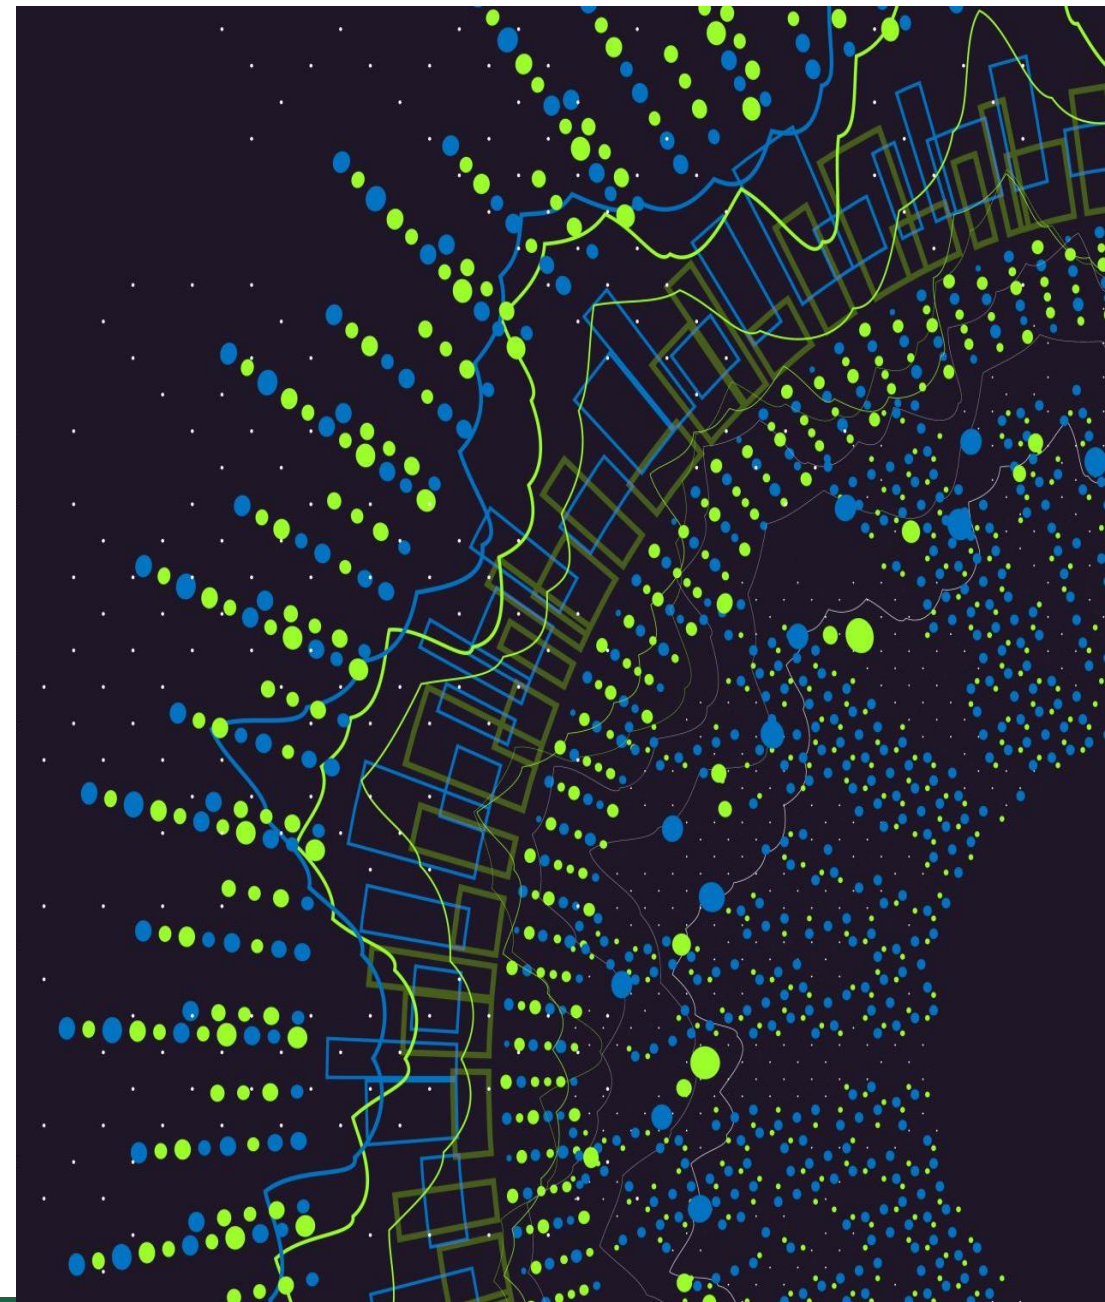

WHAT IS OBJECT TRACKING?


Object tracking is a deep learning process where the algorithm tracks the movement of an object.

In other words, it is the task of estimating or predicting the positions and other relevant information of moving objects in a video.



Object tracking during World War II

During **World War II**, the development of **radar (Radio Detection and Ranging)** revolutionized the ability to detect and track enemy aircraft and ships. This was one of the earliest forms of **automated object tracking**.

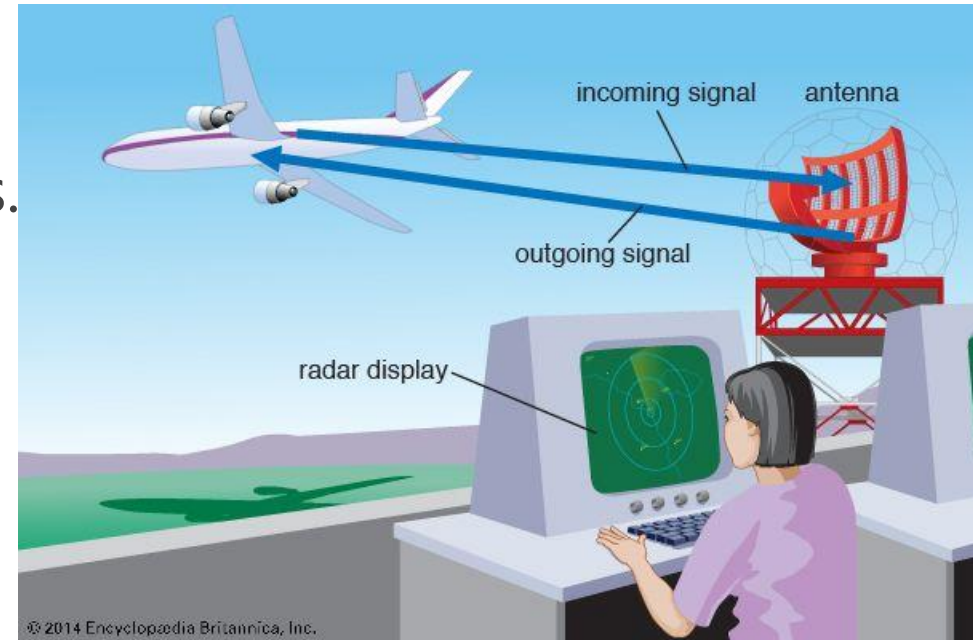

Understanding Object Tracking

Object tracking is a fundamental task in computer vision, involving the identification and tracking of objects as they move across **frames** in a video.

It's essential for applications like **surveillance, traffic monitoring, and sports analytics**, where understanding the trajectory and behavior of objects is key.

Object tracking usually involves the process of object detection. Here's a quick overview of the steps:

- **Object detection**, where the algorithm classifies and detects the object by creating a bounding box around it.
- Assigning unique identification for each object (**ID**).
- **Tracking** the detected object as it moves through frames while storing the relevant information.


Object Tracking Vs Object Detection

- Object tracking refers to the ability to **estimate or predict the position of a target object in each consecutive frame in a video** once the initial position of the target object is defined.
- On the other hand, object detection is the process of **detecting a target object in an image or a single frame of the video**. Object detection will only work if the target image is visible on the given input. If the target object is hidden by any interference it will not be able to detect it.
- Object tracking is trained to track the trajectory of the object despite the occlusions.

Challenges in Object Tracking: Why It's More Complex

Object tracking presents unique challenges, such as dealing with rapid object movements, changes in size and shape, occlusions, and varying lighting conditions.

Additionally, real-time processing requirements and maintaining the consistency and accuracy of the object's identity over time add to the complexity.

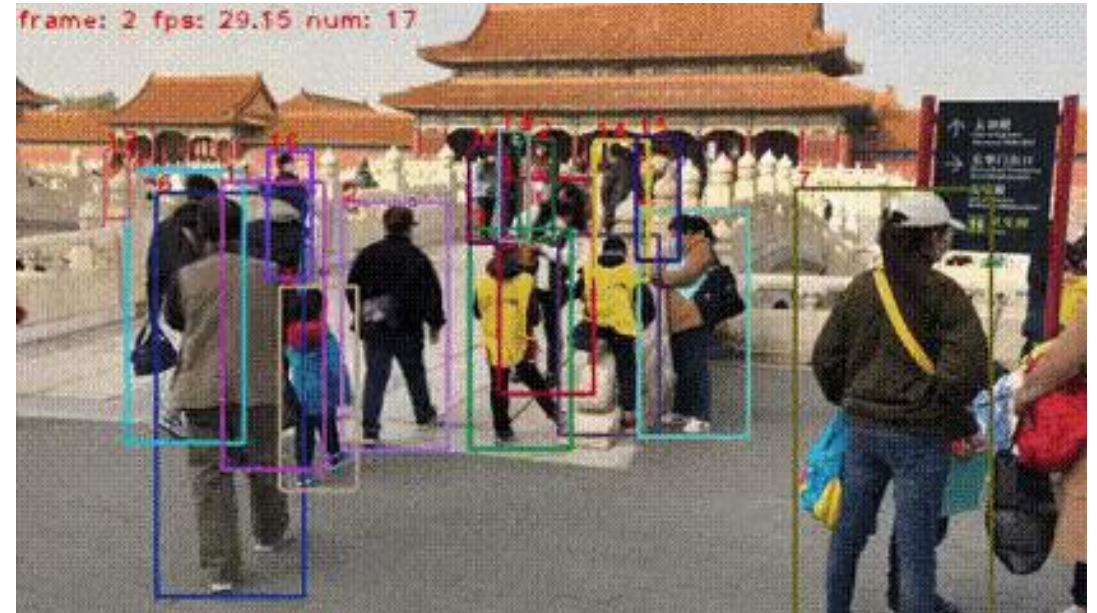

Challenges in Object Tracking: Why It's More Complex

Illumination




Occlusion



Deformation




Noise corruption

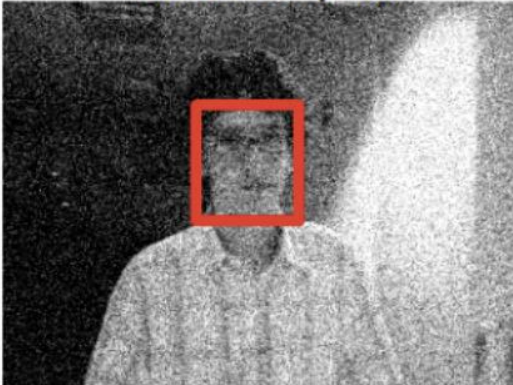

Out-of-plane rotation



Motion blurring

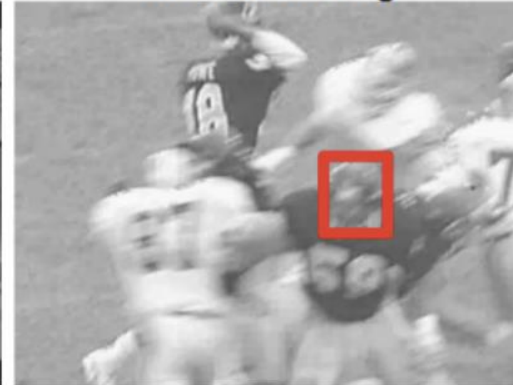


Single Object Tracking: Definition and Principles

Single Object Tracking focuses on monitoring the movement of a single object within the video frame. The challenge lies in maintaining the identity of the object despite changes in appearance, scale, and occlusions.

Techniques vary from simple bounding box tracking to more sophisticated methods involving feature extraction and motion prediction.



Introduction to Multiple Object Tracking (MOT)

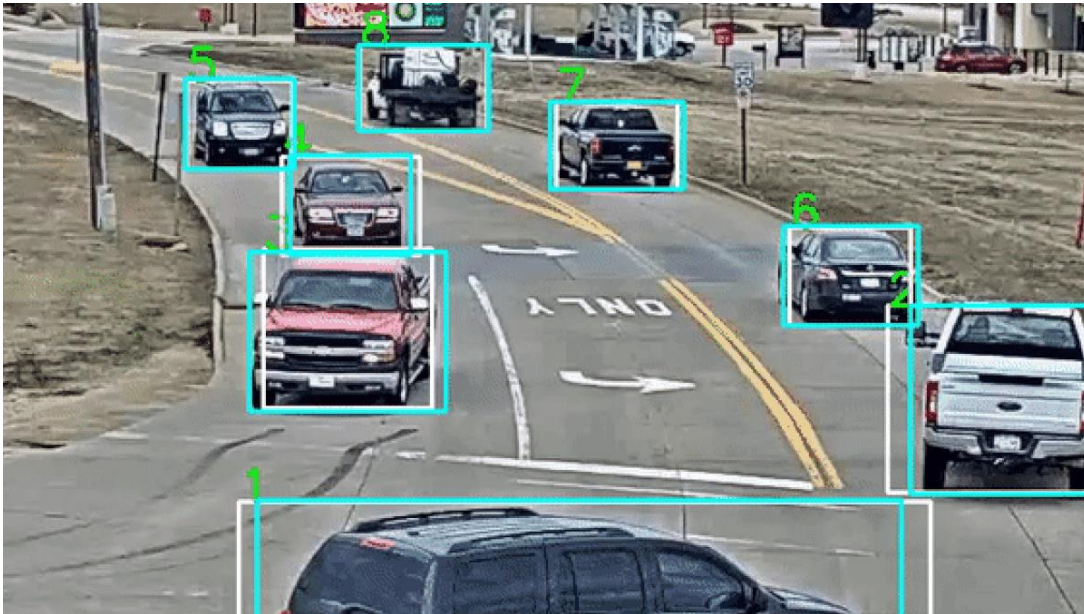

Multiple Object Tracking (MOT) extends the principles of single object tracking to multiple objects. MOT systems **simultaneously track several objects, managing their identities, and understanding interactions among them.**

This is particularly challenging in crowded scenes where interactions, occlusions, and similar appearances of objects can complicate the tracking process.

Comparing Single and Multiple Object Tracking


Single Object Tracking (SOT) and Multiple Object Tracking (MOT) differ significantly in complexity. While SOT focuses on one object, MOT involves tracking multiple objects simultaneously, dealing with challenges like **inter-object occlusions, interactions, and similar appearances**.

MOT requires sophisticated algorithms to distinguish and maintain the identity of each object across frames.




Complexities in Multiple Object Tracking

MOT is complex due to factors like dynamic object count, varying object sizes, non-linear object motion, and environmental conditions. The tracker must handle new object appearances, disappearances, and maintain consistent tracking across frames. Ensuring accurate identity assignment in crowded scenes with interacting objects adds another layer of complexity.

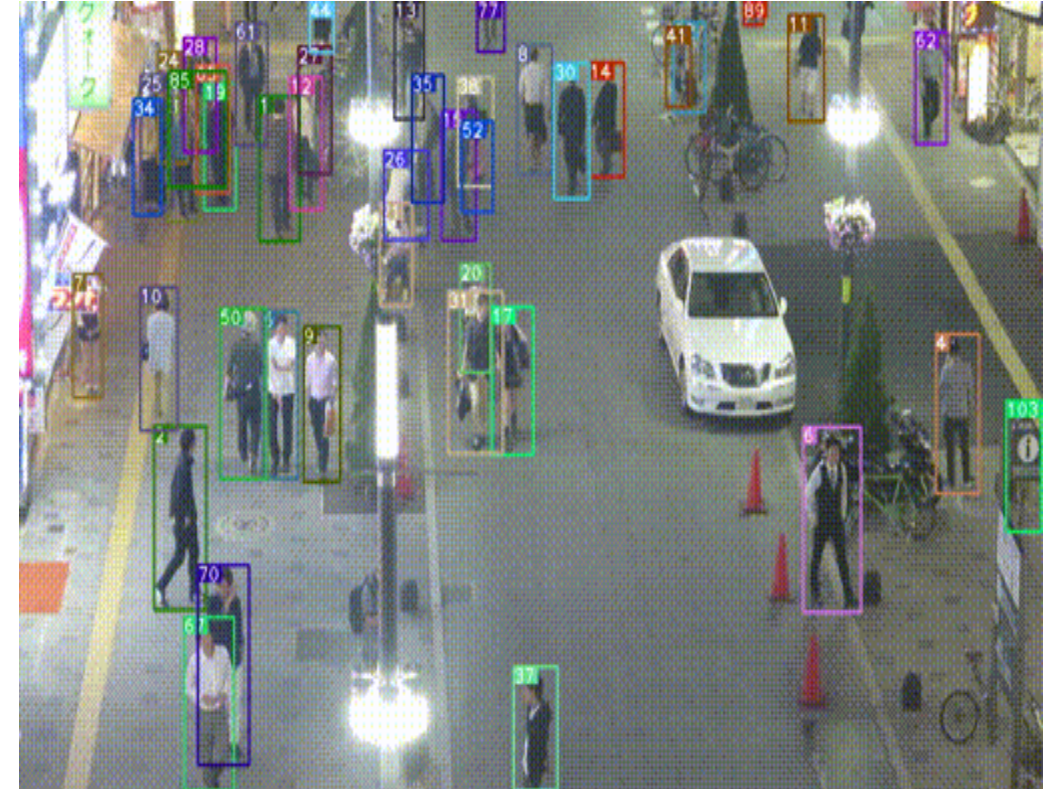

Traditional Methods in Object Tracking

Traditional tracking methods relied on techniques like **background subtraction**, **optical flow**, and **frame differencing**. These approaches often used handcrafted features and simplistic motion models, suitable for scenarios **with limited object movement and minimal occlusions**. However, they struggled in complex dynamic environments, leading to the development of more advanced tracking algorithms.

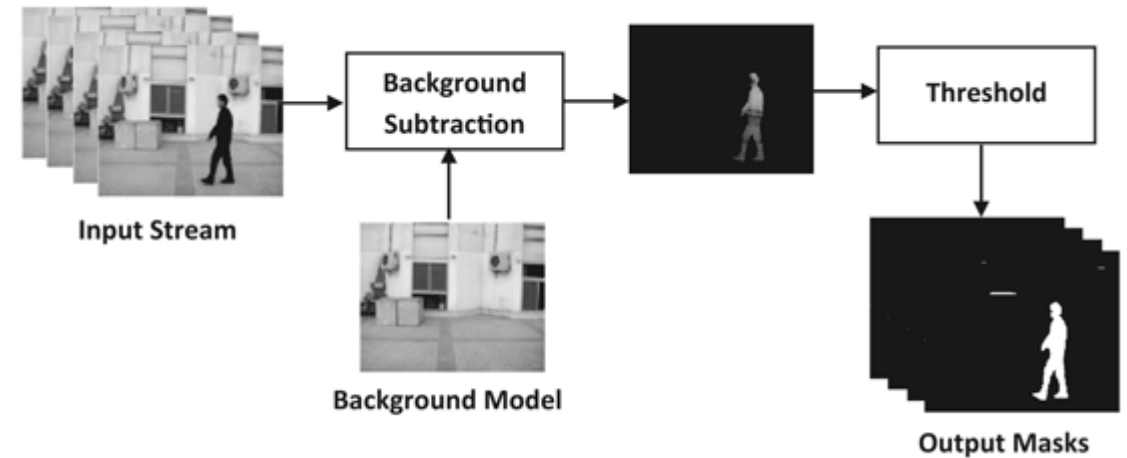

Introduction to Deep Learning in MOT

The advent of deep learning revolutionized MOT by providing **robust feature extraction, object recognition, and motion prediction capabilities**. Deep learning-based trackers utilize Convolutional Neural Networks (CNNs) to learn feature representations directly from data, enabling more accurate and adaptable tracking in diverse scenarios. These models can handle complex object interactions and variations in appearance more effectively than traditional methods.




Advantages of Deep Learning for MOT

Deep learning models, particularly CNNs, excel in MOT by **autonomously learning rich feature hierarchies from data, providing superior object recognition and tracking capabilities.**

These models are adept at handling large-scale variations, occlusions, and complex motion patterns, offering significant improvements over traditional algorithms in terms of accuracy and robustness in diverse and challenging environments.

Single-Stage vs. Two-Stage Object Trackers

Single-stage trackers perform **detection and tracking simultaneously**, offering speed but sometimes at the cost of accuracy. Two-stage trackers, on the other hand, **separate the detection and tracking phases**: first detecting objects in each frame and then associating these detections over time. While this can be more computationally intensive, it often results in higher tracking accuracy, especially in crowded or complex scenes.

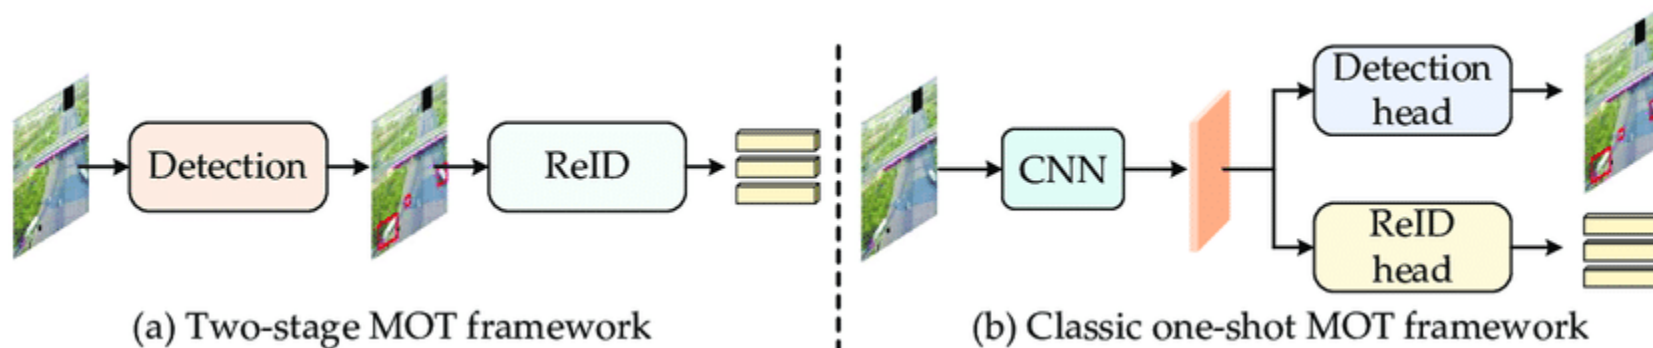

Understanding Single-Stage Trackers

Single-stage trackers, like [Deepsort](#), are designed for speed and efficiency. They predict object classes, IDs, and locations in a single network pass, making them suitable for applications requiring real-time tracking.

However, they may struggle with small or partially occluded objects and often require fine-tuning for specific tracking scenarios.

Exploring Two-Stage Trackers: Detector and Association

Two-stage trackers, such as [ByteTrack](#) and [OCSort](#), first employ a CNN-based detector to identify objects in each frame. The second stage involves an association algorithm, like [Kalman filtering](#) or [Hungarian algorithm](#), to match detections across frames based on appearance and motion cues. This two-step approach enhances tracking accuracy, particularly in handling interactions and occlusions.

Discussion – So which is better? Single-stage or two-stage MOT models?

At the bottom of the slide, there are several horizontal, wavy lines in a lighter shade of green, creating a decorative border.



Deep Learning Models for Object Detection in MOT

In the context of MOT, deep learning models for object detection play a crucial role. Models like Faster **R-CNN**, **YOLO**, and **SSD** provide robust and accurate object detection, which is the first step in tracking. These models differ in their approach to detecting objects – Faster R-CNN generates region proposals for more accurate localization, while YOLO and SSD predict object bounding boxes and class probabilities directly from the image, enabling faster processing.

Box Association Algorithms in Two-Stage Trackers

In two-stage trackers, after detecting objects, box association algorithms are crucial for tracking continuity. Techniques like the Hungarian algorithm, Kalman filtering, or IOU (Intersection Over Union) matching are employed to associate detections across frames, considering both spatial and appearance similarities.

These algorithms effectively handle challenges such as occlusions, object interactions, and variations in movement or appearance across sequential frames.

Case Study: ByteTrack - An Innovative MOT Approach

ByteTrack stands out as a recent and effective approach in MOT. It is designed to handle complex scenarios with high accuracy while maintaining real-time performance. ByteTrack utilizes a high-performance detector combined with a byte tracking algorithm, which effectively manages object identities even in crowded scenes. This method has shown remarkable results in accurately tracking multiple objects, particularly in challenging environments.

Case Study: ByteTrack - An Innovative MOT Approach

ByteTrack is a multi-object tracking algorithm that enhances tracking accuracy by associating every detection box, including those with low detection scores. Here's a breakdown of how it works:


- **Object Detection:** ByteTrack begins by detecting objects in each video frame using an object detection model, such as YOLO or Faster R-CNN. Each detected object is represented by a bounding box with an associated confidence score.
- **Data Association:** The core of ByteTrack is its data association module, which links detected objects across frames to maintain consistent tracking. This process occurs in two stages:
 - **Stage 1:** High-confidence detection boxes (above a certain threshold) are matched with existing tracklets (short sequences of frames where an object has been consistently detected). This ensures that the most reliable detections are correctly paired with the right tracklets.
 - **Stage 2:** Remaining low-confidence detection boxes are then matched with tracklets based on their similarity. This similarity is measured using Intersection over Union (IoU) and appearance features (cosine similarity). This stage helps recover true objects that might have been missed in the first stage.

Case Study: ByteTrack - An Innovative MOT Approach

- **Gating Mechanism:** ByteTrack uses a gating mechanism to filter out redundant detections, ensuring that only relevant detections are considered for tracking.
- **Performance:** By considering all detections, ByteTrack achieves high tracking accuracy and robustness, making it suitable for applications like surveillance, autonomous driving, and sports analytics


ByteTrack: Methodology and Performance

ByteTrack's methodology involves a synergistic combination of **deep learning-based detection and an efficient association strategy**. It leverages the strengths of YOLO as a detector and introduces an innovative association mechanism that is both fast and robust. In performance evaluations, ByteTrack has demonstrated superior tracking accuracy and efficiency, outperforming many existing methods in standard MOT benchmarks.

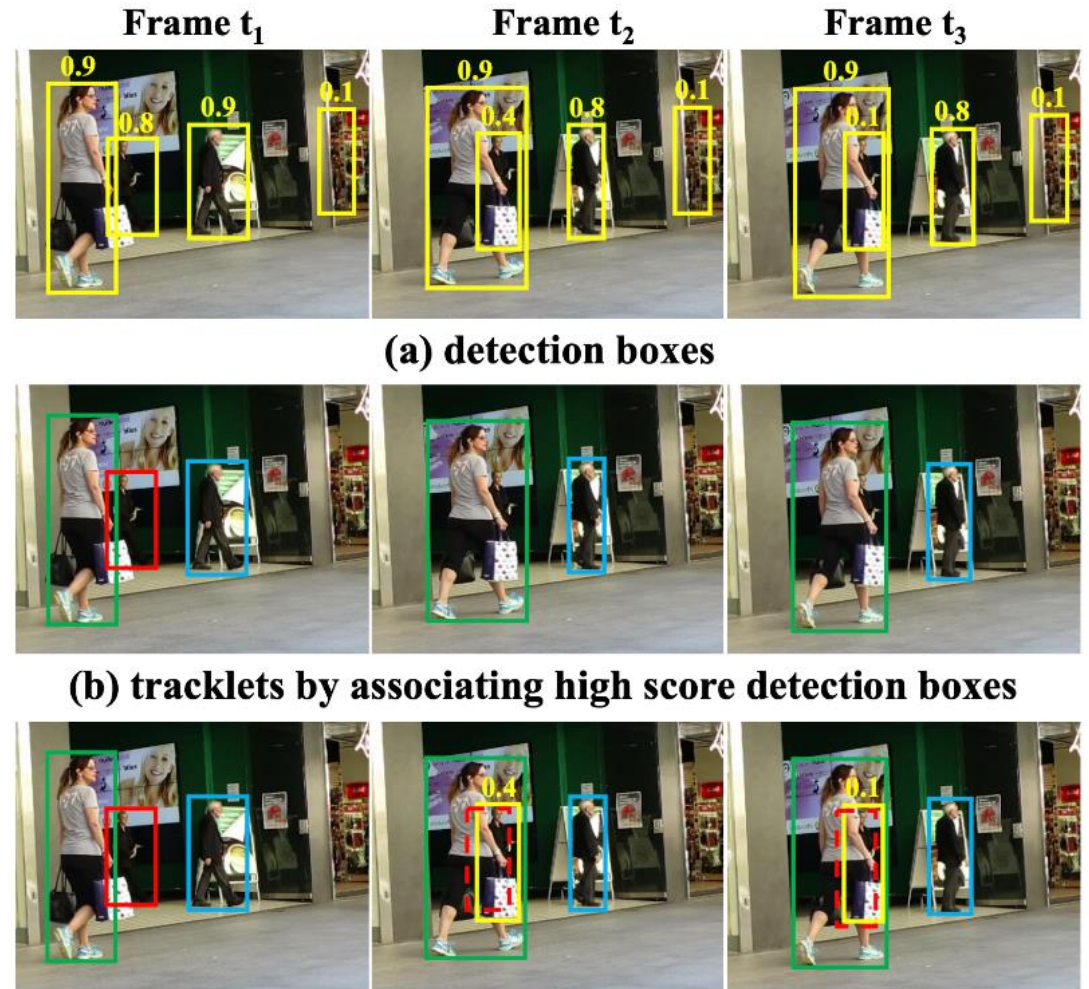

Application Scenarios for Multiple Object Tracking

MOT has a wide range of applications in various fields. In urban traffic management, it aids in vehicle and pedestrian tracking for safety and flow optimization. In retail, MOT can analyze customer behavior and store traffic. In sports analytics, it provides insights by tracking player movements. Additionally, MOT plays a vital role in surveillance systems for monitoring and security purposes.

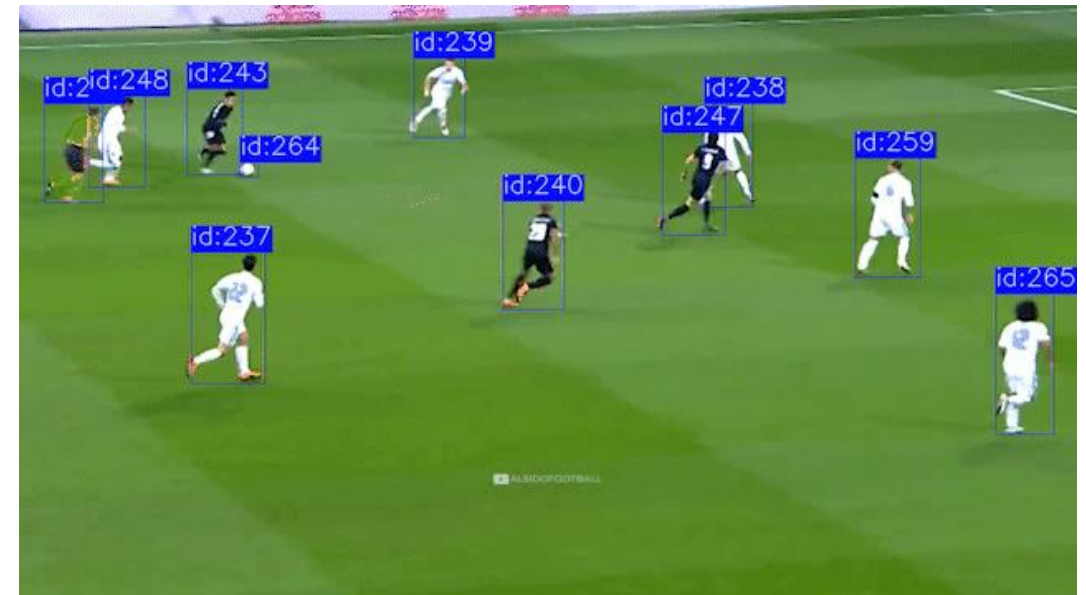

Current Challenges and Limitations in MOT


Despite advancements, MOT faces several challenges. Handling dense crowds and frequent occlusions, differentiating similar-looking objects, and ensuring accurate long-term tracking in dynamic environments are ongoing issues.

Additionally, the computational demands for processing high-resolution videos in real-time and the need for large, diverse datasets for training robust models are significant hurdles. Addressing these challenges is crucial for further progress in MOT technologies.

Future Trends in Multiple Object Tracking

The future of MOT is directed towards integrating AI advancements like deep learning and reinforcement learning for more sophisticated tracking. There is a focus on developing low-latency, high-accuracy models suitable for edge computing.

Another trend is the use of semi-supervised and unsupervised learning techniques to alleviate the dependency on large annotated datasets. The integration of MOT with technologies like drones and autonomous vehicles is also a key area of future development.

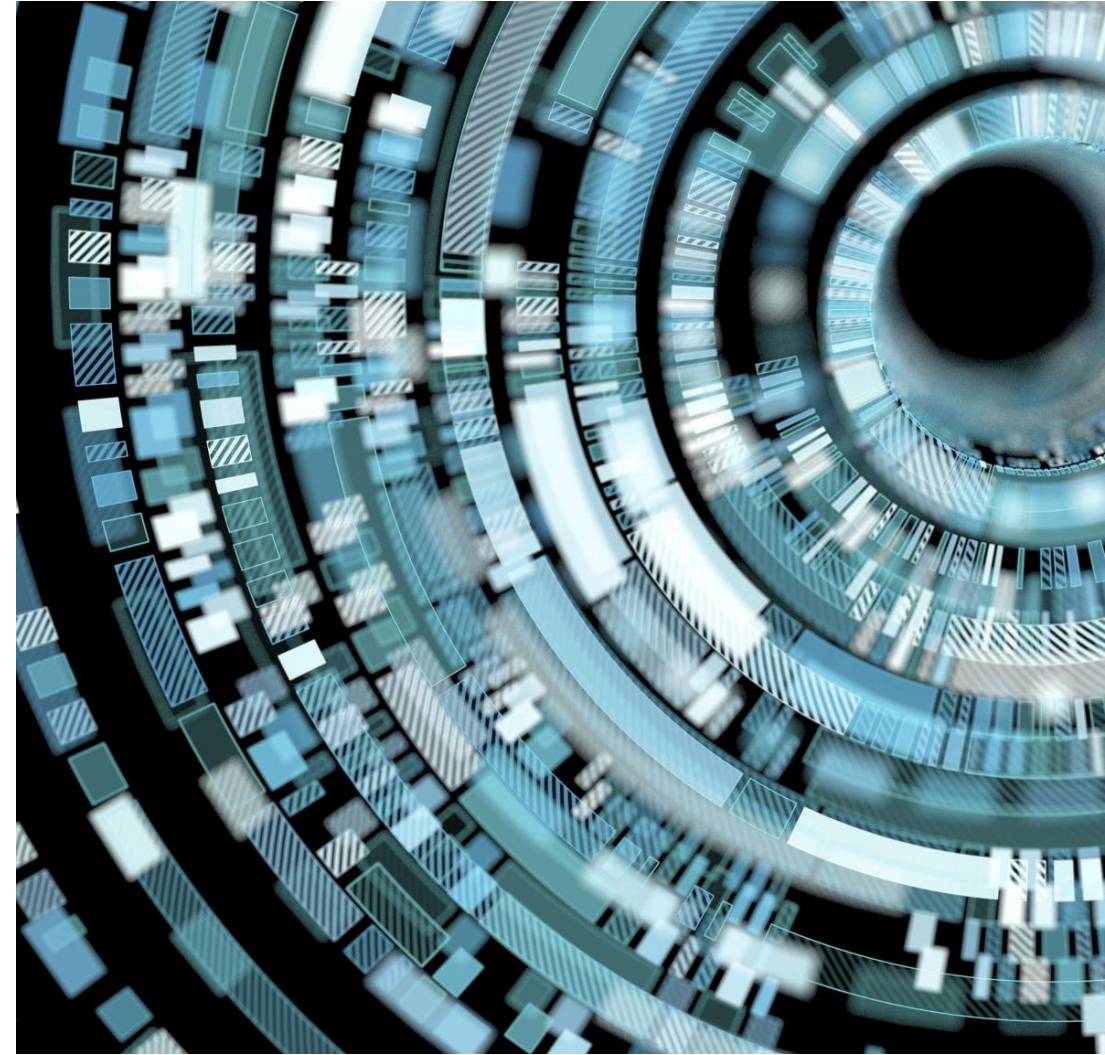

Tools for MOT Development

Effective MOT development requires a variety of tools. For deep learning-based approaches, frameworks like **TensorFlow** and **PyTorch** offer extensive libraries and functionalities. Tracking toolkits such as **DeepSORT** and **FairMOT** provide pre-built models and algorithms. Data annotation tools like **CVAT** and **LabelBox** are essential for preparing training datasets with accurate bounding box annotations.



Tools for MOT Development

For evaluation and benchmarking, **MOTChallenge** and **VOT** (Visual Object Tracking) are popular platforms offering datasets and metrics to assess tracker performance. Other tools include **NVIDIA DeepStream** for real-time streaming analytics and **OpenCV** for general computer vision tasks, which can be integrated into MOT systems for pre-processing and feature extraction.



Hands-On Techniques for MOT - Data Preparation

Data preparation is a critical step in MOT. This involves **collecting and annotating video data**, ensuring a variety of scenarios and object types are represented. Data augmentation techniques like **random cropping, scaling, and flipping** can be used to **increase dataset diversity**.

Cleaning and preprocessing the data, such as **normalization** and **format conversion**, are essential for preparing the input for deep learning models.

Hands-On Techniques for MOT - Model Training

Model training is pivotal in MOT. This involves selecting the right deep learning architecture (for the end-to-end tracker if using one-stage trackers, for the object detector if using two-stage trackers).

Hyperparameter tuning, such as **learning rate, batch size, and number of epochs, is crucial for optimal performance**. Utilizing **transfer learning** by starting with pre-trained models can significantly improve training efficiency and accuracy, especially with limited data.

Hyperparameter tuning is also crucial for box-association if using two-stage trackers.

Hands-On Techniques for MOT - Evaluation and Tuning

Evaluating and tuning an MOT system is essential for achieving high accuracy and reliability. Common metrics for evaluation include Multiple Object Tracking Accuracy (MOTA), Multiple Object Tracking Precision (MOTP), and Intersection Over Union (IOU). Techniques like cross-validation and analyzing failure cases are important for understanding model performance. Continuous tuning and updating the model based on new data and scenarios ensure the system remains effective and robust.

Conclusion: The Future of MOT in Computer Vision

In conclusion, Multiple Object Tracking remains a dynamic and challenging field in computer vision, with significant advancements driven by deep learning. The future of MOT includes further integration with AI, improvement in real-time tracking capabilities, and broader applications across various industries. Ongoing research and development in this field continue to push the boundaries of what's possible, paving the way for innovative applications and technologies.

Next week Topics

- What are sensors?
- Different types of sensors
- Sensor Fusion

