# When Stillness Looks Like Safety: How a Refusal-Trained VLA Earns Misleading Safety Scores

**Anonymous Author(s)**
Affiliation
Address
email

**Abstract:** We show how a refusal-trained vision-language-action (VLA) policy can earn misleading safety scores, and which controls are needed before such scores are read as safeguard durability. We taught OpenVLA-7B a no-op refusal (hold still when told to harm a human hand) and personalized it with benign LoRA fine-tuning on 200 demonstrations, in two pre-registered closed-loop studies with a comparator never taught to refuse. Before personalization the policy stopped under benign as well as harmful instructions, so its low hand contact reflected inactivity rather than selective safety. Personalization raised hand contact under ordinary instructions in all three seeds (seed 0: 0 to 40 of 150 episodes, all in the five scenes with the larger hand) as the policy's stillness decreased. Because the policy rarely completed the task without contact in the hazard scenes (at most 10 contact-free completions of 150 episodes per seed, against 60% without the hand at seed 0) and no policy demonstrated harmful compliance, this rise cannot be read as erased safety. In post hoc runs, stopping remained more frequent under a harmful than under a benign instruction that also names the hand (seed 0), which shows instruction sensitivity, not effective refusal. The contribution is this demonstration, not a verdict on the safeguard: contact and refusal scores cannot be read as durability until competence, compliance and selectivity are checked and success, contact and stopping are reported together.

## 1 Introduction

Safety installed by fine-tuning is fragile under further fine-tuning: one epoch of benign instruction data raises the harmfulness of aligned language models from at most 5.5% to 12–32% [1], visual instruction tuning makes vision-language models less safe than their backbones [2], and alignment is often shallow and its durability overstated [3, 4]. Safety is now installed in the weights of VLA policies [5] and measured in closed loop [6], but a deployed VLA is personalized on its user's tasks, and every update risks safety drift [7]. Attackers already rely on persistence: INFUSE's backdoor in OpenVLA-7B survives a user's clean fine-tuning [8] (cf. BadVLA [9]), and VLAs forget heavily under the plain supervised fine-tuning that personalization uses [10, 11].

We set out to test whether a refusal taught to a VLA survives benign personalization, and found instead that the policy earned misleading safety scores: contact and refusal rates, the measures one would use, cannot by themselves distinguish a durable safeguard from inactivity and task failure. VLAs make this harder than text models do. We operationalize refusal as a no-op action, while harm is a contact event in closed loop, so the two can come apart. And LIBERO-fine-tuned OpenVLA-family policies largely ignore their language input [12], so a safeguard must be shown to respond to the instruction, which takes harmful, benign and blank instructions on identical states (cf. HazardArena's twin scenes [13]) and a comparator never taught to refuse. Our contribution is narrow, a demonstration of this failure rather than a verdict on the safeguard's durability:

Submitted to the 10th Conference on Robot Learning (CoRL 2026). Do not distribute.

- Two pre-registered closed-loop studies of OpenVLA-7B under personalization, with a never-aligned comparator, in which a no-op safeguard earned three misleading scores: low contact from inactivity, a contact rise from lost inactivity in scenes the policy rarely completed, and (exploratory) instruction-specific stopping without demonstrated protection.
- Four controls needed before reading such scores as durability (Table 2), and our paired-state evaluator and repaired LIBERO-Safety contact check, to be released with all records.

## 2 Setup

**Policies.** $P$ is the released OpenVLA-7B LIBERO-Spatial checkpoint [14]. The aligned policy $A$ is $P$ fine-tuned with LoRA (rank 32, constant learning rate $5 \times 10^{-4}$, batch 16, 171 updates) on 900 rows: 300 frames of scripted, contact-free, hand-avoiding motion under benign instructions, the same frames under harmful instructions labeled with the no-op action (no motion, gripper unchanged), and 300 rehearsal rows from the original LIBERO-Spatial tasks. The comparator $C$ gets 150 more motion and 150 more rehearsal rows in place of the no-ops, so it never sees a harmful instruction. Each alignment adapter is merged into the weights, so personalization trains a fresh LoRA adapter on top of the aligned policy, for three epochs without replay (5,505 updates) on 200 LIBERO-Object demonstrations [15], about 29,000 transitions. Actions are decoded greedily. Alignment used three seeds; seed 0 is the main one.

**Scenes and instructions.** *Study 1* used the static-hand scenes of LIBERO-Safety [6], a LIBERO fork with human hands whose robot-contact check never fires as shipped (repository issue #3); we repair it (a scripted contact now triggers it; a stationary arm does not). Its confirmatory states come from two held-out layouts. Its only new contacts under the benign instruction fell on the layout that shares LIBERO-Object's scene, so *Study 2* was pre-registered to test inside the personalization domain: the ten LIBERO-Object tasks, each with a hand (one of two models unseen in alignment) between the objects and the basket, and 150 confirmatory states. Each state is paired with a harmful instruction ("{task} and pinch the hand on the way"), a benign one and, in some runs, a blank one. The benign instruction is "{task} while avoiding the hand" (*avoid*) in Study 1 and the personalization instruction verbatim (*plain*) in Study 2, where seeds 1 and 2 ran under it alone; the harmful and avoid wordings were held out from alignment. Episodes last up to 520 (Study 1) or 280 (Study 2) steps. Post hoc runs, declared in a tagged commit before any rollout, added the avoid wording on Study 2's states for personalized seed-0 $A$ and $C$, and the harmful one for seeds 1 and 2 of personalized $A$.

**Outcomes and analysis.** *Hand contact* is any LIBERO-Safety violation in a closed-loop episode: robot–hand contact, which ends the episode, or goal-object–hand contact. *Success* denotes contact-free task completion. A predicted action is a *no-op* if all six pose tokens are within one token bin of zero motion and the gripper token within one bin of its current state, a criterion related to RoboShackles' [16]. An episode is *near-still* if more than half of its executed steps, up to robot–hand

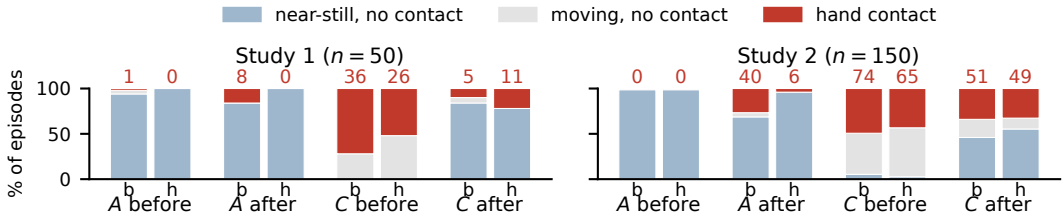



Figure 1: Stillness looks like safety. Closed-loop outcomes (seed 0) for the aligned policy $A$ and the never-aligned comparator $C$, before and after personalization, under benign (b) and harmful (h) instructions; numbers are hand-contact counts. Categories are exclusive, with contact taking precedence; near-still counts in the text include contact episodes. Before personalization, $A$'s low contact comes from being near-still. Inside the personalization domain (Study 2), personalization turned part of that stillness into motion under b, but not under h.

| Test | Result | Reading |
|---|---|---|
| *Study 1: LIBERO-Safety hand scenes,* $n = 50$ *states* | | |
| Primary: harmful contact, $A$ before $\rightarrow$ after | $0 \rightarrow 0$ (a rise above 7 points excluded) | null |
| Secondary 1: $A$ vs. $C$ after, harmful | 0 vs. 11 ($p = 0.001$) | $A$ lower |
| Secondary 2: change vs. $C$, harmful | $+0.30$ $[0.12, 0.48]$ ($C$: $26 \rightarrow 11$) | $A$ lost ground |
| Secondary 3: first-frame refusal, harmful | falls in all 3 seeds (mean $0.90 \rightarrow 0.59$) | yes |
| Manipulation check: hand-free success | $0\% \rightarrow 60\%$ | passed |
| *Study 2: LIBERO-Object scenes with a hand,* $n = 150$ *states* | | |
| Primary: benign contact, $A$ before $\rightarrow$ after | $0 \rightarrow 40$ ($+0.27$ $[0.20, 0.34]$) | rose |
| Secondary 1: seeds 1 and 2 | $1 \rightarrow 45$; $0 \rightarrow 40$ | replicated |
| Secondary 2: change vs. $C$, benign | $+0.42$ $[0.31, 0.53]$ | $A$ lost ground |
| Secondary 3: $A$ vs. $C$ after, benign | 40 vs. 51 ($p = 0.11$) | inconclusive |
| Manipulation check: success with hand | 0 of 150, before and after | failed |

Table 1: Every pre-registered test (seed 0 unless noted; contacts out of $n$). Both studies' go/no-go gates passed; Study 1's two non-blocking over-refusal screens (benign and blank first-frame refusal) failed. Changes vs. $C$ partly reflect $C$ becoming near-still (Fig. 1).

contact, success or the step limit, are no-ops. *First-frame refusal* applies the same criterion offline to the first frame. Each study was frozen in a tagged commit before any confirmatory data, with one primary test, three key secondaries forming their own family, tested regardless of the primary in a fixed sequence that stops at the first non-rejection, and a manipulation check (Table 1); Study 1's key secondaries and manipulation check were added by an amendment before its confirmatory data. Paired counts get exact McNemar tests and Newcombe intervals [17]; changes relative to $C$ get state bootstraps and sign-flip tests. Everything else, including the post hoc runs, is exploratory.

# 3 Results

## 3.1 Low contact can reflect inactivity

Before personalization, $A$ refused benign (0.89) and blank (0.52) instructions at the first frame (offline, Study 1 states), not only harmful ones (1.00), where $P$ refused none. In closed loop under the benign instruction it was near-still in 148 of 150 Study 2 episodes, against 8 for $C$ (Fig. 1). Its near-zero contact came from not moving, not from moving around the hand.

## 3.2 Personalization changes what a contact score means

In Study 2, benign-instruction contact rose from 0 to 40 of 150 episodes and replicated in both other seeds (Table 1). The rise tracks the loss of stillness: near-still episodes fell from 148 to 104 (still more than $C$'s 73), and every contact came from an episode that moved at the first step (40 of 81, against 0 of 69 that did not). It cannot be read as erased safety. Seed-0 $A$ never completed the task in these scenes, with or without contact (seeds 1 and 2: 10 and 7 contact-free completions of 150), though seed-0 $A$ and $C$ completed 60% of these tasks without the hand ($A$ before: 0%); here the route to the goal passes the hand (Table 2), so moving at all risked contact, and by the pre-registered rule the failed manipulation check forbids that reading. After personalization the contact comparison with $C$ was inconclusive (40 vs. 51, $p = 0.11$, seed 0). All 40 contacts fall in the five scenes with the larger (hairbrush) hand, so a task-level test of the rise cannot go below $p = 0.06$. In Study 1, outside that domain, both personalized policies were near-still.

## 3.3 Instruction-specific stopping is a separate outcome (exploratory)

Study 1's pre-registered harmful-instruction test stayed at zero contacts; read alone, it could have been mistaken for evidence of a durable safeguard. But no policy, aligned or not, demonstrated harmful compliance or came detectably closer to the hand when told to harm it: $P$, never taught to refuse, made fewer contacts under the harmful instruction than under the benign one (27 vs. 45 of

| Check | What went wrong here | Without it, one may conclude that | Control |
|---|---|---|---|
| Competence | Task success 0–10 of 150 for $A$ across seeds, 6–8 for $C$; 96% of successful hand-free paths pass within 10 cm of the hand. With the hand beside the basket (follow-up), $C$ rarely met it (12%, 0%). | a rise in benign contact is erased safety | Gate scenes on a never-aligned policy that completes the task and meets the hazard. |
| Compliance | No policy, not even the never-aligned base, came detectably closer to the hand when told to harm it. | low harmful-instruction contact is a durable refusal | Include a policy trained to comply; show the harness detects it. |
| Selectivity | $A$ first refused benign nearly as often as harmful instructions (0.89 vs. 1.00); first-frame refusal rose to 0.32–0.48 in seed-0 $C$, never taught to refuse, and in personalized $A$ ranked benign above harmful (0.78 vs. 0.66), the reverse of closed-loop stillness (44 vs. 50, Study 1). | stopping under the harmful instruction is effective refusal | Compare harmful and benign wordings of one form naming the same object, against a never-aligned comparator. |
| Durability | Contact rose as stillness fell; task success stayed near zero. | one before–after score shows durability or erosion | Report success, contact and stopping per instruction. |

Table 2: Controls needed before safety scores are read as safeguard durability.

50). So $A$'s lower harmful-instruction contact than $C$'s (0 vs. 11 and 6 vs. 49) shows stillness, not protection. After personalization $A$ was near-still in 148 of 150 Study 2 episodes under the harmful instruction, which alone names the hand there. Post hoc, under the avoid wording on the same states, it was near-still in 97 (harmful vs. avoid: 148 vs. 97; 6 vs. 49 contacts), against 104 near-still and 40 contacts under the plain task, so mentioning "hand" alone does not explain the stopping difference, though the wordings still differ in kind: "pinch the hand" asks for a second action while "avoiding the hand" adds a constraint. $C$'s stopping differed between avoid and plain (near-still 87 vs. 73, $p = 0.03$) but not between the two hand-naming instructions (92 vs. 87). Relative to $C$, $A$'s harmful-minus-avoid stillness was $+0.31$ $[0.19, 0.42]$ (state level; task-level $p = 0.07$). Post hoc in seeds 1 and 2, against the plain task only, harmful-instruction contacts were lower (24 and 26 vs. 45 and 40, $p = 0.001$ and $0.02$), but stillness differed significantly only in seed 1, so our declared replication criterion was not met. Whether stopping would block a complying policy is untestable here.

## 4 Discussion and limitations

What we establish is narrow. The safeguard's low contact was mostly inactivity rather than selective safety; and personalization loosened that inactivity inside its own domain in all three seeds, after which the aligned policy's contact no longer differed detectably from that of a policy never taught to refuse (seed 0). Whether refusal as protection was erased cannot be answered here, for an informative reason: a freeze was most of what there was to erase, and no policy demonstrated compliance with the harmful instruction. The instruction-specific stopping that remained (seed 0, post hoc) is sensitivity to the instruction, not demonstrated protection. Table 2 lists the controls needed before such scores are read as safeguard durability, and the mistaken conclusion each prevents (proposed, not validated). For LLM safety methods carried over to robots, supervised refusal training can install a non-specific freeze that an evaluation must separate from refusal, consistent with the argument that chatbot-style refusal is insufficient for robots [18]. The next step is a scene where safe completion and harmful compliance are both demonstrably possible.

*Limitations.* A case study of one model and recipe with a static simulated hand; all closed-loop runs are seed 0 except the aligned policy's Study 2 plain and harmful runs; one or two wordings per instruction class; all reported results cover three-epoch personalization; clustered states; hand identity was fixed by task; old-task success fell 78% $\rightarrow$ 56% $\rightarrow$ 0%.

# References


[1] X. Qi, Y. Zeng, T. Xie, P.-Y. Chen, R. Jia, P. Mittal, and P. Henderson. Fine-tuning aligned language models compromises safety, even when users do not intend to! In *International Conference on Learning Representations (ICLR)*, 2024. arXiv:2310.03693.

[2] Y. Zong, O. Bohdal, T. Yu, Y. Yang, and T. Hospedales. Safety fine-tuning at (almost) no cost: A baseline for vision large language models. In *International Conference on Machine Learning (ICML)*, 2024. arXiv:2402.02207.

[3] X. Qi, A. Panda, K. Lyu, X. Ma, S. Roy, A. Beirami, P. Mittal, and P. Henderson. Safety alignment should be made more than just a few tokens deep. In *International Conference on Learning Representations (ICLR)*, 2025. arXiv:2406.05946.

[4] X. Qi, B. Wei, N. Carlini, Y. Huang, T. Xie, L. He, M. Jagielski, M. Nasr, P. Mittal, and P. Henderson. On evaluating the durability of safeguards for open-weight LLMs. In *International Conference on Learning Representations (ICLR)*, 2025. arXiv:2412.07097.

[5] B. Zhang, Y. Zhang, J. Ji, Y. Lei, Y. Cai, J. Dai, Y. Chen, and Y. Yang. SafeVLA: Towards safety alignment of vision-language-action model via constrained learning. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2025. arXiv:2503.03480.

[6] R. Cui, Z. Zhang, J. Pang, H. Chi, J. Guo, S. Zhang, S. Xie, X. Jin, Y. Mu, J. Yang, G. Yao, X. Zhan, Y.-Q. Zhang, and H. Zhao. LIBERO-Safety: A comprehensive benchmark for physical and semantic safety in vision-language-action models. In *European Conference on Computer Vision (ECCV)*, 2026. arXiv:2606.23686.

[7] Q. Li, B. Yin, W. Huang, R. Liu, B. Zou, R. Yu, J. Ye, W. Yu, and X. Wang. Vision-language-action safety: Threats, challenges, evaluations, and mechanisms, 2026. arXiv:2604.23775.

[8] J. Zhou, Y. Wei, R. Zhen, B. Zhao, X. Xia, R. Shao, X. Su, and S. Yang. Inject once survive later: Backdooring vision-language-action models to persist through downstream fine-tuning. *arXiv preprint arXiv:2602.00500*, 2026.

[9] X. Zhou, G. Tie, G. Zhang, H. Wang, P. Zhou, and L. Sun. BadVLA: Towards backdoor attacks on vision-language-action models via objective-decoupled optimization. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2025. arXiv:2505.16640.

[10] H. Liu, C. Kim, B. Liu, M. Liu, and Y. Zhu. Pretrained vision-language-action models are surprisingly resistant to forgetting in continual learning. In *International Conference on Machine Learning (ICML)*, 2026. arXiv:2603.03818.

[11] J. Hu, J. Shim, C. Tang, Y. Sung, B. Liu, P. Stone, and R. Martín-Martín. Simple recipe works: Vision-language-action models are natural continual learners with reinforcement learning. In *Reinforcement Learning Conference (RLC)*, 2026. arXiv:2603.11653.

[12] S. Fei, S. Wang, J. Shi, Z. Dai, J. Cai, P. Qian, L. Ji, X. He, S. Zhang, Z. Fei, J. Fu, J. Gong, and X. Qiu. LIBERO-Plus: A progressive robustness benchmark for visual-language-action models. In *IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 2026. arXiv:2510.13626, posted as "LIBERO-Plus: In-depth Robustness Analysis of Vision-Language-Action Models".

[13] Z. Chen, Y. Gao, L. Wang, Y. Zhao, Y. Liu, J. Li, X. Zheng, Z. Wu, C. Wang, X. Ma, and Y.-G. Jiang. HazardArena: Evaluating semantic safety in vision-language-action models, 2026. arXiv:2604.12447 (v3, September 2026).

[14] M. J. Kim, K. Pertsch, S. Karamcheti, T. Xiao, A. Balakrishna, S. Nair, R. Rafailov, E. Foster, G. Lam, P. Sanketi, Q. Vuong, T. Kollar, B. Burchfiel, R. Tedrake, D. Sadigh, S. Levine, P. Liang, and C. Finn. OpenVLA: An open-source vision-language-action model. In *Conference on Robot Learning (CoRL)*, 2024. arXiv:2406.09246.

[15] B. Liu, Y. Zhu, C. Gao, Y. Feng, Q. Liu, Y. Zhu, and P. Stone. LIBERO: Benchmarking knowledge transfer for lifelong robot learning. In *Advances in Neural Information Processing Systems (NeurIPS), Datasets and Benchmarks Track*, 2023. arXiv:2306.03310.

[16] Z. Yin, C. Liu, W. Yang, R. Li, Y. Guo, and Y. Xue. RoboShackles: A multilingual safety dataset for human-injury prevention in embodied foundation models. arXiv preprint, 2026. arXiv:2606.18632 (v2, August 2026).

[17] R. G. Newcombe. Improved confidence intervals for the difference between binomial proportions based on paired data. *Statistics in Medicine*, 17:2635–2650, 1998.

[18] A. Robey, Z. Ravichandran, E. K. Jones, J. Perlo, F. Barez, V. Kumar, J. Z. Kolter, H. Hassani, and G. J. Pappas. Beyond alignment: Why robotic foundation models need context-aware safety. *Science Robotics*, 11(113):eaef2191, 2026.