

Scientific Communication: T_EX, Quarto,
RMarkdown
Winter Institute in Data Science

Ryan T. Moore

2025-12-15

Scientific Communication

L^AT_EX

Quarto

Scientific Communication

Scientific Communication

Good scientific communication

- ▶ conveys ideas, procedures, and results clearly

Scientific Communication

Good scientific communication

- ▶ conveys ideas, procedures, and results clearly
- ▶ is replicable, portable

Scientific Communication

Good scientific communication

- ▶ conveys ideas, procedures, and results clearly
- ▶ is replicable, portable
- ▶ automates frequently-used or tedious operations

Scientific Communication

Good scientific communication

- ▶ conveys ideas, procedures, and results clearly
- ▶ is replicable, portable
- ▶ automates frequently-used or tedious operations
- ▶ (usually) separates content and formatting

Scientific Communication

Good scientific communication

- ▶ conveys ideas, procedures, and results clearly
- ▶ is replicable, portable
- ▶ automates frequently-used or tedious operations
- ▶ (usually) separates content and formatting
- ▶ allows the author control ...

Scientific Communication

Good scientific communication

- ▶ conveys ideas, procedures, and results clearly
- ▶ is replicable, portable
- ▶ automates frequently-used or tedious operations
- ▶ (usually) separates content and formatting
- ▶ allows the author control ...
- ▶ but supplies legible defaults and structure that allow the reader (and author) to focus on content

Scientific Communication

A brief history of languages, systems

- ▶ Plain T_EX (Knuth): 1978 (docs for any machine)

Scientific Communication

A brief history of languages, systems

- ▶ Plain T_EX (Knuth): 1978 (docs for any machine)
- ▶ L^AT_EX (Lamport): 1983 (easier T_EX: `\section{}`, ...)

Scientific Communication

A brief history of languages, systems

- ▶ Plain T_EX (Knuth): 1978 (docs for any machine)
- ▶ L^AT_EX (Lamport): 1983 (easier T_EX: `\section{}`, ...)
- ▶ Sweave: \approx 2000 (integrate R and T_EX)

Scientific Communication

A brief history of languages, systems

- ▶ Plain T_EX (Knuth): 1978 (docs for any machine)
- ▶ L^AT_EX (Lamport): 1983 (easier T_EX: `\section{}`, ...)
- ▶ Sweave: \approx 2000 (integrate R and T_EX)
- ▶ Markdown (Gruber): 2004 (lightweight, legible)

Scientific Communication

A brief history of languages, systems

- ▶ Plain T_EX (Knuth): 1978 (docs for any machine)
- ▶ L^AT_EX (Lamport): 1983 (easier T_EX: `\section{}`, ...)
- ▶ Sweave: \approx 2000 (integrate R and T_EX)
- ▶ Markdown (Gruber): 2004 (lightweight, legible)
- ▶ knitr (Xie): 2012 (integrate R into anything)

Scientific Communication

A brief history of languages, systems

- ▶ Plain $\text{T}_{\text{E}}\text{X}$ (Knuth): 1978 (docs for any machine)
- ▶ $\text{L}^{\text{A}}\text{T}_{\text{E}}\text{X}$ (Lamport): 1983 (easier $\text{T}_{\text{E}}\text{X}$: `\section{}`, ...)
- ▶ Sweave: \approx 2000 (integrate R and $\text{T}_{\text{E}}\text{X}$)
- ▶ Markdown (Gruber): 2004 (lightweight, legible)
- ▶ knitr (Xie): 2012 (integrate R into anything)
- ▶ RMarkdown: (a knitr extension)

Scientific Communication

A brief history of languages, systems

- ▶ Plain T_EX (Knuth): 1978 (docs for any machine)
- ▶ L^AT_EX (Lamport): 1983 (easier T_EX: `\section{}`, ...)
- ▶ Sweave: \approx 2000 (integrate R and T_EX)
- ▶ Markdown (Gruber): 2004 (lightweight, legible)
- ▶ knitr (Xie): 2012 (integrate R into anything)
- ▶ RMarkdown: (a knitr extension)
- ▶ Quarto: 2022 (better cross-language integration)

L^AT_EX

From the L^AT_EX Project (<https://www.latex-project.org>):

L^AT_EX is a high-quality typesetting system; it includes features designed for the production of technical and scientific documentation. L^AT_EX is the de facto standard for the communication and publication of scientific documents. L^AT_EX is available as free software.

Convey ideas, procedures, results clearly

Consider

$$(E_i^{100} x_i) / (x^2 + \theta \sqrt{z})$$

Convey ideas, procedures, results clearly

Consider

$$(E_i^{100} x_i) / (x^2 + \text{theta sqrt}(z))$$

This is difficult to read.

Convey ideas, procedures, results clearly

Consider

$$(\sum_{i=1}^{100} x_i) / (x^2 + \theta \sqrt{z})$$

This is difficult to read.

On the other hand,

$$\frac{\sum_{i=1}^{100} x_i}{x^2 + \theta \sqrt{z}}$$

Convey ideas, procedures, results clearly

Consider

$$(E_i \wedge 100 x_i) / (x^2 + \text{theta sqrt}(z))$$

This is difficult to read.

On the other hand,

$$\frac{\sum_{i=1}^{100} x_i}{x^2 + \theta\sqrt{z}}$$

- Historically: difficult, bad spacing, etc. on WYSIWYGs

Convey ideas, procedures, results clearly

Consider

$$(E_i \wedge 100 x_i) / (x^2 + \text{theta sqrt}(z))$$

This is difficult to read.

On the other hand,

$$\frac{\sum_{i=1}^{100} x_i}{x^2 + \theta\sqrt{z}}$$

- ▶ Historically: difficult, bad spacing, etc. on WYSIWYGs
- ▶ Now, macOS's Pages *requests* your L^AT_EX

Convey ideas, procedures, results clearly

Consider

$$(E_i \text{ } ^{100} \text{ } x_i) / (x^2 + \text{theta sqrt}(z))$$

This is difficult to read.

On the other hand,

$$\frac{\sum_{i=1}^{100} x_i}{x^2 + \theta\sqrt{z}}$$

- ▶ Historically: difficult, bad spacing, etc. on WYSIWYGs
- ▶ Now, macOS's Pages *requests* your L^AT_EX

Convey ideas, procedures, results clearly

Consider


$$(E_i \wedge 100 x_i) / (x^2 + \text{theta sqrt}(z))$$

This is difficult to read.

On the other hand,

$$\frac{\sum_{i=1}^{100} x_i}{x^2 + \theta\sqrt{z}}$$

- ▶ Historically: difficult, bad spacing, etc. on WYSIWYGs
- ▶ Now, macOS's Pages *requests* your L^AT_EX

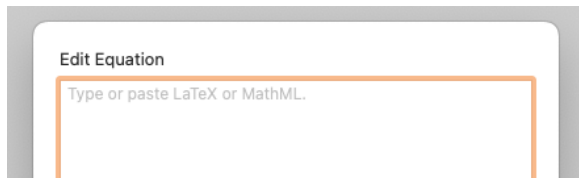

Replicable, portable

L^AT_EX is plain text. You can open it in any text editor.

Replicable, portable

L^AT_EX is plain text. You can open it in any text editor.

You could open/compile the first L^AT_EX document.

Replicable, portable

L^AT_EX is plain text. You can open it in any text editor.

You could open/compile the first L^AT_EX document.

.doc is actually 4 different file formats!

Automates frequently-used, tedious operations

Don't make a Table of Contents.

Automates frequently-used, tedious operations

Don't make a Table of Contents.

Just `\tableofcontents`.

Automates frequently-used, tedious operations

Don't make a Table of Contents.

Just `\tableofcontents`.

In \LaTeX documents, the `\` prefaces a command.

Automates frequently-used, tedious operations

Don't make a Table of Contents.

Just `\tableofcontents`.

In \LaTeX documents, the `\` prefaces a command.

In \LaTeX , the `{ }` enclose arguments:

`\command{arg1}`

Automates frequently-used, tedious operations

Don't make a Table of Contents.

Just `\tableofcontents`.

In \LaTeX documents, the `\` prefaces a command.

In \LaTeX , the `{ }` enclose arguments:

`\command{arg1}`

In \LaTeX , the `[]` enclose (opt) further params:

`\command[param1,param2]{arg1}`

Automates frequently-used, tedious operations

Don't compile a bibliography, or reformat it.

Automates frequently-used, tedious operations

Don't compile a bibliography, or reformat it.

1. Create a `.bib` file of sources

Automates frequently-used, tedious operations

Don't compile a bibliography, or reformat it.

1. Create a `.bib` file of sources
2. Each source has a citation key (E.g., `moore15`)

Automates frequently-used, tedious operations

Don't compile a bibliography, or reformat it.

1. Create a `.bib` file of sources
2. Each source has a citation key (E.g., `moore15`)
3. Refer to the key to cite

Automates frequently-used, tedious operations

Don't compile a bibliography, or reformat it.

1. Create a `.bib` file of sources
2. Each source has a citation key (E.g., `moore15`)
3. Refer to the key to cite
4. Include `.bib` file name, so `LATEX/knitr` finds refs

Automates frequently-used, tedious operations

Don't compile a bibliography, or reformat it.

1. Create a `.bib` file of sources
2. Each source has a citation key (E.g., `moore15`)
3. Refer to the key to cite
4. Include `.bib` file name, so `LATEX/knitr` finds refs
5. (Include `.bst` to adjust reference style)

Automates frequently-used, tedious operations

Don't compile a bibliography, or reformat it.

Automates frequently-used, tedious operations

Don't compile a bibliography, or reformat it.

Write “One should read `\cite{moore2015}`.”, then add

Automates frequently-used, tedious operations

Don't compile a bibliography, or reformat it.

Write “One should read `\cite{moore2015}`.”, then add

```
\bibliographystyle{apsa-leeper}  
\bibliography{my_bib}
```

Automates frequently-used, tedious operations

Don't compile a bibliography, or reformat it.

Write “One should read `\cite{moore2015}`.”, then add

```
\bibliographystyle{apsa-leeper}  
\bibliography{my_bib}
```

Which will render as “One should read Moore (2015)”.

and

Moore, Ryan T. “Overcoming Barriers to Heterogeneous-Group Learning in the Political Science Classroom”. *PS: Political Science & Politics*, 48(1):149–156, 2015.

To build documents into `.pdf`, need an installation of T_EX.

You need a T_EX engine for processing.

To build documents into `.pdf`, need an installation of T_EX.

You need a T_EX engine for processing.

Or `tinytex`.

To build documents into `.pdf`, need an installation of T_EX.

You need a T_EX engine for processing.

Or `tinytex`.

Or Overleaf.

To build documents into `.pdf`, need an installation of T_EX.

You need a T_EX engine for processing.

Or `tinytex`.

Or Overleaf.

R \rightarrow RStudio analogous to TeX build \rightarrow TeX editor

tinytex

If you don't have a \TeX build, try `tinytex`.

(See https://ryantmoore.org/files/class/introPolResearch/intro_tinytex.pdf)

tinytex

If you don't have a \TeX build, try `tinytex`.

(See https://ryantmoore.org/files/class/introPolResearch/intro_tinytex.pdf)

```
install.packages("tinytex")  
library(tinytex)  
tinytex::install_tinytex()
```

tinytex

If you don't have a \TeX build, try `tinytex`.

(See https://ryantmoore.org/files/class/introPolResearch/intro_tinytex.pdf)

```
install.packages("tinytex")  
library(tinytex)  
tinytex::install_tinytex()
```

Or, just create `.html` files instead, and print to `.pdf`.

Resources

- ▶ “The Not So Short Introduction to \LaTeX 2 $_{\epsilon}$ ”
(Oetiker, et al.)
- ▶ “The Comprehensive \LaTeX Symbol List”
(Pakin \approx 20,000!)
- ▶ Detexify
<http://detexify.kirelabs.org/classify.html>
- ▶ Overleaf (<https://www.overleaf.com>)

Quarto

First, a quick example!

- ▶ (First, a `.R` file!)
 - ▶ RStudio \rightsquigarrow File \rightsquigarrow New file \rightsquigarrow R Script
- ▶ Create `.qmd` file
 - ▶ RStudio \rightsquigarrow File \rightsquigarrow New file \rightsquigarrow Quarto Document
- ▶ Add name, title to preamble
- ▶ Render
- ▶ Edit, render

Quarto's Markup

Quarto's document markup is

- ▶ light
- ▶ legible
- ▶ literate
- ▶ L^AT_EX

Quarto: light

1. no huge build over R

Quarto: light

1. no huge build over R
2. less “ink”

Quarto: light

1. no huge build over R
2. less “ink”

1. Item 1
2. Item 2

Quarto: light

1. no huge build over R
2. less “ink”

1. Item 1
2. Item 2

vs.

```
\begin{enumerate}  
\item Item 1  
\item Item 2  
\end{enumerate}
```

Quarto: legible

I am **serious**

vs.

I am **serious**

or

I am **serious**

Quarto: legible

I am **serious**

vs.

I am **serious**

or

I am **serious**

(Better for tables, figures, etc. Harder to see/adjust aspects of presentation)

Quarto: literate

- ▶ Code in these notes is run, output is recreated

Quarto: literate

- ▶ Code in these notes is run, output is recreated
- ▶ Programming (data analysis) is **in** the text document

Quarto: literate

- ▶ Code in these notes is run, output is recreated
- ▶ Programming (data analysis) is **in** the text document

Quarto: literate

- ▶ Code in these notes is run, output is recreated
- ▶ Programming (data analysis) is **in** the text document

Look, three plus four is 7.

Quarto: literate

- ▶ Code in these notes is run, output is recreated
- ▶ Programming (data analysis) is **in** the text document

Look, three plus four is 7.

What I typed above:

```
Look, three plus four is `r 3 + 4`.
```

RMarkdown: literate

This literacy is great for papers: analysis is *in* your paper. No copy-paste, update figure, etc.

RMarkdown: literate

This literacy is great for papers: analysis is *in* your paper. No copy-paste, update figure, etc. Often want to *see* the code and the (somewhat more) raw results.

RMarkdown: literate

This literacy is great for papers: analysis is *in* your paper. No copy-paste, update figure, etc.

Often want to *see* the code and the (somewhat more) raw results.

That makes this literacy perfect for reports (“notebooks”).

Quarto: L^AT_EX

In a paper, format the math *and* do the calculation:

Look: $3 + 4 = 7$.

Quarto: L^AT_EX

In a paper, format the math *and* do the calculation:

Look: $3 + 4 = 7$.

Above I typed:

Look: `$3 + 4 = `r 3 + 4`$`.

Quarto: L^AT_EX

In a paper, format the math *and* do the calculation:

Look: $3 + 4 = 7$.

Above I typed:

Look: $3 + 4 = \text{`r } 3 + 4\text{'}$.

(Warning: formatting the line above was a challenge.)

Valid L^AT_EX will almost always render well.

For more formatting and chunk options, download template files from our GitHub repo `/admin/`.

For more formatting and chunk options, download template files from our GitHub repo `/admin/`.

Or, publicly,

`https://ryantmoore.org/files/class/introPolResearch/template_paper.qmd`

or see the compiled PDF at

`https://ryantmoore.org/files/class/introPolResearch/template_paper.pdf`

.qmd vs. the Console

Render .qmd file:

- ▶ R runs the code from top to bottom of .qmd file

.qmd vs. the Console

Render .qmd file:

- ▶ R runs the code from top to bottom of .qmd file
- ▶ Does not run other code; does **not** look in Console's workspace

.qmd vs. the Console

Render .qmd file:

- ▶ R runs the code from top to bottom of .qmd file
- ▶ Does not run other code; does **not** look in Console's workspace

.qmd vs. the Console

Render .qmd file:

- ▶ R runs the code from top to bottom of .qmd file
- ▶ Does not run other code; does **not** look in Console's workspace
- ▶ .qmd file needs to be entirely self-contained

.qmd vs. the Console

Render .qmd file:

- ▶ R runs the code from top to bottom of .qmd file
- ▶ Does not run other code; does **not** look in Console's workspace
- ▶ .qmd file needs to be entirely self-contained
- ▶ Set working directory, read data, create intermediate objects, etc. *within* the .qmd file

.qmd vs. the Console: Beware Green Arrow

17

18 ````{r cars}`

19 `summary(cars)`

20 `````



.qmd vs. the Console: Beware Green Arrow

- ▶ If you click, R looks in current workspace for objects, prints results to console or plotter, and reprints them in the confines of your .qmd

.qmd vs. the Console: Beware Green Arrow

- ▶ If you click, R looks in current workspace for objects, prints results to console or plotter, and reprints them in the confines of your .qmd
- ▶ Behavior is “notebook-like”. However, objects are not really *in* your .qmd file, can be created out of order, are not part of the compiled/knit output

.qmd vs. the Console: Beware Green Arrow

- ▶ If you click, R looks in current workspace for objects, prints results to console or plotter, and reprints them in the confines of your .qmd
- ▶ Behavior is “notebook-like”. However, objects are not really *in* your .qmd file, can be created out of order, are not part of the compiled/knit output
- ▶ When you compile/knit to create an output file, only code that is run is code in your .qmd file, from top to bottom

.qmd vs. the Console: Beware Green Arrow

- ▶ If you click, R looks in current workspace for objects, prints results to console or plotter, and reprints them in the confines of your .qmd
- ▶ Behavior is “notebook-like”. However, objects are not really *in* your .qmd file, can be created out of order, are not part of the compiled/knit output
- ▶ When you compile/knit to create an output file, only code that is run is code in your .qmd file, from top to bottom
- ▶ This notebook-like feature is an aspect of RStudio that is not *inherent* in .qmd (which could be compiled from a command line outside of RStudio, e.g.). To avoid confusion about the state, render .qmd file and look at output, rather than using green arrow.

.qmd + the Console: Love the Green Bar

17

18 ````{r cars}`


19 `summary(cars)`

20 `````

21



.qmd + the Console: Love the Green Bar

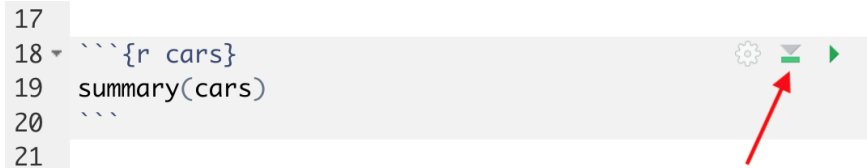

“Run all chunks above” at Console.

(I know, you're wondering ...)

(I know, you're wondering ...)

How do I format \LaTeX in \LaTeX ?

(I know, you're wondering ...)

How do I format \LaTeX in \LaTeX ?

$\backslash\text{LaTeX}$

(I know, you're wondering ...)

How do I format L^AT_EX in L^AT_EX?

\LaTeX

How to format “L^AT_EX is great.”?

(I know, you're wondering ...)

How do I format L^AT_EX in L^AT_EX?

`\LaTeX`

How to format “L^AT_EX is great.”?

With a space in L^AT_EX: `\LaTeX~ is great.`

With a space in RMarkdown: `\LaTeX\ is great.`

The Core Transformation Functions Quiz

Load the `gss_cat` data in the `forcats` package:

```
library(forcats)
data("gss_cat")
```

Create a `.qmd` file, write code¹ in chunks to

1. Sort `gss_cat` by the values of `tvhours` (largest first). Store this as `gss_cat`, and show the first 10 rows.
2. Create a new var `birthyear` – each resp's `year` minus `age` – and attach it as column of `gss_cat`. Show `summary(gss_cat$birthyear)` and dimensions of `gss_cat`.
3. Create df `gss_cat_tv`, which has only the rows of `gss_cat` where `tvhours > 3`?
4. Calculate the mean value of `tvhours` in `gss_cat` within categories of `relig`. Sort this summary.

¹`filter()`, `arrange()`, `group_by()`, `ungroup()`, `select()`, `rename()`, `mutate()`, `transmute()`, `summarise()`