



# Java Special Characters

[< Previous](#)[Next >](#)

## Special Characters

Because strings must be written within quotes, Java will misunderstand this string, and generate an error:

```
String txt = "We are the so-called "Vikings" from the north.";
```

The solution to avoid this problem, is to use the **backslash escape character**.

The backslash ( \ ) escape character turns special characters into string characters:

Escape character	Result	Description
\'	'	Single quote
\"	"	Double quote
\\	\	Backslash

The sequence \ " inserts a double quote in a string:

## Example

```
String txt = "We are the so-called \"Vikings\" from the north.";
```

[Try it Yourself »](#)

The sequence `\'` inserts a single quote in a string:

## Example

```
String txt = "It\'s alright.";
```

[Try it Yourself »](#)

The sequence `\\` inserts a single backslash in a string:

## Example

```
String txt = "The character \\ is called backslash.";
```

[Try it Yourself »](#)

Other common escape sequences that are valid in Java are:

Code	Result	Try it
<code>\n</code>	New Line	<a href="#">Try it »</a>
<code>\r</code>	Carriage Return	<a href="#">Try it »</a>
<code>\t</code>	Tab	<a href="#">Try it »</a>

<code>\b</code>	Backspace	<a href="#">Try it »</a>
<code>\f</code>	Form Feed	

[◀ Previous](#)


[Next ▶](#)

ADVERTISEMENT



NEW

We just launched  
W3Schools videos

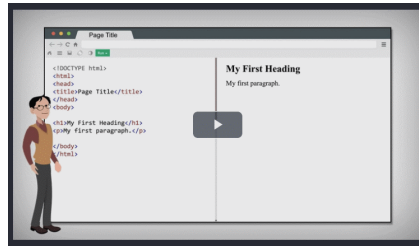

Explore now

COLOR PICKER



Get certified  
by completing  
a Java  
course today!



Get started

CODE GAME



[Play Game](#)

---

ADVERTISEMENT

ADVERTISEMENT

---

[Report Error](#)

[Spaces](#)

[Pro](#)

[Buy Certificate](#)

---

**Top Tutorials**

- [HTML Tutorial](#)
- [CSS Tutorial](#)
- [JavaScript Tutorial](#)
- [How To Tutorial](#)
- [SQL Tutorial](#)
- [Python Tutorial](#)
- [W3.CSS Tutorial](#)
- [Bootstrap Tutorial](#)
- [PHP Tutorial](#)
- [Java Tutorial](#)
- [C++ Tutorial](#)
- [jQuery Tutorial](#)

## Top References

- [HTML Reference](#)
- [CSS Reference](#)
- [JavaScript Reference](#)
- [SQL Reference](#)
- [Python Reference](#)
- [W3.CSS Reference](#)
- [Bootstrap Reference](#)
- [PHP Reference](#)
- [HTML Colors](#)
- [Java Reference](#)
- [Angular Reference](#)
- [jQuery Reference](#)

## Top Examples

- [HTML Examples](#)
- [CSS Examples](#)
- [JavaScript Examples](#)
- [How To Examples](#)
- [SQL Examples](#)
- [Python Examples](#)
- [W3.CSS Examples](#)
- [Bootstrap Examples](#)
- [PHP Examples](#)
- [Java Examples](#)
- [XML Examples](#)
- [jQuery Examples](#)

## Get Certified

- [HTML Certificate](#)
- [CSS Certificate](#)
- [JavaScript Certificate](#)
- [Front End Certificate](#)
- [SQL Certificate](#)
- [Python Certificate](#)
- [PHP Certificate](#)
- [jQuery Certificate](#)
- [Java Certificate](#)
- [C++ Certificate](#)

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookie and privacy policy.

Copyright 1999-2022 by Refsnes Data. All Rights Reserved.

W3Schools is Powered by W3.CSS.

